

Lionda Technology Co. Ltd.

Application
For
Certification
(FCC ID: O63YURI-1014)

February 28, 2001

WO# 0101859
WL/ Roy
February 28, 2001

- The test results reported in this report shall refer only to the sample actually tested and shall not refer or be deemed a refer to bulk from which such a sample may be said to have been obtained.
- This report shall not be reproduced except in full without prior authorization from Intertek Testing Services Hong Kong Limited
- For Terms And Conditions of the services, it can be provided upon request.

FCC ID: O63YURI-1014

Intertek Testing Services Hong Kong Ltd.
2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.
Tel: (852) 2173 8888 Fax: (852) 2785 5487

INTERTEK TESTING SERVICES

SUMMARY OF CONTENTS

LIST OF EXHIBITS

<i>EXHIBIT 1:</i>	General Description
<i>EXHIBIT 2:</i>	System Test Configuration
<i>EXHIBIT 3:</i>	RF Power Output
<i>EXHIBIT 4:</i>	Modulation Characteristics
<i>EXHIBIT 5:</i>	Occupied Bandwidth
<i>EXHIBIT 6:</i>	Emission Spurious
<i>EXHIBIT 7:</i>	Frequency Stability
<i>EXHIBIT 8:</i>	Technical Specifications
<i>EXHIBIT 9:</i>	Product Labelling
<i>EXHIBIT 10:</i>	Photographs
<i>EXHIBIT 11:</i>	Instruction Manual

INTERTEK TESTING SERVICES

MEASUREMENT/TECHNICAL REPORT

Application : Lionda Technology Co. Ltd.
Trade Name/Model No : 1014
Date : February 28, 2001

This report concerns (check one:) Original Grant X Class II Change _____

Equipment Type: Family Radio Service, FRS

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes _____ No X _____

If yes, defer until: _____
date

Company Name agrees to notify the Commission by: _____
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Report prepared by:

Wilson Loke
Intertek Testing Services.
2/F., Garment Centre,
576 Castle Peak Road,
Kowloon, Hong Kong.
Phone: 852-2173-8575
Fax: 852-2745-8306

INTERTEK TESTING SERVICES

Table of Contents

1.0 <u>General Description</u>	2
1.1 Product Description	2
1.2 Related Submittal(s) Grants	3
1.3 Test Methodology	3
1.4 Test Facility.....	3
2.0 <u>System Test Configuration</u>	5
2.1 Justification	5
2.2 EUT Exercising Software	6
2.3 Special Accessories	6
2.4 Equipment Modification	6
3.0 <u>RF Output Power (Section 95.639(d))</u>	8
4.0 <u>Modulation Characteristics (Section 95.637(a))</u>	13
4.1 Modulation Frequency Response	14
4.2 Modulation Limiting Characteristic.....	16
5.0 <u>Occupied Bandwidth (Section 95.633(c))</u>	17
6.0 <u>Spurious Emission (Section 95.635(b))</u>	21
6.1 Field Strength of Spurious Radiation	21
7.0 <u>Frequency Stability (Section 95.627)</u>	27
7.1 Frequency Tolerance	28
7.2 Temperature Extreme Condition.....	30
7.3 Voltage Extreme Condition	33
8.0 <u>Technical Specifications</u>	36
9.0 <u>Product Labelling</u>	40
10.0 <u>Equipment Photographs</u>	43
11.0 <u>Instruction Manual</u>	45

INTERTEK TESTING SERVICES

List of attached file

Exhibit type	File Description	Filename
Operation Description	Technical Description	descri.pdf
Test Report	Bandwidth Plot	bw.pdf
Test Report	Modulation Frequency Response	mfr.pdf
Test Report	Modulation Limit Characteristic	mlc.pdf
Test Report	Spurious Emission	spurious.pdf
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
ID Label/Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Test Report	Test Report	report.doc
Test Setup Photo	Radiated Emission	radiated1.jpg to radiated2.jpg
Internal Photo	Internal Photo	iphoto1.jpg to iphoto3.jpg
External Photo	External Photo	ophoto1.jpg to ophoto2.jpg
Test Report	Tune Up Procedure	tuneup.pdf
Test Report	Part List	partlist.pdf

INTERTEK TESTING SERVICES

EXHIBIT 1

GENERAL DESCRIPTION

INTERTEK TESTING SERVICES

1.0 **General Description**

1.1 Product Description 1.1

Product Description

The Equipment Under Test (EUT) is a 14-Channel Family Radio Service (FRS) Transceiver operating between 462.5625 and 467.7125 MHz. The EUT is powered by 6V d.c. (4 x 1.5V “AAA” battery).

Transmitter Portion:

- (i) Type of Emission: 10K3F3E
- (ii) Frequency Range: 462.5625 to 467.7125 MHz
- (iii) Maximum Power Rating: 0.01W

The brief circuit description is saved with filename: descri.pdf

INTERTEK TESTING SERVICES

1.2 Related Submittal(s) Grants

This is an Application for Certification of the transmitter portion of a FRS Transceiver. The receiver section of the FRS Transceiver is subject to verification process.

1.3 Test Methodology

Radiated emission measurements were performed according to the procedures in ANSI C63.4 (1992). All measurement were performed in Open Area Test Sites. Preliminary scans were performed in the Open Area Test Sites only to determine worst case modes. For each scan, the procedure of maximizing emissions in Appendices D and E were followed. All Radiated tests were performed at an antenna the EUT distance of 3 meters, unless stated otherwise in the “**Justification Section**” of this Application.

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the emission data is located at Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong. The test facility and site measurement data have been fully placed on file with the FCC.

INTERTEK TESTING SERVICES

EXHIBIT 2

SYSTEM TEST CONFIGURATION

INTERTEK TESTING SERVICES

2.0 **System Test Configuration**

2.1 Justification

The device was configured for testing in a typical fashion (as a customer would normally use it). The device was placed on a turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes. When the radiated emissions are measured.

The device was powered by 4 x fully charged 1.5V "AAA" battery.

The frequency range from 30 MHz to 10th harmonics was searched for spurious emissions from the device. Only those emissions reported were detected. All other emissions were at least 20 dB below the applicable limits.

INTERTEK TESTING SERVICES

2.2 EUT Exercising Software

There was no special software to exercise the device. Once the unit is powered on, a signal is transmitted.

2.3 Special Accessories

A special headset is provided by client for compliance of this device.

2.4 Equipment Modification

Any modification installed previous to testing by Lionda Technology Co. Ltd. will be incorporated in each production model sold/leased in the United States.

No modification were installed by Intertek Testing Services.

Confirmed by:

*Wilson Loke
Manager
Intertek Testing Services
Agent for Lionda Technology Co. Ltd.*



Signature

February 28, 2001 Date

INTERTEK TESTING SERVICES

EXHIBIT 3

RF POWER OUTPUT

INTERTEK TESTING SERVICES

3.0 **RF Power Output (Section 2.1046(a))**

A. Equipment Used

Equipment	Brand Name	Model No.
Biconical Antenna	CDI	B300
Test receiver	Rohde & Schwarz	ESVS30
RF Filter	Tailithic	3VF
Tuned Dipole Antenna	CDI	Robert Antenna 4
Signal Generator	Maconi	2024

B. Testing Procedure

1. On a test site, the EUT shall be placed at 1.5m height on a turn table, and in the position closest to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarisation located 3m from EUT to correspond to the frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the quasi-peak detector is used for the measurement.
4. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test.
5. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.

INTERTEK TESTING SERVICES

6. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
7. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
8. The maximum signal level detected by the measuring receiver shall be noted.
9. The transmitter shall be replaced by a tuned dipole (substitution antenna).
10. The substitution antenna shall be orientated for vertical polarisation and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
11. The substitution antenna shall be connected to a calibrated signal generator.
12. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
13. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
14. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
15. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
16. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarisation.
17. The measure of the effective radiated power is the larger of the two levels recorded, at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.

INTERTEK TESTING SERVICES

Table 1

**Lionda Technology Co. Ltd.
1014**

Transmission Power

Channel	Frequency (M Hz)	Effective Radiated Power (W)	Limit (W)	Margin (W)
1	462.563	0.01	0.5	-0.49
2	462.588	0.01	0.5	-0.49
3	462.613	0.01	0.5	-0.49
4	462.638	0.01	0.5	-0.49
5	462.663	0.01	0.5	-0.49
6	462.688	0.01	0.5	-0.49
7	462.713	0.01	0.5	-0.49
8	467.563	0.01	0.5	-0.49
9	467.588	0.01	0.5	-0.49
10	467.613	0.01	0.5	-0.49
11	467.638	0.01	0.5	-0.49
12	467.663	0.01	0.5	-0.49
13	467.688	0.01	0.5	-0.49
14	467.713	0.01	0.5	-0.49

Notes: Negative sign in the margin column shows the value below limits.

Test Engineer: Ben W. K. Ho

Date of Test: February 24, 2001

INTERTEK TESTING SERVICES

INTERTEK TESTING SERVICES

EXHIBIT 4

MODULATION CHARACTERISTICS

INTERTEK TESTING SERVICES

4.0 **Modulation Characteristics**

In order to satisfy the 95.637(a) requirement, Modulation Frequency Response and Modulation Limit Characteristics are attached in Exhibit 4.1 & 4.2.

Plots for each tests are saved with filename: mfr.pdf and mlc.pdf

INTERTEK TESTING SERVICES


4.1 Modulation Frequency Response

A. Test Equipment

Equipment	Brand Name	Model No.
Audio Signal Generator	Leader	LFG-1300S
dB meter	Leader	LMV-182A
20 dB RF Load	Bird	8304-200-N
Modulation Meter	Marconi Instrument	2945

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

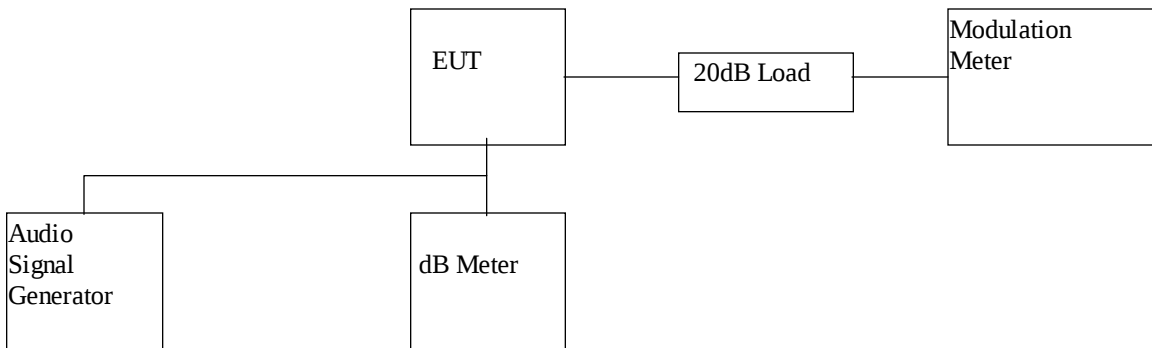

- 2) Set the audio signal generator frequency to the sound pressure level 97.0dB SPL at the microphone of the EUT.
- 3) The frequency of the audio signal generator is changed from 300Hz to 5kHz.
- 4) Record the frequency deviation.

INTERTEK TESTING SERVICES

C. Test Result

Table 2

Lionda Technology Co. Ltd.
1014

Modulation Frequency Response

Test Channel : 4

Input level = 97.0dB SPL

Modulation Frequency (Hz)	Modulation index (%)
200	0.55
300	0.43
400	0.58
500	1.10
600	0.95
700	0.93
800	0.73
900	0.68
1000	0.84
1250	0.17
1500	0.17
1750	0.21
2000	0.31
2250	0.19
2500	0.34
2750	0.29
3000	0.31
3125	0.25
3250	0.22
3500	0.19
4000	0.15
5000	0.12

Test Engineer: Ben W. K. Ho

Date of Test: February 24, 2001

INTERTEK TESTING SERVICES


4.2 Modulation Limiting Characteristics (Section 2.1047(b))

A. Test Equipment

Equipment	Brand Name	Model No.
Audio Signal Generator	Leader	LFG-1300S
20 dB RF Load	Bird	8304-200-N
Modulation Meter	Marconi	2950

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

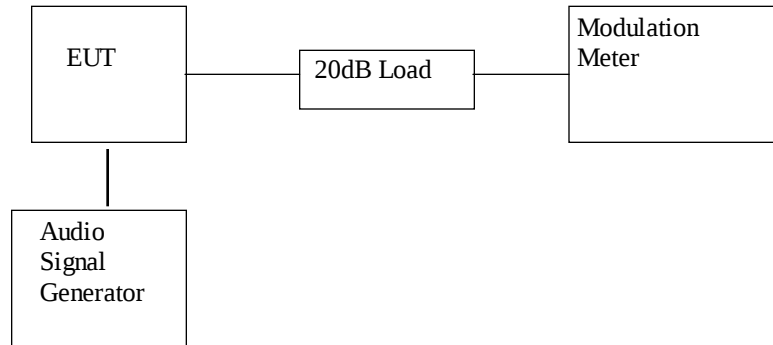

- 2) Set the frequency of the audio signal generator to 500Hz and adjust the level from 47dBSPL to 127dBSPL.
- 3) Record the maximum value of plus or minus peak frequency deviation.
- 4) Repeat the above procedure with frequency 1000Hz, 2500Hz & 3125Hz.

INTERTEK TESTING SERVICES

C. Test Result

Table 3

Lionda Technology Co. Ltd.
1014

Modulation Limiting Characteristics

Test Channel : 4

Modulation Input (dB SPL)	Peak Frequency Deviation (kHz) at 500Hz	Peak Frequency Deviation (kHz) at 1000Hz	Peak Frequency Deviation (kHz) at 2500Hz	Peak Frequency Deviation (kHz) at 3125Hz
47	0.10	0.10	0.10	0.56
57	0.10	0.10	0.10	0.56
67	0.10	0.11	0.11	0.56
77	0.12	0.14	0.14	0.57
87	0.22	0.30	0.31	0.59
97	0.54	0.81	0.84	0.80
107	1.73	2.22	1.60	1.48
117	2.22	2.28	1.64	1.71
127	2.22	2.28	1.66	1.71
137	2.22	2.28	1.67	1.71

Test Engineer: Ben W. K. Ho

Date of Test: February 24, 2001

INTERTEK TESTING SERVICES

EXHIBIT 5

OCCUPIED BANDWIDTH

INTERTEK TESTING SERVICES


5.0 Occupied Bandwidth (Section 95.633(c))

A. Test Equipment

Equipment	Brand Name	Model No.
Audio Signal Generator	Leader	LFG-1300S
dB meter	Leader	LMV-182A
20 dB RF Load	Bird	8304-200-N
Spectrum Analyzer	Hewlett Packard	8951EM

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

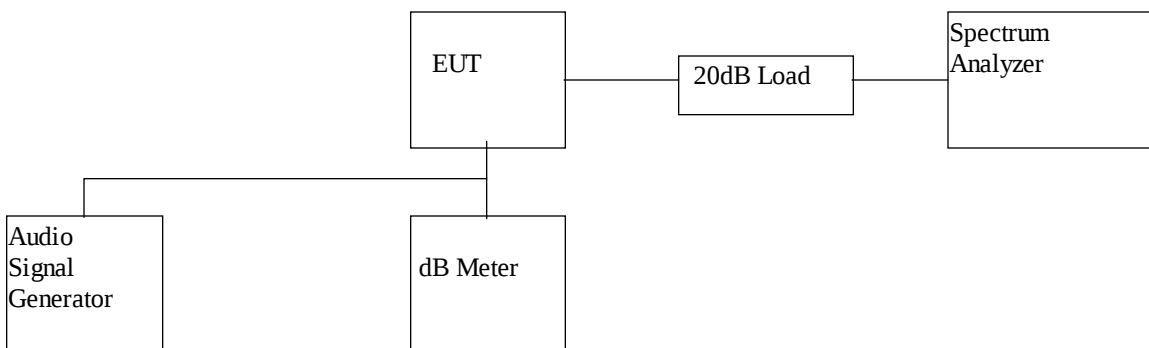

- 2) Set the level of audio signal generator to obtain 16 dB greater than required for 50% modulation.
- 3) The occupied bandwidth is measured with the spectrum analyzer set at 5kHz/div scan and 10dB/div.

C. Test Result

The occupied Bandwidth is measured to be 10.3 kHz.

For the electronic filing, the bandwidth plot is saved with filename:
bw.pdf

Test Engineer: Ben W. K. Ho

Date of Test: February 24, 2001

INTERTEK TESTING SERVICES

EXHIBIT 6

SPURIOUS EMISSION

INTERTEK TESTING SERVICES

6.0 **Spurious Emission (Section 95.635)**

In order to satisfy the 95.635 requirement, the spurious emission from the EUT are measured and shown in the Exhibit 6.1.

INTERTEK TESTING SERVICES

6.1 Field Strength of Spurious Radiation (Section 95.635)

A. Test Equipment

Equipment	Brand Name	Model No.
Antenna	CDI	B100,B200,B300, Horn
Test receiver	Rohde & Schwarz	ESVS30
RF Filter	Tailithic	3VF

B. Testing Procedure

Radiated emission measurements were performed according to the procedures in ANSI C63.4(1992). All measurements were performed in Open Area Test Sites located at Roof Top of Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.

INTERTEK TESTING SERVICES

C. Radiated Emission Configuration Photograph

Worst Case Radiated Emission

For electronic filing, the radiated emission configurations photograph is saved with filename: radiated1.jpg and radiated2.jpg

INTERTEK TESTING SERVICES

C. Test Result

Lionda Technology Co. Ltd.
1014

Table 4(a)

1. Unwanted emission from CARRIER $\pm 6.25\text{kHz}$ to Carrier $\pm 31.25\text{kHz}$

(Refer to the plots which is saved with filename: spurious.pdf)

Region	Unwanted emission	
	Channel 4	Channel 11
CARRIER $\pm 6.25\text{kHz}$ to $\pm 12.5\text{kHz}$	<25dB	<25dB
CARRIER $\pm 12.5\text{kHz}$ to $\pm 31.25\text{kHz}$	<35dB	<35dB

INTERTEK TESTING SERVICES

Table 4(b): Channel 4

Orientation	Frequency (M H z)	Reading (dB μ V)	Pre- Am p (dB)	Antenna Factor (dB)	Calculated Net at 3m (dB μ V /m)	Calculated Limit at 3m * (dB μ V /m)	Margin (dB)
V	925.280	34.0	16	22.8	40.8	82.2	-41.4
V	1387.915	67.1	34	25.5	58.6	82.2	-23.6
V	1850.558	67.7	34	26.5	60.2	82.2	-22.0
V	2313.189	52.9	34	29.1	48.0	82.2	-34.2
V	2775.829	55.1	34	29.1	50.2	82.2	-32.0
H	3238.466	50.8	34	31.4	48.2	82.2	-34.0
H	3701.106	59.2	34	32.8	58.0	82.2	-24.2
V	4163.739	51.0	34	34.2	51.2	82.2	-31.0
H	4626.375	51.3	34	31.0	48.3	82.2	-33.9
H	5089.015	44.9	34	35.2	46.1	82.2	-36.1
V	5551.680	39.0	34	36.0	41.0	82.2	-41.2
V	6014.295	43.4	34	36.5	45.9	82.2	-36.3

- Remark:
1. Quasi-peak data for emission below 1000MHz.
 2. ‘-’ sign in margin column shows the value below the limits.
 3. Any emissions and any other harmonics which are attenuated more than 20dB below the permissible value need not be recorded.
 4. Horn Antenna and average detector is used for emission over 1000MHz.

$$\begin{aligned}
 * \text{ Calculated limit} &= 10 \log_{10} (\text{TP(W)}) - 43 - 10 \log_{10} (\text{TP}) \\
 &= -43\text{dBW} \\
 &= 82.2\text{dB}\mu\text{V/m at 3m}
 \end{aligned}$$

Test Engineer: Ben W. K. Ho

Date of Test: February 24, 2001

INTERTEK TESTING SERVICES

Table 4(b): Channel 11

Orientation	Frequency (M H z)	Reading (dBμV)	Pre- Am p (dB)	Antenna Factor (dB)	Calculated Net at 3m (dBμV /m)	Calculated Limit at 3m * (dBμV /m)	M argin (dB)
V	935.276	34.6	16	22.8	41.4	82.2	-40.8
V	1402.913	68.2	34	25.5	59.7	82.2	-22.5
V	1870.551	66.4	34	26.5	58.9	82.2	-23.3
V	2338.190	54.1	34	29.1	49.2	82.2	-33.0
V	2805.826	56.0	34	29.1	51.1	82.2	-31.1
H	3273.464	51.5	34	31.4	48.9	82.2	-33.3
H	3741.103	59.9	34	32.8	58.7	82.2	-23.5
V	4208.741	52.1	34	34.2	52.3	82.2	-29.9
H	4676.379	50.2	34	34.0	50.2	82.2	-32.0
H	5144.018	45.5	34	35.2	46.7	82.2	-35.5
V	5611.656	40.1	34	36.0	42.1	82.2	-40.1
V	6079.294	43.5	34	36.5	46.0	82.2	-36.2

- Remark: 1. Quasi-peak data for emission below 1000MHz.
2. ‘-’ sign in margin column shows the value below the limits.
3. Any emissions and any other harmonics which are attenuated more than 20dB below the permissible value need not be recorded.
4. Horn Antenna and average detector is used for emission over 1000MHz.

$$\begin{aligned}
 * \text{ Calculated limit} &= 10 \log_{10} (\text{TP(W)}) - 43 - 10 \log_{10} (\text{TP}) \\
 &= -43\text{dBW} \\
 &= 82.2\text{dB}\mu\text{V/m at 3m}
 \end{aligned}$$

Test Engineer: Ben W. K. Ho

Date of Test: February 24, 2001

INTERTEK TESTING SERVICES

EXHIBIT 7

FREQUENCY STABILITY

INTERTEK TESTING SERVICES

7.0 **Frequency Stability**

The frequency tolerance was tested in normal condition & over extreme ambient conditions with respect to voltage and temperature variation.

INTERTEK TESTING SERVICES


7.1 Frequency Tolerance (Section 95.625)

A. Test Equipment

Equipment	Brand Name	Model No.
Regulated Power Supply	PAD	30-35L
20 dB RF Load	Bird	8304-200-N
Frequency Counter	Phillips	PM6668

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:



- 2) Measure all transmit channel frequencies in MHz.

INTERTEK TESTING SERVICES

C. Test Result

Table 5

**Lionda Technology Co. Ltd.
1014**

Frequency Tolerance

Channel	Frequency (M H z)	M easured Frequency (M H z)	Tolerance (%)
1	462.56250	462.56277	-0.000058
2	462.58750	462.58782	-0.000069
3	462.61250	462.61281	-0.000067
4	462.63750	462.63779	-0.000063
5	462.66250	462.66278	-0.000061
6	462.68750	462.68772	-0.000048
7	462.71250	462.71272	-0.000048
8	467.56250	467.56275	-0.000053
9	467.58750	467.58772	-0.000047
10	467.61250	467.61271	-0.000045
11	467.63750	467.63770	-0.000043
12	467.66250	467.66269	-0.000041
13	467.68750	467.68768	-0.000038
14	467.71250	467.71266	-0.000034

INTERTEK TESTING SERVICES


7.2 Frequency Stability - Temperature (Section 2.1055)

A. Test Equipment

Equipment	Brand Name	Model No.
20 dB RF Load	Bird	8304-200-N
Frequency Counter	Phillips	PM6668

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

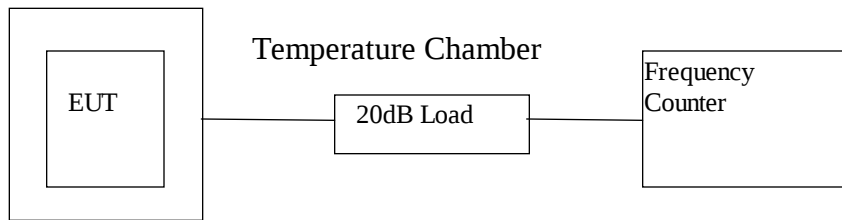

- 2) Set the Temperature Chamber to -20°C and stabilize the EUT temperature for one hour.
Set transmitter ON for two minutes.
- 3) Measure the channel frequency of channel 4, 11 in MHz.
- 4) Turn the EUT OFF
- 5) Repeat the above procedure from -20°C to 50°C with 10°C increment.

INTERTEK TESTING SERVICES

C. Test Result

Table 6(a)

**Lionda Technology Co. Ltd.
1014**

Frequency Deviation with Temperature Variation

Channel : 4

Temperature (°C)	Assigned Frequency (M H z)	Measured Frequency (M H z)	% Deviation
-30	462.63750	No Transmission	Not Applicable
-20	462.63750	462.63799	0.000106
-10	462.63750	462.63767	0.000037
0	462.63750	462.63812	0.000134
10	462.63750	462.63812	0.000134
20	462.63750	462.63779	0.000063
30	462.63750	462.63768	0.000039
40	462.63750	462.63704	-0.000099
50	462.63750	462.63690	-0.000130

Test Engineer: Ben W. K. Ho

Date of Test: February 24, 2001

INTERTEK TESTING SERVICES

C. Test Result

Table 6(b)

**Lionda Technology Co. Ltd.
1014**

Frequency Deviation with Temperature Variation

Channel : 11

Temperature (°C)	Assigned Frequency (M H z)	Measured Frequency (M H z)	% Deviation
-30	467.63750	No Transmission	Not Applicable
-20	467.63750	467.63801	0.000109
-10	467.63750	467.63736	-0.000030
0	467.63750	467.63812	0.000133
10	467.63750	467.63811	0.000130
20	467.63750	467.63770	0.000043
30	467.63750	467.63767	0.000036
40	467.63750	467.63715	-0.000075
50	467.63750	467.63694	-0.000120

Test Engineer: Ben W. K. Ho

Date of Test: February 24, 2001

INTERTEK TESTING SERVICES


7.3 Frequency Stability - Voltage (Section 2.1055)

A. Test Equipment

Equipment	Brand Name	Model No.
Regulated Power Supply	PAD	30-35L
20 dB RF Load	Bird	8304-200-N
Voltage meter	Fluke	87
Frequency Counter	Phillips	PM6668

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

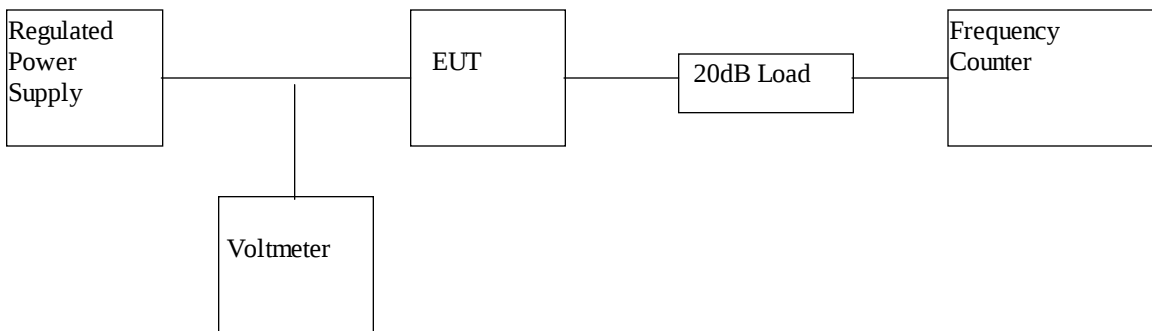

- 2) Vary the level of regulated power supply to the manufacturer specified battery end point of the EUT.
- 3) Measure the channel frequency from channel 1 to 14 in MHz.

INTERTEK TESTING SERVICES

C. Test Result

Table 7

**Lionda Technology Co. Ltd.
1014**

Frequency Deviation with Voltage Variation

The manufacturer specified battery end point 4.0V

Channel	Frequency (M H z)	Measured Frequency (M H z)	Tolerance (%)
4	462.63750	462.63756	0.000013
11	467.63750	467.63756	0.000013

INTERTEK TESTING SERVICES

EXHIBIT 8

TECHNICAL SPECIFICATIONS

INTERTEK TESTING SERVICES

8.0 Technical Specifications

INTERTEK TESTING SERVICES

8.1 Block Diagram

For electronic filing, the block diagram of the FRS is saved with filename:
block.pdf

Figure 8.1 Block Diagram

INTERTEK TESTING SERVICES

8.2 Schematic Diagram

For electronic filing, the schematic diagram of the FRS is saved with filename: circuit.pdf

Figure 8.2 Schematic Diagram

INTERTEK TESTING SERVICES

EXHIBIT 9

PRODUCT LABELLING

INTERTEK TESTING SERVICES

9.0 **Product Labelling**

INTERTEK TESTING SERVICES

9.1 Label Artwork & Location

Figure 9.1 Label Artwork & Location

An engineering drawing of the label which will be permanently affixed to the unit. For electronic filing, the label artwork & location are saved with filename: label.pdf

INTERTEK TESTING SERVICES

EXHIBIT 10

PHOTOGRAPHS

INTERTEK TESTING SERVICES

10.0 **Equipment Photographs**

For electronic filing, photographs of the tested EUT are saved with filename:
ophoto1.jpg to ophoto2.jpg for external photo and iphoto1.jpg to iphoto3.jpg for internal
photo.

INTERTEK TESTING SERVICES

EXHIBIT 11

INSTRUCTION MANUAL

INTERTEK TESTING SERVICES

11.0 **Instruction Manual**

This manual will be provided to the end-user with each unit sold/leased in the United States.

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf