

ATTACHMENT O – SAR TEST PLOTS

Test Laboratory: HCT

Company : UTStarcom Inc.
Mode : PCS1900/Antenna : in/Channel:25
Liquid Temperature : 22.1 °C
Date Tested : July 23, 2006

DUT: PCS1400VM; Type: Bar; Serial: #1

Communication System: PCS 1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 25/Area Scan (51x91x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.55 mW/g

Left touch 25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 29.9 V/m; Power Drift = 0.127 dB

Peak SAR (extrapolated) = 2.60 W/kg

SAR(1 g) = 1.25 mW/g; SAR(10 g) = 0.637 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.53 mW/g

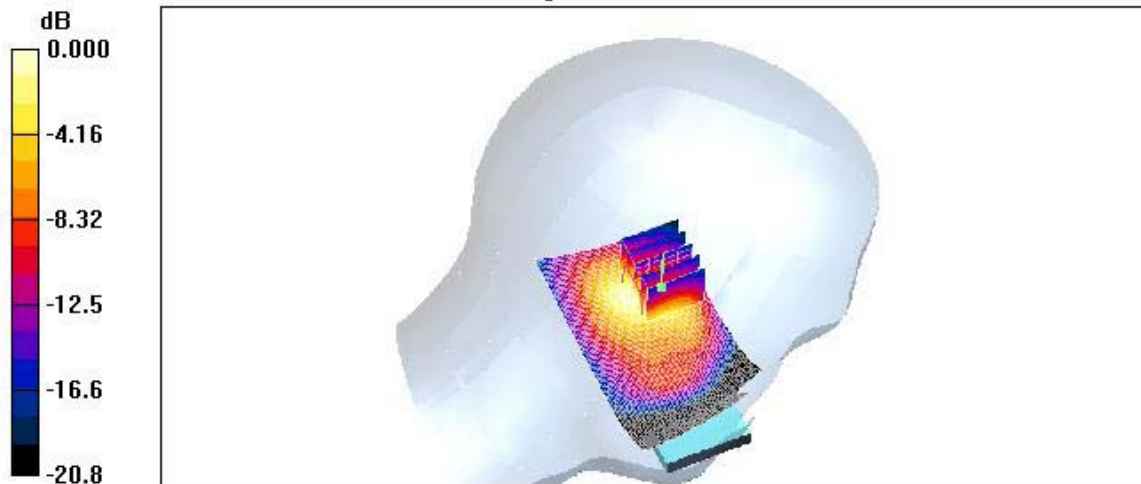

0 dB = 1.53mW/g

Test Laboratory: HCT

Company : UTStarcom Inc.
Mode : PCS1900/ Antenna : in/ Channel :600
Liquid Temperature : 22.1 °C
Date Tested : July 23, 2006

DUT: PCS1400VM; Type: Bar; Serial: #1

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 600/Area Scan (51x91x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 1.83 mW/g


Left touch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 33.5 V/m; Power Drift = -0.120 dB

Peak SAR (extrapolated) = 3.04 W/kg

SAR(1 g) = 1.47 mW/g; SAR(10 g) = 0.760 mW/g

Maximum value of SAR (measured) = 1.73 mW/g

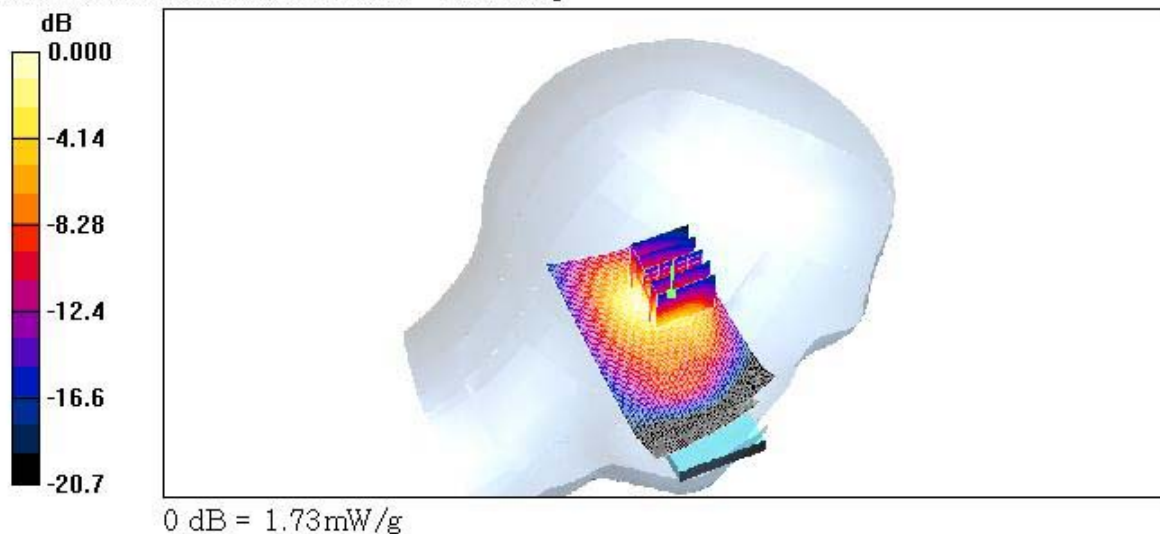

Test Laboratory: HCT

Company : UTStarcom Inc.
Mode : PCS1900/ Antenna : in/ Channel :1175
Liquid Temperature : 22.1℃
Date Tested : July 23, 2006

DUT: PCS1400VM; Type: Bar; Serial: #1

Communication System: PCS 1900; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1908.75 \text{ MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 38.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 1175/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.56 mW/g

Left touch 1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 33.9 V/m; Power Drift = -0.112 dB

Peak SAR (extrapolated) = 2.77 W/kg

SAR(1 g) = 1.33 mW/g; SAR(10 g) = 0.696 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.56 mW/g

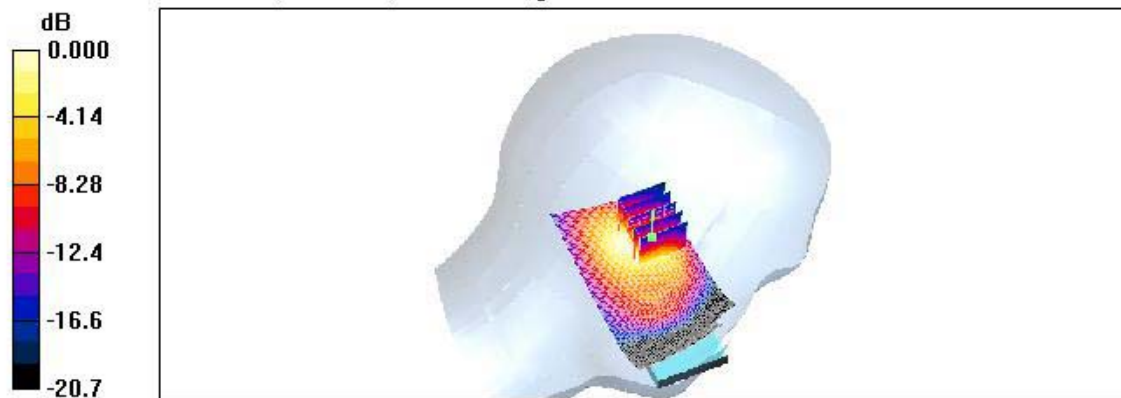

0 dB = 1.56mW/g

Test Laboratory: HCT

Company : UTStarcom Inc.
Mode : PCS1900/ Antenna : in/ Channel :25
Liquid Temperature : 22.1 °C
Date Tested : July 23, 2006

DUT: PCS1400VM; Type: Bar; Serial: #1

Communication System: PCS 1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 25/Area Scan (51x91x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.18 mW/g

Right touch 25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm


Reference Value = 26.5 V/m; Power Drift = 0.179 dB

Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.585 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.14 mW/g

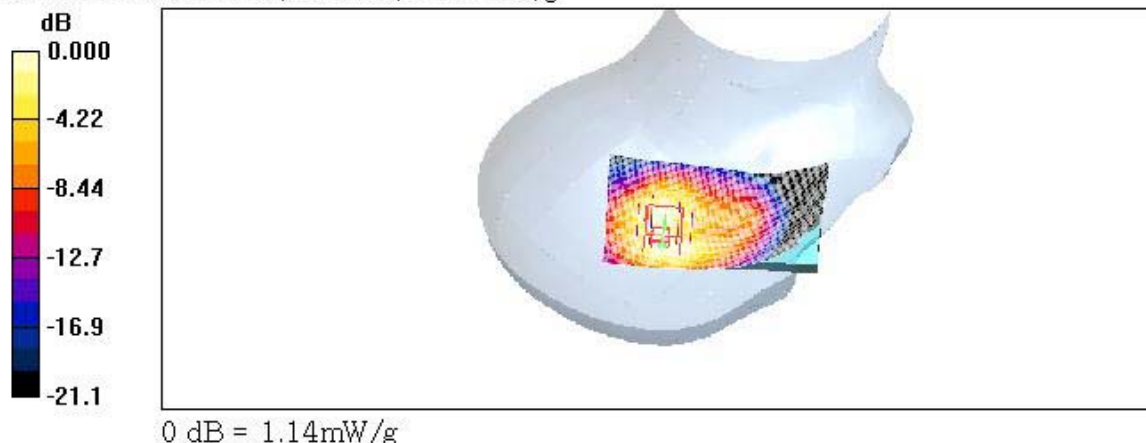

Test Laboratory: HCT

Company : UTStarcom Inc.
Mode : PCS1900/ Antenna : in/ Channel :600
Liquid Temperature : 22.1 °C
Date Tested : July 23, 2006

DUT: PCS1400VM; Type: Bar; Serial: #1

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.44 \text{ mho/m}$; $\epsilon_r = 38.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 600/Area Scan (51x91x1): Measurement grid: $\Delta x = 15\text{mm}$, $\Delta y = 15\text{mm}$

Maximum value of SAR (interpolated) = 1.44 mW/g


Right touch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8\text{mm}$, $\Delta y = 8\text{mm}$, $\Delta z = 5\text{mm}$

Reference Value = 29.9 V/m; Power Drift = -0.164 dB

Peak SAR (extrapolated) = 2.18 W/kg

SAR(1 g) = 1.31 mW/g; SAR(10 g) = 0.718 mW/g

Maximum value of SAR (measured) = 1.46 mW/g

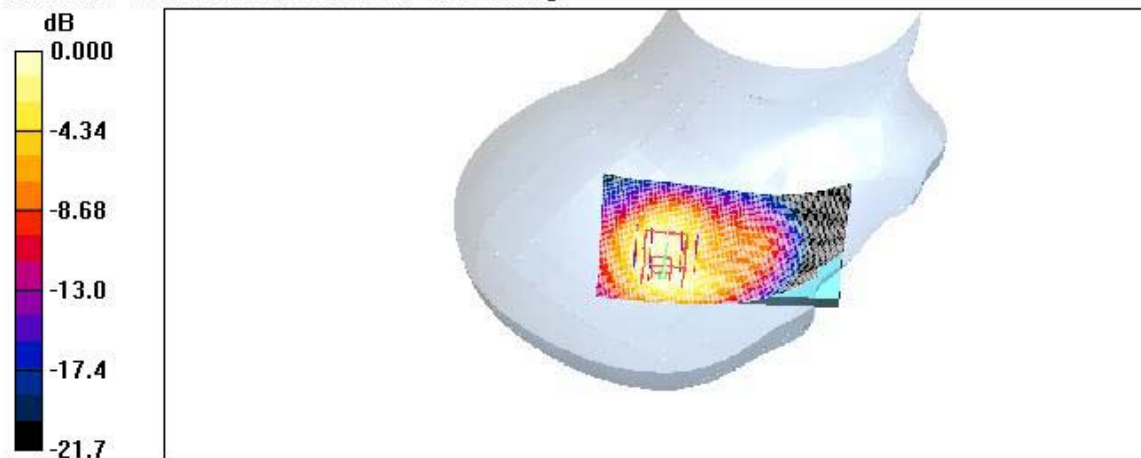

0 dB = 1.46mW/g

Test Laboratory: HCT

Company : UTStarcom Inc.
Mode : PCS1900/ Antenna : in/ Channel :1175
Liquid Temperature : 22.1 °C
Date Tested : July 23, 2006

DUT: PCS1400VM; Type: Bar; Serial: #1

Communication System: PCS 1900; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1908.75 \text{ MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 38.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 1175/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 1.45 mW/g


Right touch 1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 28.3 V/m; Power Drift = -0.186 dB

Peak SAR (extrapolated) = 2.19 W/kg

SAR(1 g) = 1.3 mW/g; SAR(10 g) = 0.701 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 1.43 mW/g

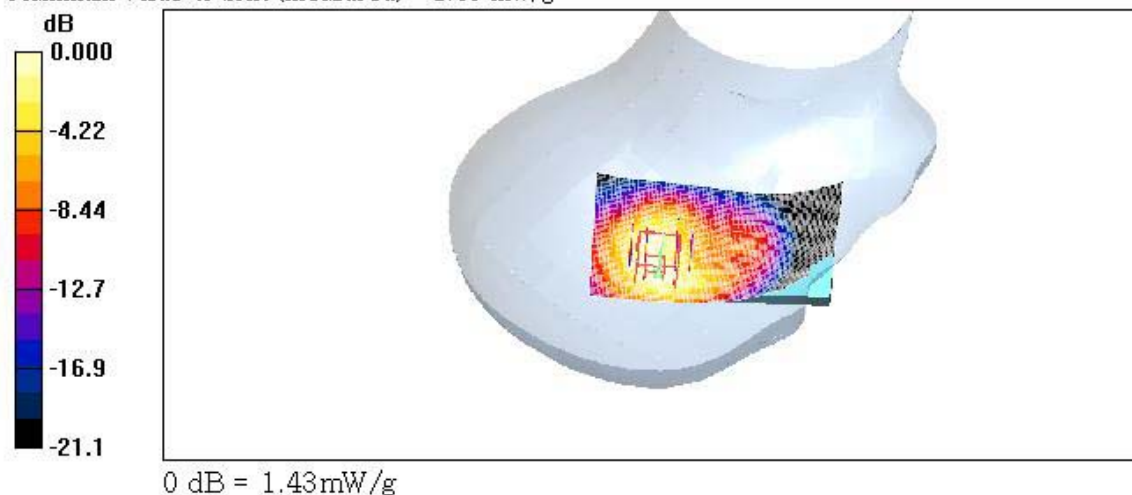

Test Laboratory: HCT

Company : UTStarcom Inc.

Mode : PCS1900/ Antenna : in/ Channel :25

Liquid Temperature : 22.1 °C

Date Tested : July 23, 2006

DUT: PCS1400VM; Type: Bar; Serial: #1

Communication System: PCS 1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn446; Calibrated: 2006-03-17

- Phantom: SAM 1800/1900 MHz; Type: SAM

Left tilt 25/Area Scan (51x91x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.35 mW/g

Left tilt 25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 29.8 V/m; Power Drift = 0.057 dB

Peak SAR (extrapolated) = 2.17 W/kg

SAR(1 g) = 1.19 mW/g; SAR(10 g) = 0.631 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.28 mW/g

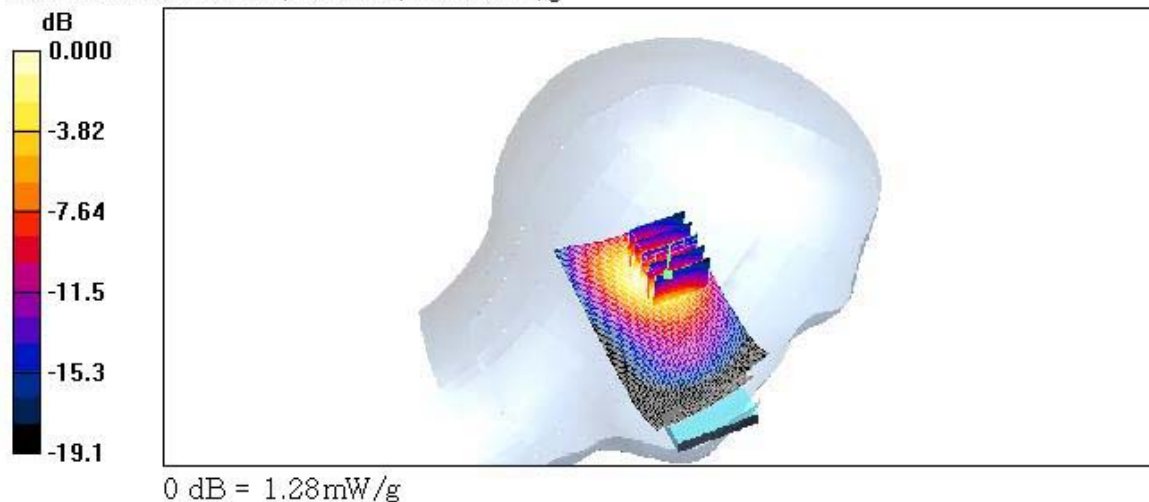

Test Laboratory: HCT

Company : UTStarcom Inc.
Mode : PCS1900/ Antenna : in/ Channel :600
Liquid Temperature : 22.1℃
Date Tested : July 23, 2006

DUT: PCS1400VM; Type: Bar; Serial: #1

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.44 \text{ mho/m}$; $\epsilon_r = 38.3$; $\rho = 1000 \text{ kg/m}^3$


Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

Left tilt 600/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 1.56 mW/g

Left tilt 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 32.1 V/m; Power Drift = 0.089 dB
Peak SAR (extrapolated) = 2.68 W/kg
SAR(1 g) = 1.41 mW/g; SAR(10 g) = 0.742 mW/g
Maximum value of SAR (measured) = 1.55 mW/g

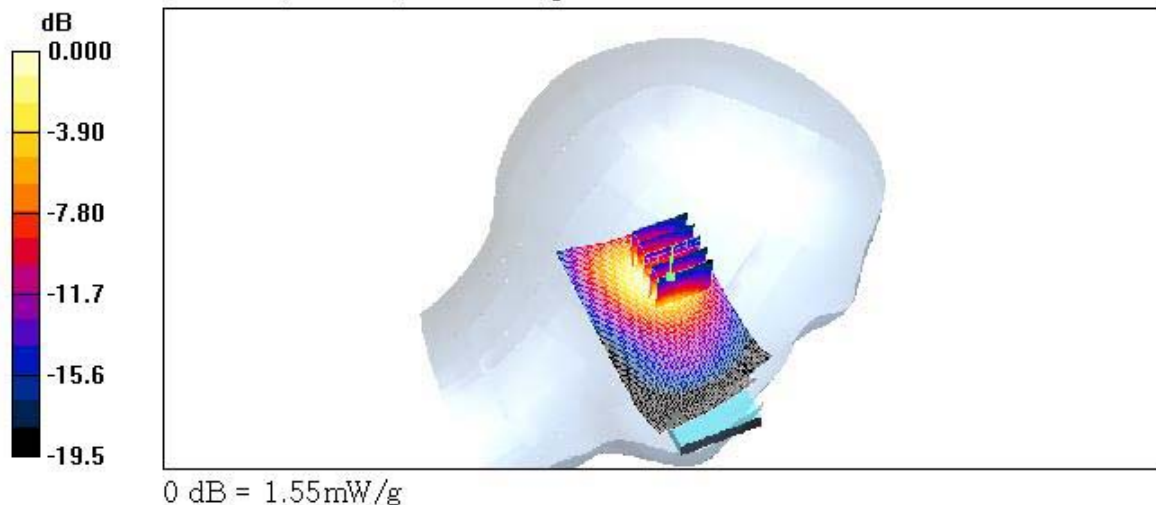

Test Laboratory: HCT

Company : UTStarcom Inc.
Mode : PCS1900/ Antenna : in/ Channel :1175
Liquid Temperature : 22.1℃
Date Tested : July 23, 2006

DUT: PCS1400VM; Type: Bar; Serial: #1

Communication System: PCS 1900; Frequency: 1908.75 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1908.75 \text{ MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 38.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

Left tilt 1175/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 1.44 mW/g


Left tilt 1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 31.0 V/m; Power Drift = -0.070 dB

Peak SAR (extrapolated) = 2.44 W/kg

SAR(1 g) = 1.29 mW/g; SAR(10 g) = 0.678 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 1.41 mW/g

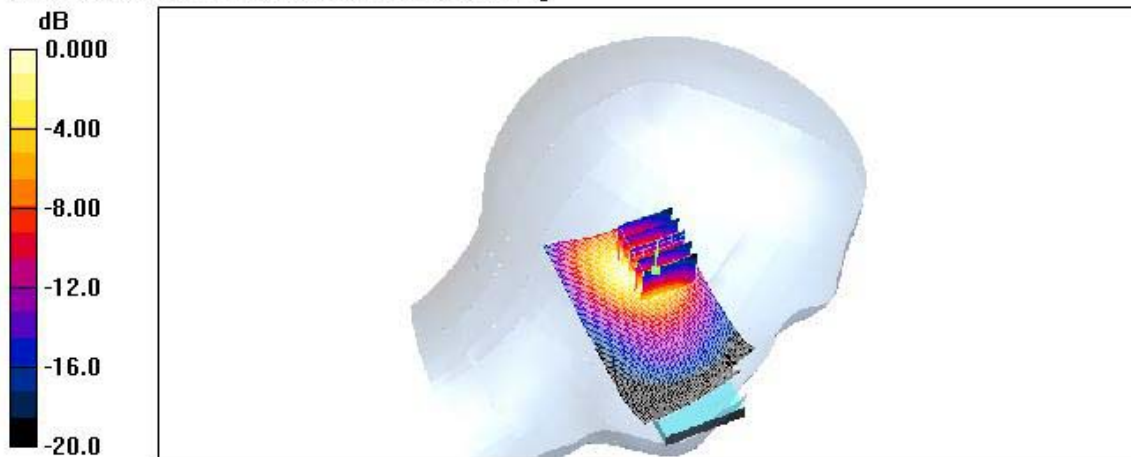

Test Laboratory: HCT

Company : UTStarcom Inc.
Mode : PCS1900/ Antenna : in/ Channel :25
Liquid Temperature : 22.1 °C
Date Tested : July 23, 2006

DUT: PCS1400VM; Type: Bar; Serial: #1

Communication System: PCS 1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section ;Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right tilt 25/Area Scan (51x91x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.15 mW/g

Right tilt 25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 27.2 V/m; Power Drift = 0.139 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.924 mW/g; SAR(10 g) = 0.534 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.999 mW/g

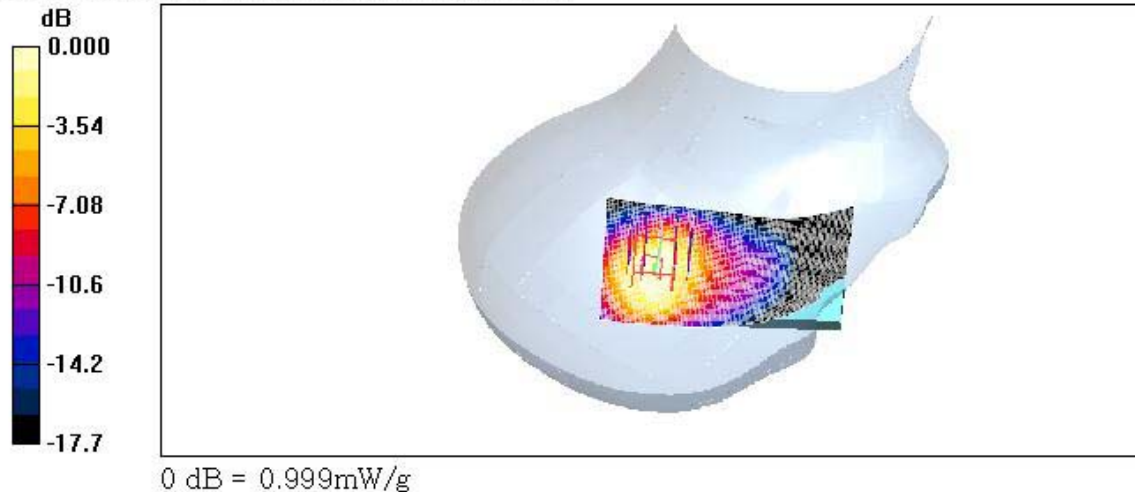

Test Laboratory: HCT

Company : UTStarcom Inc.
Mode : PCS1900/ Antenna : in/ Channel :600
Liquid Temperature : 22.1℃
Date Tested : July 23, 2006

DUT: PCS1400VM; Type: Bar; Serial: #1


Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.44 \text{ mho/m}$; $\epsilon_r = 38.3$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right tilt 600/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 1.37 mW/g

Right tilt 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 30.2 V/m; Power Drift = -0.002 dB
Peak SAR (extrapolated) = 1.86 W/kg
SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.647 mW/g
Maximum value of SAR (measured) = 1.23 mW/g

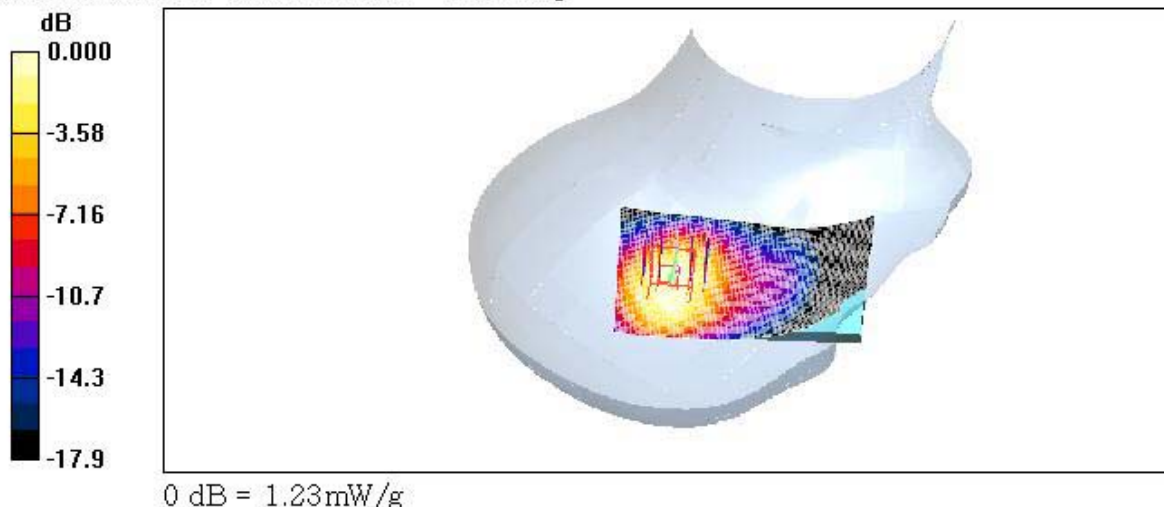

Test Laboratory: HCT

Company : UTStarcom Inc.
Mode : PCS1900/ Antenna : in/ Channel :1175
Liquid Temperature : 22.1℃
Date Tested : July 23, 2006

DUT: PCS1400VM; Type: Bar; Serial: #1

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.44 \text{ mho/m}$; $\epsilon_r = 38.3$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right tilt 1175/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 1.30 mW/g

Right tilt 1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 29.9 V/m; Power Drift = 0.069 dB
Peak SAR (extrapolated) = 1.70 W/kg
SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.595 mW/g
Maximum value of SAR (measured) = 1.13 mW/g

