

### C3000 (Body)

SAM II Phantom, Flat Section; Position: (90°,90°); Frequency: 835 MHz

Probe: ET3DV6 - SN1609; ConvF(6.47,6.47,6.47); Crest factor: 1.0; Body 835 MHz:  $\sigma = 0.97$  mho/m  $\epsilon_r = 54.2$   $\rho = 1.00$  g/cm<sup>3</sup>

Cube 5x5x7: SAR (1g): 0.231 mW/g, SAR (10g): 0.161 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -0.05 dB

Comment :

MODEL: C3000

Company : UTStarcom Inc.


Test Position: Body / Antenna: in

Mode: CDMA / Channel: 777 (848.31MHz)

Conducted Power : 25.0 dBm

Liquid Temperature: 21.6°C

Date Tested : June 24, 2005

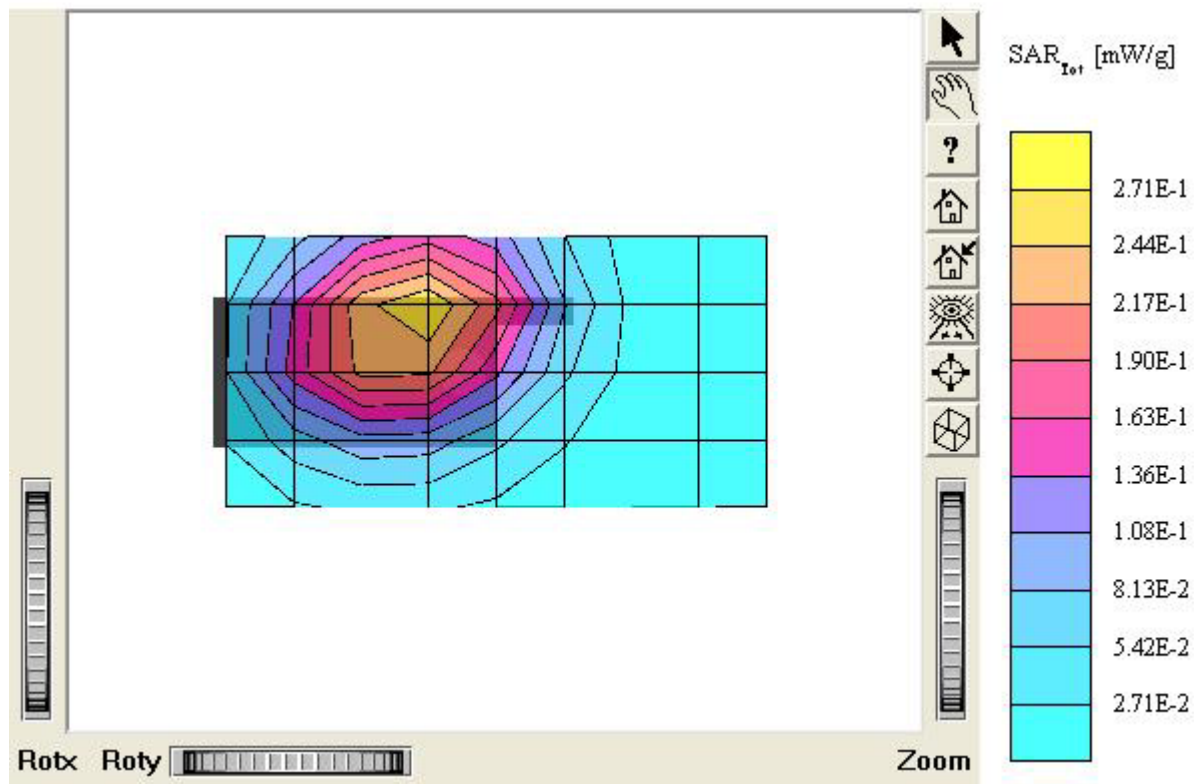

## C3000 (Body)

SAM II Phantom; Flat Section; Position: (90°, 90°); Frequency: 835 MHz

Probe: ET3DV6 - SN1609; ConvF(6.47,6.47,6.47); Crest factor: 1.0; Body 835 MHz:  $\sigma = 0.97$  mho/m  $\epsilon_r = 54.2$   $\rho = 1.00$  g/cm<sup>3</sup>

Cube 5x5x7: SAR (1g): 0.250 mW/g, SAR (10g): 0.175 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -0.08 dB

Comment :

MODEL: C3000

Company : UTStarcom Inc.


Test Position: Body / Antenna: out

Mode: CDMA / Channel: 777 (848.31MHz)

Conducted Power : 25.0 dBm

Liquid Temperature: 21.6°C

Date Tested : June 24, 2005

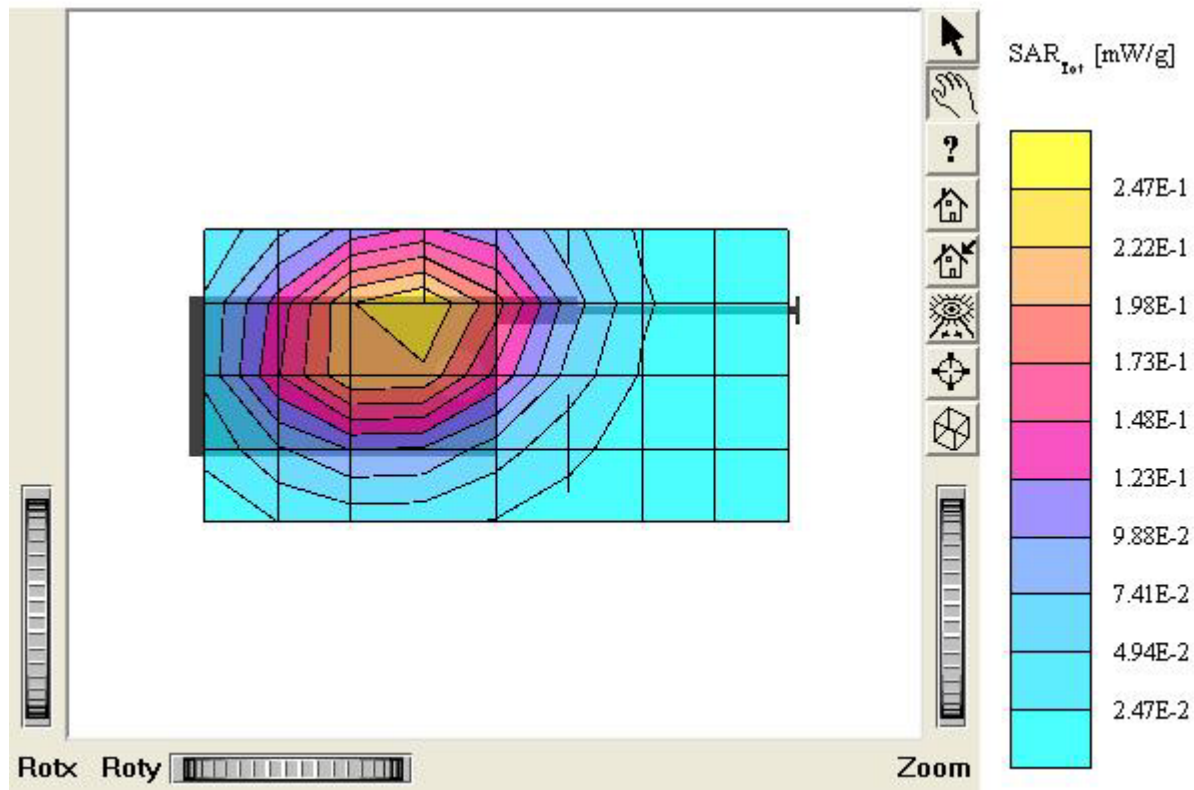

## C3000 (Body)

SAM I Phantom; Flat Section; Position: (90°,90°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz:  $\sigma = 1.51 \text{ mho/m}$   $\epsilon_r = 52.8$

$\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR(1g): 0.570 mW/g, SAR(10g): 0.348 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: 0.01 dB

Comment :

MODEL: C3000

Company : UTStarcom Inc.


Test Position : Body / Antenna: in

Mode: PCS CDMA / Channel: 25 (1851.25MHz)

Conducted Power : 25.0 dBm

Liquid Temperature: 21.6°C

Date Tested : June 24, 2005

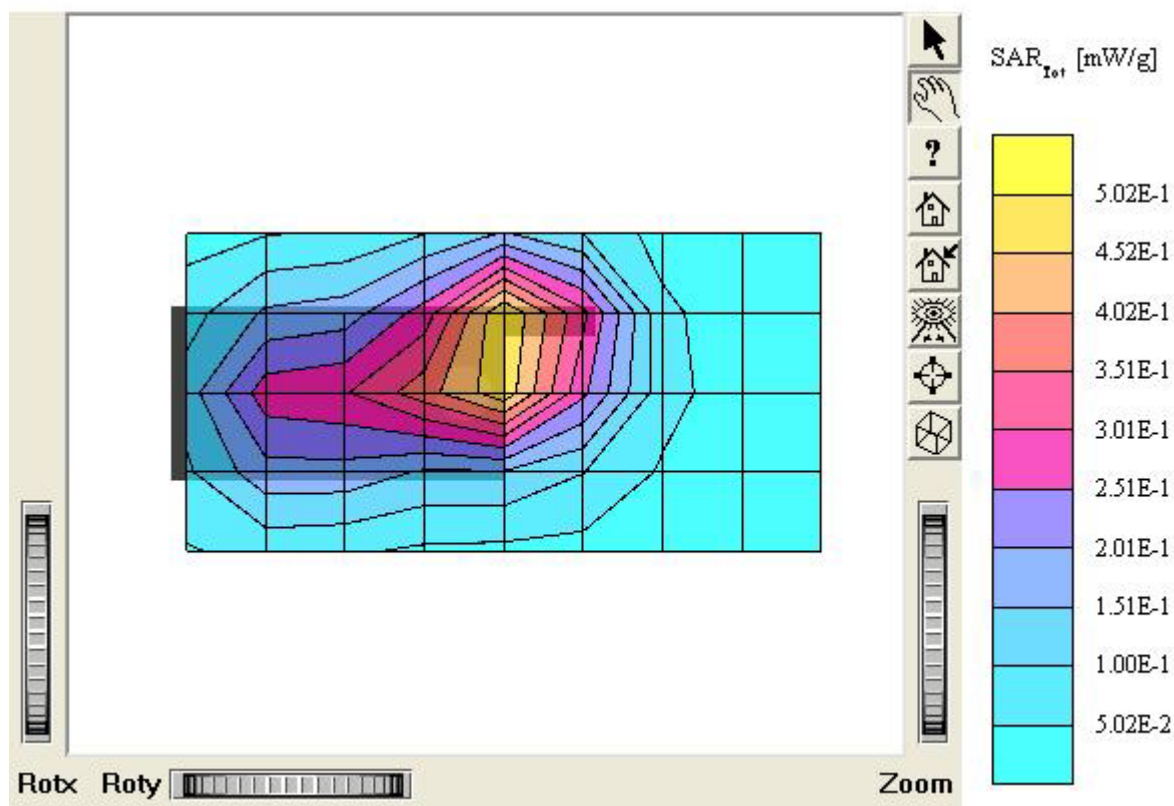

**C3000 (Body)**

SAM I Phantom; Flat Section; Position: (90°,90°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz:  $\sigma = 1.51 \text{ mho/m}$   $\epsilon_r = 52.8$   $\rho = 1.00 \text{ g/cm}^3$ 

Cube 5x5x7: SAR(1g): 0.663 mW/g, SAR(10g): 0.411 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: 0.08 dB

Comment :

MODEL: C3000


Company : UTStarcom Inc.

Mode: PCS CDMA / Channel: 25 (1851.25MHz)

Conducted Power : 25.0 dBm

Liquid Temperature: 21.6°C

Date Tested : June 24, 2005

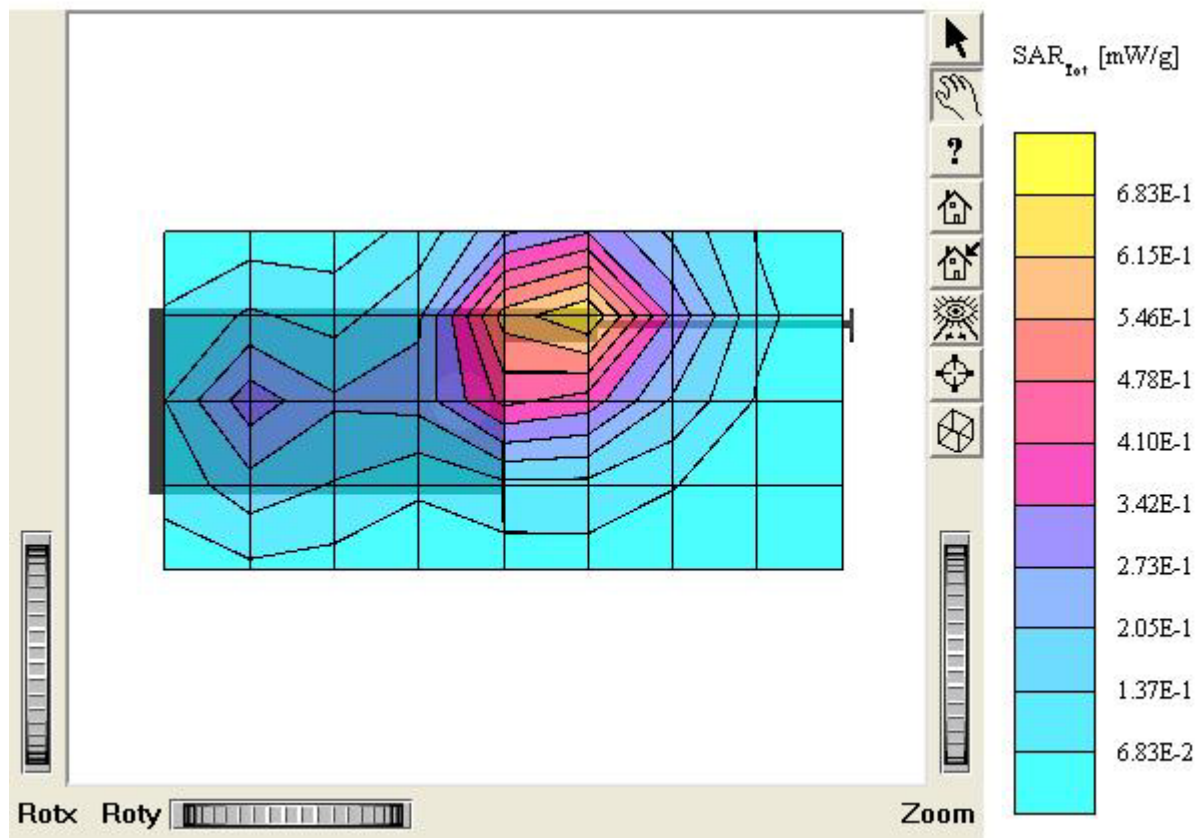

## C3000 (Body)

SAM I Phantom; Flat Section; Position: (90°, 90°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz:  $\sigma = 1.51 \text{ mho/m}$   $\epsilon_r = 52.8$   $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.488 mW/g, SAR (10g): 0.297 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: 0.01 dB

Comment :

MODEL: C3000

Company : UTStarcom Inc.


Test Position : Body / Antenna: in

Mode: PCS CDMA / Channel: 600 (1880.00MHz)

Conducted Power : 25.0 dBm

Liquid Temperature: 21.6°C

Date Tested : June 24, 2005

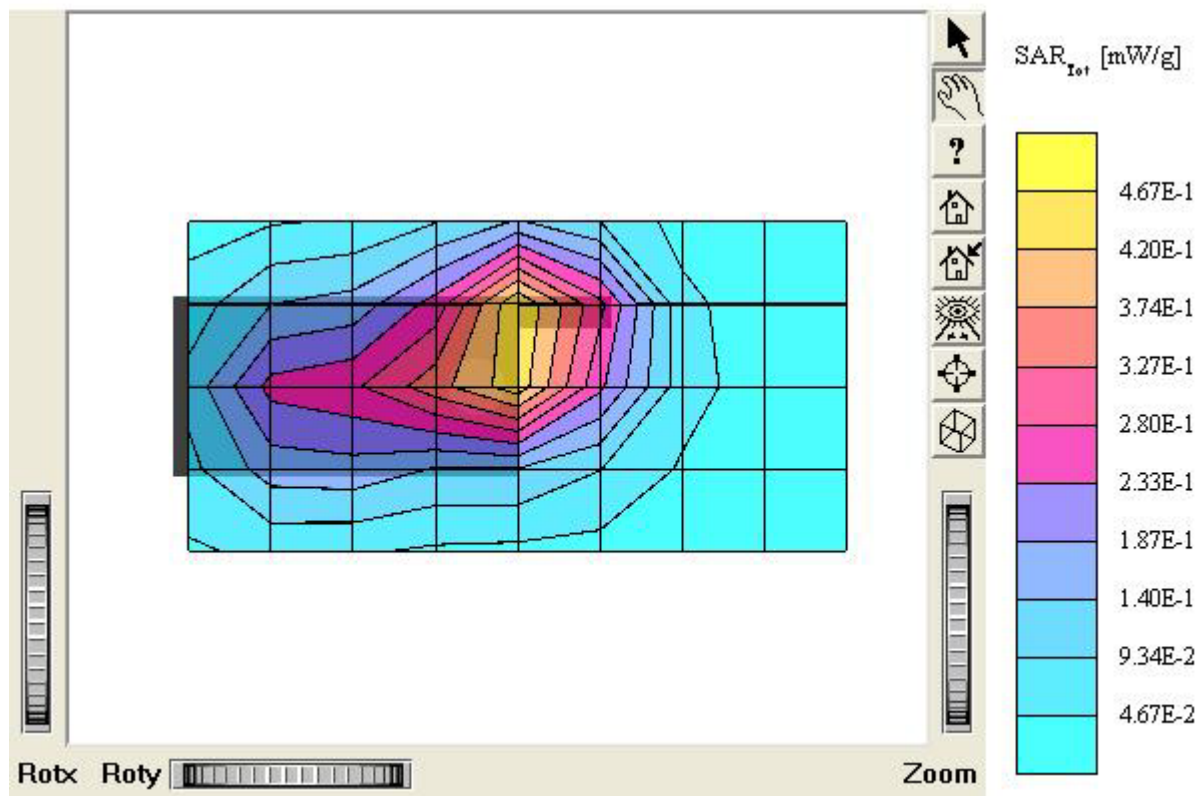

## C3000 (Body)

SAM I Phantom; Flat Section; Position: (90°,90°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz:  $\sigma = 1.51$  mho/m  $\epsilon_r = 52.8$   $\rho = 1.00$  g/cm<sup>3</sup>

Cube 5x5x7: SAR (1g): 0.639 mW/g, SAR (10g): 0.393 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: 0.13 dB

Comment :

MODEL: C3000

Company : UTStarcom Inc.


Test Position : Body / Antenna: out

Mode: PCS CDMA / Channel: 600 (1880.00MHz)

Conducted Power : 25.0 dBm

Liquid Temperature: 21.6°C

Date Tested : June 24, 2005

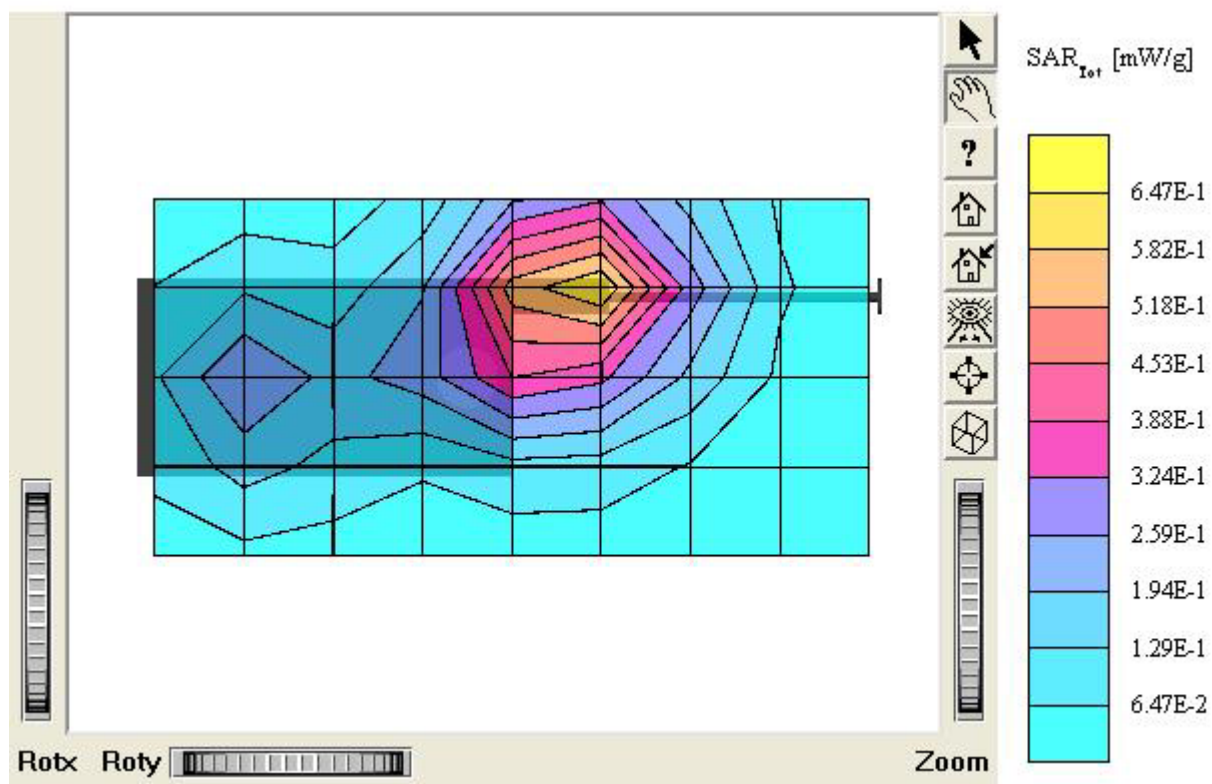

## C3000 (Body)

SAM I Phantom; Flat Section; Position: (90°,90°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz:  $\sigma = 1.51 \text{ mho/m}$ ,  $\epsilon_r = 52.8$ ,  $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR(1g): 0.443 mW/g, SAR(10g): 0.267 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: 0.02 dB

Comment :

MODEL: C3000

Company : UTStarcom Inc.


Test Position : Body / Antenna: in

Mode: PCS CDMA / Channel: 1175 (1908.75MHz)

Conducted Power : 25.0 dBm

Liquid Temperature: 21.6°C

Date Tested : June 24, 2005

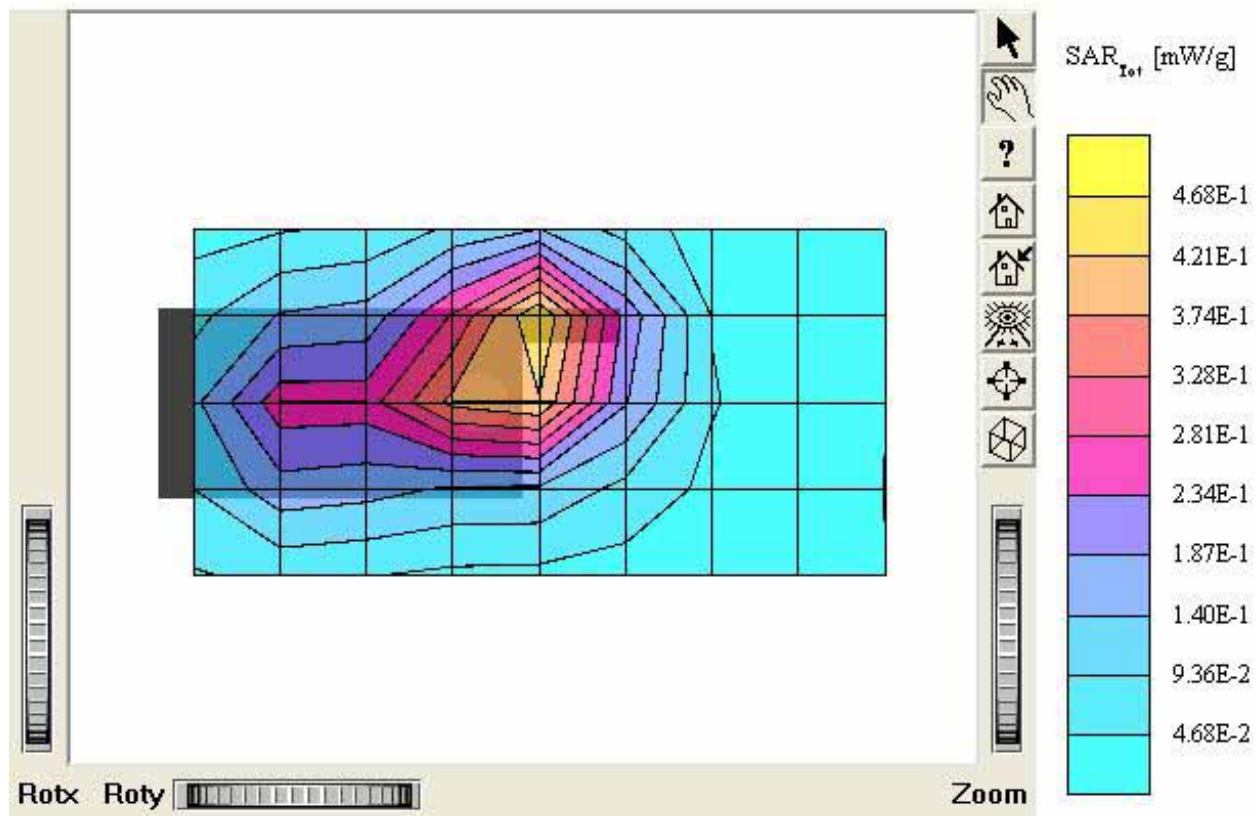

**C3000 (Body)**

SAM I Phantom, Flat Section, Position: (90°,90°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz:  $\sigma = 1.51 \text{ mho/m}$ ,  $\epsilon_r = 52.8$ ,  $\rho = 1.00 \text{ g/cm}^3$ 

Cube 5x5x7: SAR(1g): 0.687 mW/g, SAR(10g): 0.419 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: 0.19 dB

Comment :

MODEL: C3000

Company : UTStarcom Inc.


Test Position : Body / Antenna: out

Mode: PCS CDMA / Channel: 1175 (1908.75MHz)

Conducted Power : 25.0 dBm

Liquid Temperature: 21.6°C

Date Tested : June 24, 2005

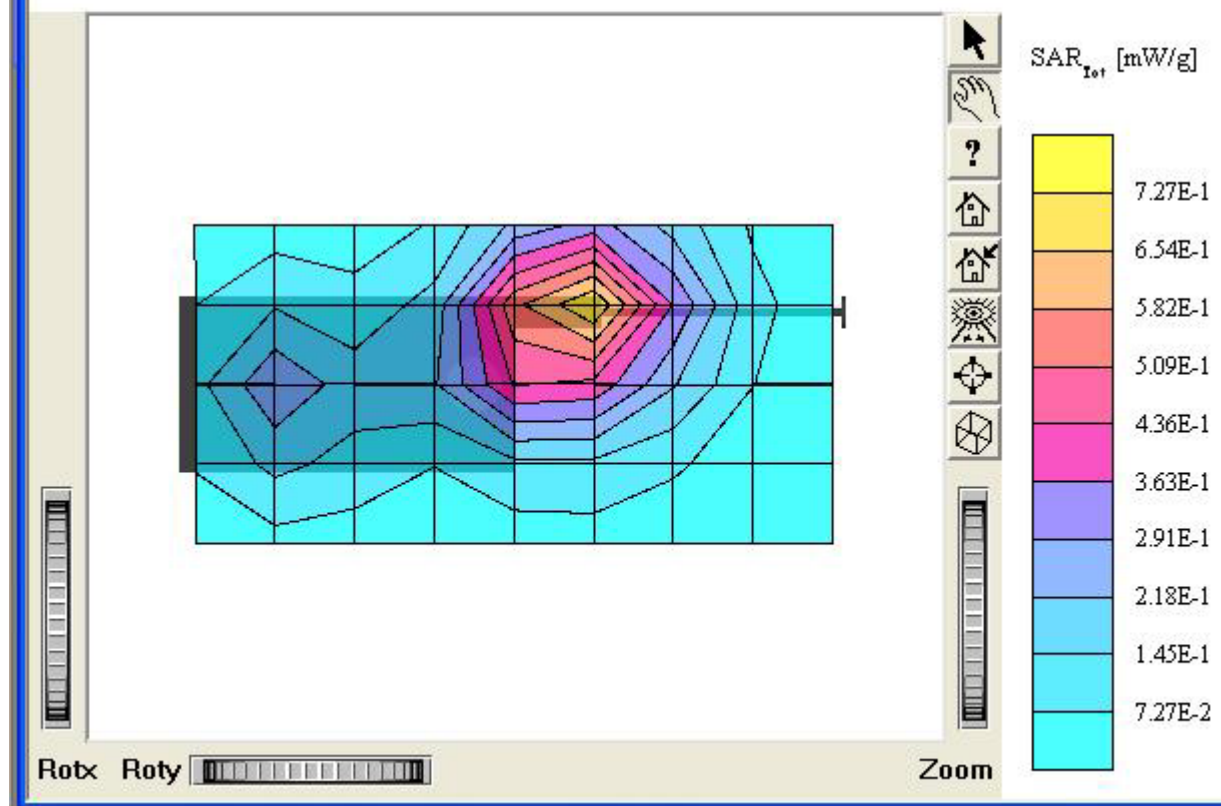

## C3000 (Body)

SAM II Phantom; Section; Position: ; Frequency: 835 MHz

Probe: ET3DV6 - SN1609; ConvF(6.47,6.47,6.47); Crest factor: 1.0; Body 835 MHz:  $\sigma = 0.97$  mho/m  $\epsilon_r = 54.2$   $\rho = 1.00$  g/cm<sup>3</sup>

:

Z-Axis: Dx = 0.0, Dy = 0.0, Dz = 5.0

Comment :

MODEL: C3000

Company : UTStarcom Inc.


Test Position: Body / Antenna: out

Mode: AMPS / Channel: 383 (836.49MHz)

Conducted Power: 26.3 dBm

Liquid Temperature: 21.6°C

Date Tested : June 24, 2005

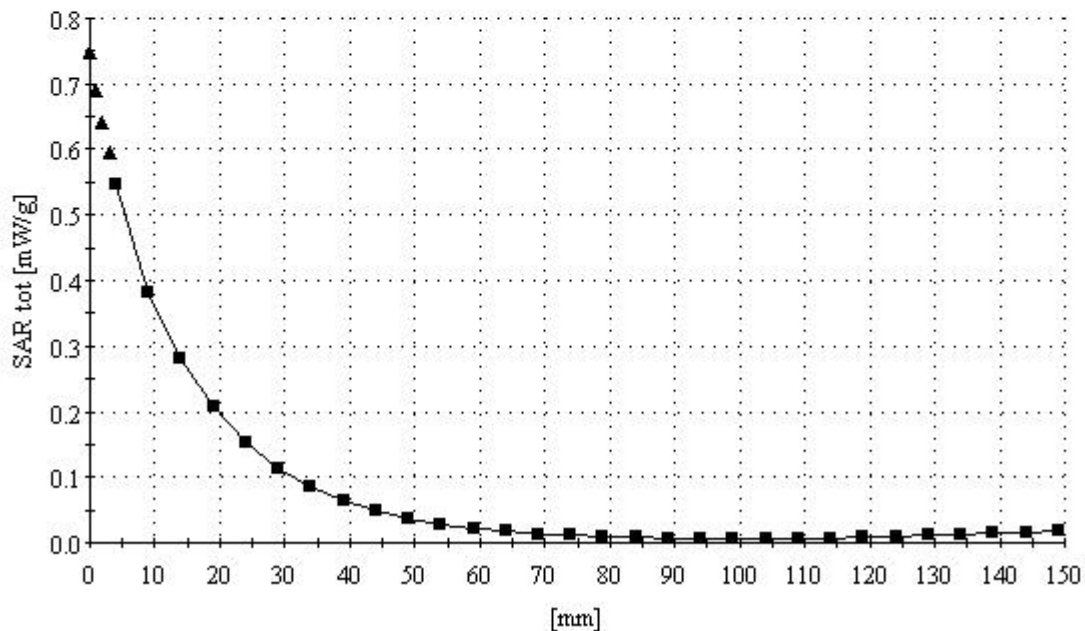

## C3000 (Body)

SAM II Phantom; Section; Position: ; Frequency: 835 MHz

Probe: ET3DV6 - SN1609; ConvF(6.47,6.47,6.47); Crest factor: 1.0; Body 835 MHz:  $\sigma = 0.97$  mho/m  $\epsilon_r = 54.2$   $\rho = 1.00$  g/cm<sup>3</sup>

:

Z-Axis: Dx = 0.0, Dy = 0.0, Dz = 5.0

Comment :

MODEL: C3000

Company : UTStarcom Inc.


Test Position: Body / Antenna: out

Mode: CDMA / Channel: 363 (835.89MHz)

Conducted Power : 25.0 dBm

Liquid Temperature: 21.6°C

Date Tested : June 24, 2005

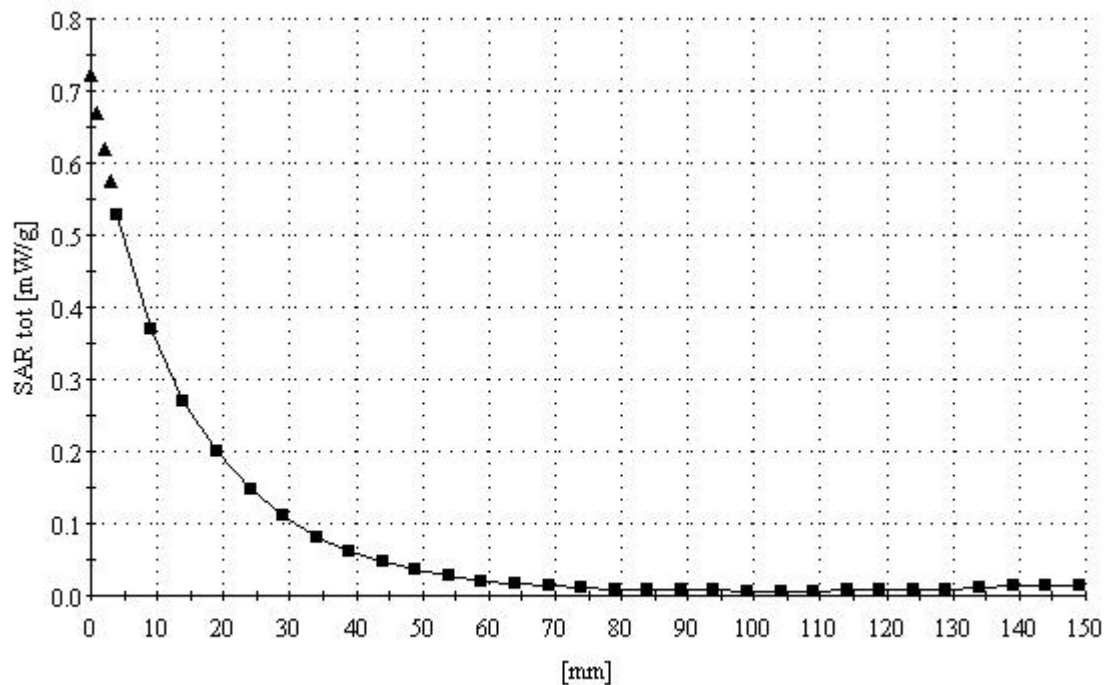

**C3000 (Body)**

SAM I Phantom; Section; Position : ; Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz:  $\sigma = 1.51 \text{ mho/m}$   $\epsilon_r = 52.8$   $\rho = 1.00 \text{ g/cm}^3$ 

:

Z-Axis: Dx = 0.0, Dy = 0.0, Dz = 5.0

Comment :

MODEL: C3000

Company : UTStarcom Inc.

Test Position : Body / Antenna: out

Mode: PCS CDMA / Channel: 600 (1880.00MHz)

Conducted Power : 25.0 dBm

Liquid Temperature: 21.6°C

Date Tested : June 24, 2005

