

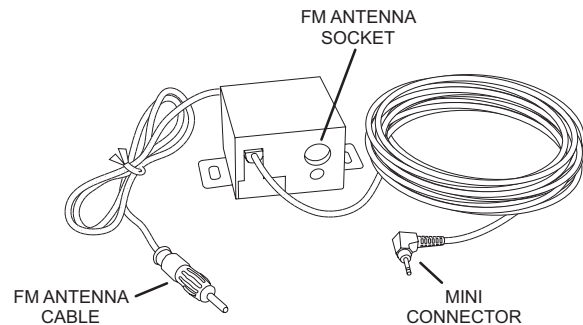


Figure 3

4. Plug the vehicle's AM/FM antenna cable (which was disconnected from the vehicle's AM/FM radio) into the FM antenna socket of the FM Direct Adapter. (An additional adapter may be required.)
5. Plug the mini-connector of the FM Direct Adapter into the **FM OUT** connection at the rear of the S50 vehicle dock.
6. Choose a channel on the FM band of the vehicle's AM/FM radio that has little or no reception from a local FM station. You can consult the SIRIUS website at <http://www.sirius.com/fm-channel> for more information on finding a clear FM channel in your area.
7. Choose the same channel from the FM Frequencies menu of your S50 radio. (Refer to the user guide of your S50 radio for detailed instructions.)

If the installation is successful, you should hear the SIRIUS broadcasts through the vehicle's AM/FM radio.

SIRIUS
SATELLITE RADIO

THE BEST RADIO ON RADIO™

SIRIUS Customer Service: 1-888-539-7474
customer@sirius-radio.com

SIRIUS Satellite Radio Inc.
1221 Avenue of the Americas
New York, NY 10020
1-888-539-7474
<http://www.sirius.com>

SIRIUS
SATELLITE RADIO




**Instructions to Install the
FM Direct Adapter to the
S50 Vehicle Dock with an
FM Out Plug**

An "FM Out Plug" is installed in your S50 vehicle dock to ensure that your S50 radio operates properly and does not interfere with other radios.

Using the FM Direct Adapter is another way to ensure that your S50 does not interfere with other radios. Professional installation of the FM Direct Adapter is recommended.

If you will not be using the FM Direct Adapter, the FM Out Plug is required to remain installed in the vehicle dock to ensure that your S50 radio operates properly and does not interfere with other radios.

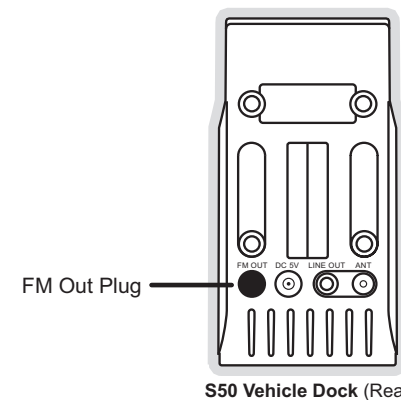

S50 Vehicle Dock (Rear)

Considerations

If you will be installing the FM Direct Adapter (also known as a FM Relay Switch or FM Switch Box), it will directly connect the FM signal from your SIRIUS radio to your vehicle's AM/FM radio, reducing any interference which might be present from FM radio station broadcasts. When the SIRIUS radio is turned off, the vehicle's FM antenna is automatically connected back to the vehicle's AM/FM radio. The adapter connects directly in-line with the vehicle's existing AM/FM antenna input.

If you will not be installing the FM Direct Adapter, the FM Out Plug must remain installed in the S50 vehicle dock to ensure that your S50 radio operates properly and does not interfere with other radios.

SIRIUS suggests professional installation of the FM Direct Adapter in your vehicle. Ask your SIRIUS retailer if they provide professional installation services, or can recommend a professional installation service.

Certain vehicle models will require adapters to connect the vehicle's AM/FM antenna to the FM Direct Adapter, and to connect the FM Direct Adapter to the vehicle's AM/FM radio. Your SIRIUS retailer may sell these adapters, or a professional installer may be able to provide them.

Installation

Figure 1 shows an overall diagram of the FM Direct Adapter installation with your vehicle's AM/FM radio and your SIRIUS S50 radio.

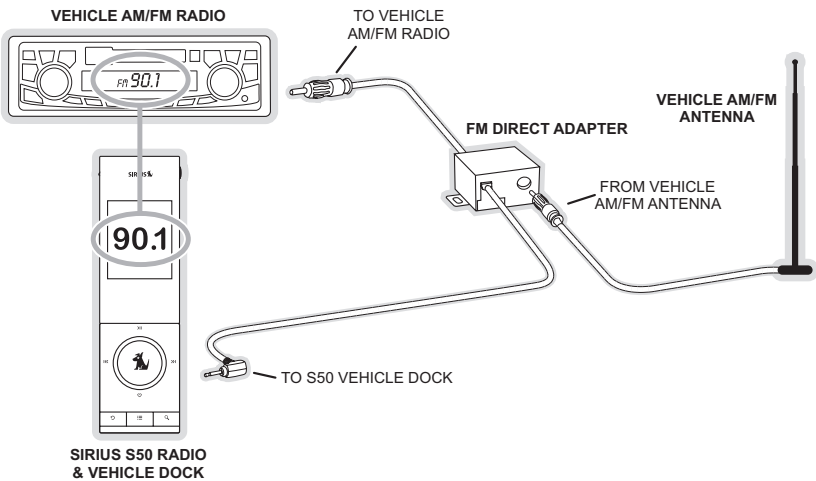


Figure 1

To install the FM Direct Adapter in your vehicle follow these steps:

1. Consult a professional installer to assist you in removing the FM Out Plug from the **FM OUT** connection at the rear of S50 vehicle dock. (Figure 2) Retain the FM Out Plug and reinstall it if the FM Direct Adapter is ever disconnected from the S50 vehicle dock.

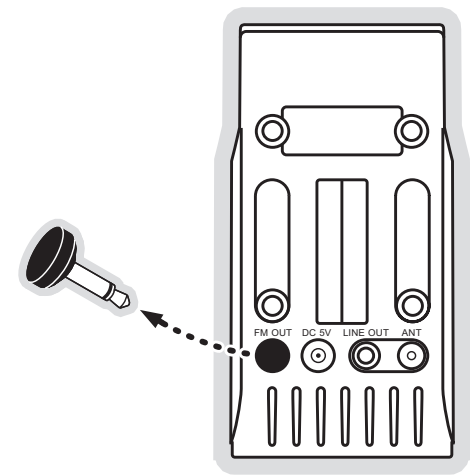


Figure 2

2. Remove the vehicle's AM/FM radio from the dash and disconnect the vehicle's AM/FM antenna cable from the rear of the radio.
3. Refer to Figure 3 and plug the FM antenna cable from the FM Direct Adapter into the same connector on vehicle's AM/FM radio. (An additional adapter may be required.)