



TEST REPORT

Test item description: Tablet
FCC ID: O86-FLEX10D
Trademark(s): MobileDemand
Model/Type reference: FLEX10D
Applicant's name: MobileDemand, LC
Address: 1501 Boyson Square Drive Suite 101 Hiawatha IA 52233 United States Of America
Manufacturer: Shenzhen Bmorn Technology Co., Ltd.
Address: 20th floor, Wanting Building, Baoyuan Road, Bao'an District, Shenzhen, Guangdong, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Apr. 03, 2026
Sample tested Date: Apr. 03, 2026 to Jun. 26, 2026
Issue Date: Jun. 26, 2026
Report No.: CTB26040308605RF02
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2020
Test Results: PASS
Remark: This is Bluetooth radio test report.
Compiled by: Reviewed by: Approved by:

Kai Chen

Kai Chen

Martin Feng

Martin Feng

Bin Mei

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. The tested sample(s) and the sample information are provided by the applicant. The authenticity, accuracy, and completeness of the provided information are the sole responsibility of the applicant. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The result decision rules of our laboratory are based solely on the direct comparison between the actual measured values of test results and the standard limits, without considering the measurement uncertainty. "★" indicates the testing items were fulfilled by subcontracted lab. "—" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION.....	4
2. TEST SUMMARY.....	5
3. MEASUREMENT UNCERTAINTY.....	6
4. PRODUCT INFORMATION AND TEST SETUP.....	7
4.1 Product Information.....	7
4.2 Test Setup Configuration.....	7
4.3 Support Equipment.....	7
4.4 Channel List.....	8
4.5 Test Mode.....	8
4.6 Test Environment.....	8
5. TEST FACILITY AND TEST INSTRUMENT USED.....	9
5.1 Test Facility.....	9
5.2 Test Instrument Used.....	9
6. AC POWER LINE CONDUCTED EMISSION.....	12
6.1 Block Diagram Of Test Setup.....	12
6.2 Limit.....	12
6.3 Test procedure.....	12
6.4 Test Result.....	14
7. RADIATED SPURIOUS EMISSION.....	16
7.1 Block Diagram Of Test Setup.....	16
7.2 Limit.....	16
7.3 Test procedure.....	17
7.4 Test Result.....	18
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS.....	36
8.1 Block Diagram Of Test Setup.....	36
8.2 Limit.....	36
8.3 Test procedure.....	36
8.4 Test Result.....	37
9. CONDUCTED PEAK OUTPUT POWER.....	44
9.1 Block Diagram Of Test Setup.....	44
9.2 Limit.....	44
9.3 Test procedure.....	44
9.4 Test Result.....	44
10. 20DB OCCUPIED BANDWIDTH.....	48
10.1 Block Diagram Of Test Setup.....	48
10.2 Limit.....	48

10.3	Test procedure	48
10.4	Test Result.....	48
11.	CARRIER FREQUENCIES SEPARATION	52
11.1	Block Diagram Of Test Setup	52
11.2	Limit	52
11.3	Test procedure	52
11.4	Test Result.....	52
12.	HOPPING CHANNEL NUMBER.....	56
12.1	Block Diagram Of Test Setup	56
12.2	Limit	56
12.3	Test procedure	56
12.4	Test Result.....	56
13.	DWELL TIME.....	58
13.1	Block Diagram Of Test Setup	58
13.2	Limit	58
13.3	Test procedure	58
13.4	Test Result.....	58
14.	PSEUDORANDOM FREQUENCY.....	65
14.1	Limit	65
14.2	Test procedure	65
14.3	Test Result.....	65
15.	ANTENNA REQUIREMENT	66
16.	EUT TEST SETUP PHOTOGRAPHS	67

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB26040308605RF02	Jun. 26, 2026	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2020	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2020	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2020	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2020	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2020	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2020	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2020	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2020	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(a)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2020	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2020.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9kHz-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
Humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
Frequency	1×10 ⁻⁷
Conducted Emission(150kHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model/Type reference:	FLEX10D
Model Difference:	N/A
Bluetooth Version:	Bluetooth 5.0
Hardware Version:	S240ANR100
Software Version:	BIOS:T10NM2-BI-752-F-20260604 EC:S240ANR100-EC-V0106
Operation Frequency:	Bluetooth: 2402-2480MHz
Max. RF output power:	Bluetooth: 8.93dBm
Type of Modulation:	Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna installation:	Bluetooth: FPC antenna
Antenna Gain:	Bluetooth: 0.78dBi
Ratings:	Input: AC 100-240V~50/60Hz Output: 12V=2.5A DC 7.6V by battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC):	120V
Normal Temperature($^{\circ}$ C)	23
Low Temperature($^{\circ}$ C)	0
High Temperature($^{\circ}$ C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: CN1276

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated Date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2026/5/14	2027/5/13
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2026/5/14	2027/5/13
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2026/5/14	2027/5/13
4	Communication test set	R&S	CMW500	108058	V3.5.80	2026/5/14	2027/5/13
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2026/5/14	2027/5/13
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2026/5/14	2027/5/13
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2026/5/14	2027/5/13
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2026/5/14	2027/5/13
9	2.4 GHz Filter	Shenxiang	MSF2400-2483. 5MS-1154	20181015001	/	2026/5/16	2027/5/15
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	/	2026/5/16	2027/5/15
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	/	2026/5/16	2027/5/15
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/10/20	2026/10/19
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/7/13	2026/7/12
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/	/
16	966 chamber	C.R.T.	966	/	/	2024/6/23	2027/6/22

17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2026/5/15	2027/5/14
18	Amplifier	HP	8447E	2945A02747	/	2026/5/15	2027/5/14
19	Amplifier	Agilent	8449B	3008A01838	/	2026/5/14	2027/5/13
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2026/5/17	2027/5/16
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2026/5/15	2027/5/14
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2026/5/17	2027/5/16
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2026/6/1	2027/5/31
26	Amplifier	AEROFLEX	Aeroflex	097	/	2026/6/1	2027/5/31
27	Power Meter	KEYSIGHT	N1912AP	N/A	A.05.00	2026/6/1	2027/5/31

Continuous disturbance							
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated Date	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2024/6/22	2027/6/21
2	LISN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2026/5/14	2027/5/13
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2026/5/15	2027/5/14
4	Coaxial cable	ZDECL	Z302S	18091904	/	2026/5/14	2027/5/13
5	ISN	Schwarzbeck	NTFM8158	183	/	2026/5/18	2027/5/17
6	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2026/5/16	2027/5/15
7	EZ-EMC	Frad	EMC-con3A1.1	/	/	/	/
8	Current Probe	FCC	F-52B	199453	/	2026/5/22	2027/5/21
9	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2026/5/14	2027/5/13
10	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2026/5/14	2027/5/13

Radiated emission(No.1 Chamber)							
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2024/6/23	2027/6/22
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2026/5/15	2027/5/14


3	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2026/5/17	2027/5/16
4	Amplifier	Agilent	8449B	3008A01838	/	2026/5/14	2027/5/13
5	Amplifier	HP	8447E	2945A02747	/	2026/5/15	2027/5/14
6	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2026/5/17	2027/5/16
7	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI	100362	RF_ATTEN_7 (104489/003)	2026/5/15	2027/5/14
8	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2026/5/14	2027/5/13
9	Coaxial cable	ETS	RFC-SNS-100-NMS-80	/	/	2026/5/14	2027/5/13
10	Coaxial cable	ETS	RFC-SN-100-NMS-20	/	/	2026/5/14	2027/5/13
11	Coaxial cable	ETS	RFC-SNS-100-SMS-20	/	/	2026/5/14	2027/5/13
12	Coaxial cable	ETS	RFC-NNS-100-NMS-300	/	/	2026/5/14	2027/5/13
13	EMI test software	Frad	EZ-EMC	Ver/ FA-03A2 RE	/	/	/
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2026/5/14	2027/5/13
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2026/5/14	2027/5/13

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2020 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

L: Worst case-GFSK(Mid channel)

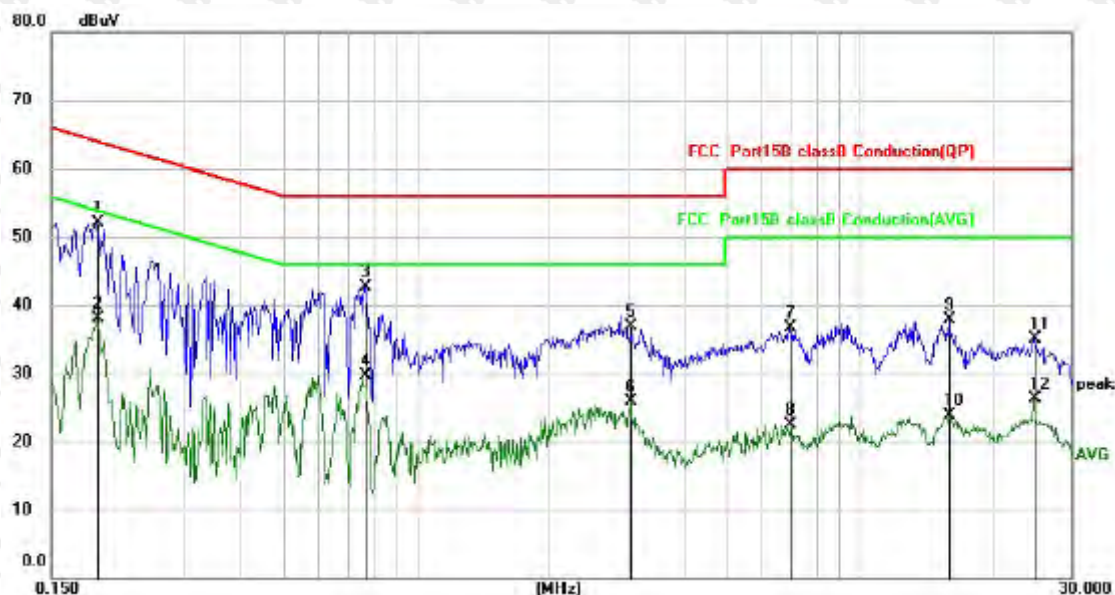


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1904	41.97	10.08	52.05	64.02	-11.97	QP
2		0.1904	27.94	10.08	38.02	54.02	-16.00	AVG
3		0.7660	32.62	10.11	42.73	56.00	-13.27	QP
4		0.7660	19.61	10.11	29.72	46.00	-16.28	AVG
5		3.0539	26.73	10.21	36.94	56.00	-19.06	QP
6		3.0539	15.60	10.21	25.81	46.00	-20.19	AVG
7		6.9500	26.24	10.38	36.62	60.00	-23.38	QP
8		6.9500	12.13	10.38	22.51	50.00	-27.49	AVG
9		15.8900	27.07	10.77	37.84	60.00	-22.16	QP
10		15.8900	13.13	10.77	23.90	50.00	-26.10	AVG
11		24.7900	23.87	11.19	35.06	60.00	-24.94	QP
12		24.7900	15.15	11.19	26.34	50.00	-23.66	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N: Worst case-GFSK(Mid channel)

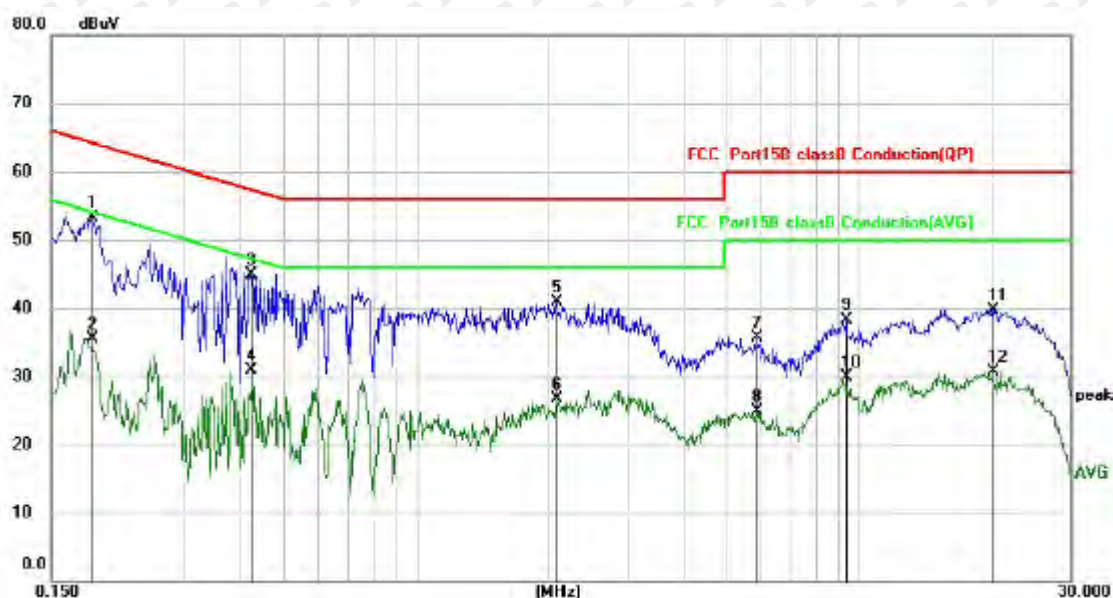

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1859	43.20	10.08	53.28	64.22	-10.94	QP
2		0.1859	25.47	10.08	35.55	54.22	-18.67	AVG
3		0.4218	34.86	10.09	44.95	57.41	-12.46	QP
4		0.4218	20.90	10.09	30.99	47.41	-16.42	AVG
5		2.0779	30.66	10.17	40.83	56.00	-15.17	QP
6		2.0779	16.58	10.17	26.75	46.00	-19.25	AVG
7		5.8658	25.35	10.32	35.67	60.00	-24.33	QP
8		5.8658	14.53	10.32	24.85	50.00	-25.15	AVG
9		9.3536	27.94	10.43	38.37	60.00	-21.63	QP
10		9.3536	19.46	10.43	29.89	50.00	-20.11	AVG
11		19.9540	28.77	10.96	39.73	60.00	-20.27	QP
12		19.9540	19.72	10.96	30.68	50.00	-19.32	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

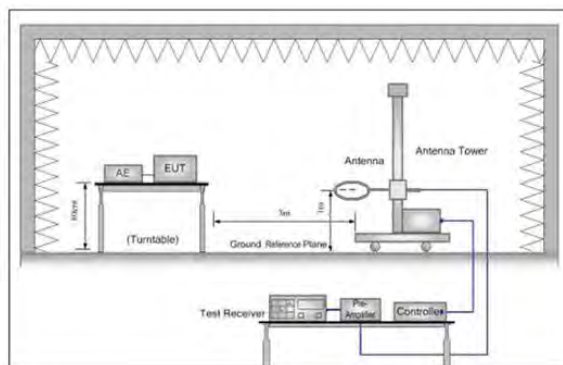


Figure 1. Below 30MHz

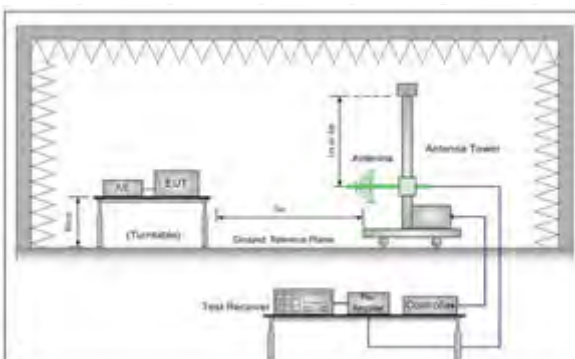


Figure 2. 30MHz to 1GHz

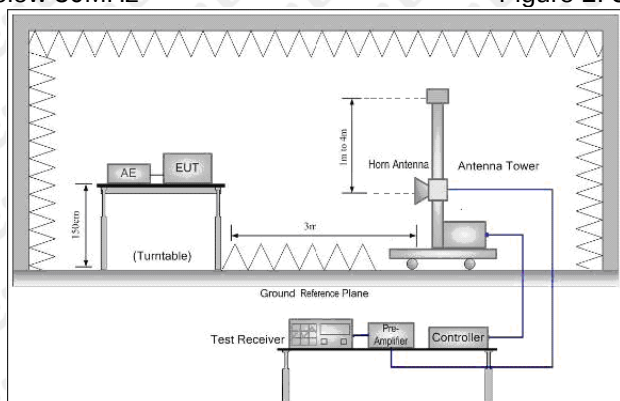


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- Repeat above procedures until all frequencies measured was complete.
- Full battery is used during test.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

Below 1GHz Test Results:

Antenna polarity: H


Worst case-GFSK(Mid channel)



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		48.5866	29.99	-6.37	23.62	40.00	-16.38	QP
2		149.2238	35.98	-4.48	31.50	43.50	-12.00	QP
3	!	223.3414	47.52	-5.66	41.86	46.00	-4.14	QP
4	*	308.9125	45.15	-2.38	42.77	46.00	-3.23	QP
5	!	434.8267	40.84	-0.26	40.58	46.00	-5.42	QP
6		782.3453	27.57	8.18	35.75	46.00	-10.25	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V
Worst case-GFSK(low channel)

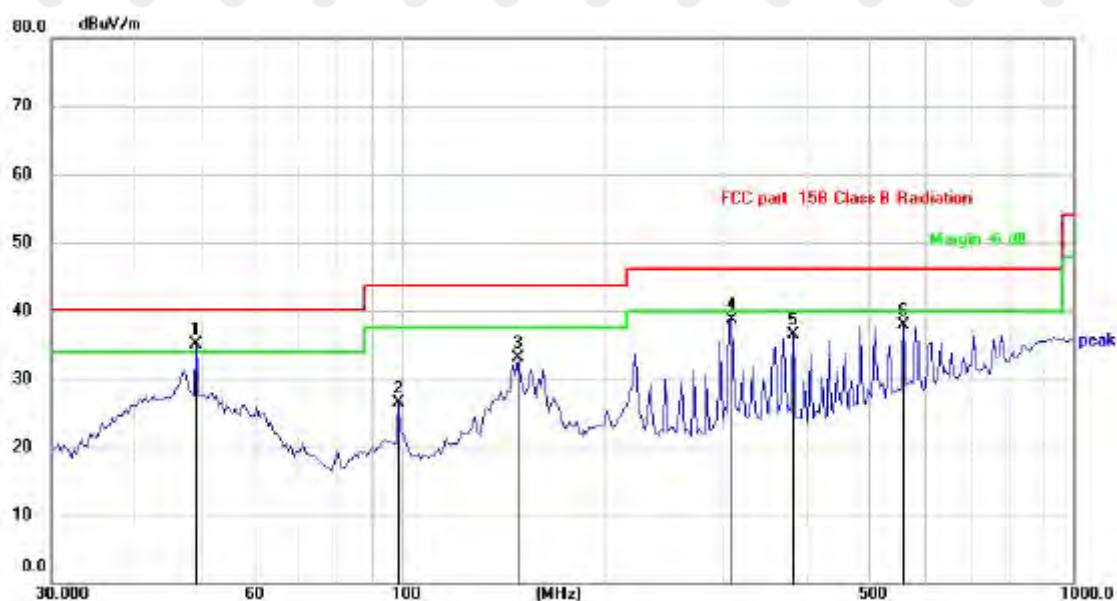

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1	*	49.4459	41.53	-6.42	35.11	40.00	-4.89	QP
2		98.8324	34.34	-7.93	26.41	43.50	-17.09	QP
3		149.2238	37.51	-4.48	33.03	43.50	-10.47	QP
4		311.6324	41.08	-2.33	38.75	46.00	-7.25	QP
5		384.6055	37.61	-1.15	36.46	46.00	-9.54	QP
6		560.6928	35.20	2.79	37.99	46.00	-8.01	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit


Above 1 GHz Test Results:
Antenna polarity: H
Worst case-GFSK(low channel)



No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		14515.000	36.56	10.54	47.10	74.00	-26.90	peak
2		14515.000	29.01	10.54	39.55	54.00	-14.45	AVG
3		16172.500	40.73	10.37	51.10	74.00	-22.90	peak
4		16172.500	32.62	10.37	42.99	54.00	-11.01	AVG
5		17362.500	37.20	16.45	53.65	74.00	-20.35	peak
6	*	17362.500	29.31	16.45	45.76	54.00	-8.24	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V

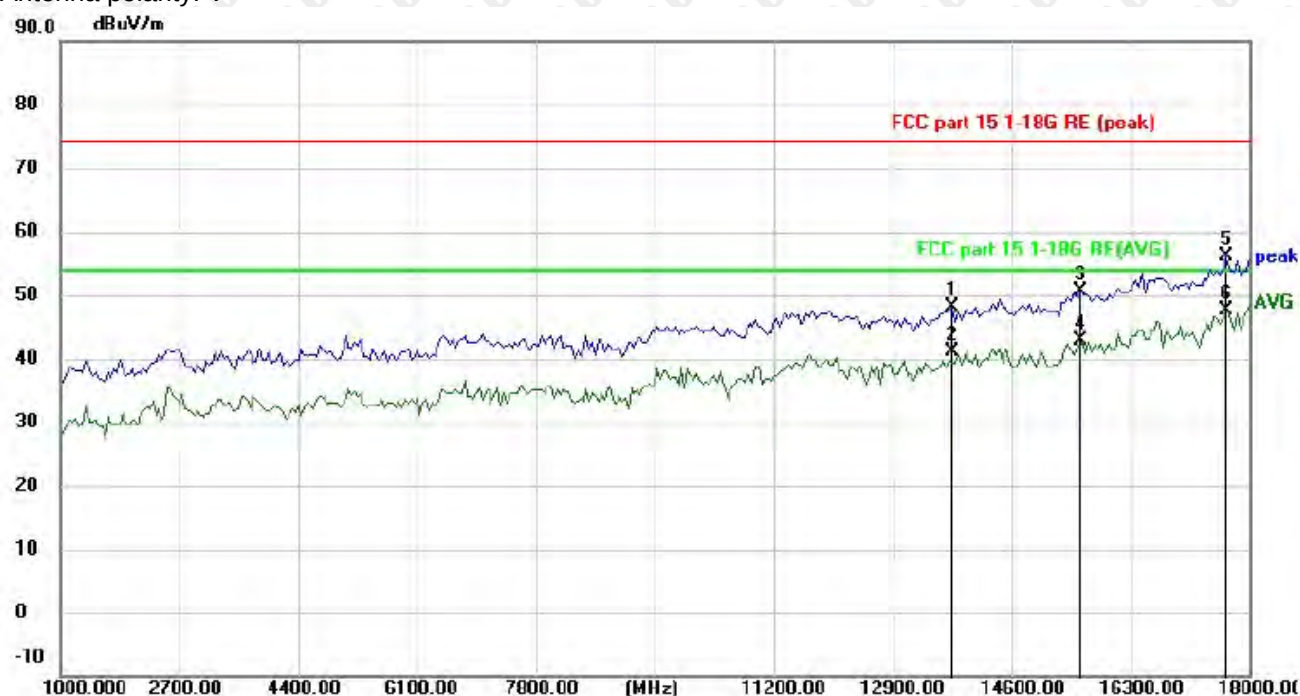

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		13750.000	37.89	10.23	48.12	74.00	-25.88	peak
2		13750.000	30.83	10.23	41.06	54.00	-12.94	AVG
3		15577.500	40.76	9.98	50.74	74.00	-23.26	peak
4		15577.500	32.94	9.98	42.92	54.00	-11.08	AVG
5		17660.000	37.39	18.62	56.01	74.00	-17.99	peak
6	*	17660.000	28.90	18.62	47.52	54.00	-6.48	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: H
Worst case-GFSK(low channel)



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		23005.000	60.73	-9.55	51.18	74.00	-22.82	peak
2		23005.000	51.64	-9.55	42.09	54.00	-11.91	AVG
3		24265.000	59.63	-7.66	51.97	74.00	-22.03	peak
4		24265.000	48.05	-7.66	40.39	54.00	-13.61	AVG
5		24912.500	63.76	-6.67	57.09	74.00	-16.91	peak
6	*	24912.500	54.25	-6.67	47.58	54.00	-6.42	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit


Antenna polarity: V



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		23705.000	63.47	-8.50	54.97	74.00	-19.03	peak
2		23705.000	52.15	-8.50	43.65	54.00	-10.35	AVG
3		24212.500	64.61	-7.74	56.87	74.00	-17.13	peak
4		24212.500	54.97	-7.74	47.23	54.00	-6.77	AVG
5		24790.000	65.38	-6.86	58.52	74.00	-15.48	peak
6	*	24790.000	56.40	-6.86	49.54	54.00	-4.46	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: H
Worst case-GFSK(Mid channel)

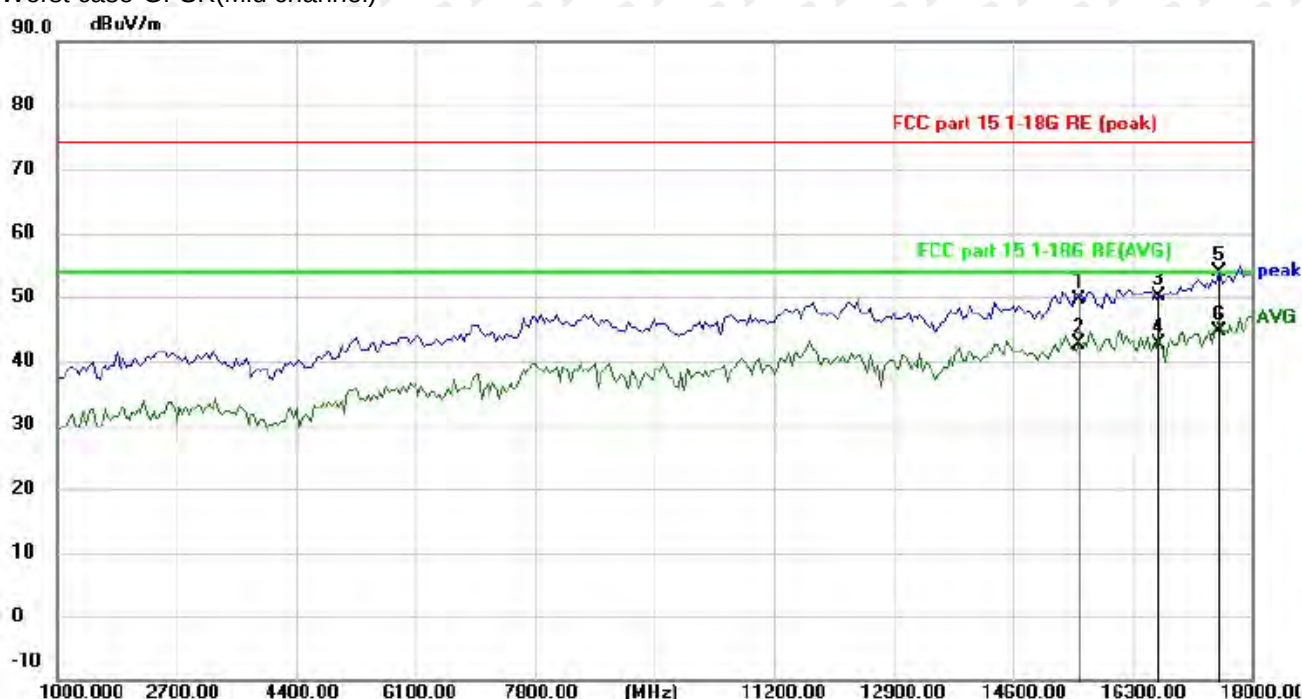

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		15535.000	39.61	10.01	49.62	74.00	-24.38	peak
2		15535.000	32.68	10.01	42.69	54.00	-11.31	AVG
3		16682.500	37.53	12.48	50.01	74.00	-23.99	peak
4		16682.500	30.23	12.48	42.71	54.00	-11.29	AVG
5		17532.500	36.27	17.69	53.96	74.00	-20.04	peak
6	*	17532.500	26.84	17.69	44.53	54.00	-9.47	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		13580.000	41.60	9.95	51.55	74.00	-22.45	peak
2		13580.000	35.66	9.95	45.61	54.00	-8.39	AVG
3		15025.000	41.16	10.41	51.57	74.00	-22.43	peak
4		15025.000	34.11	10.41	44.52	54.00	-9.48	AVG
5		17447.500	38.61	17.07	55.68	74.00	-18.32	peak
6	*	17447.500	30.34	17.07	47.41	54.00	-6.59	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit


Antenna polarity: H
Worst case-GFSK(Mid channel)



No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		23670.000	61.50	-8.55	52.95	74.00	-21.05	peak
2		23670.000	49.89	-8.55	41.34	54.00	-12.66	AVG
3		24107.500	62.35	-7.90	54.45	74.00	-19.55	peak
4		24107.500	51.47	-7.90	43.57	54.00	-10.43	AVG
5		24755.000	63.18	-6.91	56.27	74.00	-17.73	peak
6	*	24755.000	53.88	-6.91	46.97	54.00	-7.03	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit


Antenna polarity: V

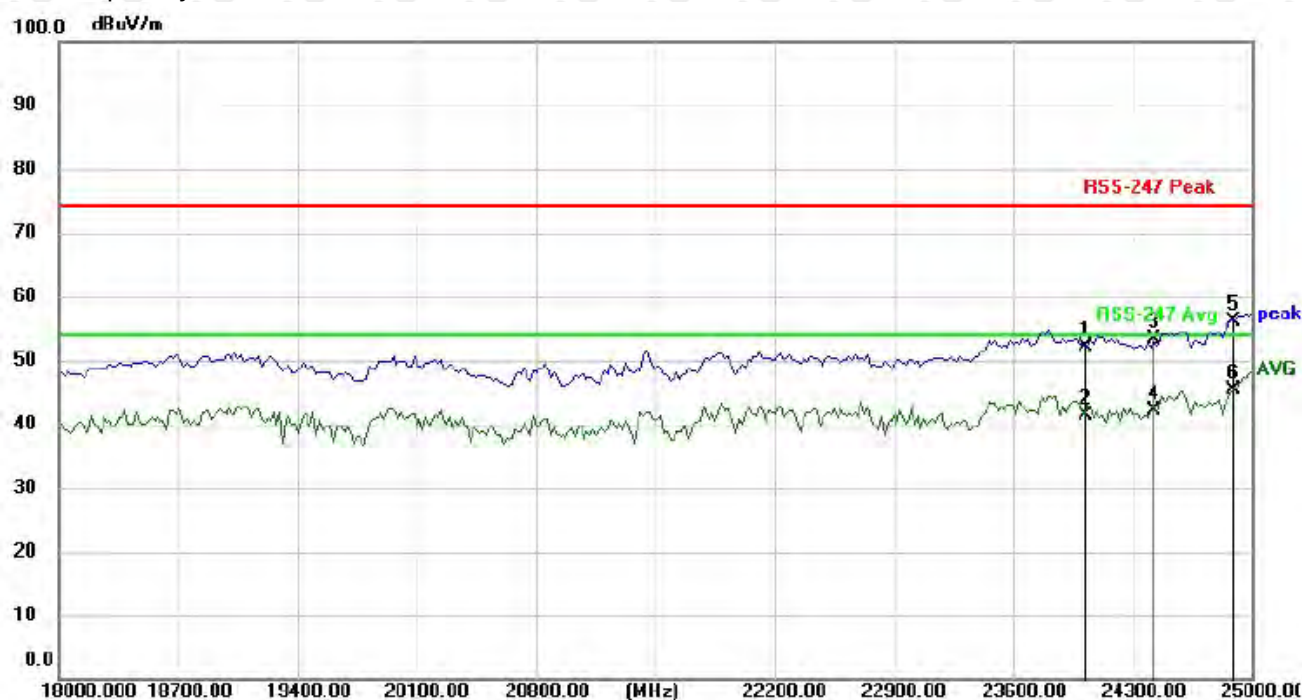

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		24020.000	60.16	-8.03	52.13	74.00	-21.87	peak
2		24020.000	49.42	-8.03	41.39	54.00	-12.61	AVG
3		24422.500	60.81	-7.42	53.39	74.00	-20.61	peak
4		24422.500	49.51	-7.42	42.09	54.00	-11.91	AVG
5		24895.000	62.88	-6.70	56.18	74.00	-17.82	peak
6	*	24895.000	52.01	-6.70	45.31	54.00	-8.69	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit


Antenna polarity: H
Worst case-GFSK(high channel)

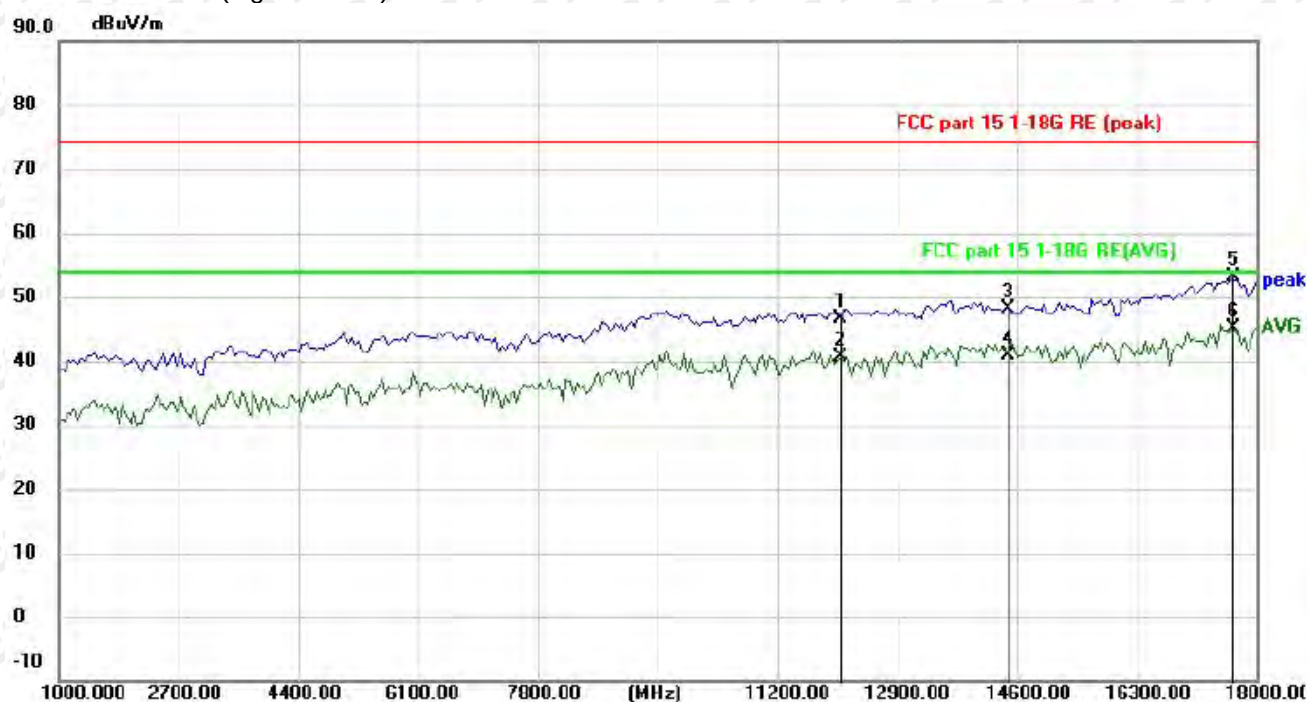

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		12092.500	40.10	6.61	46.71	74.00	-27.29	peak
2		12092.500	34.07	6.61	40.68	54.00	-13.32	AVG
3		14472.500	37.55	10.55	48.10	74.00	-25.90	peak
4		14472.500	30.39	10.55	40.94	54.00	-13.06	AVG
5		17660.000	34.39	18.62	53.01	74.00	-20.99	peak
6	*	17660.000	26.40	18.62	45.02	54.00	-8.98	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V

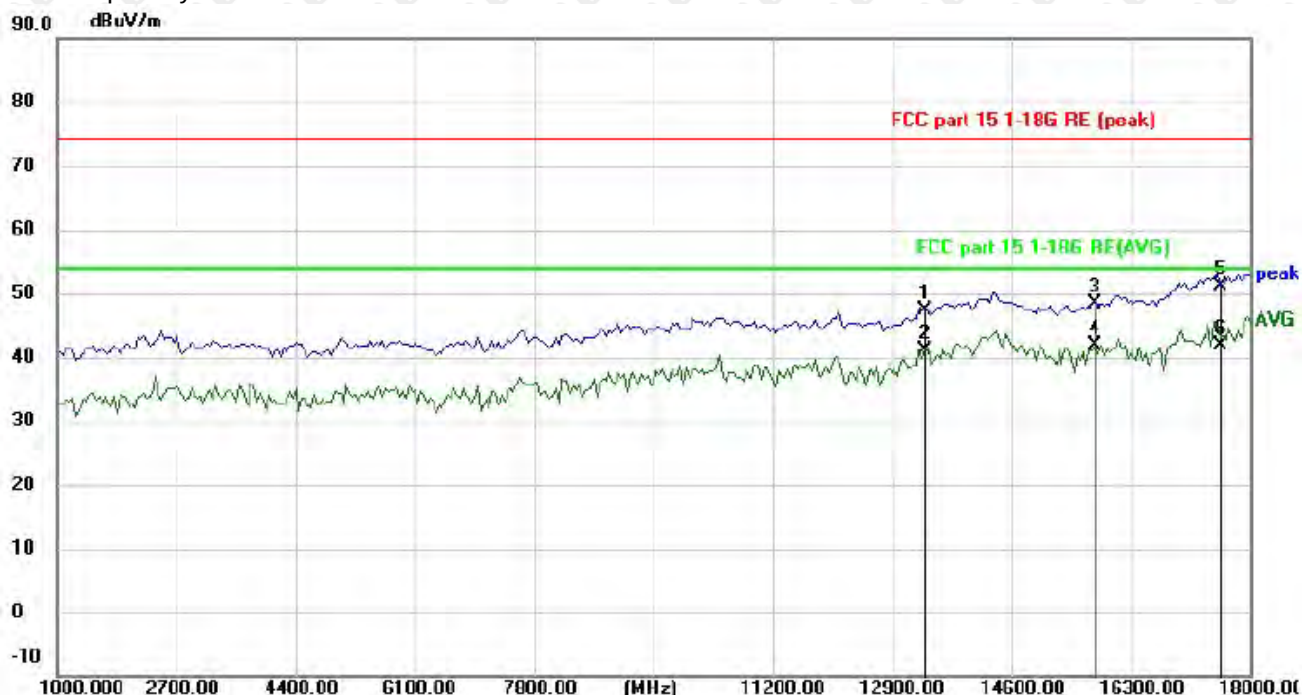

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		13367.500	37.72	9.59	47.31	74.00	-26.69	peak
2		13367.500	31.66	9.59	41.25	54.00	-12.75	AVG
3		15790.000	38.47	9.81	48.28	74.00	-25.72	peak
4		15790.000	31.99	9.81	41.80	54.00	-12.20	AVG
5		17575.000	33.16	18.00	51.16	74.00	-22.84	peak
6	*	17575.000	23.89	18.00	41.89	54.00	-12.11	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit


Antenna polarity: H
Worst case-GFSK(high channel)



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		23232.500	62.44	-9.21	53.23	74.00	-20.77	peak
2		23232.500	52.04	-9.21	42.83	54.00	-11.17	AVG
3		23985.000	61.11	-8.08	53.03	74.00	-20.97	peak
4		23985.000	50.63	-8.08	42.55	54.00	-11.45	AVG
5		24790.000	63.88	-6.86	57.02	74.00	-16.98	peak
6	*	24790.000	54.33	-6.86	47.47	54.00	-6.53	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V

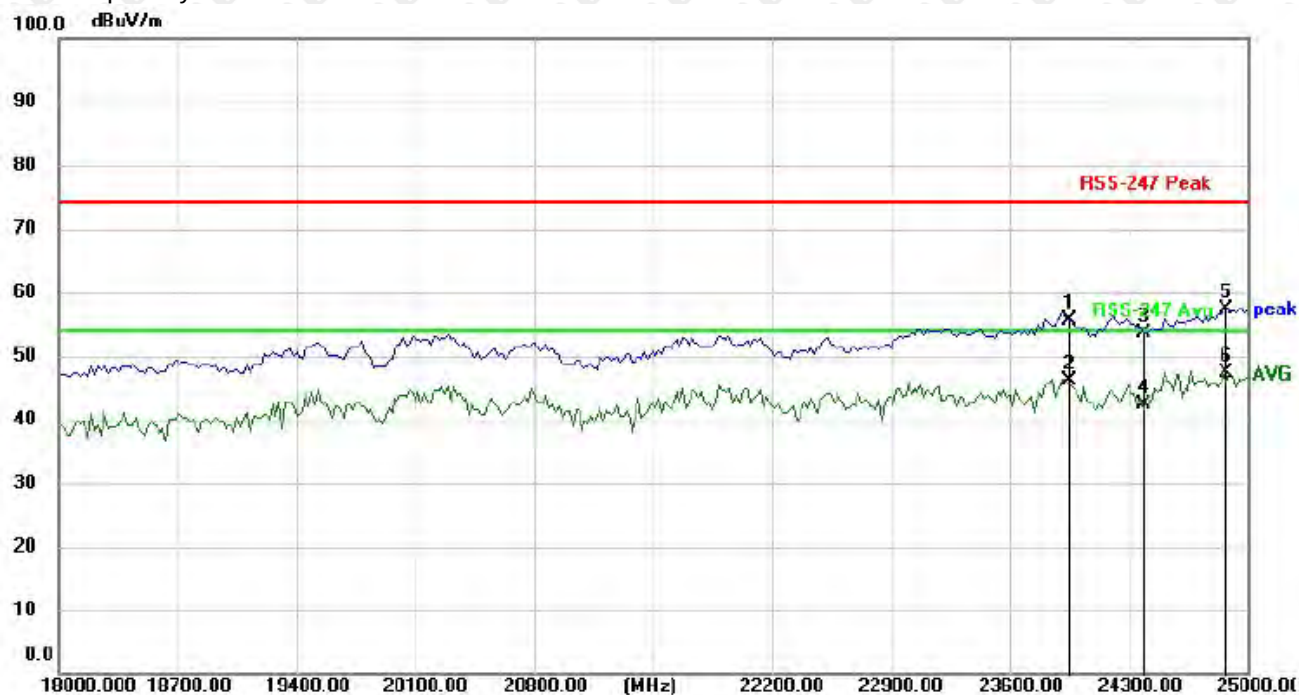


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		23950.000	63.79	-8.13	55.66	74.00	-18.34	peak
2		23950.000	54.26	-8.13	46.13	54.00	-7.87	AVG
3		24387.500	61.19	-7.47	53.72	74.00	-20.28	peak
4		24387.500	49.90	-7.47	42.43	54.00	-11.57	AVG
5		24877.500	64.09	-6.73	57.36	74.00	-16.64	peak
6	*	24877.500	54.04	-6.73	47.31	54.00	-6.69	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Restricted bands around fundamental frequency (Radiated)


Antenna polarity: H
Worst case-GFSK(low channel)

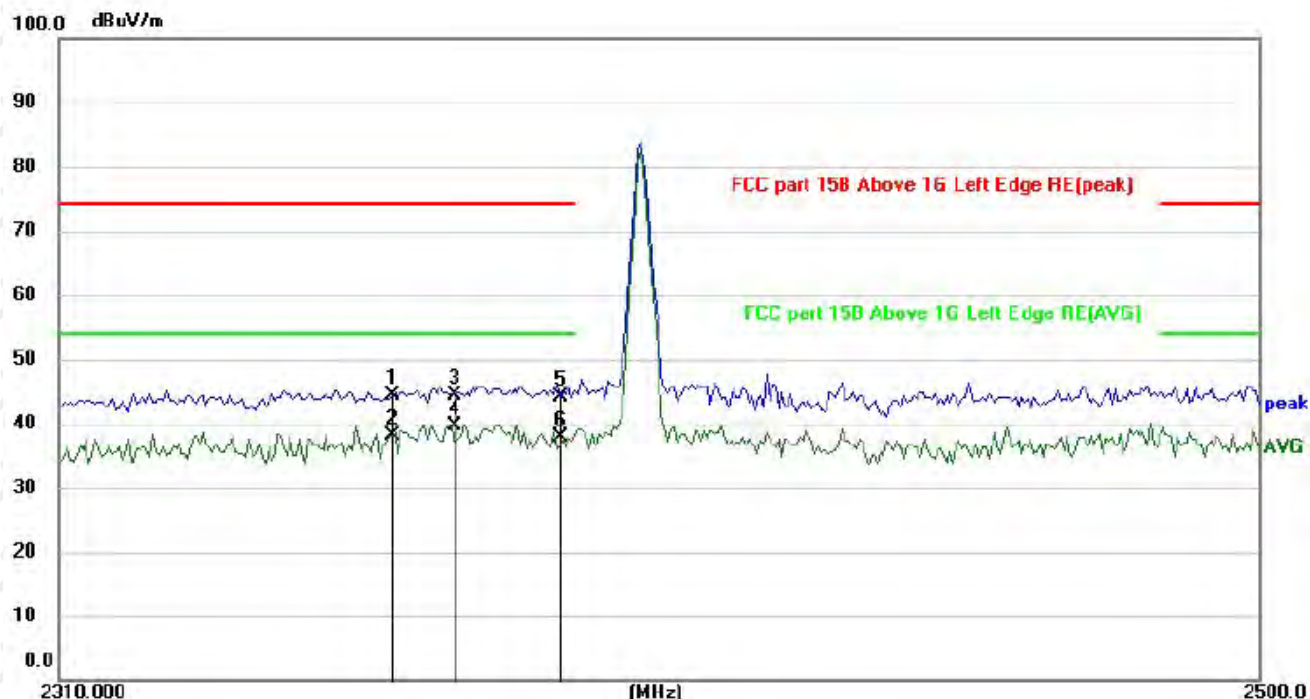

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		2361.228	64.31	-19.84	44.47	74.00	-29.53	peak
2		2361.228	58.08	-19.84	38.24	54.00	-15.76	AVG
3		2371.047	64.28	-19.78	44.50	74.00	-29.50	peak
4	*	2371.047	59.49	-19.78	39.71	54.00	-14.29	AVG
5		2387.503	63.84	-19.69	44.15	74.00	-29.85	peak
6		2387.503	57.55	-19.69	37.86	54.00	-16.14	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit


Antenna polarity: V

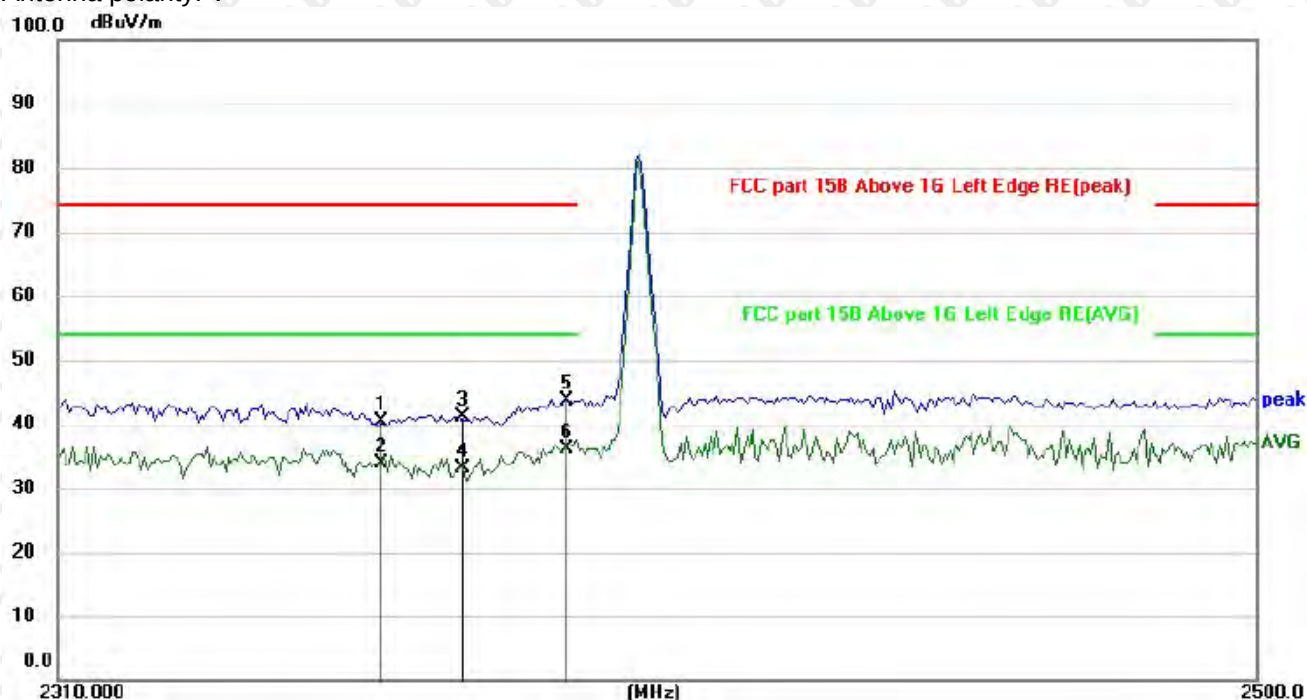

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		2359.829	60.15	-19.85	40.30	74.00	-33.70	peak
2		2359.829	53.84	-19.85	33.99	54.00	-20.01	AVG
3		2371.985	60.83	-19.78	41.05	74.00	-32.95	peak
4		2371.985	52.80	-19.78	33.02	54.00	-20.98	AVG
5		2388.447	63.22	-19.69	43.53	74.00	-30.47	peak
6	*	2388.447	55.86	-19.69	36.17	54.00	-17.83	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit


Antenna polarity: H
Worst case-GFSK(high channel)

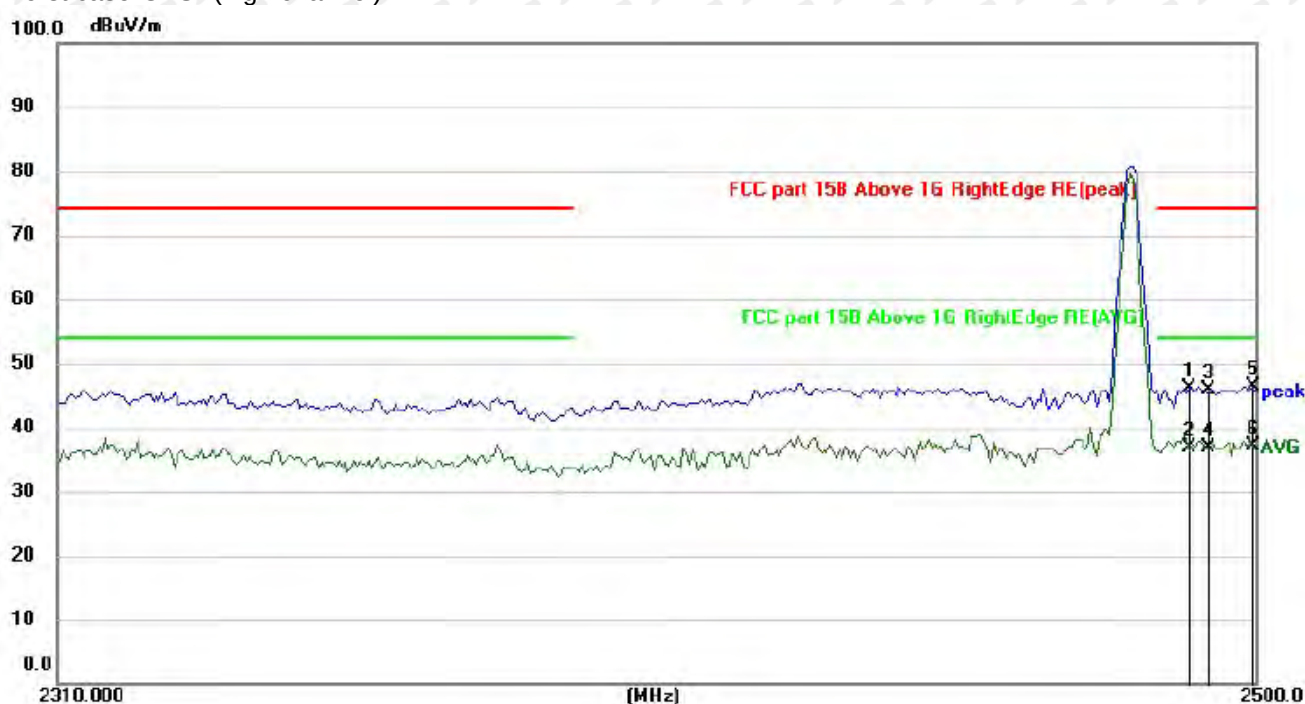

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		2489.155	65.26	-19.12	46.14	74.00	-27.86	peak
2		2489.155	55.88	-19.12	36.76	54.00	-17.24	AVG
3		2491.616	65.09	-19.11	45.98	74.00	-28.02	peak
4		2491.616	56.03	-19.11	36.92	54.00	-17.08	AVG
5		2499.506	65.50	-19.06	46.44	74.00	-27.56	peak
6	*	2499.506	56.21	-19.06	37.15	54.00	-16.85	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V

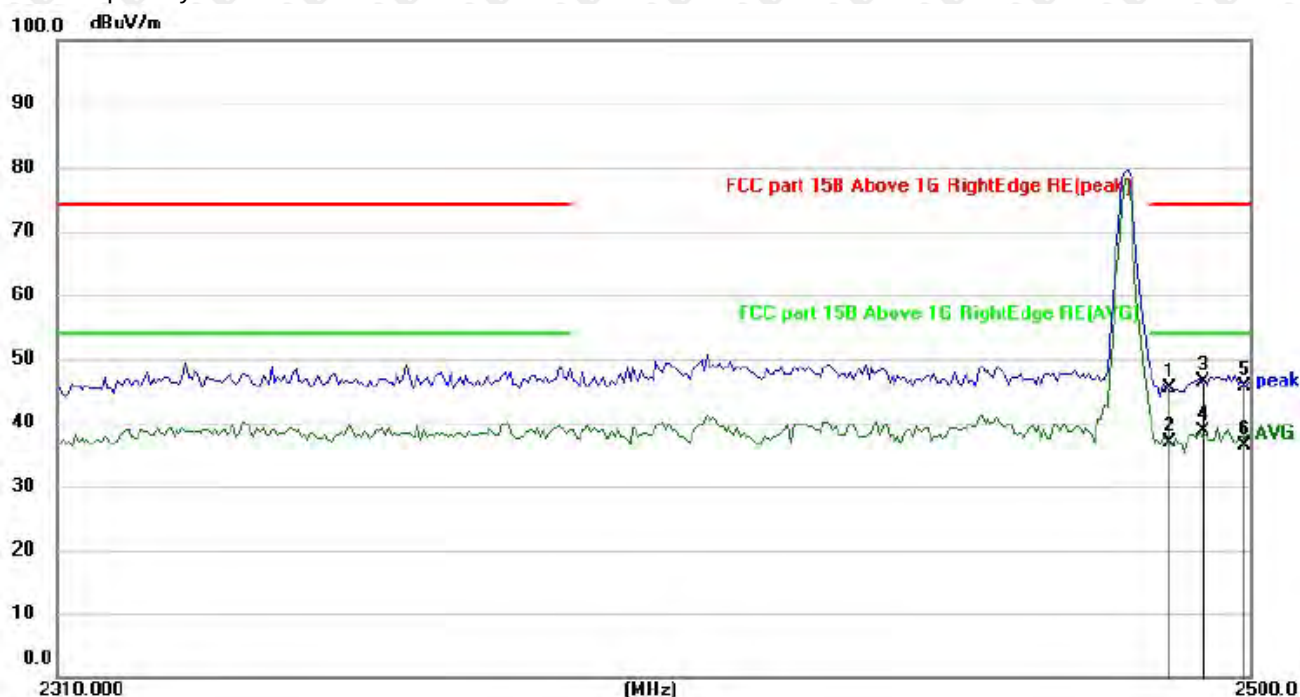


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBm	dB	Detector
1		2486.206	64.45	-19.14	45.31	74.00	-28.69	peak
2		2486.206	55.97	-19.14	36.83	54.00	-17.17	AVG
3		2491.616	65.58	-19.11	46.47	74.00	-27.53	peak
4	*	2491.616	57.79	-19.11	38.68	54.00	-15.32	AVG
5		2499.012	64.68	-19.07	45.61	74.00	-28.39	peak
6		2499.012	55.46	-19.07	36.39	54.00	-17.61	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Note: All modes of GFSK, $\pi/4$ DQPSK, 8DPSK were test at Low, High channel, Hopping and No Hopping was tested and passed, the worst result of GFSK DH5 No Hopping was reported

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

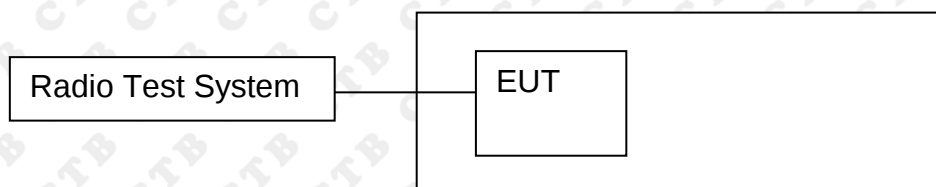

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold


Above 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold


8.4 Test Result




GFSK/HCH/
Hop



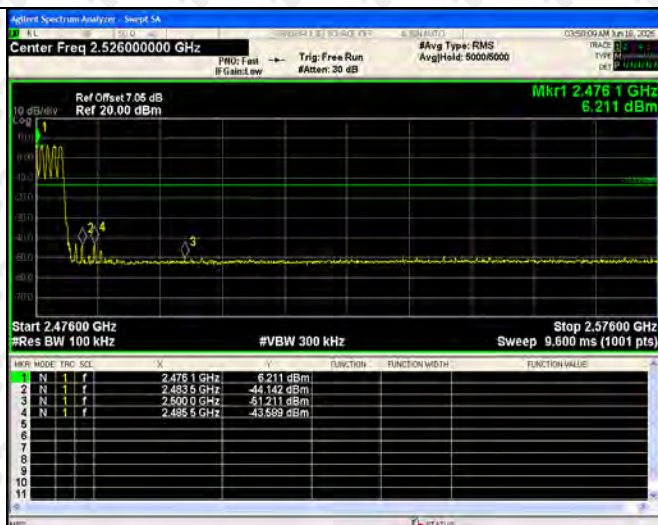


$\pi/4$ DQPSK/LCH/
No Hop

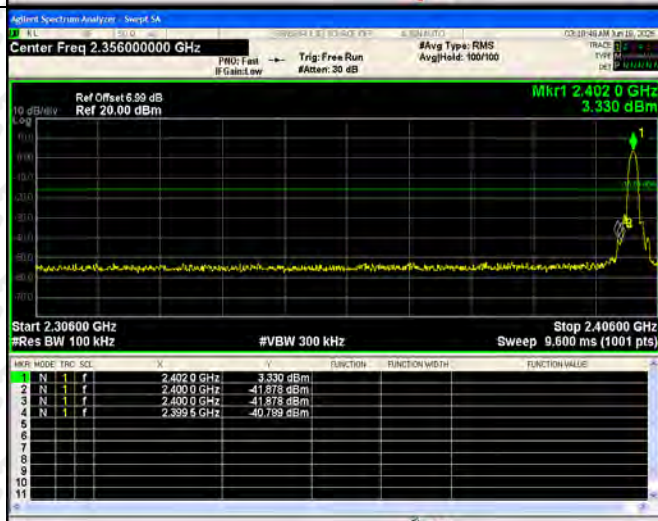


$\pi/4$ DQPSK/LCH/
Hop

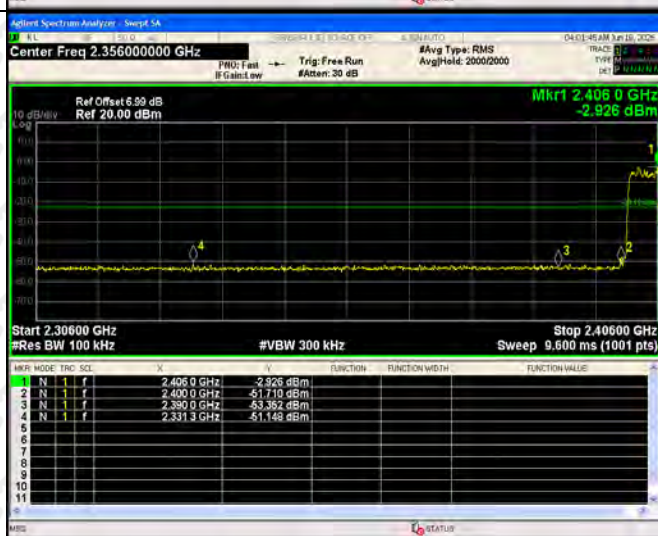


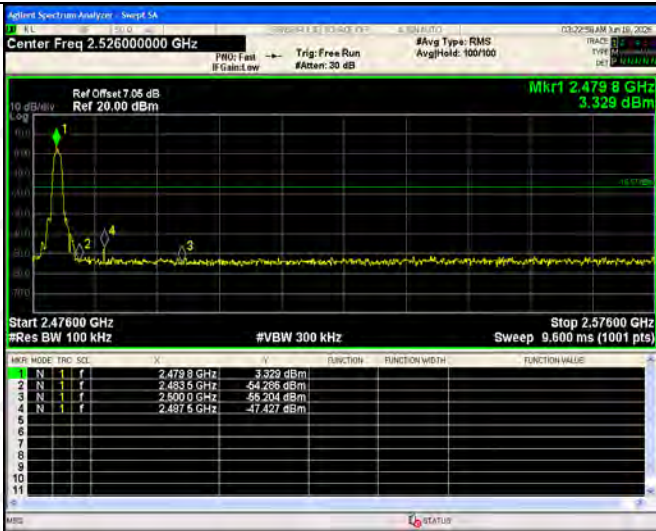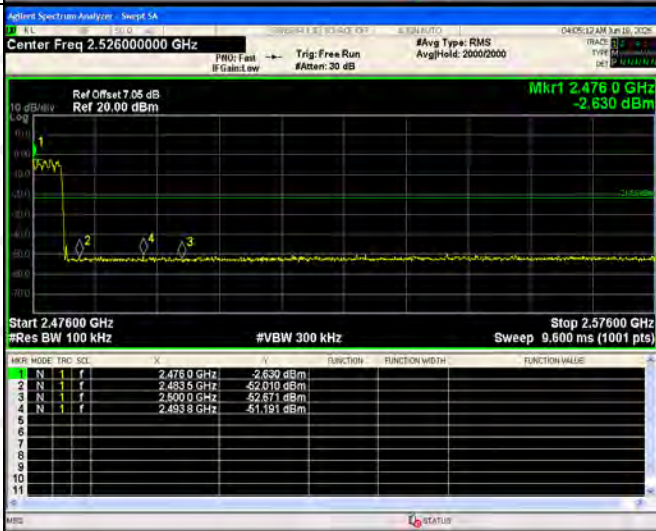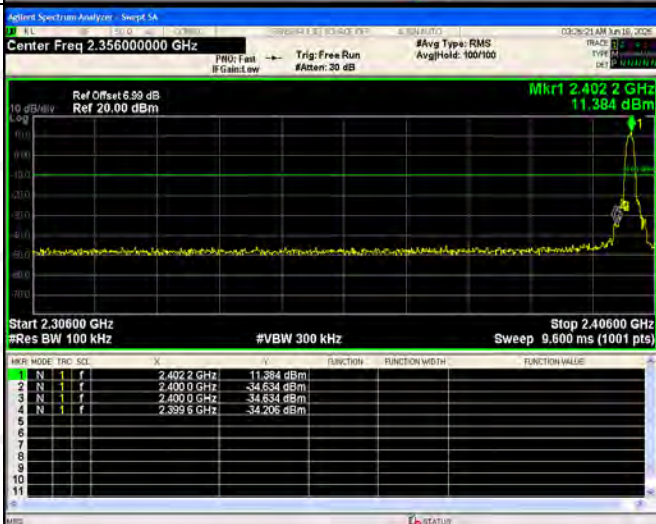$\pi/4$ DQPSK/HCH/ No Hop	 Center Freq 2.526000000 GHz Ref Offset 7.05 dB Ref 20.00 dBm Mkr1 2.4798 GHz 3.329 dBm Start 2.47600 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.57600 GHz Sweep 9.600 ms (1001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SCN</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4798 GHz</td><td>3.329 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.4835 GHz</td><td>-54.286 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.5000 GHz</td><td>-55.204 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.4875 GHz</td><td>-47.427 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRIG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4798 GHz	3.329 dBm				2	N	1	f	2.4835 GHz	-54.286 dBm				3	N	1	f	2.5000 GHz	-55.204 dBm				4	N	1	f	2.4875 GHz	-47.427 dBm			
MKR	MODE	TRIG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.4798 GHz	3.329 dBm																																									
2	N	1	f	2.4835 GHz	-54.286 dBm																																									
3	N	1	f	2.5000 GHz	-55.204 dBm																																									
4	N	1	f	2.4875 GHz	-47.427 dBm																																									
$\pi/4$ DQPSK/HCH/ Hop	 Center Freq 2.526000000 GHz Ref Offset 7.05 dB Ref 20.00 dBm Mkr1 2.4760 GHz -2.630 dBm Start 2.47600 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.57600 GHz Sweep 9.600 ms (1001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SCN</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4760 GHz</td><td>-2.630 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.4835 GHz</td><td>-52.010 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.5000 GHz</td><td>-52.571 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.4938 GHz</td><td>-51.191 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRIG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4760 GHz	-2.630 dBm				2	N	1	f	2.4835 GHz	-52.010 dBm				3	N	1	f	2.5000 GHz	-52.571 dBm				4	N	1	f	2.4938 GHz	-51.191 dBm			
MKR	MODE	TRIG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.4760 GHz	-2.630 dBm																																									
2	N	1	f	2.4835 GHz	-52.010 dBm																																									
3	N	1	f	2.5000 GHz	-52.571 dBm																																									
4	N	1	f	2.4938 GHz	-51.191 dBm																																									
8DPSK/LCH/No Hop	 Center Freq 2.356000000 GHz Ref Offset 6.99 dB Ref 20.00 dBm Mkr1 2.4202 GHz 11.384 dBm Start 2.30600 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.40600 GHz Sweep 9.600 ms (1001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SCN</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4202 GHz</td><td>11.384 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.4000 GHz</td><td>-34.634 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.4000 GHz</td><td>-34.634 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.3995 GHz</td><td>-34.206 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRIG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4202 GHz	11.384 dBm				2	N	1	f	2.4000 GHz	-34.634 dBm				3	N	1	f	2.4000 GHz	-34.634 dBm				4	N	1	f	2.3995 GHz	-34.206 dBm			
MKR	MODE	TRIG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.4202 GHz	11.384 dBm																																									
2	N	1	f	2.4000 GHz	-34.634 dBm																																									
3	N	1	f	2.4000 GHz	-34.634 dBm																																									
4	N	1	f	2.3995 GHz	-34.206 dBm																																									


8DPSK
/LCH/Hop

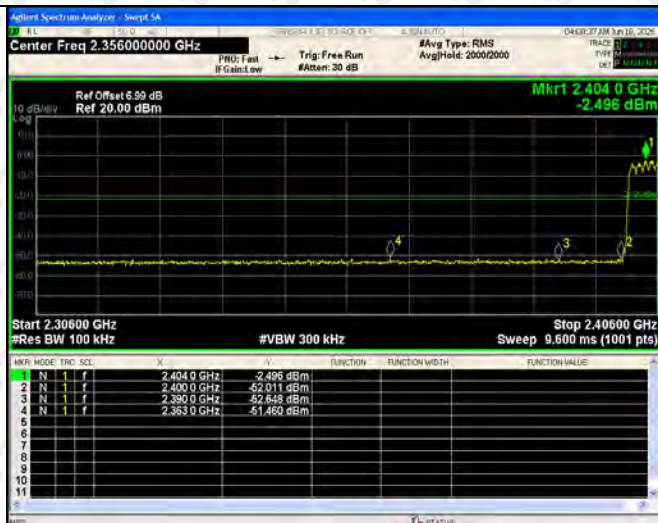

8DPSK /HCH/No
Hop

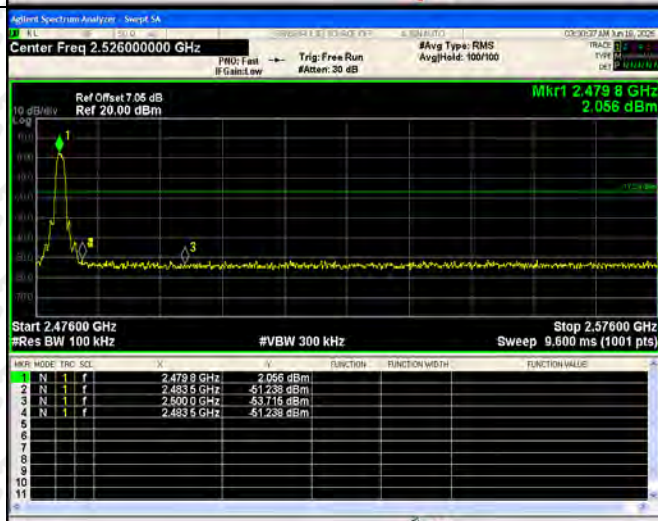


8DPSK
/HCH/Hop

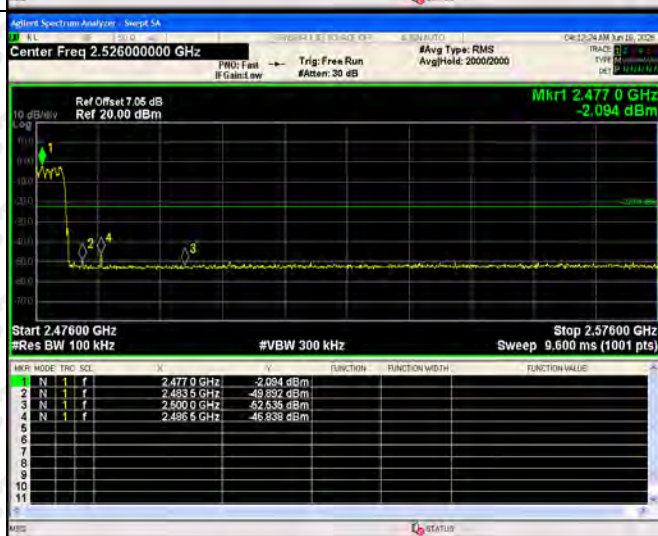


RF Conducted Spurious Emissions Graphs


GFSK/LCH



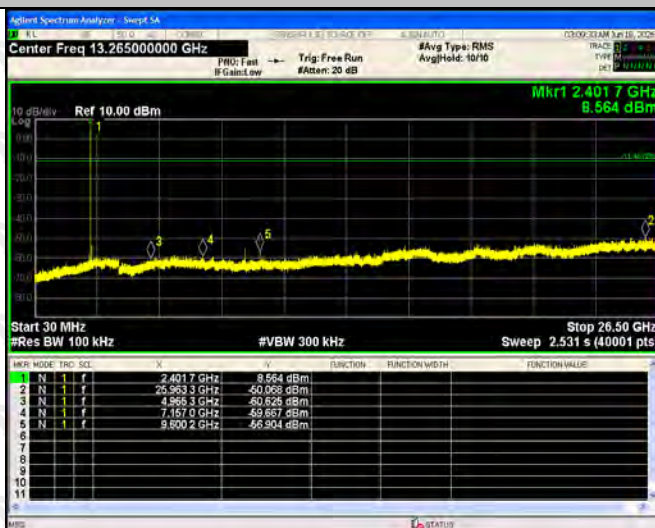


GFSK/MCH

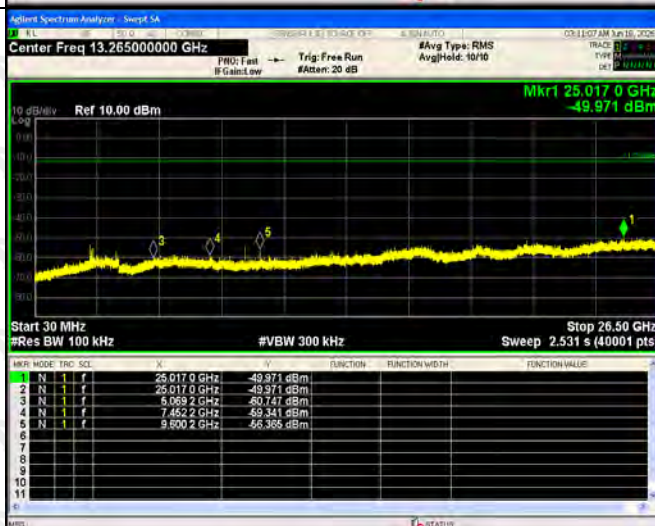


GFSK/HCH

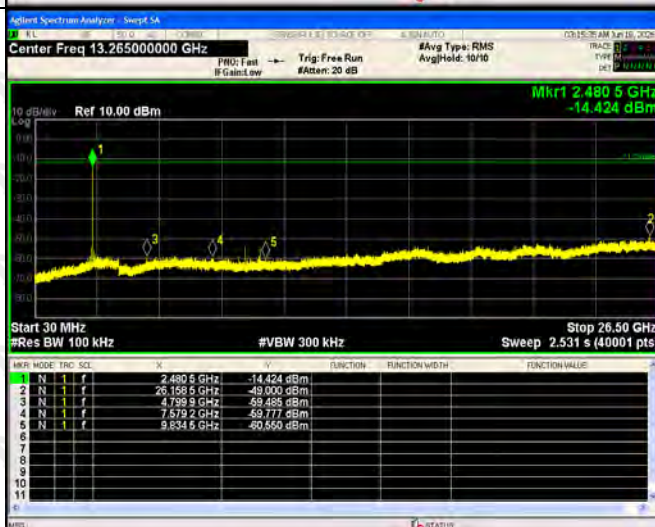


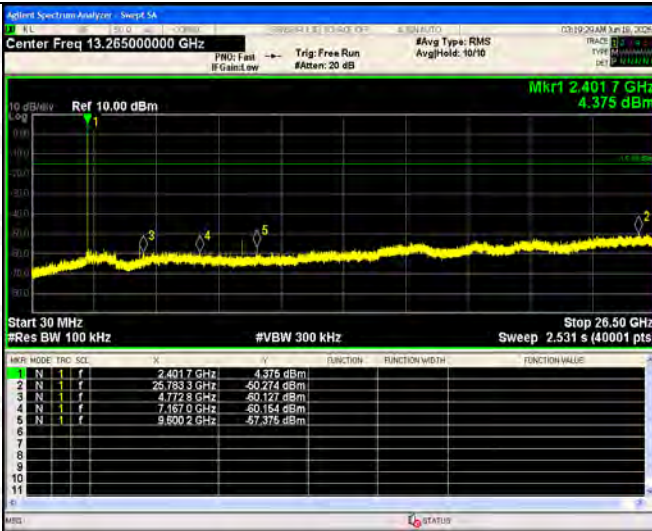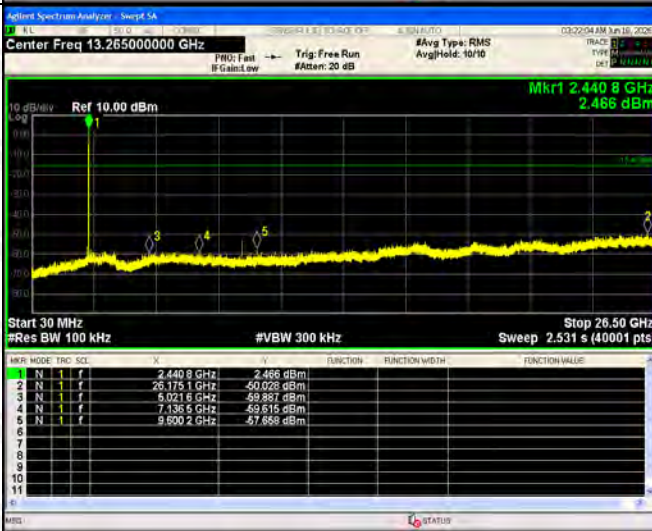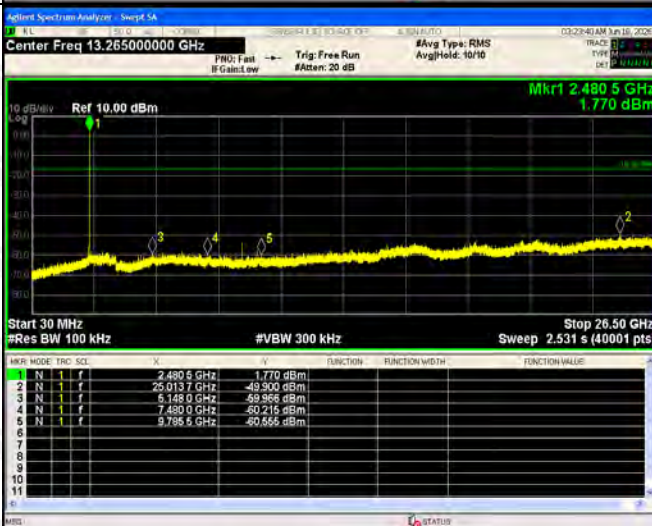$\pi/4$ DQPSK /LCH	 <table><tr><th>PKR</th><th>MODE</th><th>FREQ</th><th>SCAL</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>2.4017 GHz</td><td>1</td><td>f</td><td></td><td>4.375 dBm</td></tr><tr><td>2</td><td>N</td><td>26.7833 GHz</td><td>1</td><td>f</td><td></td><td>-50.724 dBm</td></tr><tr><td>3</td><td>N</td><td>4.7728 GHz</td><td>1</td><td>f</td><td></td><td>-60.127 dBm</td></tr><tr><td>4</td><td>N</td><td>7.1670 GHz</td><td>1</td><td>f</td><td></td><td>-60.154 dBm</td></tr><tr><td>5</td><td>N</td><td>9.6002 GHz</td><td>1</td><td>f</td><td></td><td>-67.375 dBm</td></tr></table>	PKR	MODE	FREQ	SCAL	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.4017 GHz	1	f		4.375 dBm	2	N	26.7833 GHz	1	f		-50.724 dBm	3	N	4.7728 GHz	1	f		-60.127 dBm	4	N	7.1670 GHz	1	f		-60.154 dBm	5	N	9.6002 GHz	1	f		-67.375 dBm
PKR	MODE	FREQ	SCAL	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																					
1	N	2.4017 GHz	1	f		4.375 dBm																																					
2	N	26.7833 GHz	1	f		-50.724 dBm																																					
3	N	4.7728 GHz	1	f		-60.127 dBm																																					
4	N	7.1670 GHz	1	f		-60.154 dBm																																					
5	N	9.6002 GHz	1	f		-67.375 dBm																																					
$\pi/4$ DQPSK/MCH	 <table><tr><th>PKR</th><th>MODE</th><th>FREQ</th><th>SCAL</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>2.4408 GHz</td><td>1</td><td>f</td><td></td><td>2.486 dBm</td></tr><tr><td>2</td><td>N</td><td>26.7151 GHz</td><td>1</td><td>f</td><td></td><td>-50.028 dBm</td></tr><tr><td>3</td><td>N</td><td>5.0216 GHz</td><td>1</td><td>f</td><td></td><td>-59.897 dBm</td></tr><tr><td>4</td><td>N</td><td>7.1365 GHz</td><td>1</td><td>f</td><td></td><td>-59.615 dBm</td></tr><tr><td>5</td><td>N</td><td>9.6002 GHz</td><td>1</td><td>f</td><td></td><td>-67.658 dBm</td></tr></table>	PKR	MODE	FREQ	SCAL	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.4408 GHz	1	f		2.486 dBm	2	N	26.7151 GHz	1	f		-50.028 dBm	3	N	5.0216 GHz	1	f		-59.897 dBm	4	N	7.1365 GHz	1	f		-59.615 dBm	5	N	9.6002 GHz	1	f		-67.658 dBm
PKR	MODE	FREQ	SCAL	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																					
1	N	2.4408 GHz	1	f		2.486 dBm																																					
2	N	26.7151 GHz	1	f		-50.028 dBm																																					
3	N	5.0216 GHz	1	f		-59.897 dBm																																					
4	N	7.1365 GHz	1	f		-59.615 dBm																																					
5	N	9.6002 GHz	1	f		-67.658 dBm																																					
$\pi/4$ DQPSK/HCH	 <table><tr><th>PKR</th><th>MODE</th><th>FREQ</th><th>SCAL</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>2.4805 GHz</td><td>1</td><td>f</td><td></td><td>1.770 dBm</td></tr><tr><td>2</td><td>N</td><td>26.0137 GHz</td><td>1</td><td>f</td><td></td><td>-49.900 dBm</td></tr><tr><td>3</td><td>N</td><td>5.1480 GHz</td><td>1</td><td>f</td><td></td><td>-59.966 dBm</td></tr><tr><td>4</td><td>N</td><td>7.4800 GHz</td><td>1</td><td>f</td><td></td><td>-60.215 dBm</td></tr><tr><td>5</td><td>N</td><td>9.7965 GHz</td><td>1</td><td>f</td><td></td><td>-60.656 dBm</td></tr></table>	PKR	MODE	FREQ	SCAL	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.4805 GHz	1	f		1.770 dBm	2	N	26.0137 GHz	1	f		-49.900 dBm	3	N	5.1480 GHz	1	f		-59.966 dBm	4	N	7.4800 GHz	1	f		-60.215 dBm	5	N	9.7965 GHz	1	f		-60.656 dBm
PKR	MODE	FREQ	SCAL	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																					
1	N	2.4805 GHz	1	f		1.770 dBm																																					
2	N	26.0137 GHz	1	f		-49.900 dBm																																					
3	N	5.1480 GHz	1	f		-59.966 dBm																																					
4	N	7.4800 GHz	1	f		-60.215 dBm																																					
5	N	9.7965 GHz	1	f		-60.656 dBm																																					


8DPSK /LCH

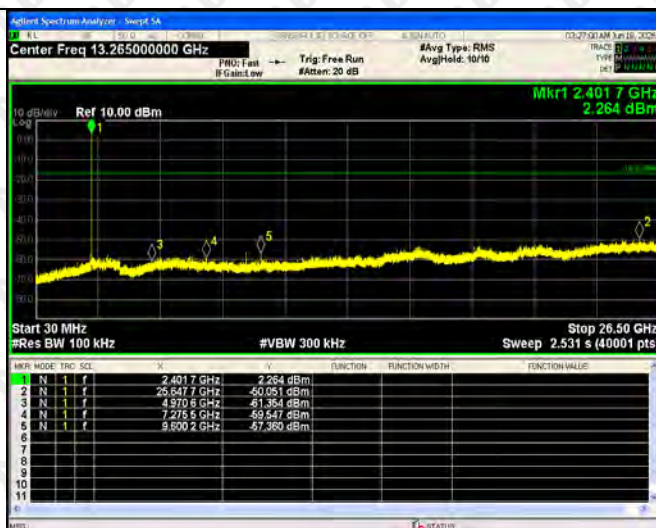

8DPSK /MCH

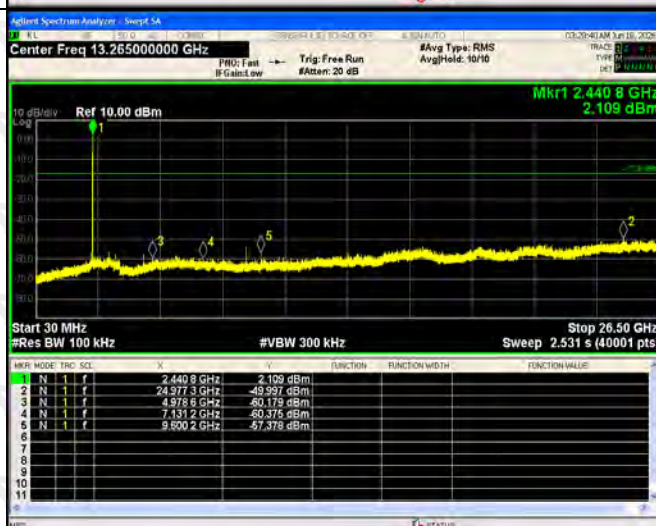


8DPSK /HCH

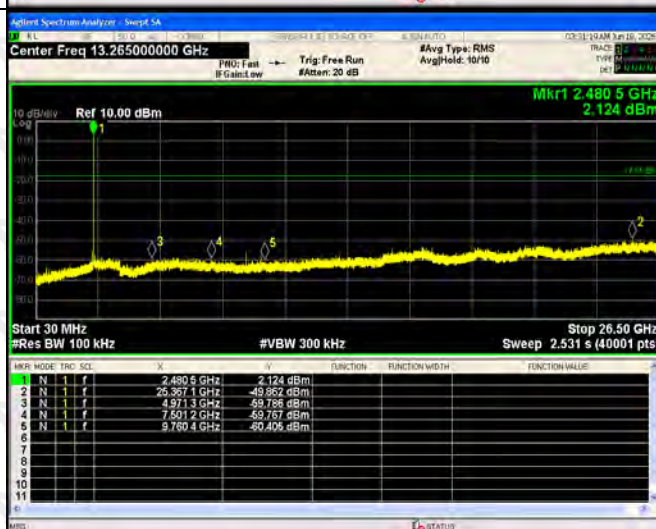

9. CONDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

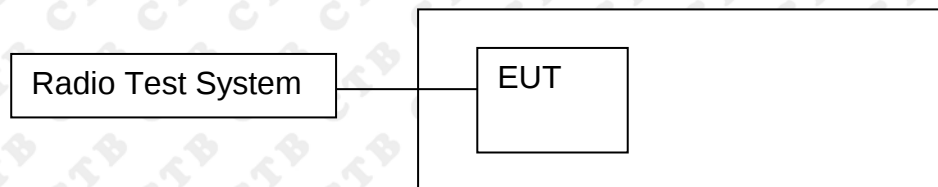

9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.


9.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
GFSK	LCH	8.9	20.97	PASS
	MCH	8.93	20.97	PASS
	HCH	8.62	20.97	PASS
$\pi/4$ DQPSK	LCH	6.66	20.97	PASS
	MCH	6.54	20.97	PASS
	HCH	5.82	20.97	PASS
8DPSK	LCH	7.87	20.97	PASS
	MCH	6.65	20.97	PASS
	HCH	5.95	20.97	PASS

Test Graph:

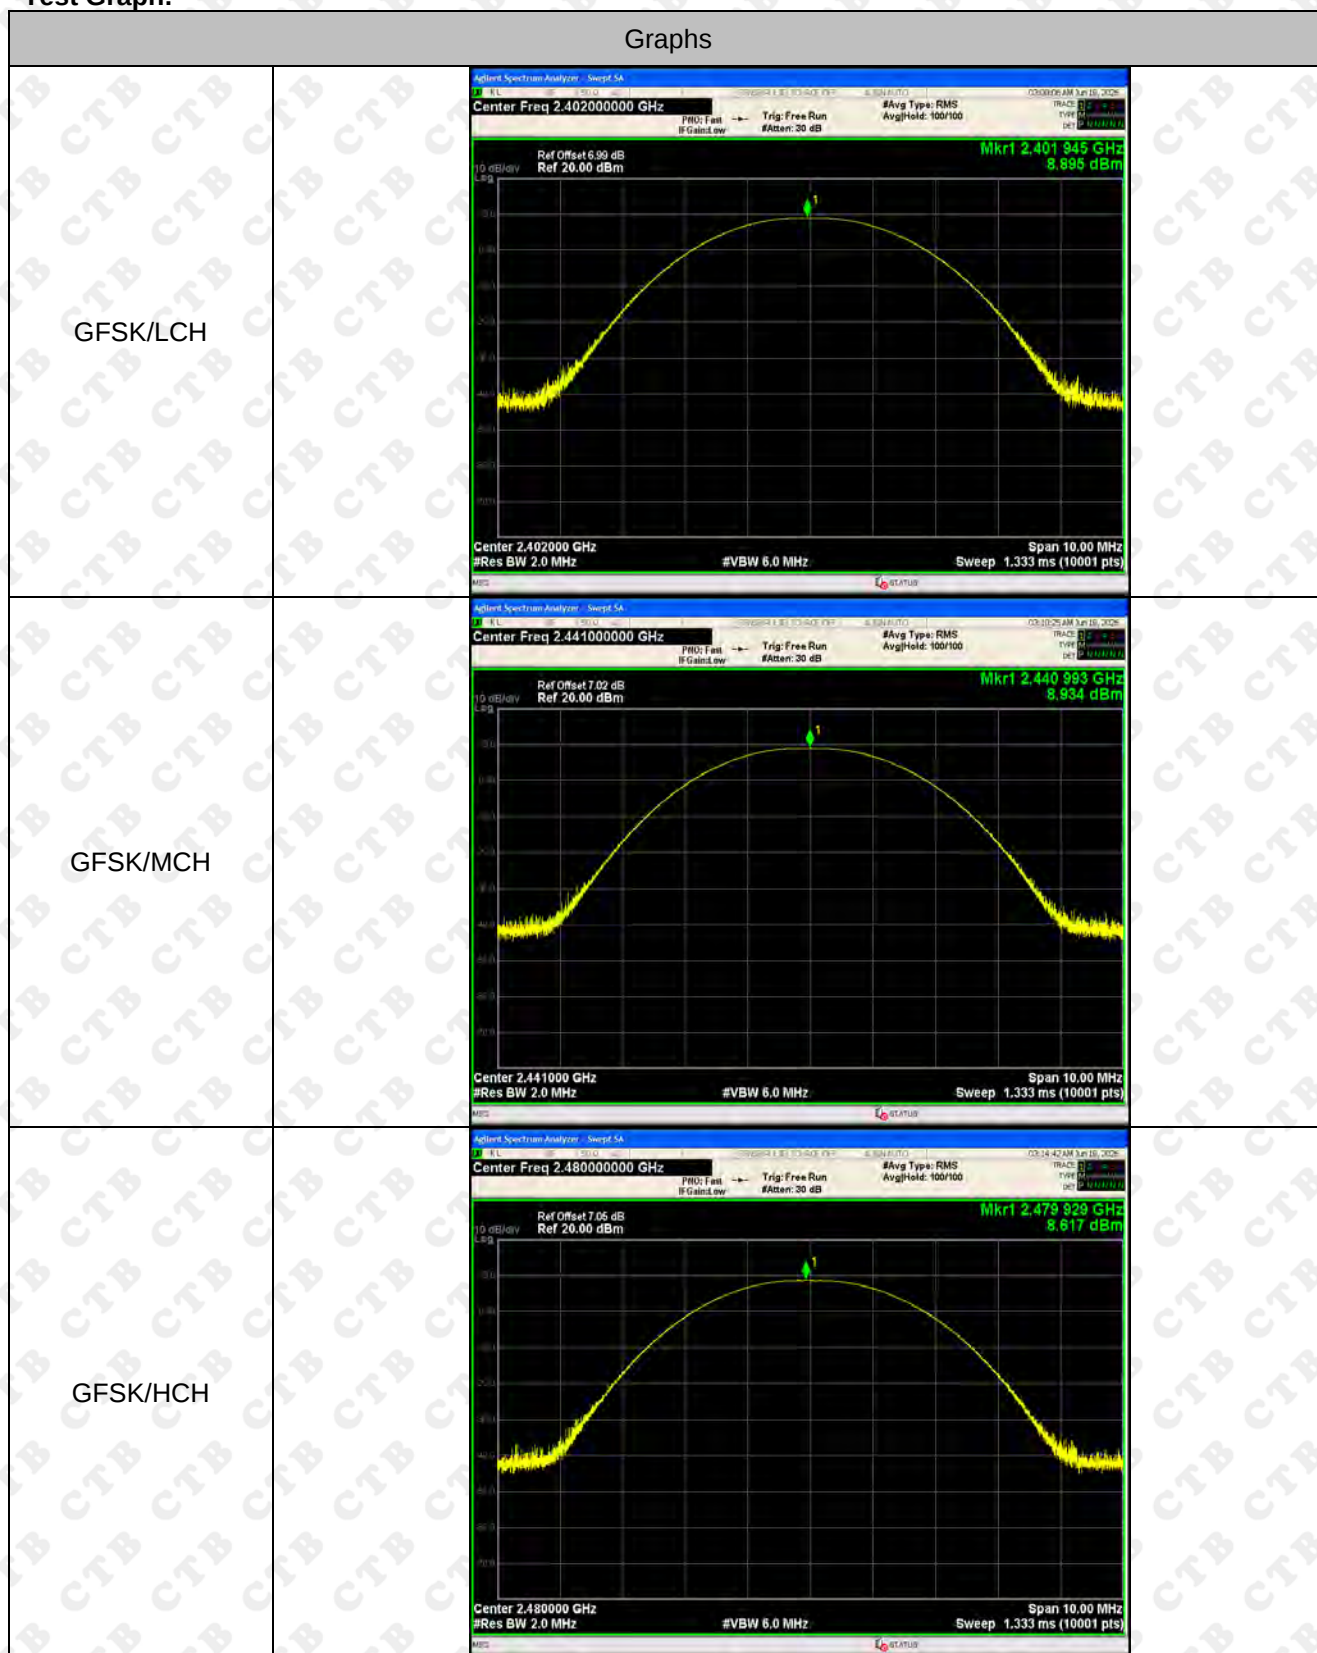


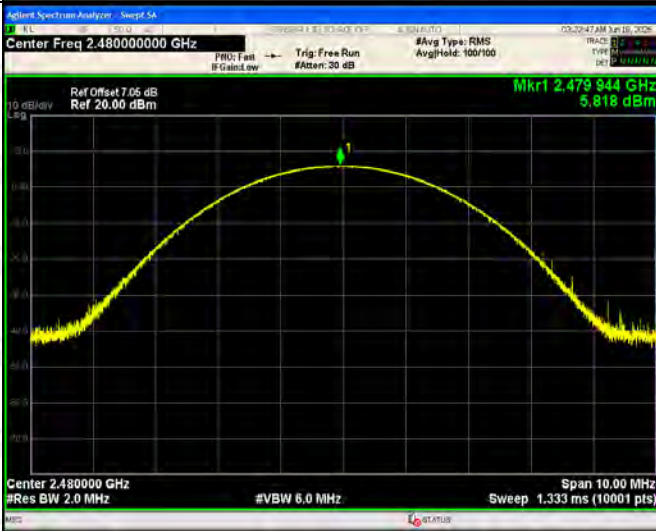$\pi/4$DQPSK/LCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.40200000 GHz Ref Offset 6.99 dB Ref 20.00 dBm Mkr1 2.402 014 GHz 6.658 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 5.0 MHz Span 10.00 MHz Sweep 1.333 ms (10001 pts)
$\pi/4$DQPSK/MCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.44100000 GHz Ref Offset 7.02 dB Ref 20.00 dBm Mkr1 2.440 971 GHz 6.540 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 5.0 MHz Span 10.00 MHz Sweep 1.333 ms (10001 pts)
$\pi/4$DQPSK/HCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.48000000 GHz Ref Offset 7.05 dB Ref 20.00 dBm Mkr1 2.479 944 GHz 5.818 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 5.0 MHz Span 10.00 MHz Sweep 1.333 ms (10001 pts)

8DPSK/LCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.40200000 GHz Ref Offset 6.99 dB Ref 20.00 dBm Mkr1 2.401 932 GHz 7.871 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.333 ms (10001 pts)
8DPSK /MCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.44100000 GHz Ref Offset 7.02 dB Ref 20.00 dBm Mkr1 2.440 913 GHz 6.851 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.333 ms (10001 pts)
8DPSK /HCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.48000000 GHz Ref Offset 7.05 dB Ref 20.00 dBm Mkr1 2.480 026 GHz 5.948 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.333 ms (10001 pts)

10. 20DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

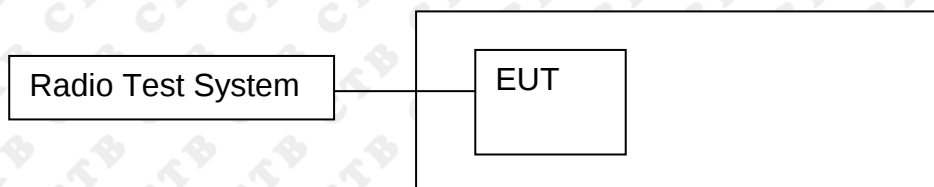

10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

10.3 Test procedure


1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.



10.4 Test Result



Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.926	PASS
	Mid channel	0.929	PASS
	High channel	0.932	PASS
$\pi/4$ DQPSK	Low channel	1.481	PASS
	Mid channel	1.509	PASS
	High channel	1.499	PASS
8DPSK	Low channel	1.474	PASS
	Mid channel	1.475	PASS
	High channel	1.476	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:

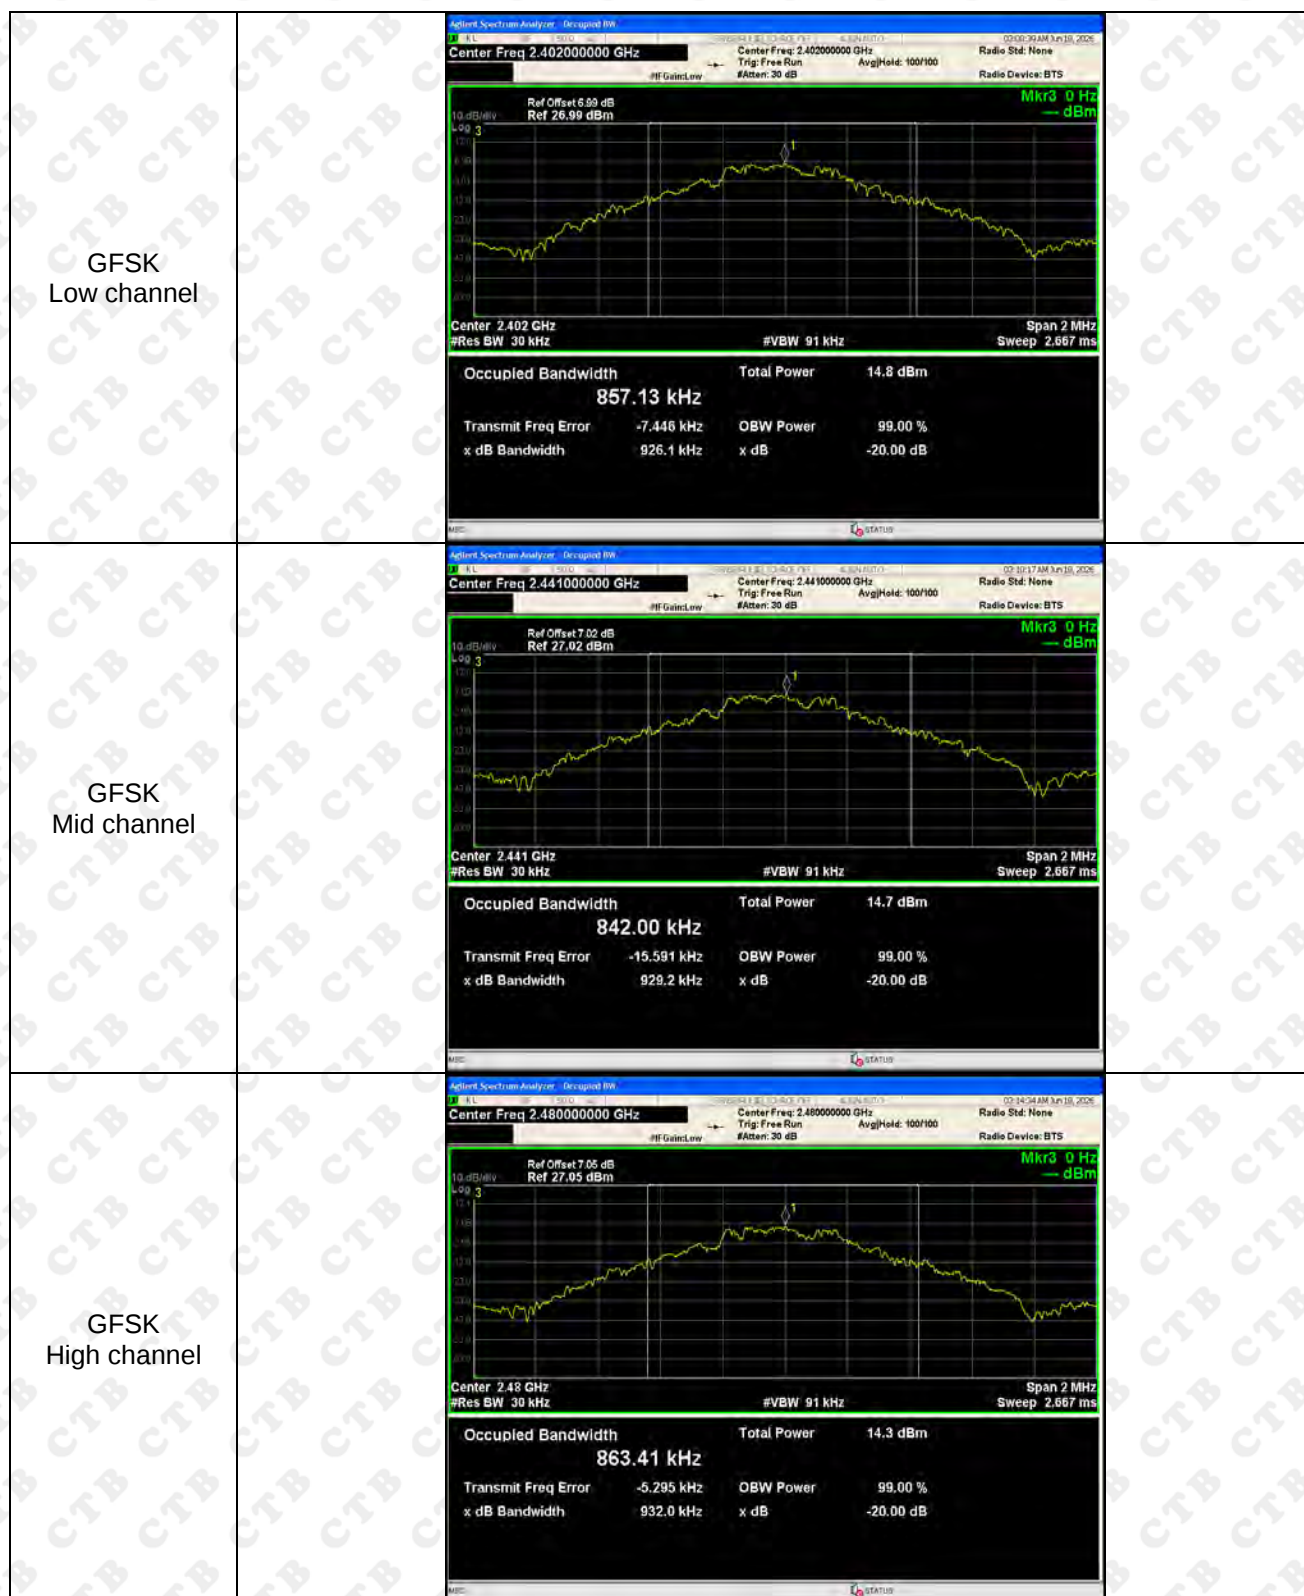


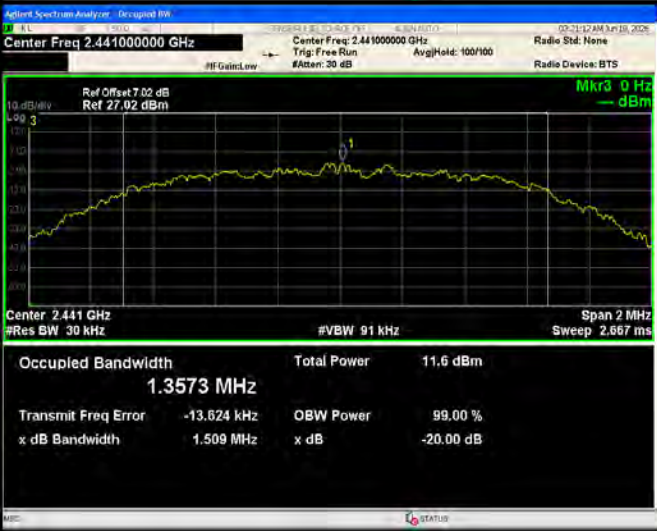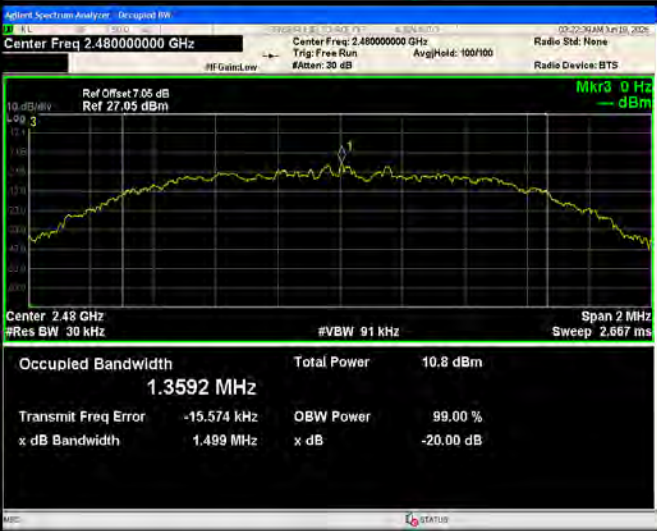$\pi/4$-DQPSK Low channel	 Center Freq: 2.402000000 GHz Occupied Bandwidth: 1.3556 MHz Total Power: 11.6 dBm
$\pi/4$-DQPSK Mid channel	 Center Freq: 2.441000000 GHz Occupied Bandwidth: 1.3573 MHz Total Power: 11.6 dBm
$\pi/4$-DQPSK High channel	 Center Freq: 2.480000000 GHz Occupied Bandwidth: 1.3592 MHz Total Power: 10.8 dBm

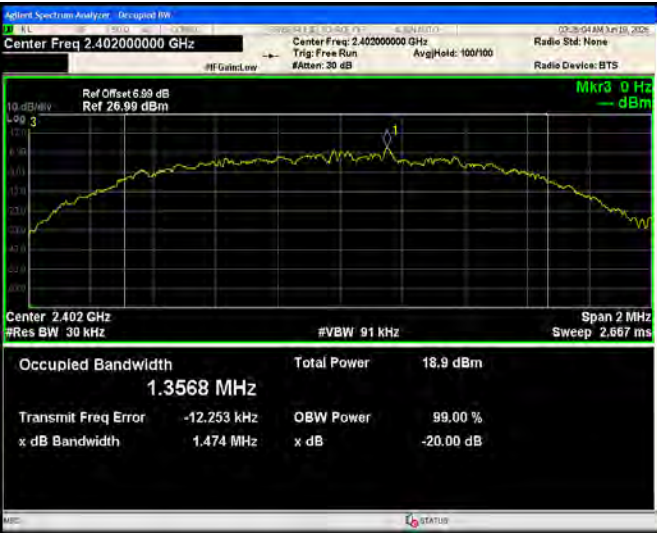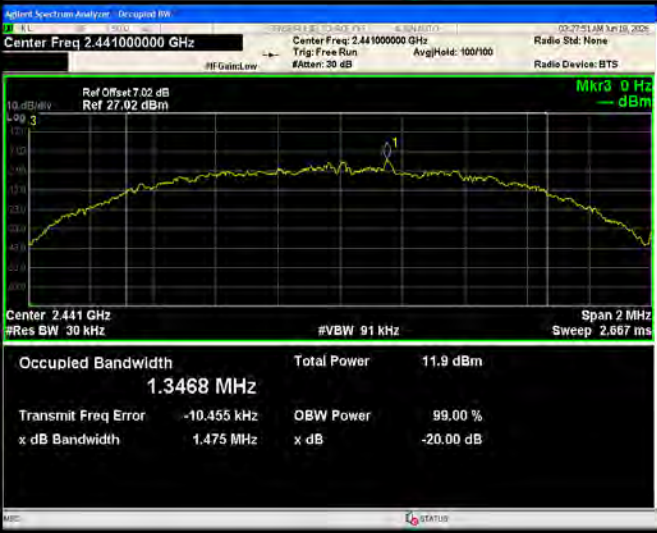8DPSK Low channel	 Center Freq 2.40200000 GHz Res BW 30 kHz Span 2 MHz Sweep 2.667 ms Occupied Bandwidth 1.3568 MHz Total Power 18.9 dBm Transmit Freq Error -12.253 kHz OBW Power 99.00 % x dB Bandwidth 1.474 MHz x dB -20.00 dB
8DPSK Mid channel	 Center Freq 2.44100000 GHz Res BW 30 kHz Span 2 MHz Sweep 2.667 ms Occupied Bandwidth 1.3468 MHz Total Power 11.9 dBm Transmit Freq Error -10.455 kHz OBW Power 99.00 % x dB Bandwidth 1.475 MHz x dB -20.00 dB
8DPSK High channel	 Center Freq 2.48000000 GHz Res BW 30 kHz Span 2 MHz Sweep 2.667 ms Occupied Bandwidth 1.3602 MHz Total Power 11.0 dBm Transmit Freq Error -10.700 kHz OBW Power 99.00 % x dB Bandwidth 1.476 MHz x dB -20.00 dB

11. CARRIER FREQUENCIES SEPARATION

11.1 Block Diagram Of Test Setup

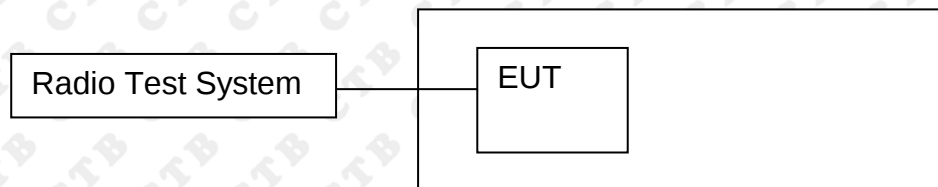

11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 20kHz. VBW = 60kHz , Span = 2MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.4 Test Result

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	1.002	0.617	PASS
GFSK	MCH	1.002	0.619	PASS
GFSK	HCH	1.000	0.621	PASS
$\pi/4$ DQPSK	LCH	1.005	0.988	PASS
$\pi/4$ DQPSK	MCH	1.008	1.006	PASS
$\pi/4$ DQPSK	HCH	1.005	0.999	PASS
8DPSK	LCH	1.005	0.983	PASS
8DPSK	MCH	1.005	0.984	PASS
8DPSK	HCH	0.999	0.984	PASS

Test Graph

Graphs

GFSK/LCH




GFSK/MCH



GFSK/HCH




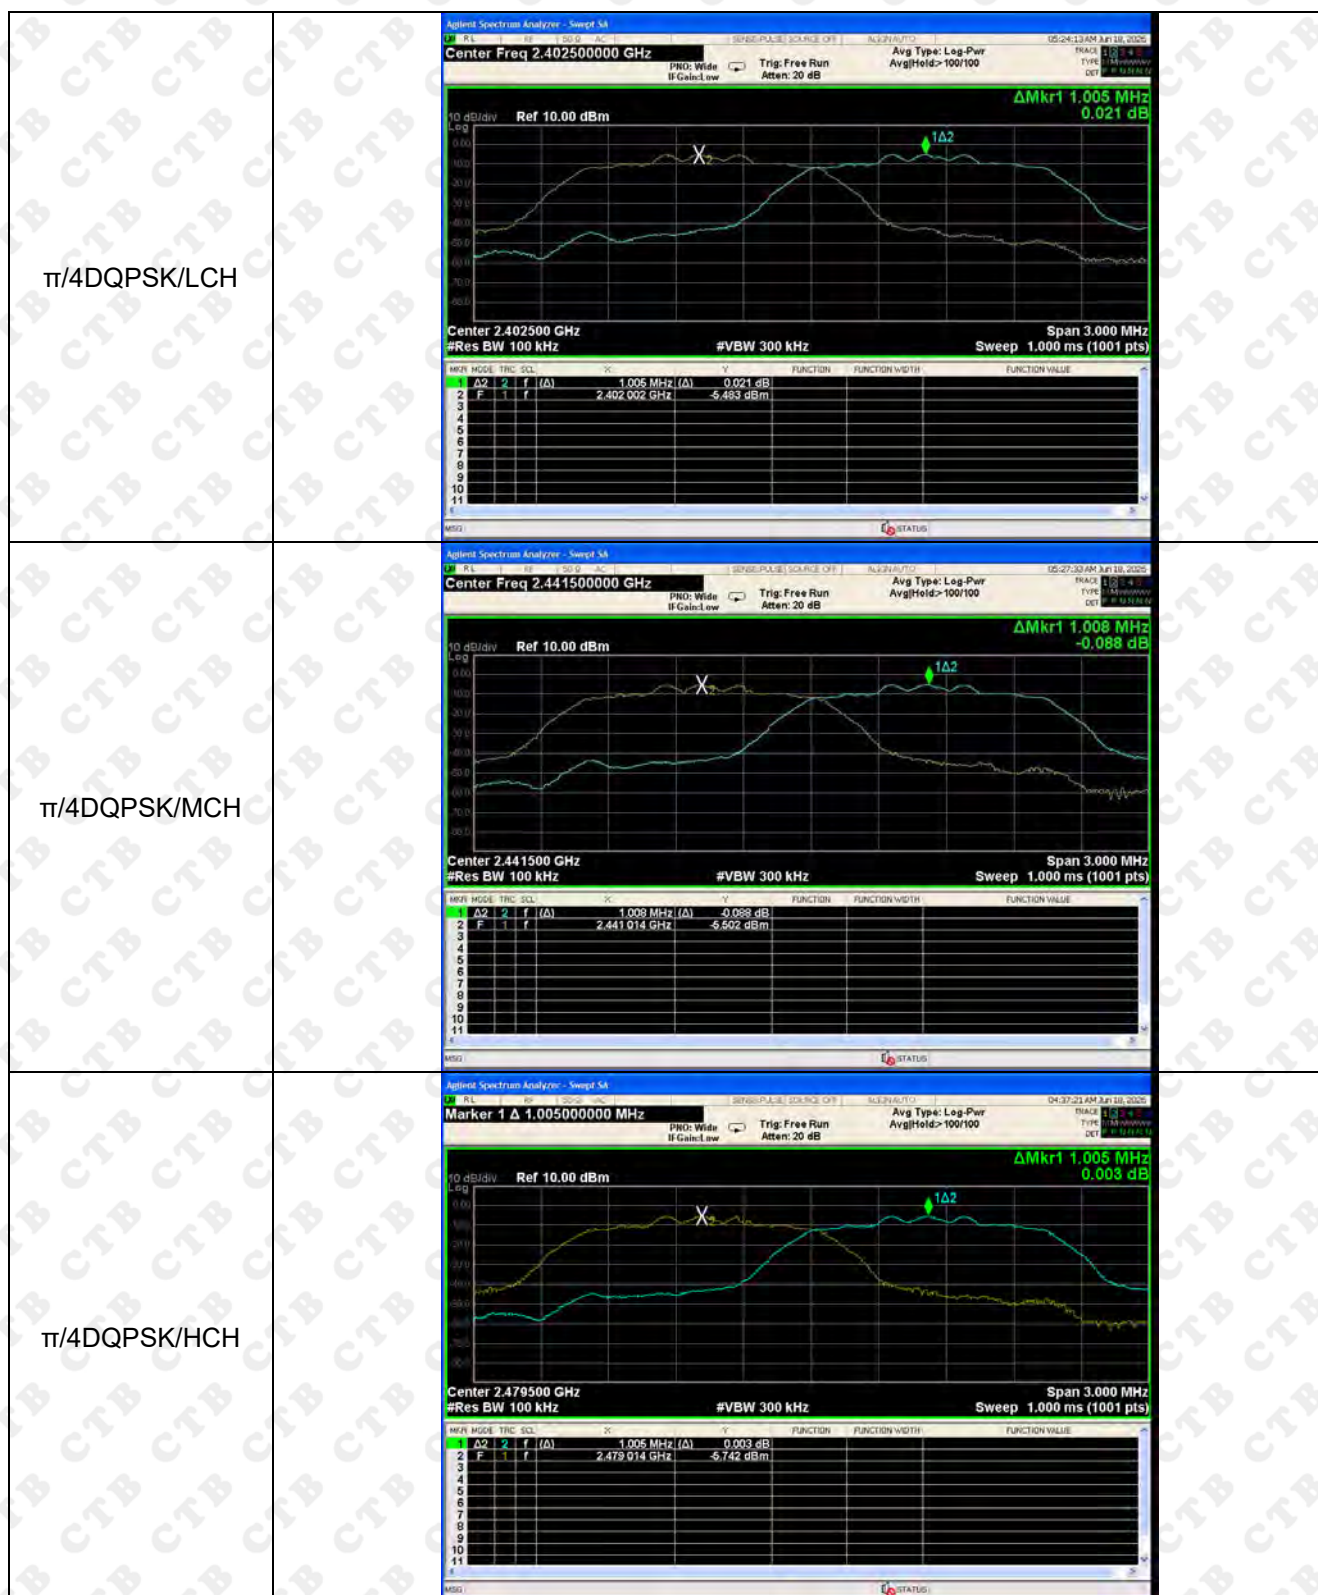



12. HOPPING CHANNEL NUMBER

12.1 Block Diagram Of Test Setup

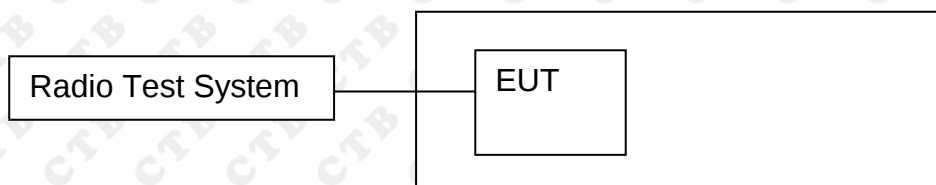

12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

12.4 Test Result

Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	≥ 15	PASS
$\pi/4$ DQPSK	Hop	79	≥ 15	PASS
8DPSK	Hop	79	≥ 15	PASS

Test Graph

Graphs


GFSK/Hop



$\pi/4$ DQPSK/Hop




8DPSK/Hop

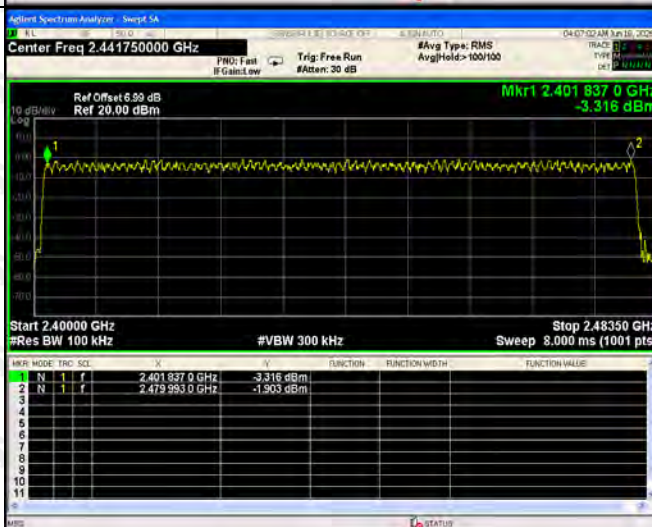

13. DWELL TIME

13.1 Block Diagram Of Test Setup

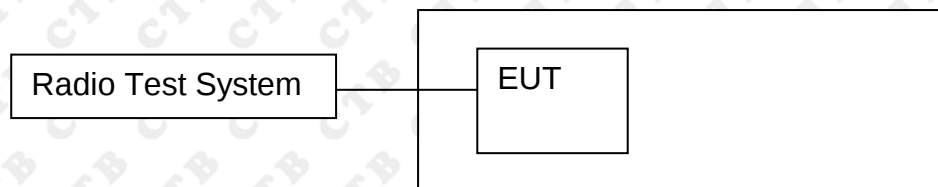

13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

13.3 Test procedure

According to ANSI C63.10-2020 sub-clause 7.8.4

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- Span: Zero span, centered on a hopping channel.
- RBW shall be $\leq$ channel spacing and where possible RBW should be set $\geq 1/T$, where T is the expected dwell time per channel.
- Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- Detector function: Peak.
- Trace: Max hold.
- Trace: Clear-write, single sweep.
- Place markers at the start of the first transmission on the channel and at the end of the last transmission. The dwell time per hop is the time between these two markers.



13.4 Test Result



Packet	Channel	Pulse Time (ms)	Burst Count (Num)	Total Dwell Time (ms)	Limit (ms)	Verdict
DH1	LCH	0.38	318	120.84	400	PASS
DH1	MCH	0.38	316	120.08	400	PASS
DH1	HCH	0.38	320	121.6	400	PASS
2DH3	LCH	1.641	159	260.919	400	PASS
2DH3	MCH	1.64	145	237.8	400	PASS
2DH3	HCH	1.641	166	272.406	400	PASS
3DH5	LCH	2.89	113	326.57	400	PASS
3DH5	MCH	2.89	99	286.11	400	PASS
3DH5	HCH	2.891	106	306.446	400	PASS

Remark: Dwell time = Pulse time * Total Hops


Remark: Mkr Delta is once pulse time.

Test Graph

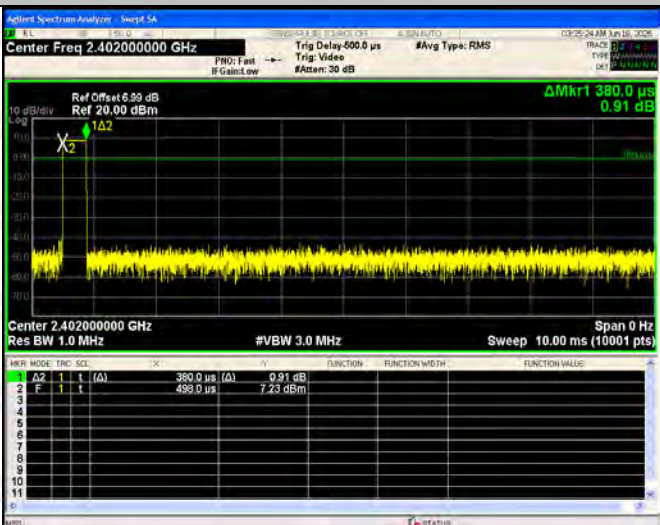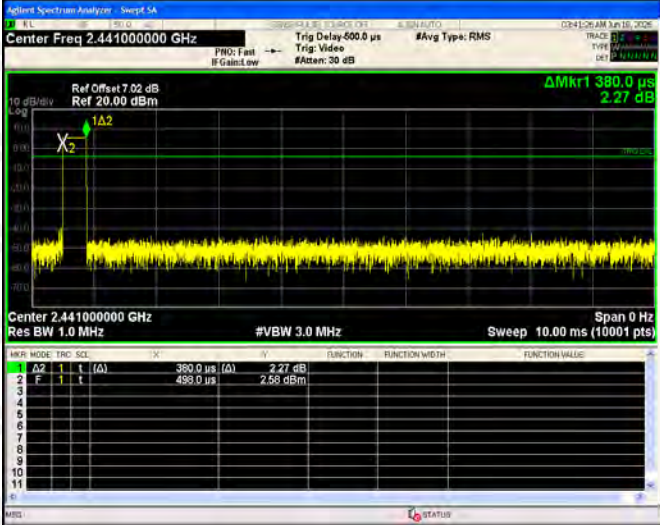
Graphs		
GFSK_1DH1/LCH- One Burst		
GFSK_1DH1/LCH- Accumulated		
GFSK_1DH1/MCH- One Burst		

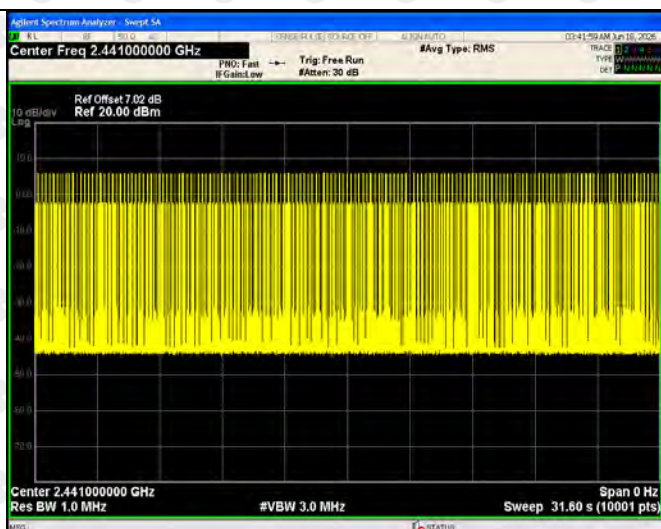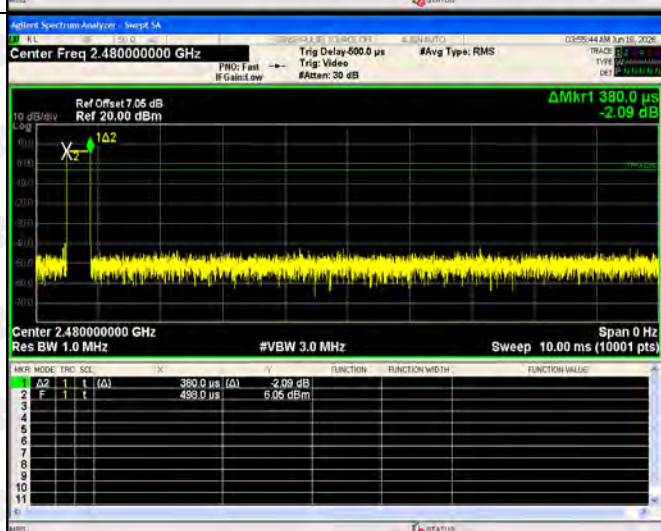GFSK_1DH1/MCH-
Accumulated

GFSK_1DH1/HCH-
One Burst

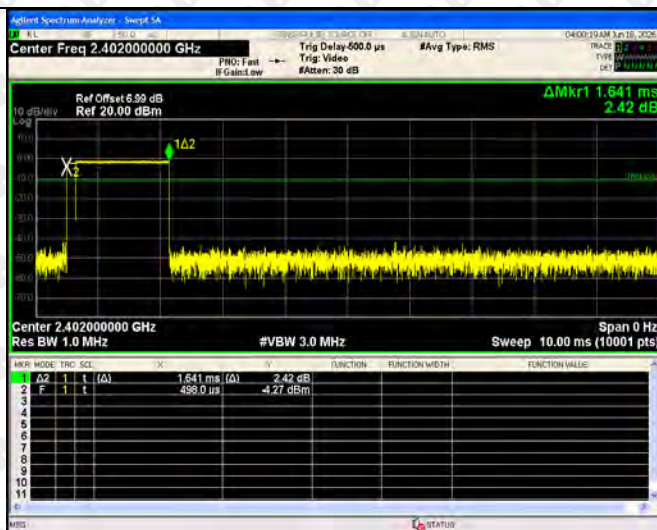GFSK_1DH1/HCH-
Accumulated



$\pi/4$ DQPSK_2DH3
/LCH- One Burst

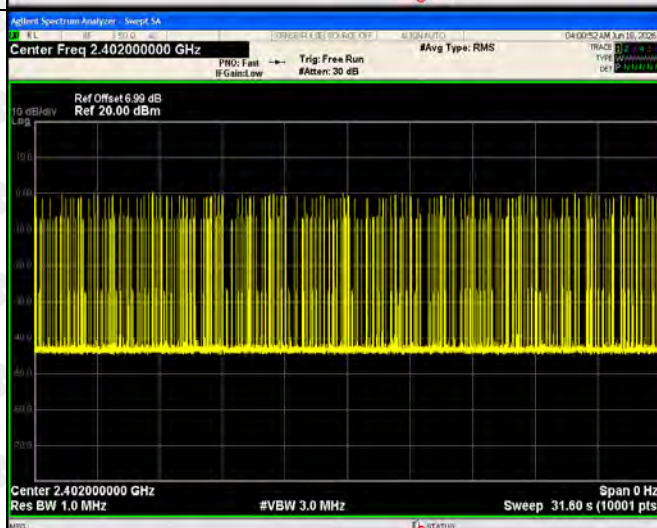



$\pi/4$ DQPSK_2DH3
/LCH- Accumulated





$\pi/4$ DQPSK_2DH3
/MCH- One Burst

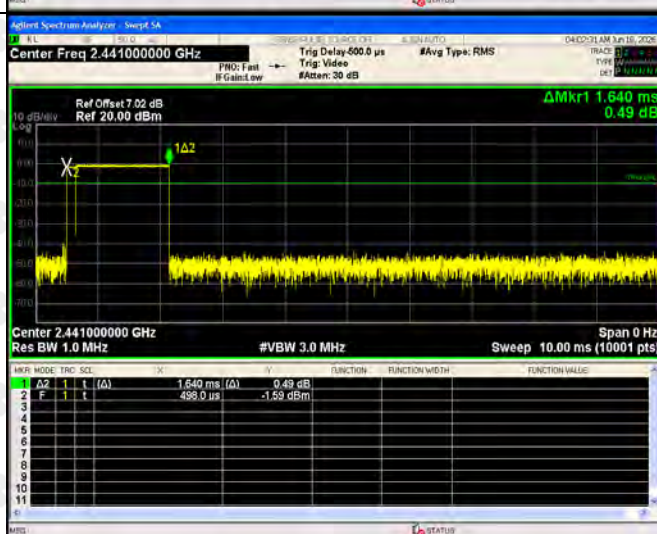

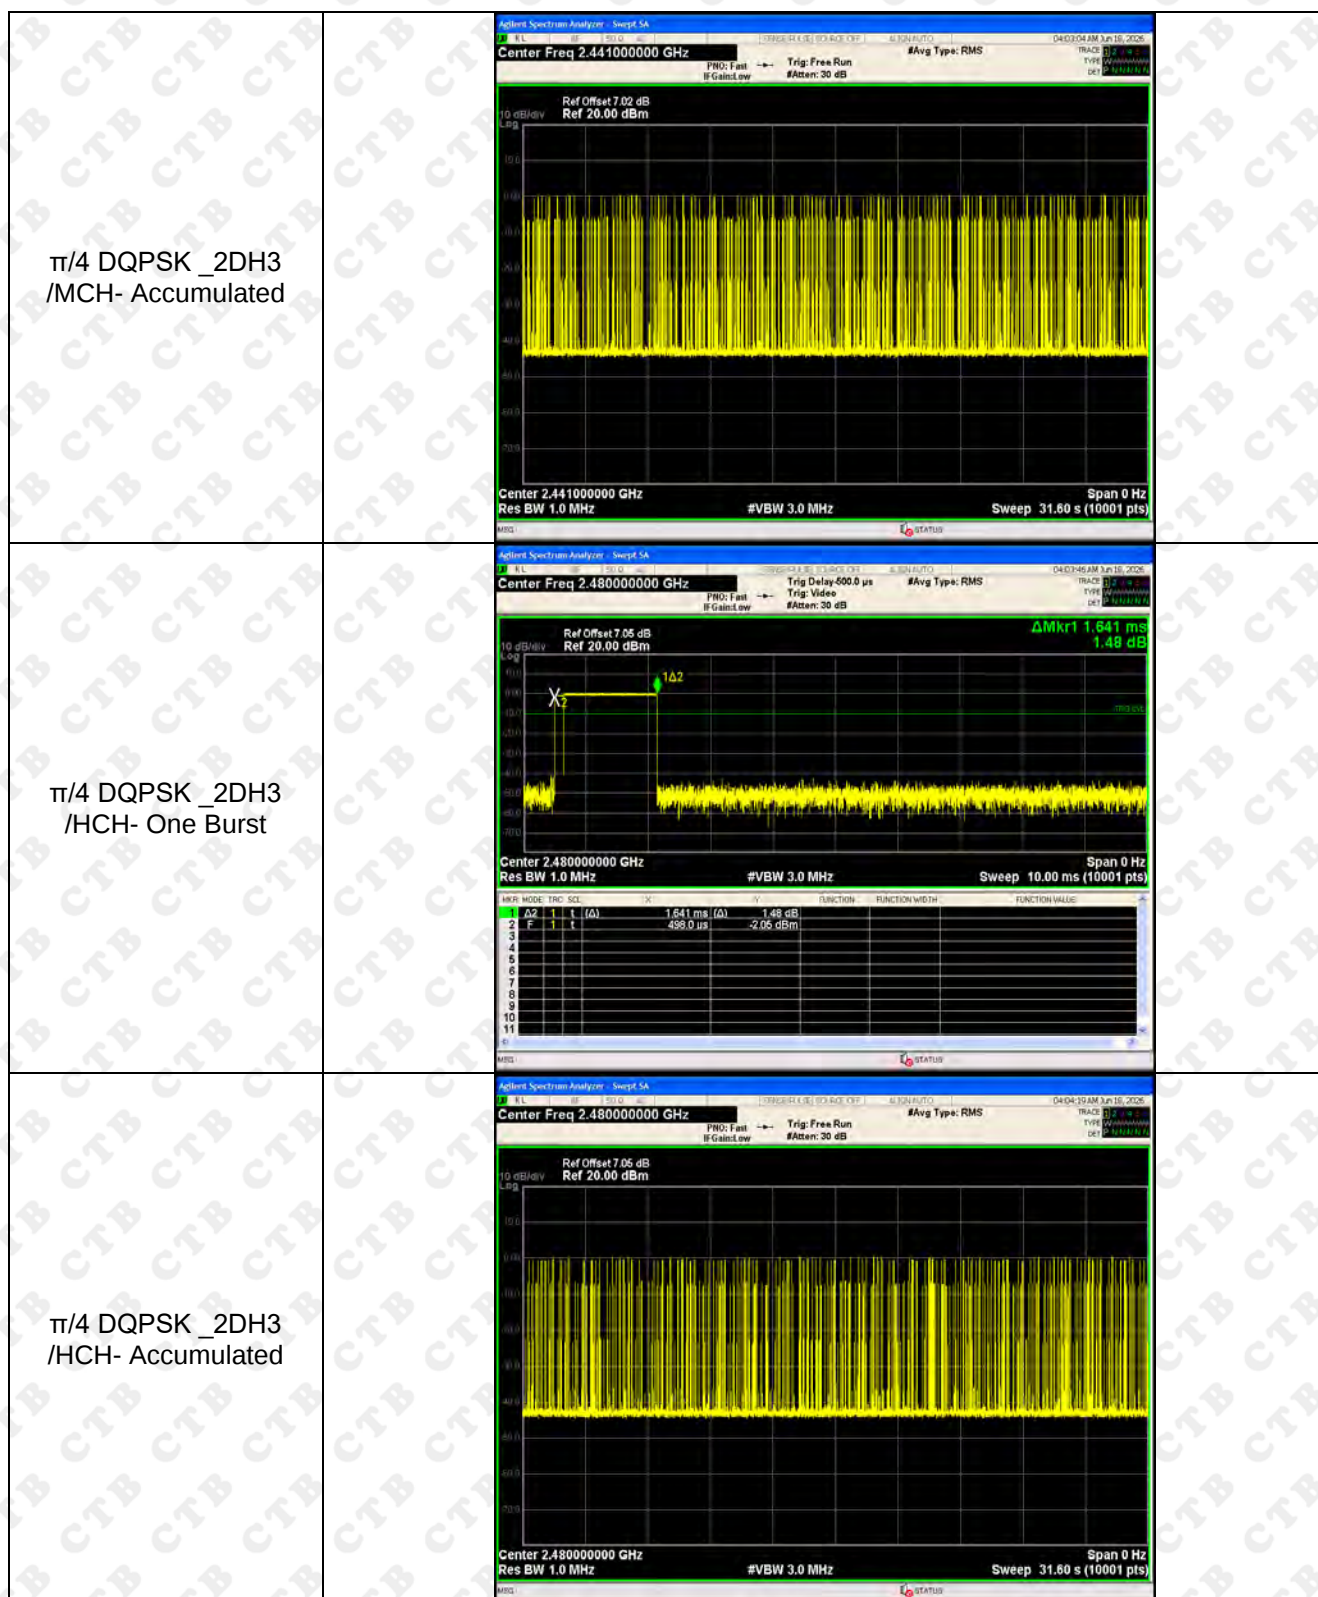

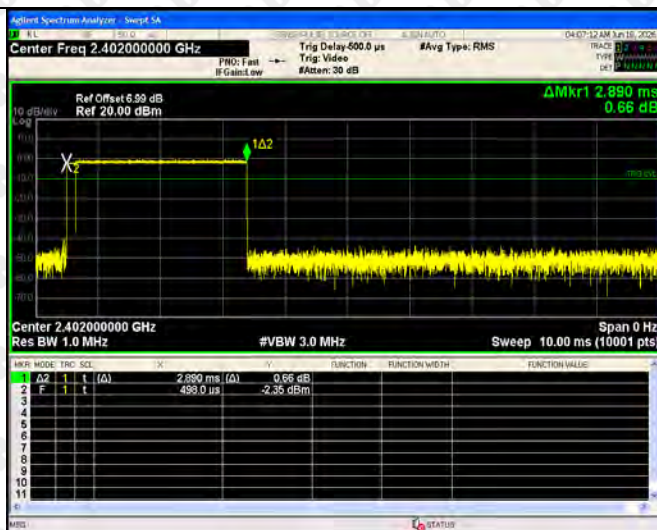8DPSK_3DH5/LCH-
One Burst

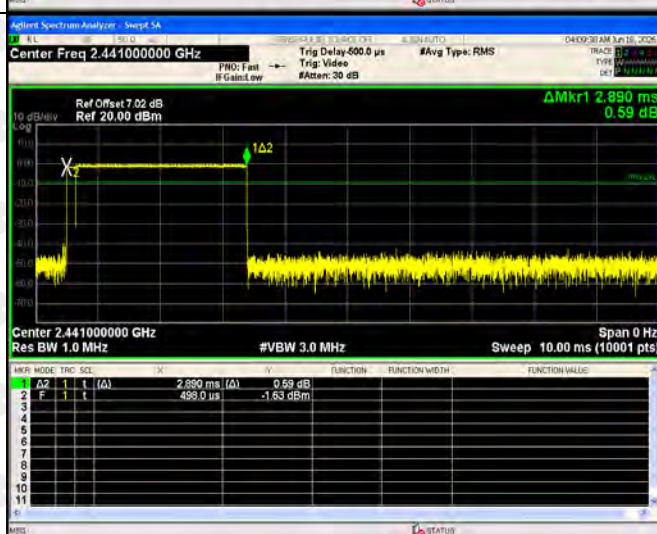8DPSK_3DH5/LCH-
Accumulated

8DPSK_3DH5/MCH-
One Burst




14. PSEUDORANDOM FREQUENCY

14.1 Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

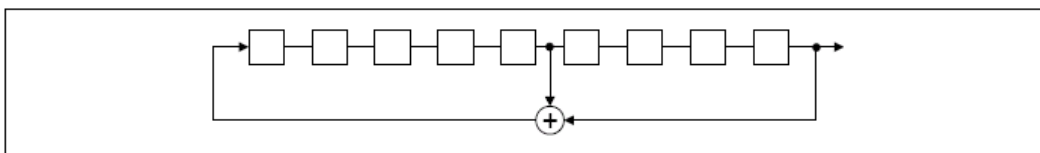

An example of Pseudorandom Frequency Hopping Sequence as follow:

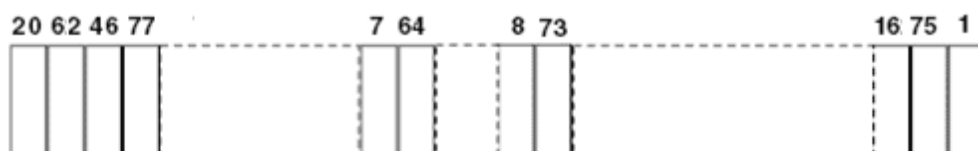

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

15. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is FPC antenna. The best case gain of the antenna is 0.78dBi.

16. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G

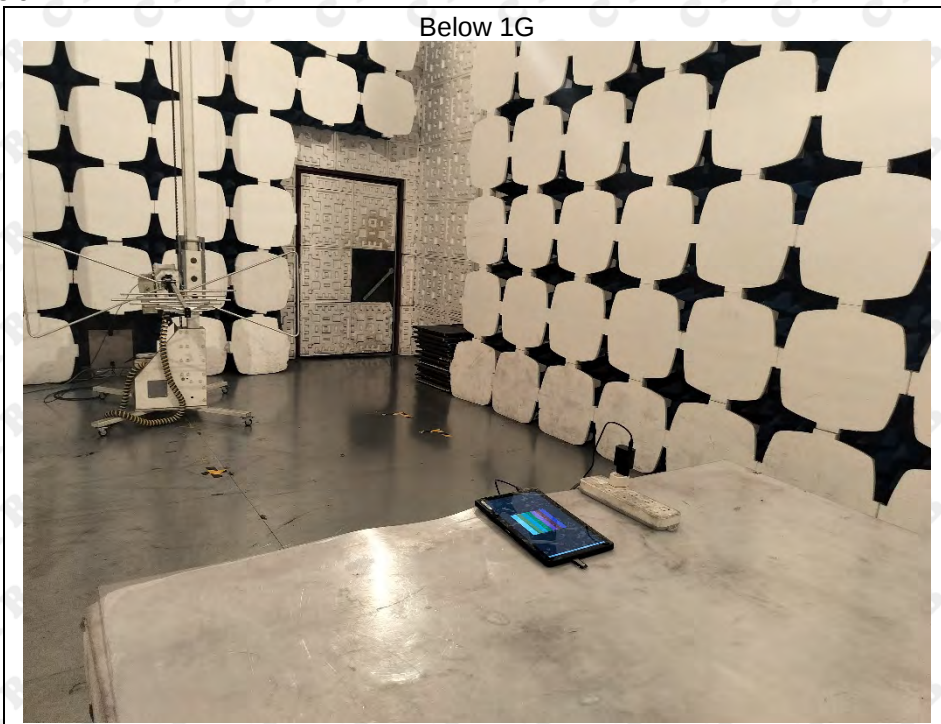

Above 1G



Conducted Emission



RF Conducted



***** END OF REPORT *****