

BT

DUT: xTablet T8655


Communication System:BT; Frequency: 2480 MHz;Duty Cycle: 1:1.2965
Medium: H2450 Medium parameters used: $f = 2480\text{ MHz}$; $\sigma = 1.82\text{ S/m}$; $\epsilon_r = 39.54$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $22.1\text{ }^{\circ}\text{C}$; Liquid Temperature : $21.9\text{ }^{\circ}\text{C}$

- DASY5 Configuration:
- Probe: EX3DV4 - SN3970; Calibrated: 2025/6/5;
 - Electronics: DAE4 Sn1418; Calibrated: 2025/6/5
 - Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Right-Ant Main 3DH5 High/Area Scan (5x14x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (measured) = 0.0792 W/kg

Right-Ant Main 3DH5 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 2.375 V/m ; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 0.523 W/kg
SAR(1 g) = 0.158 W/kg ; SAR(10 g) = 0.050 W/kg
Maximum value of SAR (measured) = 0.192 W/kg

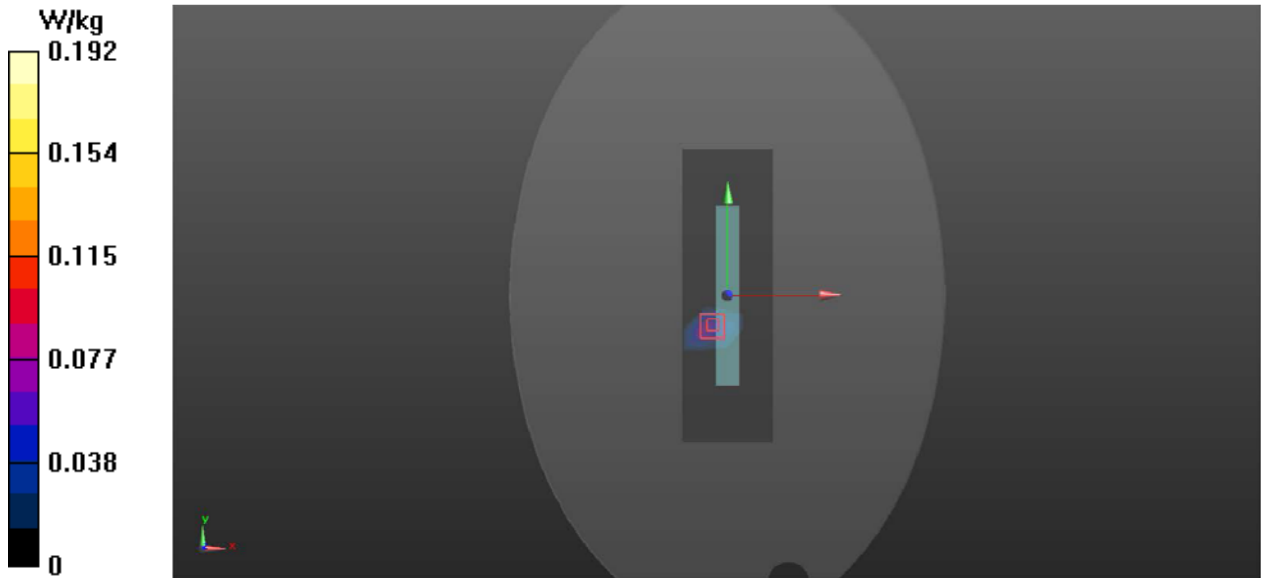

2.4GWIFI


DUT: xTablet T8655

Communication System: 802.11b ; Frequency: 2437 MHz;Duty Cycle: 1:1
Medium: H2450 Medium parameters used: $f = 2437\text{ MHz}$; $\sigma = 1.73\text{ S/m}$; $\epsilon_r = 39.86$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $22.1\text{ }^{\circ}\text{C}$; Liquid Temperature : $21.9\text{ }^{\circ}\text{C}$

DASY5 Configuration:
- Probe: EX3DV4 - SN3970; Calibrated: 2025/6/5;
- Electronics: DAE4 Sn1418; Calibrated: 2025/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Right-Ant Main/Area Scan (5x14x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$
Maximum value of SAR (measured) = 0.334 W/kg

Right-Ant Main/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 4.144 V/m ; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 2.76 W/kg
SAR(1 g) = 1.03 W/kg ; SAR(10 g) = 0.331 W/kg
Smallest distance from peaks to all points 3 dB below = 7.3 mm
Ratio of SAR at M2 to SAR at M1 = 35.8%
Maximum value of SAR (measured) = 1.02 W/kg

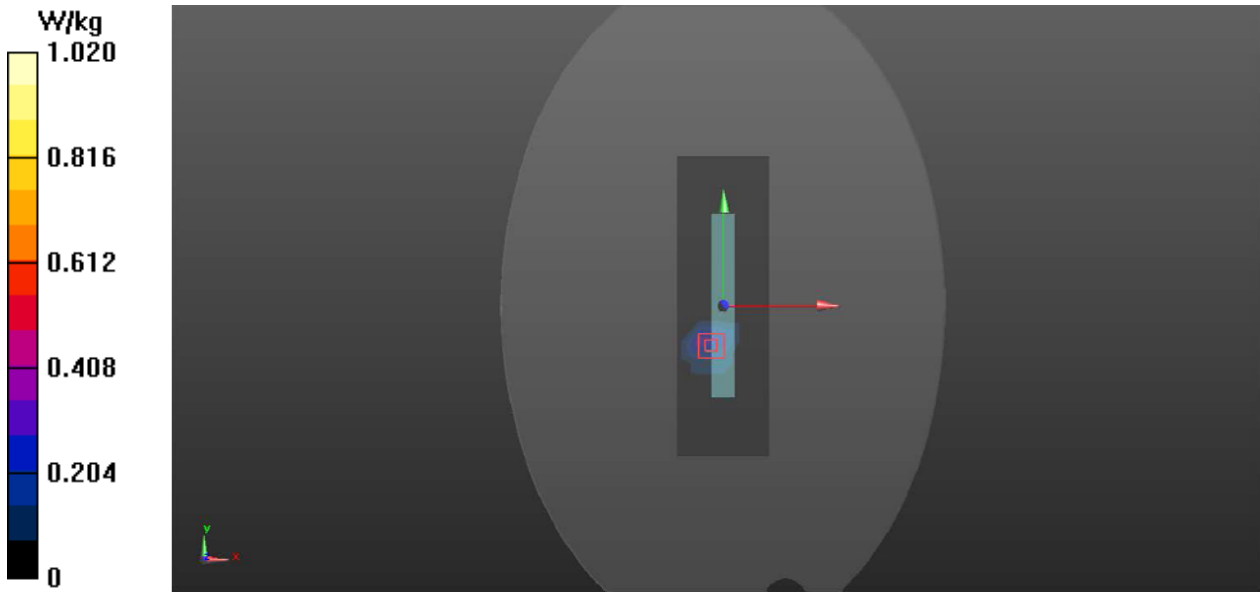

5.2GWIFI


DUT: xTablet T8655

Communication System:802.11a; Frequency: 5240 MHz;Duty Cycle: 1:1
Medium: H5G Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.72 \text{ S/m}$; $\epsilon_r = 36.88$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.1 \text{ }^\circ\text{C}$

- DASY5 Configuration:
- Probe: EX3DV4 - SN3970; Calibrated: 2025/6/5;
 - Electronics: DAE4 Sn1418; Calibrated: 2025/6/5
 - Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Right-Ant Main High/Area Scan (5x14x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$
Maximum value of SAR (measured) = 2.57 W/kg

Right-Ant Main High/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 2.341 V/m ; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 12.0 W/kg
SAR(1 g) = 1.07 W/kg ; SAR(10 g) = 0.409 W/kg
Smallest distance from peaks to all points 3 dB below = 6.4 mm
Ratio of SAR at M2 to SAR at M1 = 46.7%
Maximum value of SAR (measured) = 4.90 W/kg

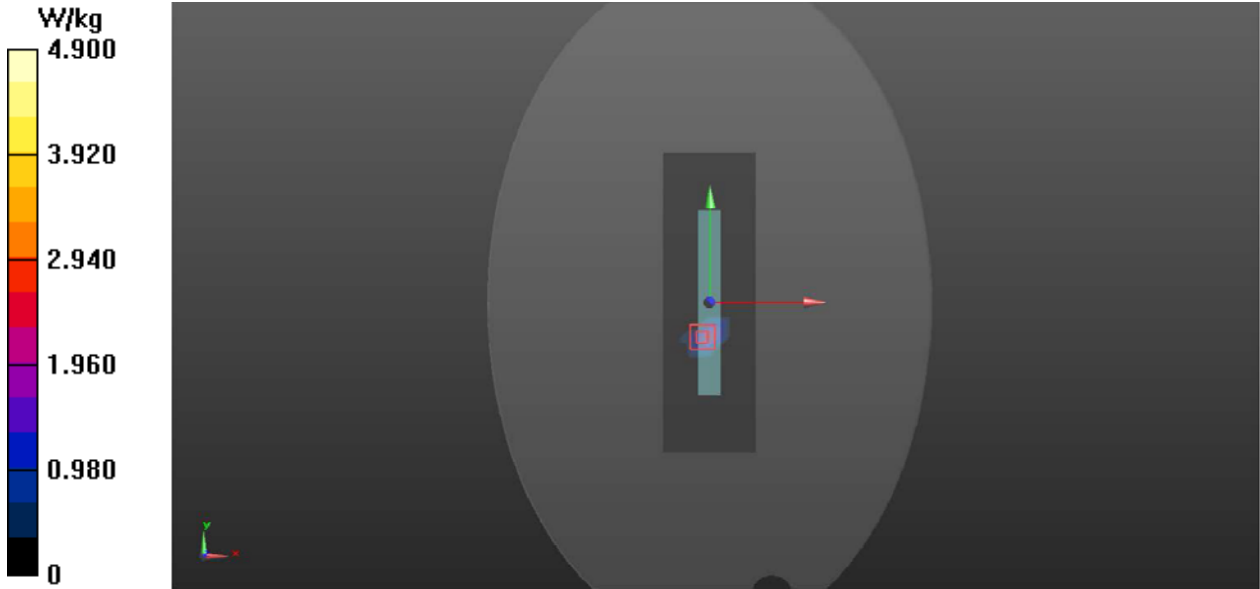

5.3GWIFI

DUT: xTablet T8655

Communication System:802.11a; Frequency: 5260 MHz;Duty Cycle: 1:1
Medium: H5G Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 4.73 \text{ S/m}$; $\epsilon_r = 36.86$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.1 \text{ }^\circ\text{C}$


DASY5 Configuration:
- Probe: EX3DV4 - SN3970; Calibrated: 2025/6/5;
- Electronics: DAE4 Sn1418; Calibrated: 2025/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Right-Ant Main Low/Area Scan (5x14x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 2.53 W/kg

Right-Ant Main Low/Zoom Scan (9x9x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.907 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 12.3 W/kg
SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.355 W/kg
Smallest distance from peaks to all points 3 dB below = 6.1 mm
Ratio of SAR at M2 to SAR at M1 = 46.4%
Maximum value of SAR (measured) = 4.99 W/kg

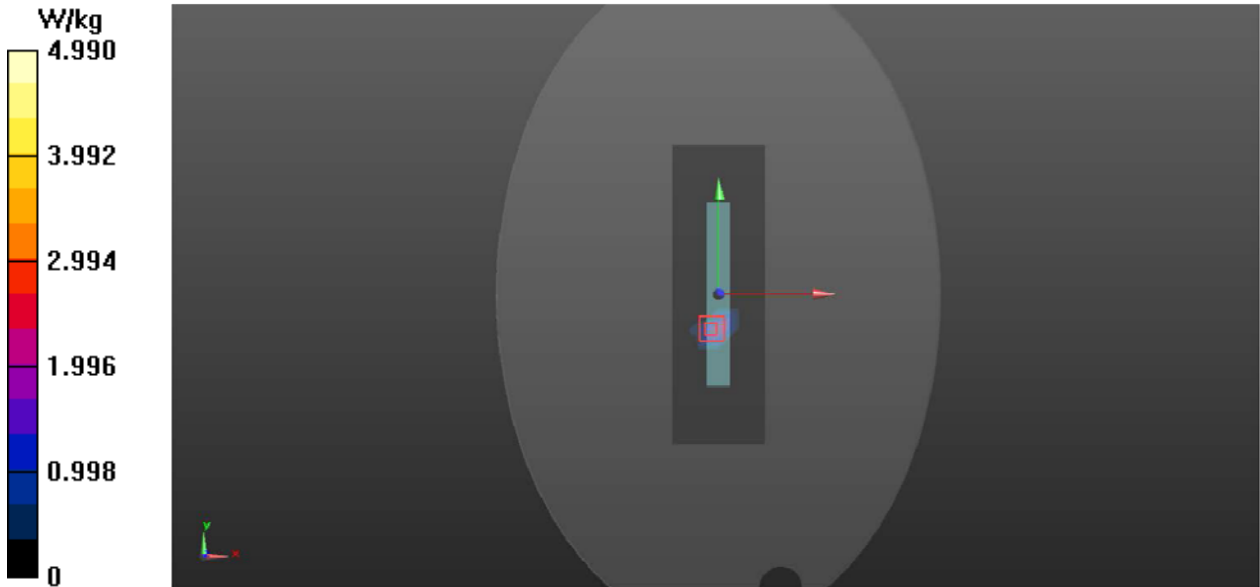

5.6GWIFI


DUT: xTablet T8655

Communication System:802.11a; Frequency: 5500 MHz;Duty Cycle: 1:1
Medium: H5G Medium parameters used: $f = 5500\text{ MHz}$; $\sigma = 5.12\text{ S/m}$; $\epsilon_r = 36.38$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $22.4\text{ }^{\circ}\text{C}$; Liquid Temperature : $22.2\text{ }^{\circ}\text{C}$

- DASY5 Configuration:
- Probe: EX3DV4 - SN3970; Calibrated: 2025/6/5;
 - Electronics: DAE4 Sn1418; Calibrated: 2025/6/5
 - Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Right-Ant Main Low/Area Scan (7x16x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$
Maximum value of SAR (measured) = 4.63 W/kg

Right-Ant Main Low/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 12.640 V/m ; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 17.0 W/kg
SAR(1 g) = 1.11 W/kg ; SAR(10 g) = 0.476 W/kg
Smallest distance from peaks to all points 3 dB below = 5.6 mm
Ratio of SAR at M2 to SAR at M1 = 43.5%
Maximum value of SAR (measured) = 6.46 W/kg

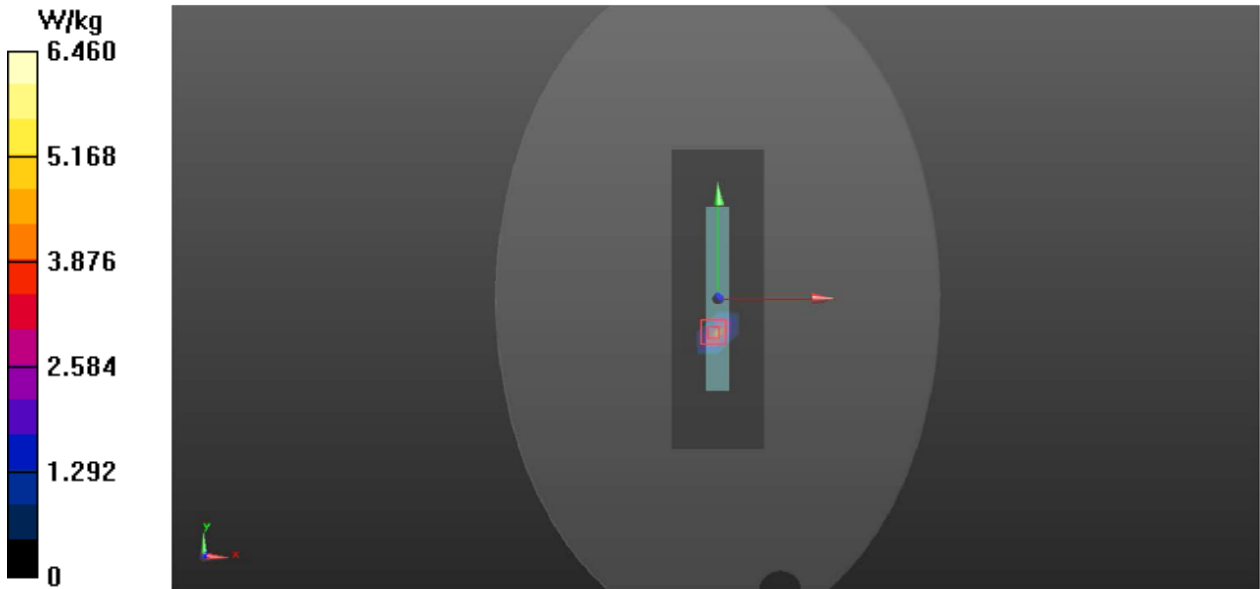

5.8GWIFI

DUT: xTablet T8655

Communication System:802.11a; Frequency: 5785 MHz;Duty Cycle: 1:1
Medium: H5G Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.32 \text{ S/m}$; $\epsilon_r = 35.80$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.0 \text{ }^\circ\text{C}$; Liquid Temperature : $21.8 \text{ }^\circ\text{C}$

DASY5 Configuration:
- Probe: EX3DV4 - SN3970; Calibrated: 2025/6/5;
- Electronics: DAE4 Sn1418; Calibrated: 2025/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Right-Ant Main/Area Scan (7x16x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$
Maximum value of SAR (measured) = 1.69 W/kg

Right-Ant Main/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 2.147 V/m ; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 11.4 W/kg
SAR(1 g) = 0.913 W/kg ; SAR(10 g) = 0.286 W/kg
Smallest distance from peaks to all points 3 dB below = 6.1 mm
Ratio of SAR at M2 to SAR at M1 = 42.6%
Maximum value of SAR (measured) = 4.02 W/kg

