

8.7 POWER LINE CONDUCTED EMISSIONS

8.7.1 Applicable Standard

According to FCC Part 15.207(a)

According to IC RSS-Gen 8.8

8.7.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

8.7.3 Test Configuration

Test according to clause 7.3 conducted emission test setup.

8.7.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.


Repeat above procedures until all frequency measured were complete.

8.7.5 Test Results

PASS


Temperature :	21.2°C	ATM Pressure:	1011 mbar
Humidity :	55%	Test Engineer:	Zhuowen Sheng

The AC120V &240V voltage have been tested, and the worst result of AC120V was report as below.

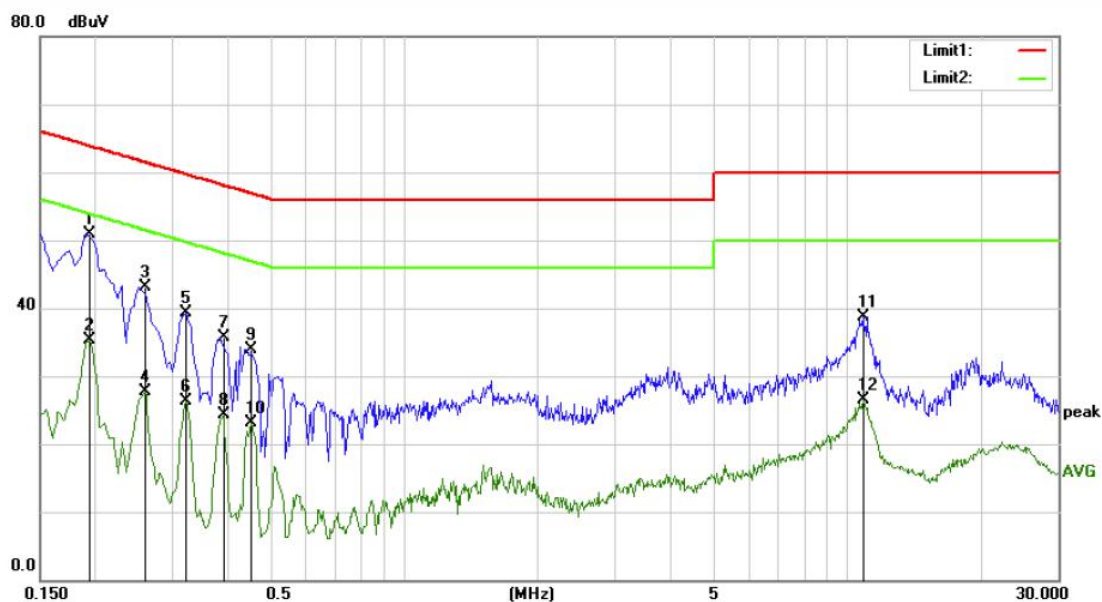

Site Conduction #1 Phase: **N** Temperature: 21.2

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1950	41.07	9.90	50.97	63.82	-12.85	QP	
2		0.1950	25.38	9.90	35.28	53.82	-18.54	AVG	
3		0.2600	33.18	9.93	43.11	61.43	-18.32	QP	
4		0.2600	17.85	9.93	27.78	51.43	-23.65	AVG	
5		0.3200	29.33	9.92	39.25	59.71	-20.46	QP	
6		0.3200	16.30	9.92	26.22	49.71	-23.49	AVG	
7		0.3900	25.72	9.89	35.61	58.06	-22.45	QP	
8		0.3900	14.34	9.89	24.23	48.06	-23.83	AVG	
9		0.4500	24.00	9.91	33.91	56.88	-22.97	QP	
10		0.4500	13.16	9.91	23.07	46.88	-23.81	AVG	
11		10.8550	28.36	10.25	38.61	60.00	-21.39	QP	
12		10.8550	16.27	10.25	26.52	50.00	-23.48	AVG	

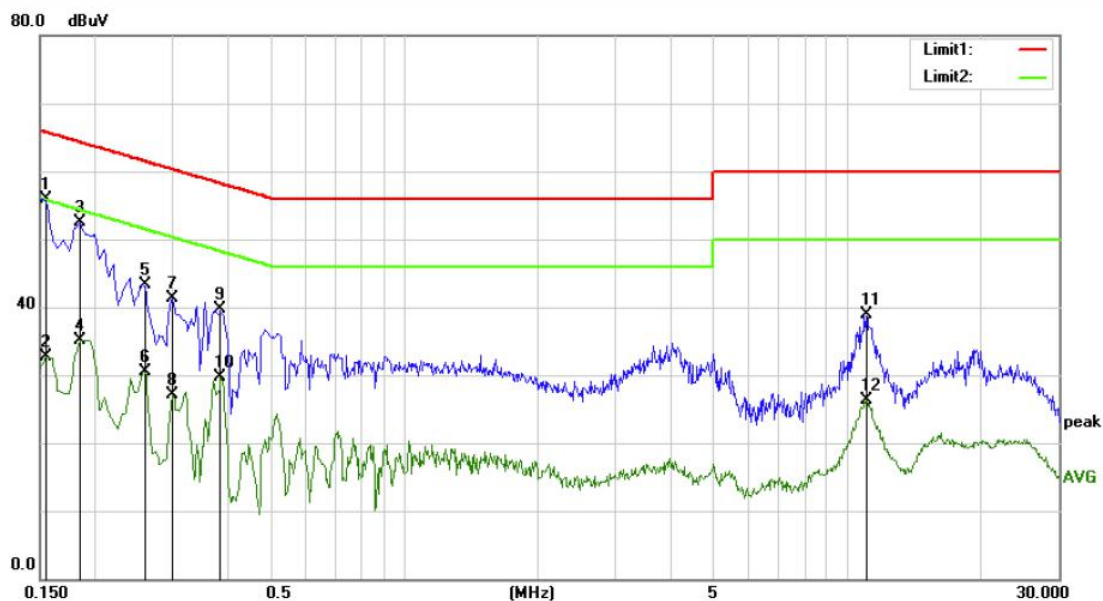

Site Conduction #1				Phase: L1		Temperature: 21.2		
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector Comment
1	*	0.1550	45.84	10.02	55.86	65.73	-9.87	QP
2		0.1550	22.65	10.02	32.67	55.73	-23.06	AVG
3		0.1850	42.50	10.04	52.54	64.26	-11.72	QP
4		0.1850	25.09	10.04	35.13	54.26	-19.13	AVG
5		0.2600	33.37	10.03	43.40	61.43	-18.03	QP
6		0.2600	20.51	10.03	30.54	51.43	-20.89	AVG
7		0.3000	31.29	10.05	41.34	60.24	-18.90	QP
8		0.3000	16.96	10.05	27.01	50.24	-23.23	AVG
9		0.3850	29.70	9.95	39.65	58.17	-18.52	QP
10		0.3850	19.71	9.95	29.66	48.17	-18.51	AVG
11		11.0550	28.82	10.17	38.99	60.00	-21.01	QP
12		11.0550	16.18	10.17	26.35	50.00	-23.65	AVG

8.8 ANTENNA REQUIREMENT

8.8.1 Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
RSS-Gen Section 6.8	The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

8.8.2 Result

PASS

Temperature :	25 °C	ATM Pressure:	1011 mbar
Humidity :	45 %	Test Engineer:	GJ

The EUT is Integrated Antenna, antenna gain is Ant1: 4.81dBi, Ant2: 3.29dBi.

- ☒ Antenna use a permanently attached antenna which is not replaceable.
- ☐ Not using a standard antenna jack or electrical connector for antenna replacement
- ☐ The antenna has to be professionally installed (please provide method of installation)

Please refer to the attached document Internal Photos to show the antenna connector.

Detail of factor for radiated emission

Frequency(MHz)	Ant_F(dB)	Cab_L(dB)	Preamp(dB)	Correct Factor(dB)
0.009	20.6	0.03	\	20.63
0.15	20.7	0.1	\	20.8
1	20.9	0.15	\	21.05
10	20.1	0.28	\	20.38
30	18.8	0.45	\	19.25
30	11.7	0.62	27.9	-15.58
100	12.5	1.02	27.8	-14.28
300	12.9	1.91	27.5	-12.69
600	19.2	2.92	27	-4.88
800	21.1	3.54	26.6	-1.96
1000	22.3	4.17	26.2	0.27
1000	25.6	1.76	41.4	-14.04
3000	28.9	3.27	43.2	-11.03
5000	31.1	4.2	44.6	-9.3
8000	36.2	5.95	44.7	-2.55
10000	38.4	6.3	43.9	0.8
12000	38.5	7.14	42.3	3.34
15000	40.2	8.15	41.4	6.95
18000	45.4	9.02	41.3	13.12
18000	37.9	1.81	47.9	-8.19
21000	37.9	1.95	48.7	-8.85
25000	39.3	2.01	42.8	-1.49
28000	39.6	2.16	46.0	-4.24
31000	41.2	2.24	44.5	-1.06
34000	41.5	2.29	46.6	-2.81
37000	43.8	2.30	46.4	-0.3
40000	43.2	2.50	42.2	3.5

--- End of Report ---

声 明 Statement

1. 本报告无授权批准人签字及“检验检测专用章”无效。
1. This report is invalid without the signature of the authorized approver and "special seal for testing".
2. 未经许可本报告不得部分复制。
2. This report shall not be copied partly without authorization.
3. 本报告的检测结果仅对送测样品有效，委托方对样品的代表性和资料的真实性负责。
3. The test results or observations are applicable only to tested sample. Client shall be responsible for representativeness of the sample and authenticity of the material.
4. 本检测报告中检测项目标注有特殊符号则该项目不在资质认定范围内，仅作为客户委托、科研、教学或内部质量控制等目的使用。
4. The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.
5. 本检测报告以实测值进行符合性判定，未考虑不确定度所带来的风险，本实验室不承担相关责任，特别约定、标准或规范中有明确规定的除外。
5. The test results or observations are provided in accordance with measured value, without taking risks caused by uncertainty into account. Without explicit stipulation in special agreements, standards or regulations, EMTEK shall not assume any responsibility.
6. 对本检验报告若有异议，请于收到报告之日起 20 日内提出。
6. Objections shall be raised within 20 days from the date receiving the report.