

	Test Report S/N:	121405O8F-T705-S24C		Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006		Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093	IC RSS-102 Issue 2

APPENDIX A - SAR MEASUREMENT DATA

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):		1851.25-1908.75 MHz 824.70-848.31 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report S/N:	12140508F-T705-S24C	Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006	Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093 IC RSS-102 Issue 2

Date Tested: 12/15/2005

Head SAR - Cellular CDMA - Right Ear - Cheek/Touch Position - Channel 384

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Ambient Temp: 23.5 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 103.3 kPa; Humidity: 30%

Communication System: Cellular CDMA
 Li-ion Battery Pack (P/N: 157-10014-00)
 RF Output Power: 24.4 dBm (Conducted)
 Frequency: 836.52 MHz; Channel 384; Duty Cycle: 1:1
 Medium: HSL835 ($\sigma = 0.88$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Head SAR - Cellular CDMA - Right Ear - Cheek/Touch Position - Mid Channel/Area Scan (7x11x1):


Measurement grid: dx=15mm, dy=15mm

Head SAR - Cellular CDMA - Right Ear - Cheek/Touch Position - Mid Channel/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 33.0 V/m; Power Drift = -0.0894 dB
 Peak SAR (extrapolated) = 1.80 W/kg
SAR(1 g) = 1.36 mW/g; SAR(10 g) = 0.988 mW/g

Head SAR - Cellular CDMA - Right Ear - Cheek/Touch Position - Mid Channel/Zoom Scan (7x7x7)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 33.0 V/m; Power Drift = -0.0894 dB
 Peak SAR (extrapolated) = 1.73 W/kg
SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.772 mW/g

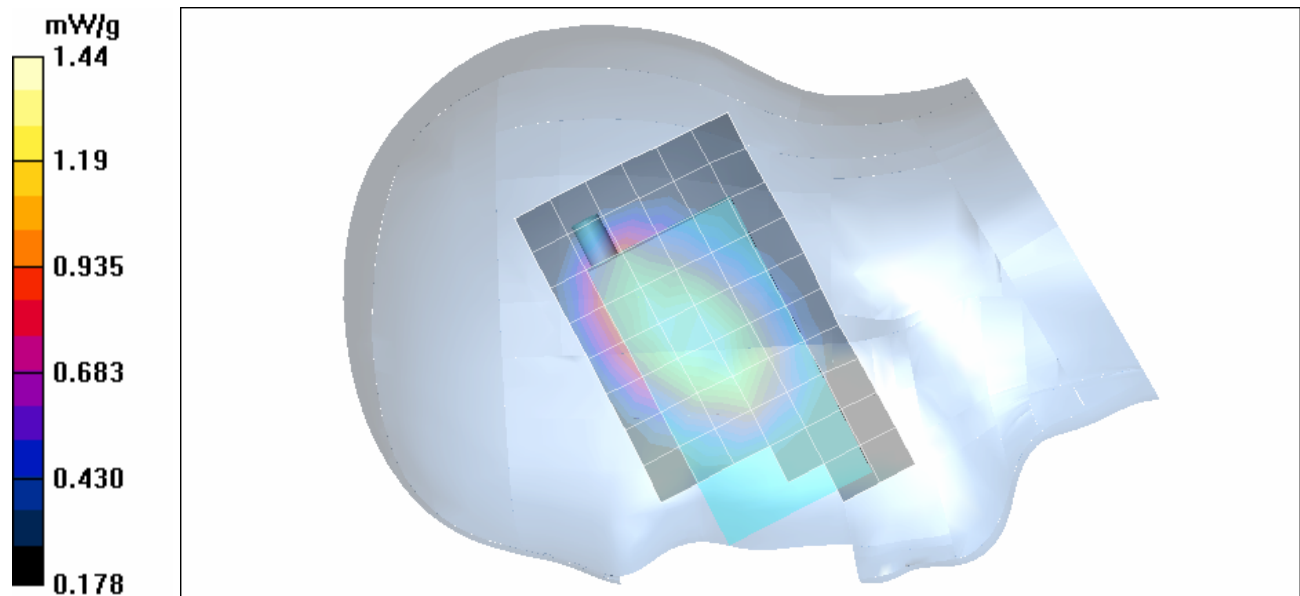

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):	1851.25-1908.75 MHz 824.70-848.31 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 24 of 108

	Test Report S/N:	12140508F-T705-S24C	Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006	Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093 IC RSS-102 Issue 2

Date Tested: 12/15/2005

Head SAR - Cellular CDMA - Right Ear - Cheek/Touch Position - Channel 1013

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Ambient Temp: 23.5 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 103.3 kPa; Humidity: 30%

Communication System: Cellular CDMA
 Li-ion Battery Pack (P/N: 157-10014-00)
 RF Output Power: 23.8 dBm (Conducted)
 Frequency: 824.70 MHz; Channel 1013; Duty Cycle: 1:1
 Medium: HSL835 ($\sigma = 0.88$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglas; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Head SAR - Cellular CDMA - Right Ear - Cheek/Touch Position - Low Channel/Area Scan (7x11x1):


Measurement grid: dx=15mm, dy=15mm

Head SAR - Cellular CDMA - Right Ear - Cheek/Touch Position - Low Channel/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 31.6 V/m; Power Drift = 0.178 dB
 Peak SAR (extrapolated) = 1.57 W/kg
SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.845 mW/g

Head SAR - Cellular CDMA - Right Ear - Cheek/Touch Position - Low Channel/Zoom Scan (7x7x7)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 31.6 V/m; Power Drift = 0.178 dB
 Peak SAR (extrapolated) = 1.67 W/kg
SAR(1 g) = 1.19 mW/g; SAR(10 g) = 0.829 mW/g

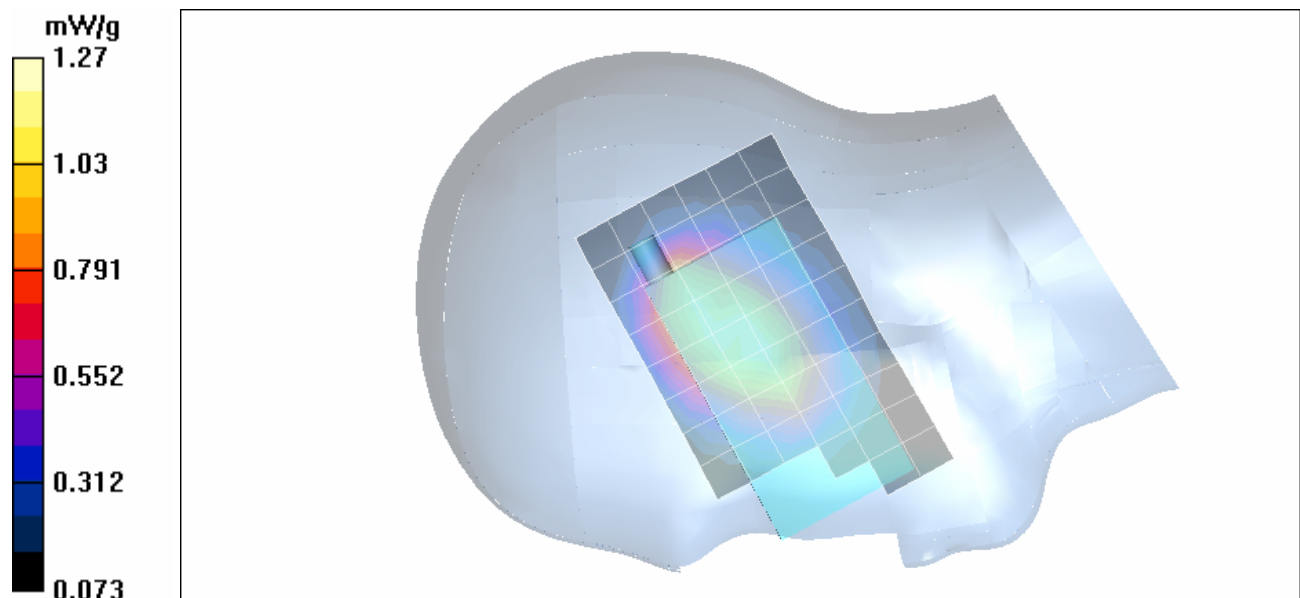

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):	1851.25-1908.75 MHz 824.70-848.31 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 25 of 108

	Test Report S/N:	12140508F-T705-S24C		Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006		Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093	IC RSS-102 Issue 2

Date Tested: 12/15/2005

Head SAR - Cellular CDMA - Right Ear - Cheek/Touch Position - Channel 777

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Ambient Temp: 23.5 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 103.3 kPa; Humidity: 30%


Communication System: Cellular CDMA
 Li-ion Battery Pack (P/N: 157-10014-00)
 RF Output Power: 24.2 dBm (Conducted)
 Frequency: 848.31 MHz; Channel 777; Duty Cycle: 1:1
 Medium: HSL835 ($\sigma = 0.88$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Head SAR - Cellular CDMA - Right Ear - Cheek/Touch Position - High Channel/Area Scan (7x11x1):
 Measurement grid: dx=15mm, dy=15mm


Head SAR - Cellular CDMA - Right Ear - Cheek/Touch Position - High Channel/Zoom Scan (7x7x7)/Cube 0:
 Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 35.1 V/m; Power Drift = -0.0822 dB
 Peak SAR (extrapolated) = 1.97 W/kg
SAR(1 g) = 1.48 mW/g; SAR(10 g) = 1.06 mW/g

Head SAR - Cellular CDMA - Right Ear - Cheek/Touch Position - High Channel/Zoom Scan (7x7x7)/Cube 1:
 Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 35.1 V/m; Power Drift = -0.0822 dB
 Peak SAR (extrapolated) = 1.88 W/kg
SAR(1 g) = 1.27 mW/g; SAR(10 g) = 0.820 mW/g

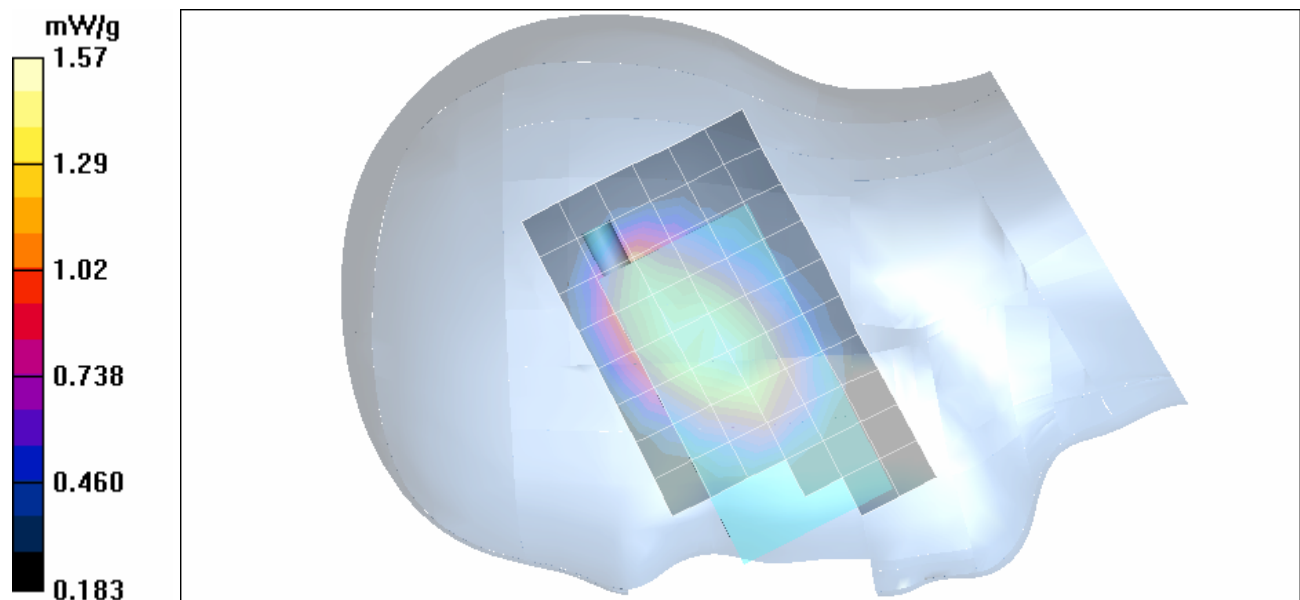

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):		1851.25-1908.75 MHz 824.70-848.31 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 26 of 108

Z-Axis Scan

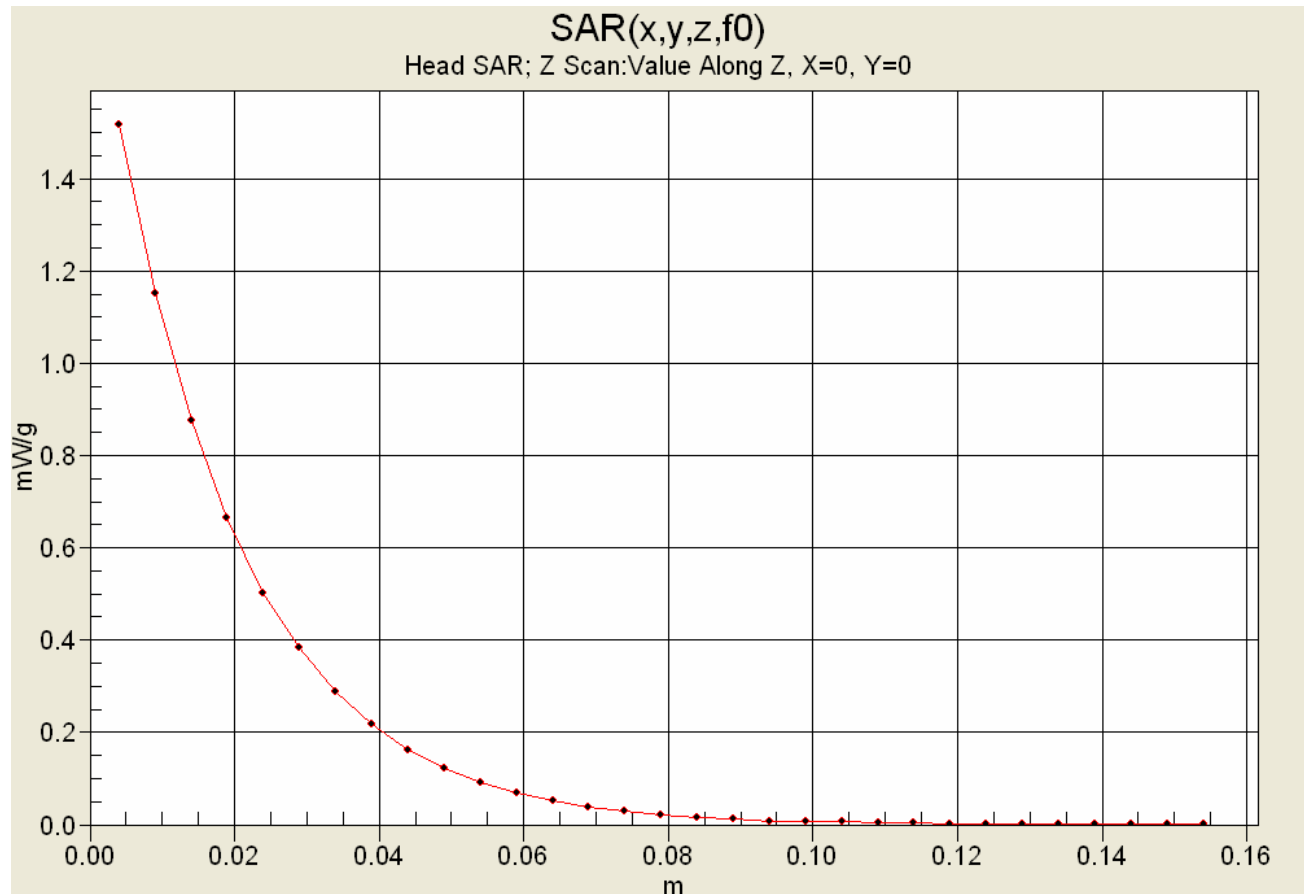

	Test Report S/N:	12140508F-T705-S24C		Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006		Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093	IC RSS-102 Issue 2

Date Tested: 12/15/2005

Head SAR - Cellular CDMA - Right Ear - Tilt Position (15°) - Channel 384

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Ambient Temp: 23.5 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 103.3 kPa; Humidity: 30%

Communication System: Cellular CDMA
 Li-ion Battery Pack (P/N: 157-10014-00)
 RF Output Power: 24.4 dBm (Conducted)
 Frequency: 836.52 MHz; Channel 384; Duty Cycle: 1:1
 Medium: HSL835 ($\sigma = 0.88$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Head SAR - Cellular CDMA - Right Ear - Tilt Position (15°) - Mid Channel/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm

Head SAR - Cellular CDMA - Right Ear - Tilt Position (15°) - Mid Channel/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 33.3 V/m; Power Drift = 0.0545 dB
 Peak SAR (extrapolated) = 2.84 W/kg
SAR(1 g) = 1.27 mW/g; SAR(10 g) = 0.773 mW/g

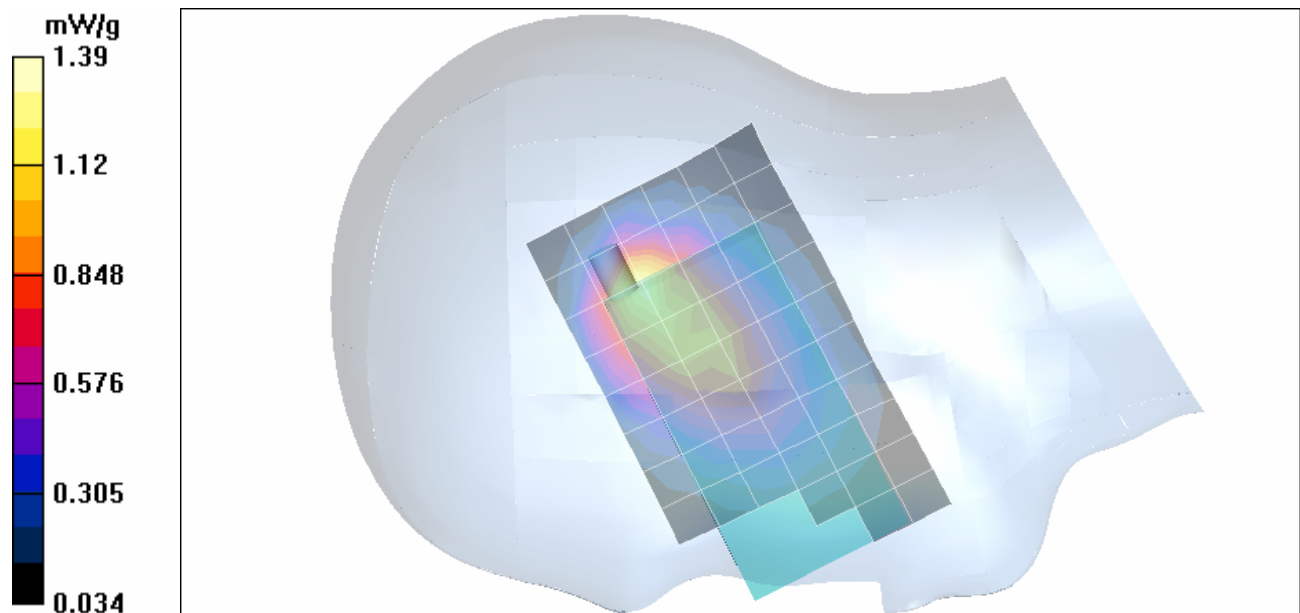

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):		1851.25-1908.75 MHz 824.70-848.31 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report S/N:	12140508F-T705-S24C		Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006		Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093	IC RSS-102 Issue 2

Date Tested: 12/15/2005

Head SAR - Cellular CDMA - Right Ear - Tilt Position (15°) - Channel 1013

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184


Ambient Temp: 23.5 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 103.3 kPa; Humidity: 30%

Communication System: Cellular CDMA
 Li-ion Battery Pack (P/N: 157-10014-00)
 RF Output Power: 23.8 dBm (Conducted)
 Frequency: 824.70 MHz; Channel 1013; Duty Cycle: 1:1
 Medium: HSL835 ($\sigma = 0.88$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Head SAR - Cellular CDMA - Right Ear - Tilt Position (15°) - Low Channel/Area Scan (7x11x1):
 Measurement grid: dx=15mm, dy=15mm

Head SAR - Cellular CDMA - Right Ear - Tilt Position (15°) - Low Channel/Zoom Scan (7x7x7)/Cube 0:
 Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 31.7 V/m; Power Drift = 0.0636 dB
 Peak SAR (extrapolated) = 2.82 W/kg
SAR(1 g) = 1.22 mW/g; SAR(10 g) = 0.727 mW/g

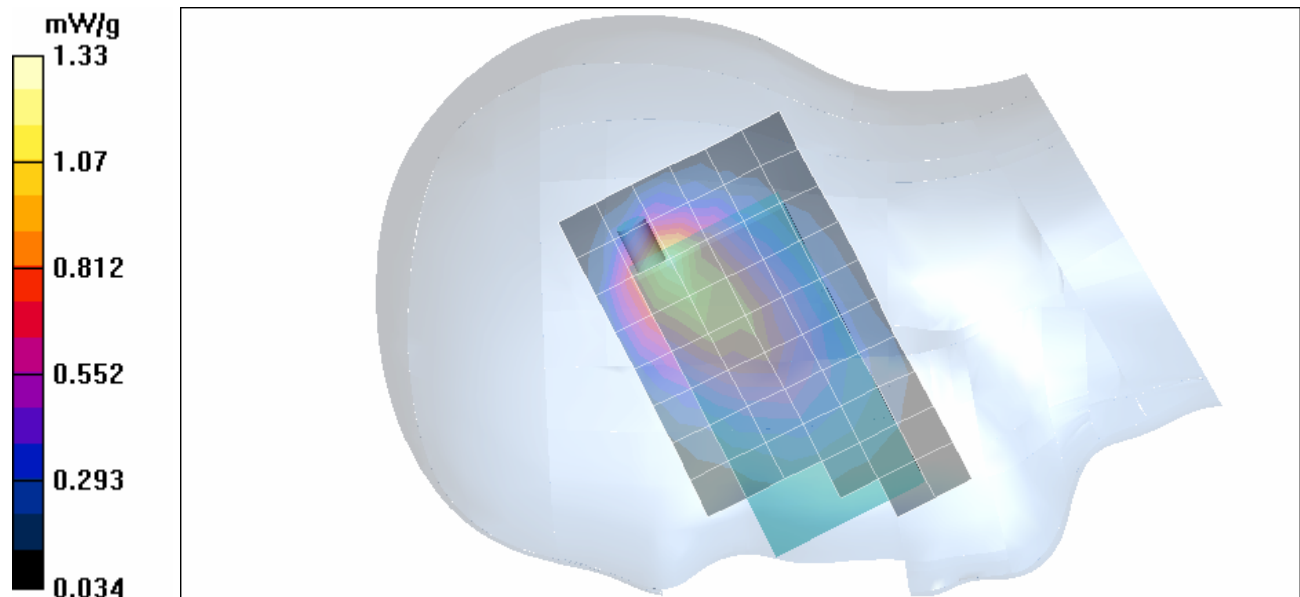

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):		1851.25-1908.75 MHz 824.70-848.31 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 29 of 108

	Test Report S/N:	12140508F-T705-S24C		Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006		Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093	IC RSS-102 Issue 2

Date Tested: 12/15/2005

Head SAR - Cellular CDMA - Right Ear - Tilt Position (15°) - Channel 777

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184


Ambient Temp: 23.5 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 103.3 kPa; Humidity: 30%

Communication System: Cellular CDMA
 Li-ion Battery Pack (P/N: 157-10014-00)
 RF Output Power: 24.2 dBm (Conducted)
 Frequency: 848.31 MHz; Channel 777; Duty Cycle: 1:1
 Medium: HSL835 ($\sigma = 0.88$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Head SAR - Cellular CDMA - Right Ear - Tilt Position (15°) - High Channel/Area Scan (7x11x1):
 Measurement grid: dx=15mm, dy=15mm

Head SAR - Cellular CDMA - Right Ear - Tilt Position (15°) - High Channel/Zoom Scan (7x7x7)/Cube 0:
 Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 34.1 V/m; Power Drift = -0.0328 dB
 Peak SAR (extrapolated) = 2.61 W/kg
SAR(1 g) = 1.25 mW/g; SAR(10 g) = 0.774 mW/g

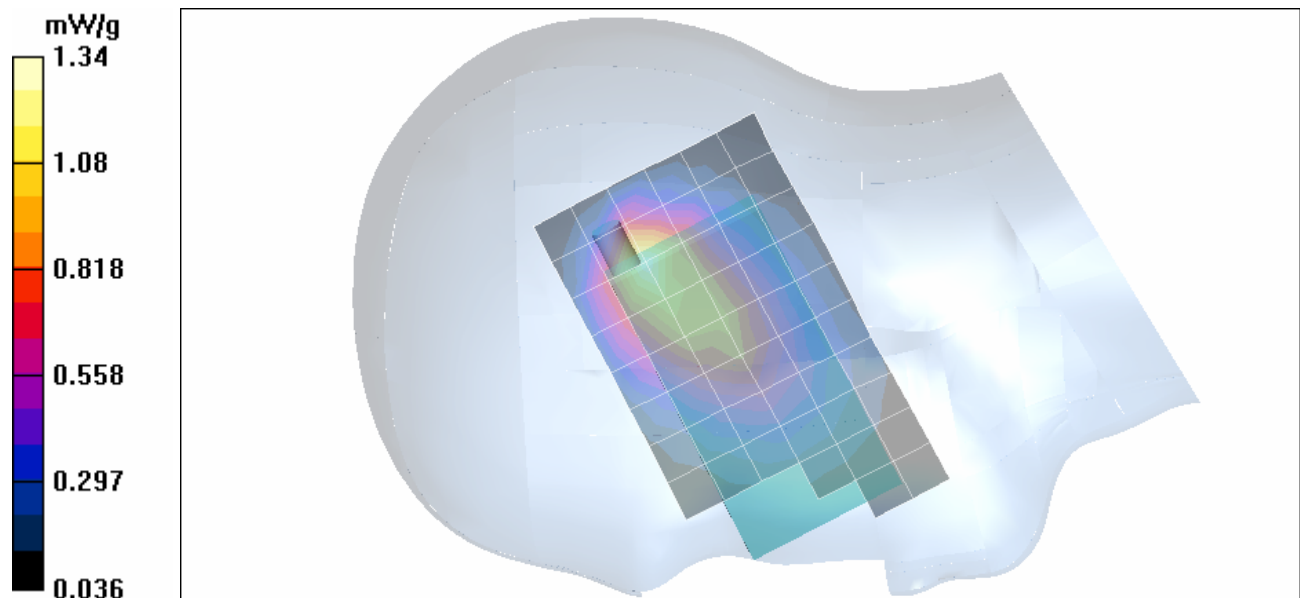

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):		1851.25-1908.75 MHz 824.70-848.31 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report S/N:	12140508F-T705-S24C		Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006		Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093	IC RSS-102 Issue 2

Date Tested: 12/15/2005

Head SAR - Cellular CDMA - Left Ear - Cheek/Touch Position - Channel 384

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Ambient Temp: 23.5 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 103.3 kPa; Humidity: 30%

Communication System: Cellular CDMA
 Li-ion Battery Pack (P/N: 157-10014-00)
 RF Output Power: 24.4 dBm (Conducted)
 Frequency: 836.52 MHz; Channel 384; Duty Cycle: 1:1
 Medium: HSL835 ($\sigma = 0.88$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Head SAR - Cellular CDMA - Left Ear - Cheek/Touch Position - Mid Channel/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm

Head SAR - Cellular CDMA - Left Ear - Cheek/Touch Position - Mid Channel/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 33.2 V/m; Power Drift = -0.0689 dB
 Peak SAR (extrapolated) = 1.63 W/kg
SAR(1 g) = 1.27 mW/g; SAR(10 g) = 0.922 mW/g

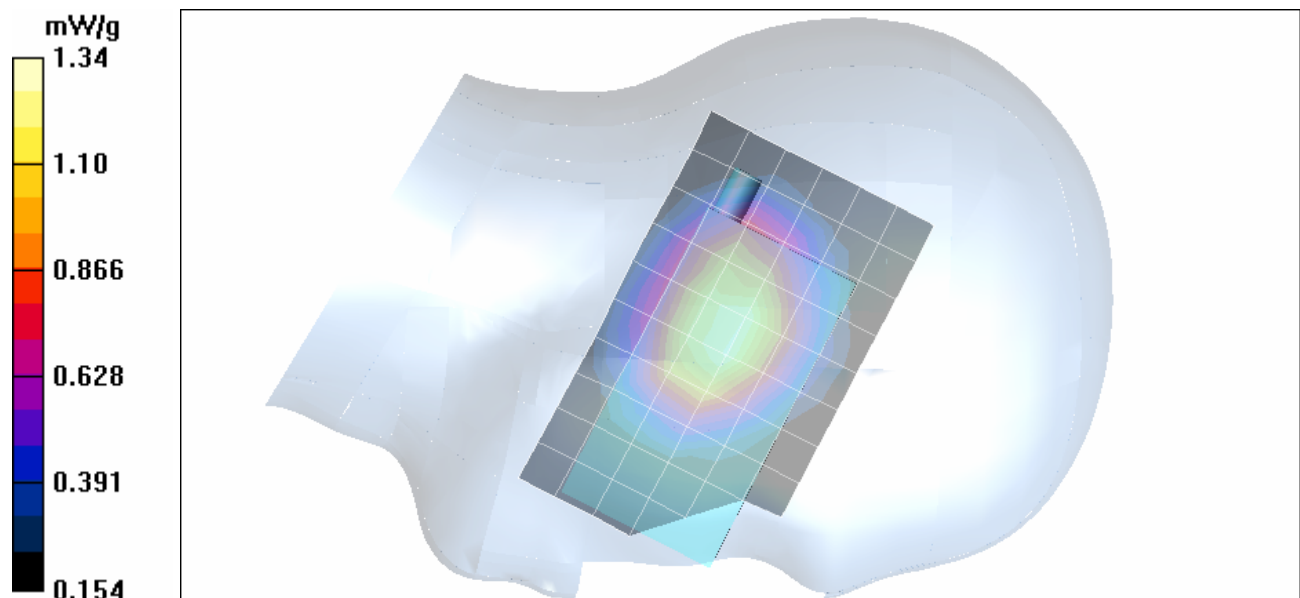

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):	1851.25-1908.75 MHz 824.70-848.31 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report S/N:	12140508F-T705-S24C	Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006	Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093 IC RSS-102 Issue 2

Date Tested: 12/15/2005

Head SAR - Cellular CDMA - Left Ear - Cheek/Touch Position - Channel 1013

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Ambient Temp: 23.5 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 103.3 kPa; Humidity: 30%

Communication System: Cellular CDMA
 Li-ion Battery Pack (P/N: 157-10014-00)
 RF Output Power: 23.8 dBm (Conducted)
 Frequency: 824.70 MHz; Channel 1013; Duty Cycle: 1:1
 Medium: HSL835 ($\sigma = 0.88$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Head SAR - Cellular CDMA - Left Ear - Cheek/Touch Position - Low Channel/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm

Head SAR - Cellular CDMA - Left Ear - Cheek/Touch Position - Low Channel/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 30.4 V/m; Power Drift = -0.0219 dB
 Peak SAR (extrapolated) = 1.35 W/kg
SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.745 mW/g

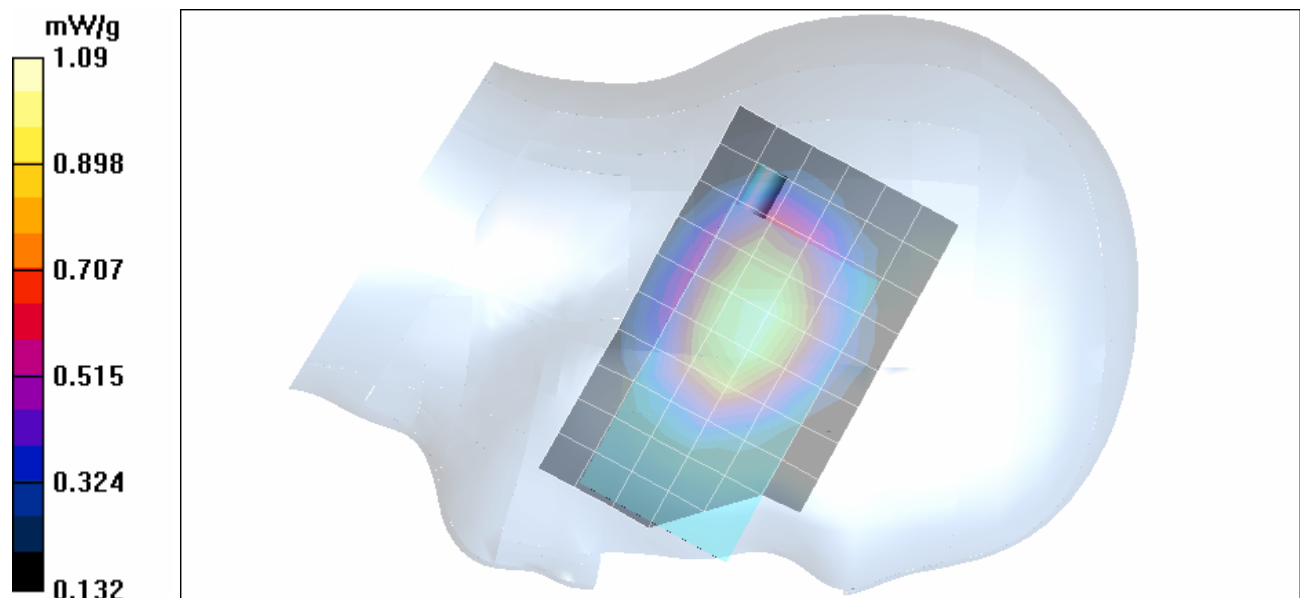

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):	1851.25-1908.75 MHz 824.70-848.31 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 32 of 108

	Test Report S/N:	12140508F-T705-S24C		Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006		Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093	IC RSS-102 Issue 2

Date Tested: 12/15/2005

Head SAR - Cellular CDMA - Left Ear - Cheek/Touch Position - Channel 777

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Ambient Temp: 23.5 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 103.3 kPa; Humidity: 30%

Communication System: Cellular CDMA

Li-ion Battery Pack (P/N: 157-10014-00)

RF Output Power: 24.2 dBm (Conducted)

Frequency: 848.31 MHz; Channel 777; Duty Cycle: 1:1

Medium: HSL835 ($\sigma = 0.88$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Head SAR - Cellular CDMA - Left Ear - Cheek/Touch Position - High Channel/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm


Head SAR - Cellular CDMA - Left Ear - Cheek/Touch Position - High Channel/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 36.3 V/m; Power Drift = -0.0285 dB

Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g) = 1.30 mW/g; SAR(10 g) = 0.942 mW/g

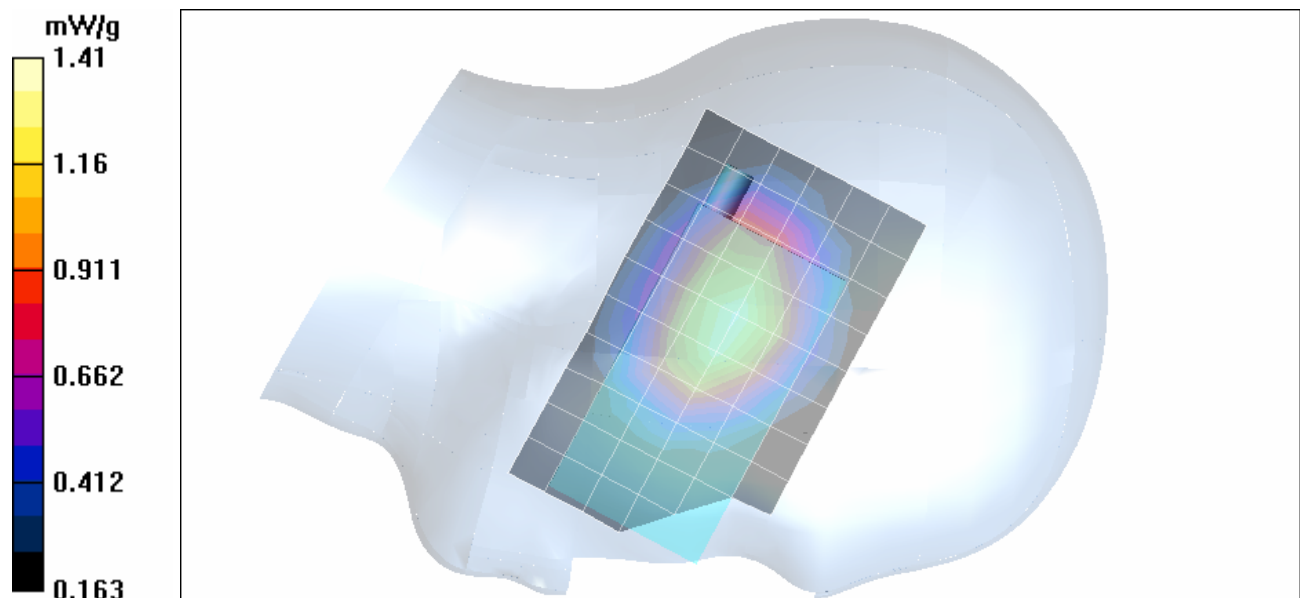

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):	1851.25-1908.75 MHz 824.70-848.31 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report S/N:	12140508F-T705-S24C	Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006	Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093 IC RSS-102 Issue 2

Date Tested: 12/15/2005

Head SAR - Cellular CDMA - Left Ear - Tilt Position (15°) - Channel 384

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Ambient Temp: 23.5 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 103.3 kPa; Humidity: 30%


Communication System: Cellular CDMA
 Li-ion Battery Pack (P/N: 157-10014-00)
 RF Output Power: 24.4 dBm (Conducted)
 Frequency: 836.52 MHz; Channel 384; Duty Cycle: 1:1
 Medium: HSL835 ($\sigma = 0.88$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Head SAR - Cellular CDMA - Left Ear - Tilt Position (15°) - Mid Channel/Area Scan (7x11x1):
 Measurement grid: dx=15mm, dy=15mm

Head SAR - Cellular CDMA - Left Ear - Tilt Position (15°) - Mid Channel/Zoom Scan (7x7x7)/Cube 0:
 Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 31.7 V/m; Power Drift = 0.0271 dB
 Peak SAR (extrapolated) = 1.32 W/kg
SAR(1 g) = 0.916 mW/g; SAR(10 g) = 0.630 mW/g

Head SAR - Cellular CDMA - Left Ear - Tilt Position (15°) - Mid Channel/Zoom Scan (7x7x7)/Cube 1:
 Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 31.7 V/m; Power Drift = 0.0271 dB
 Peak SAR (extrapolated) = 1.17 W/kg
SAR(1 g) = 0.875 mW/g; SAR(10 g) = 0.641 mW/g

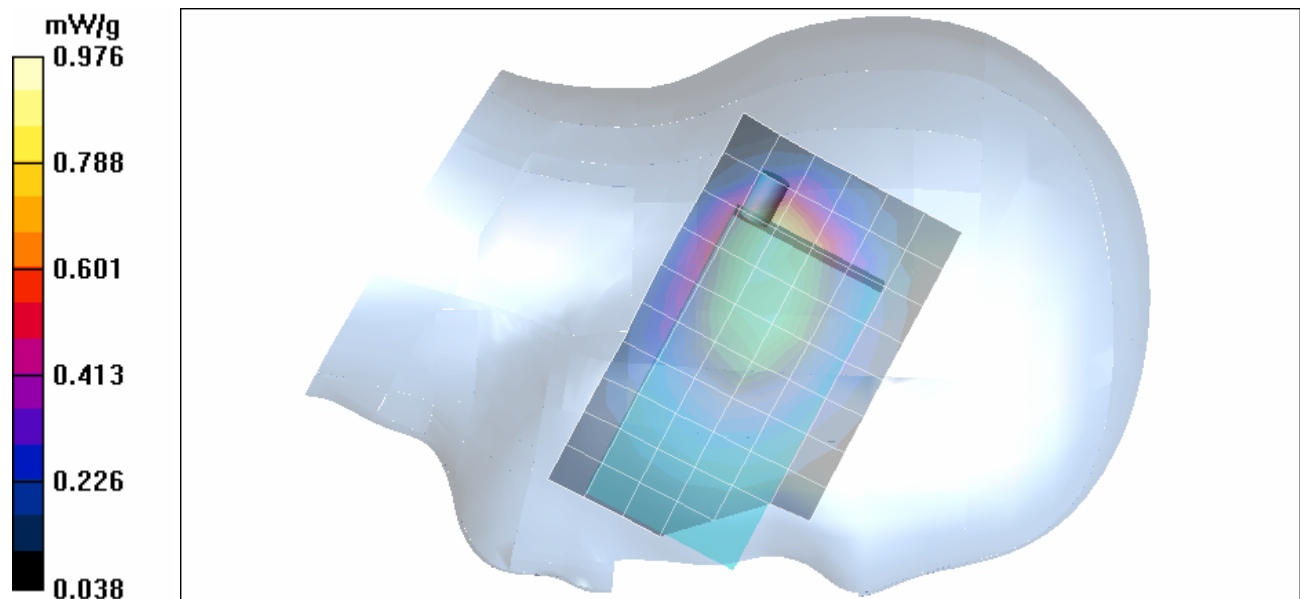

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):	1851.25-1908.75 MHz 824.70-848.31 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 34 of 108	

	Test Report S/N:	12140508F-T705-S24C	Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006	Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093 IC RSS-102 Issue 2

Date Tested: 12/15/2005

Head SAR - Cellular CDMA - Left Ear - Tilt Position (15°) - Channel 1013

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Ambient Temp: 23.5 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 103.3 kPa; Humidity: 30%

Communication System: Cellular CDMA
 Li-ion Battery Pack (P/N: 157-10014-00)
 RF Output Power: 23.8 dBm (Conducted)
 Frequency: 824.70 MHz; Channel 1013; Duty Cycle: 1:1
 Medium: HSL835 ($\sigma = 0.88$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Head SAR - Cellular CDMA - Left Ear - Tilt Position (15°) - Low Channel/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm

Head SAR - Cellular CDMA - Left Ear - Tilt Position (15°) - Low Channel/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 29.4 V/m; Power Drift = 0.0229 dB
 Peak SAR (extrapolated) = 1.71 W/kg
SAR(1 g) = 0.795 mW/g; SAR(10 g) = 0.541 mW/g

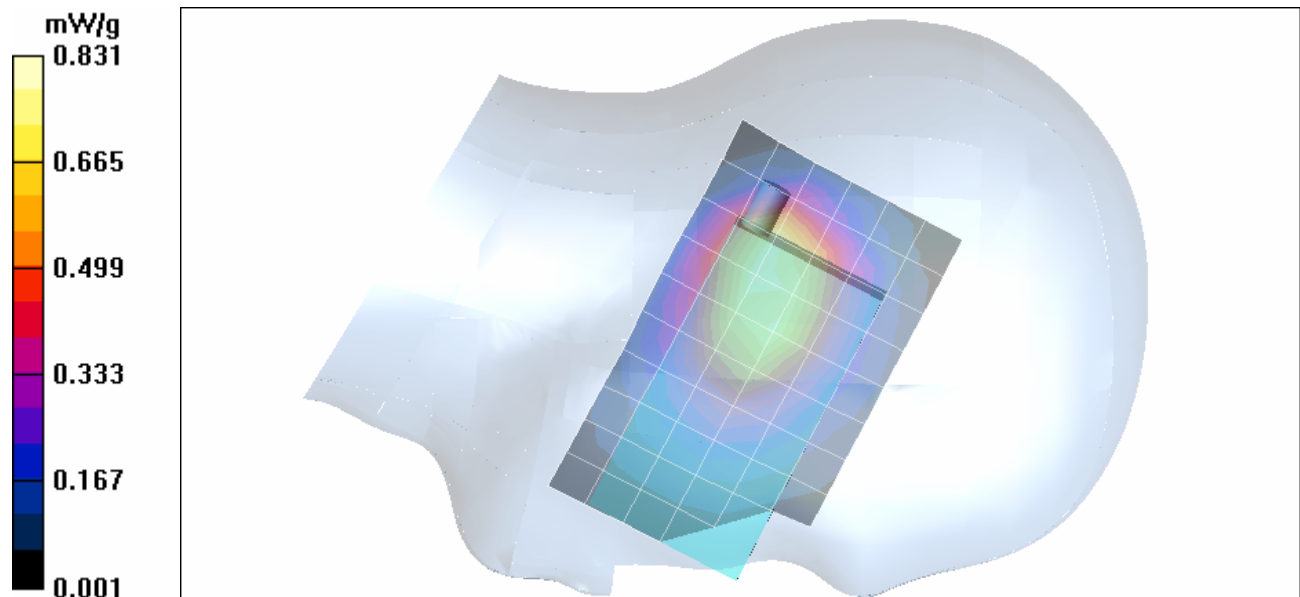

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):		1851.25-1908.75 MHz 824.70-848.31 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report S/N:	12140508F-T705-S24C		Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006		Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093	IC RSS-102 Issue 2

Date Tested: 12/15/2005

Head SAR - Cellular CDMA - Left Ear - Tilt Position (15°) - Channel 777

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184


Ambient Temp: 23.5 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 103.3 kPa; Humidity: 30%

Communication System: Cellular CDMA
 Li-ion Battery Pack (P/N: 157-10014-00)
 RF Output Power: 24.2 dBm (Conducted)
 Frequency: 848.31 MHz; Channel 777; Duty Cycle: 1:1
 Medium: HSL835 ($\sigma = 0.88$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Head SAR - Cellular CDMA - Left Ear - Tilt Position (15°) - High Channel/Area Scan (7x11x1):
 Measurement grid: dx=15mm, dy=15mm

Head SAR - Cellular CDMA - Left Ear - Tilt Position (15°) - High Channel/Zoom Scan (7x7x7)/Cube 0:
 Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 33.9 V/m; Power Drift = 0.000659 dB
 Peak SAR (extrapolated) = 1.45 W/kg
SAR(1 g) = 0.994 mW/g; SAR(10 g) = 0.685 mW/g

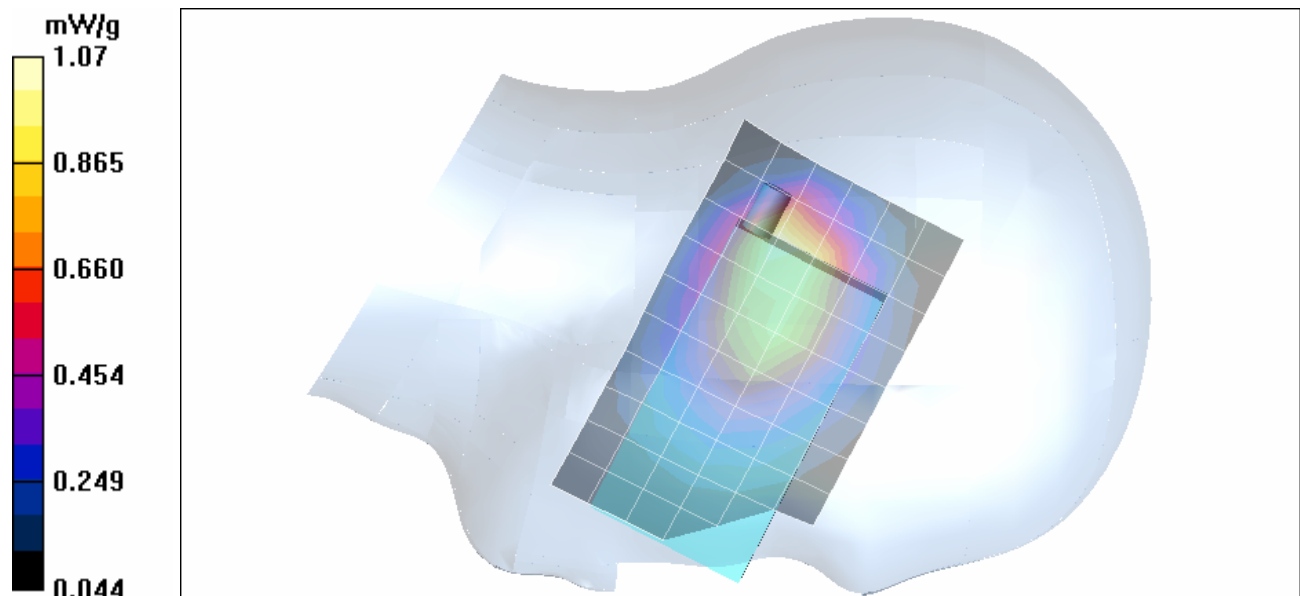

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):		1851.25-1908.75 MHz 824.70-848.31 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report S/N:	12140508F-T705-S24C	Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006	Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093 IC RSS-102 Issue 2

Date Tested: 12/16/2005

Head SAR - PCS CDMA - Right Ear - Cheek/Touch Position - Channel 600

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Ambient Temp: 23.5 °C; Fluid Temp: 23.7 °C; Barometric Pressure: 102.7 kPa; Humidity: 30%

Communication System: PCS CDMA

Li-ion Battery Pack (P/N: 157-10014-00)

RF Output Power: 24.7 dBm (Conducted)

Frequency: 1880.00 MHz; Channel 600; Duty Cycle: 1:1

Medium: HSL1880 ($\sigma = 1.35$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(5.18, 5.18, 5.18); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Electronics: DAE4 Sn353; Calibrated: 15/06/2005

- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033

- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Head SAR - PCS CDMA - Right Ear - Cheek/Touch Position - Mid Channel/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm

Head SAR - PCS CDMA - Right Ear - Cheek/Touch Position - Mid Channel/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.2 V/m; Power Drift = -0.171 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.755 mW/g; SAR(10 g) = 0.494 mW/g

Head SAR - PCS CDMA - Right Ear - Cheek/Touch Position - Mid Channel/Zoom Scan (7x7x7)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.2 V/m; Power Drift = -0.171 dB

Peak SAR (extrapolated) = 0.984 W/kg

SAR(1 g) = 0.708 mW/g; SAR(10 g) = 0.462 mW/g


Right Touch - Mid Channel 2/Zoom Scan (7x7x7)/Cube 2:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.2 V/m; Power Drift = -0.171 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.668 mW/g; SAR(10 g) = 0.439 mW/g

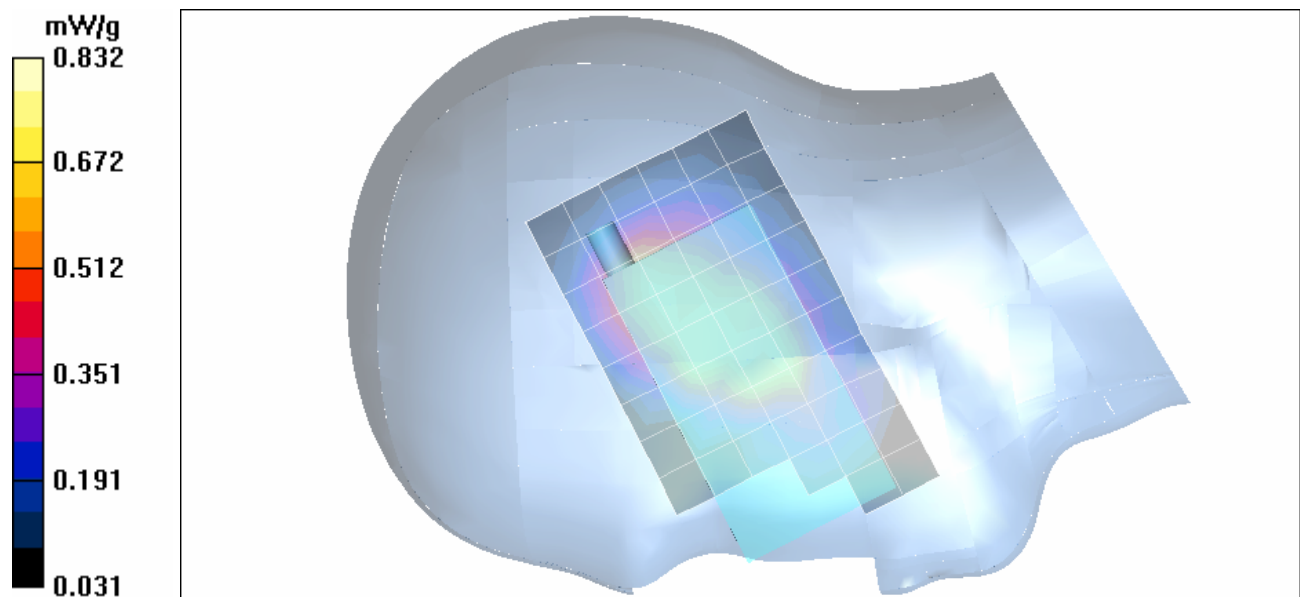

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):		1851.25-1908.75 MHz 824.70-848.31 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 37 of 108

	Test Report S/N:	12140508F-T705-S24C		Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006		Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093	IC RSS-102 Issue 2

Date Tested: 12/16/2005

Head SAR - PCS CDMA - Right Ear - Tilt Position (15°) - Channel 600

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Ambient Temp: 23.5 °C; Fluid Temp: 23.7 °C; Barometric Pressure: 102.7 kPa; Humidity: 30%

Communication System: PCS CDMA

Li-ion Battery Pack (P/N: 157-10014-00)

RF Output Power: 24.7 dBm (Conducted)

Frequency: 1880.00 MHz; Channel 600; Duty Cycle: 1:1

Medium: HSL1880 ($\sigma = 1.35$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(5.18, 5.18, 5.18); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Head SAR - PCS CDMA - Right Ear - Tilt Position (15°) - Mid Channel/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm


Head SAR - PCS CDMA - Right Ear - Tilt Position (15°) - Mid Channel/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.5 V/m; Power Drift = -0.0416 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.965 mW/g; SAR(10 g) = 0.604 mW/g

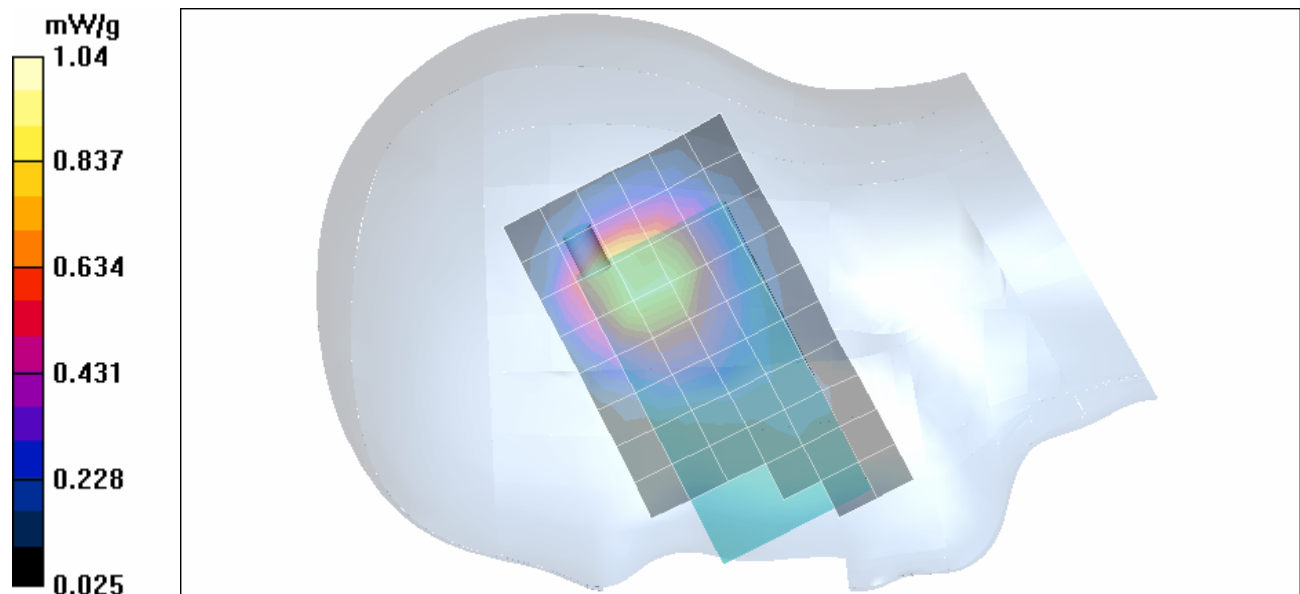

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):	1851.25-1908.75 MHz 824.70-848.31 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report S/N:	12140508F-T705-S24C	Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006	Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093
				IC RSS-102 Issue 2

Date Tested: 12/16/2005

Head SAR - PCS CDMA - Right Ear - Tilt Position (15°) - Channel 25

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Ambient Temp: 23.5 °C; Fluid Temp: 23.7 °C; Barometric Pressure: 102.7 kPa; Humidity: 30%

Communication System: PCS CDMA

Li-ion Battery Pack (P/N: 157-10014-00)

RF Output Power: 23.8 dBm (Conducted)

Frequency: 1851.25 MHz; Channel 25; Duty Cycle: 1:1

Medium: HSL1880 ($\sigma = 1.35$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(5.18, 5.18, 5.18); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Head SAR - PCS CDMA - Right Ear - Tilt Position (15°) - Low Channel/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm


Head SAR - PCS CDMA - Right Ear - Tilt Position (15°) - Low Channel/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.7 V/m; Power Drift = -0.209 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.888 mW/g; SAR(10 g) = 0.554 mW/g

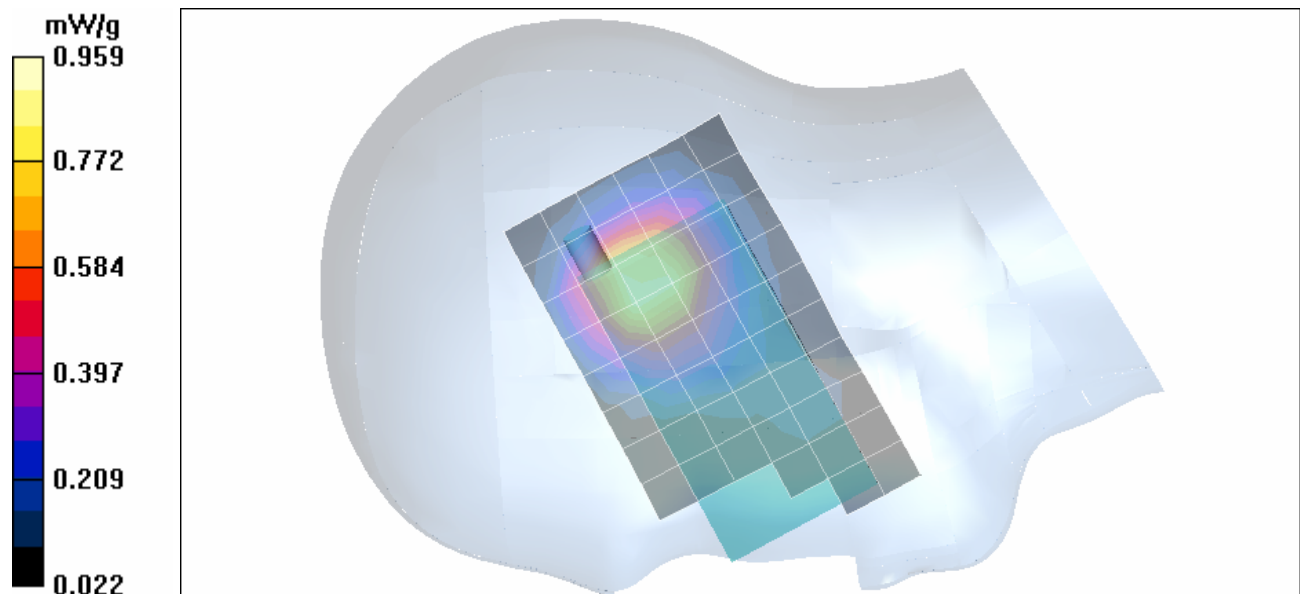

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):	1851.25-1908.75 MHz 824.70-848.31 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 39 of 108

	Test Report S/N:	12140508F-T705-S24C		Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006		Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093	IC RSS-102 Issue 2

Date Tested: 12/16/2005

Head SAR - PCS CDMA - Right Ear - Tilt Position (15°) - Channel 1175

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Ambient Temp: 23.5 °C; Fluid Temp: 23.7 °C; Barometric Pressure: 102.7 kPa; Humidity: 30%

Communication System: PCS CDMA

Li-ion Battery Pack (P/N: 157-10014-00)

RF Output Power: 24.0 dBm (Conducted)

Frequency: 1908.75 MHz; Channel 1175; Duty Cycle: 1:1

Medium: HSL1880 ($\sigma = 1.35$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(5.18, 5.18, 5.18); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Head SAR - PCS CDMA - Right Ear - Tilt Position (15°) - High Channel/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm


Head SAR - PCS CDMA - Right Ear - Tilt Position (15°) - High Channel/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.6 V/m; Power Drift = -0.134 dB

Peak SAR (extrapolated) = 0.956 W/kg

SAR(1 g) = 0.640 mW/g; SAR(10 g) = 0.403 mW/g

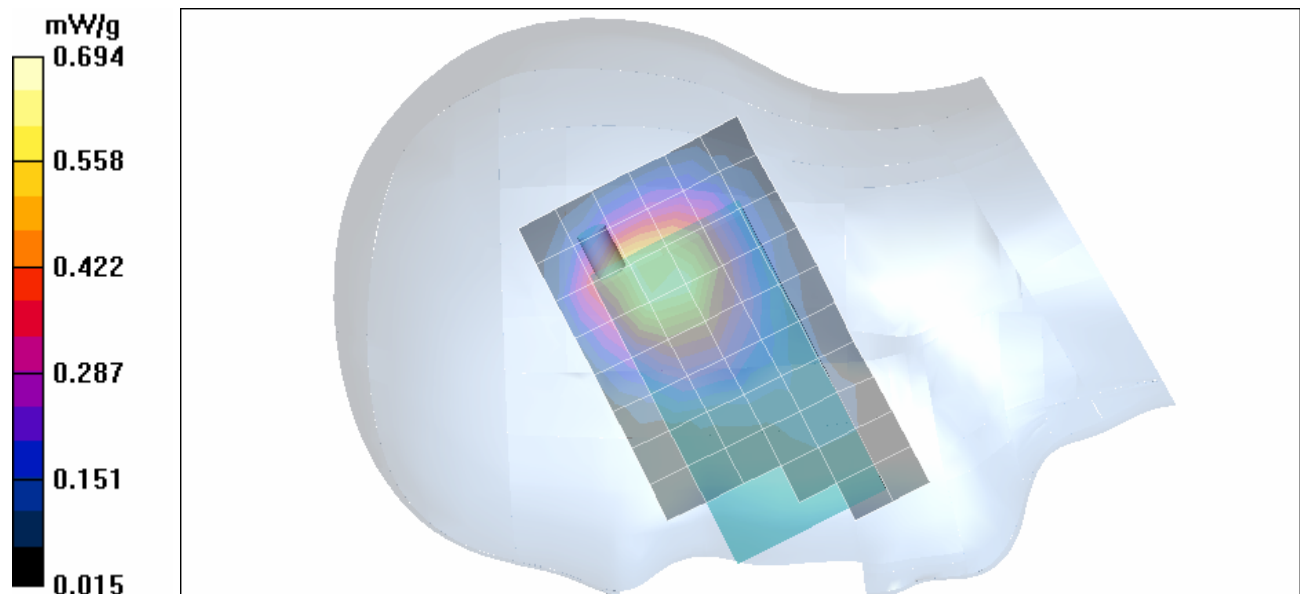

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):		1851.25-1908.75 MHz 824.70-848.31 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report S/N:	12140508F-T705-S24C	Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006	Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093 IC RSS-102 Issue 2

Date Tested: 12/16/2005

Head SAR - PCS CDMA - Left Ear - Cheek/Touch Position - Channel 600

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Ambient Temp: 23.5 °C; Fluid Temp: 23.7 °C; Barometric Pressure: 102.7 kPa; Humidity: 30%

Communication System: PCS CDMA

Li-ion Battery Pack (P/N: 157-10014-00)

RF Output Power: 24.7 dBm (Conducted)

Frequency: 1880.00 MHz; Channel 600; Duty Cycle: 1:1

Medium: HSL1880 ($\sigma = 1.35$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(5.18, 5.18, 5.18); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Head SAR - PCS CDMA - Left Ear - Cheek/Touch Position - Mid Channel/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm


Head SAR - PCS CDMA - Left Ear - Cheek/Touch Position - Mid Channel/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.5 V/m; Power Drift = -0.203 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.900 mW/g; SAR(10 g) = 0.574 mW/g

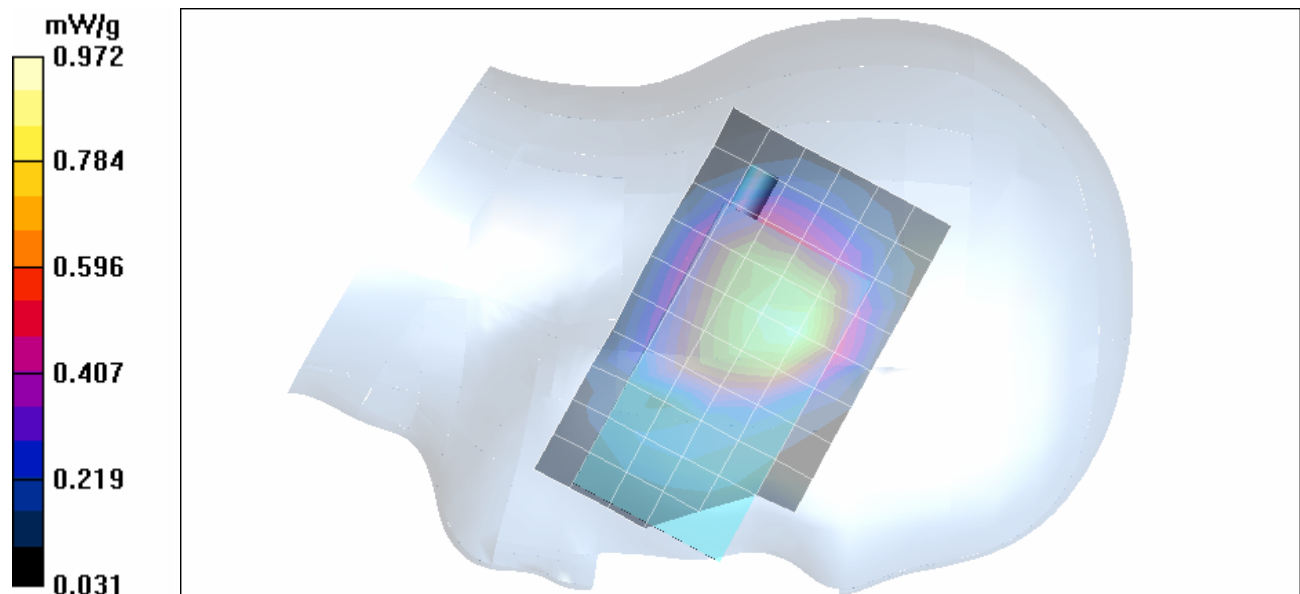

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):	1851.25-1908.75 MHz 824.70-848.31 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 41 of 108

	Test Report S/N:	12140508F-T705-S24C		Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006		Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093	IC RSS-102 Issue 2

Date Tested: 12/19/2005

Head SAR - PCS CDMA - Left Ear - Cheek/Touch Position - Channel 25

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Ambient Temp: 23.0 °C; Fluid Temp: 23.8 °C; Barometric Pressure: 103.1 kPa; Humidity: 30%

Communication System: PCS CDMA

Li-ion Battery Pack (P/N: 157-10014-00)

RF Output Power: 23.8 dBm (Conducted)

Frequency: 1851.25 MHz; Channel 25; Duty Cycle: 1:1

Medium: HSL1880 ($\sigma = 1.40$ mho/m; $\epsilon_r = 39.0$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(5.18, 5.18, 5.18); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Head SAR - PCS CDMA - Left Ear - Cheek/Touch Position - Low Channel/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm


Head SAR - PCS CDMA - Left Ear - Cheek/Touch Position - Low Channel/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.8 V/m; Power Drift = -0.190 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.765 mW/g; SAR(10 g) = 0.518 mW/g

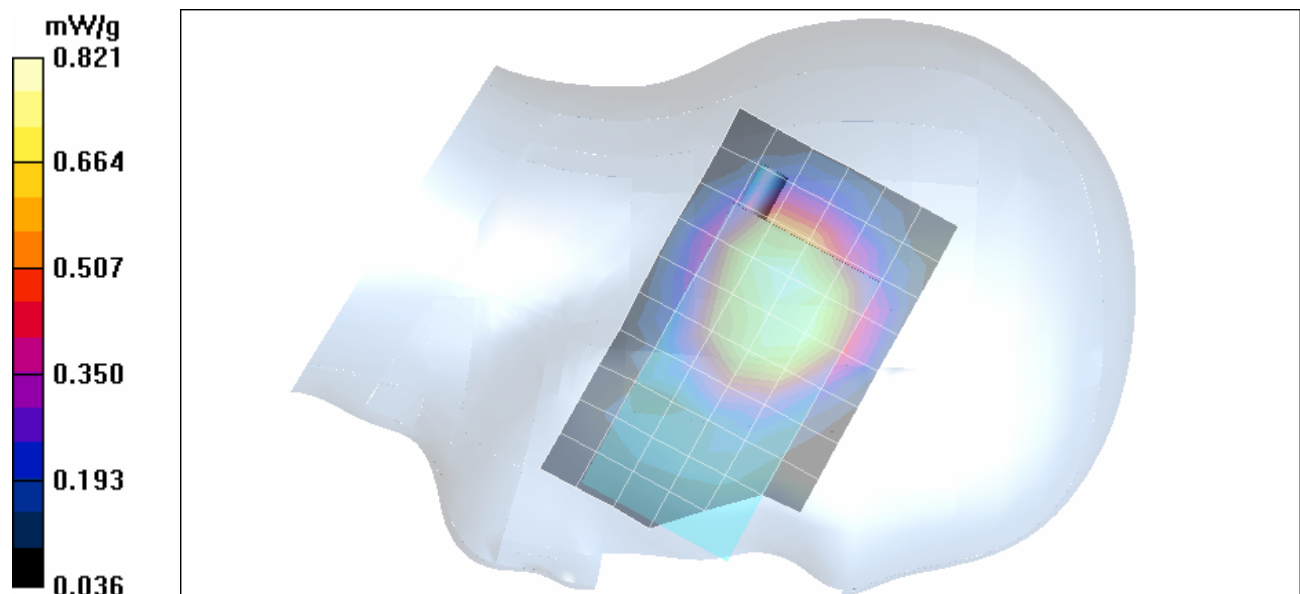

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):	1851.25-1908.75 MHz 824.70-848.31 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report S/N:	12140508F-T705-S24C	Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006	Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093
				IC RSS-102 Issue 2

Date Tested: 12/19/2005

Head SAR - PCS CDMA - Left Ear - Cheek/Touch Position - Channel 1175

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Ambient Temp: 23.0 °C; Fluid Temp: 23.8 °C; Barometric Pressure: 103.1 kPa; Humidity: 30%

Communication System: PCS CDMA

Li-ion Battery Pack (P/N: 157-10014-00)

RF Output Power: 24.0 dBm (Conducted)

Frequency: 1908.75 MHz; Channel 1175; Duty Cycle: 1:1

Medium: HSL1880 ($\sigma = 1.40$ mho/m; $\epsilon_r = 39.0$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(5.18, 5.18, 5.18); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Head SAR - PCS CDMA - Left Ear - Cheek/Touch Position - High Channel/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm


Head SAR - PCS CDMA - Left Ear - Cheek/Touch Position - High Channel/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.1 V/m; Power Drift = -0.213 dB

Peak SAR (extrapolated) = 0.992 W/kg

SAR(1 g) = 0.673 mW/g; SAR(10 g) = 0.432 mW/g

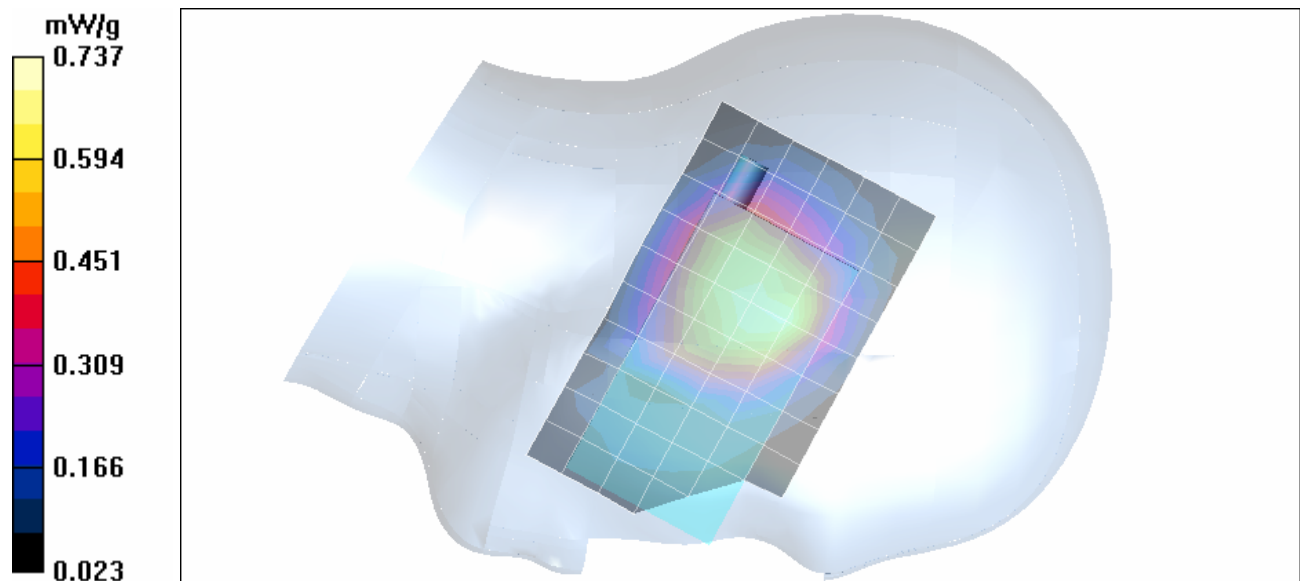

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):	1851.25-1908.75 MHz 824.70-848.31 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 43 of 108

	Test Report S/N:	12140508F-T705-S24C		Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006		Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093	IC RSS-102 Issue 2

Date Tested: 12/16/2005

Head SAR - PCS CDMA - Left Ear - Tilt Position (15°) - Channel 600

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Ambient Temp: 23.5 °C; Fluid Temp: 23.7 °C; Barometric Pressure: 102.7 kPa; Humidity: 30%

Communication System: PCS CDMA

Li-ion Battery Pack (P/N: 157-10014-00)

RF Output Power: 24.7 dBm (Conducted)

Frequency: 1880.00 MHz; Channel 600; Duty Cycle: 1:1

Medium: HSL1880 ($\sigma = 1.35$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(5.18, 5.18, 5.18); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Head SAR - PCS CDMA - Left Ear - Tilt Position (15°) - Mid Channel/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm


Head SAR - PCS CDMA - Left Ear - Tilt Position (15°) - Mid Channel/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 32.0 V/m; Power Drift = -0.203 dB

Peak SAR (extrapolated) = 1.71 W/kg


SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.695 mW/g

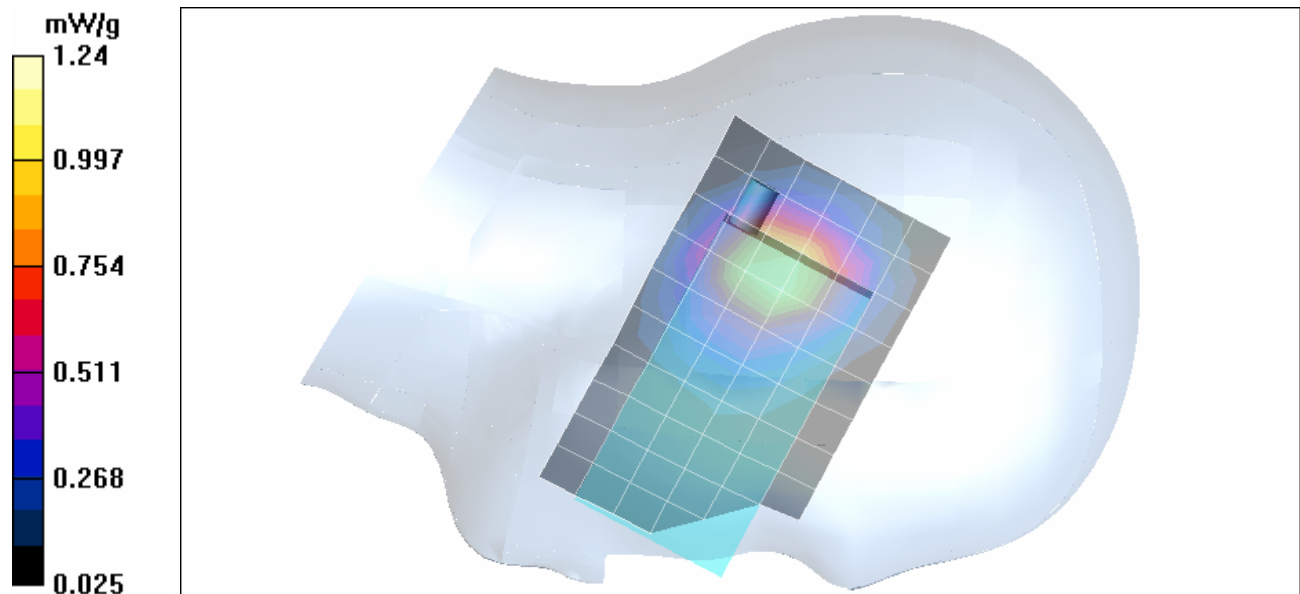

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):	1851.25-1908.75 MHz 824.70-848.31 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report S/N:	12140508F-T705-S24C		Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006		Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093	IC RSS-102 Issue 2

Z-Axis Scan

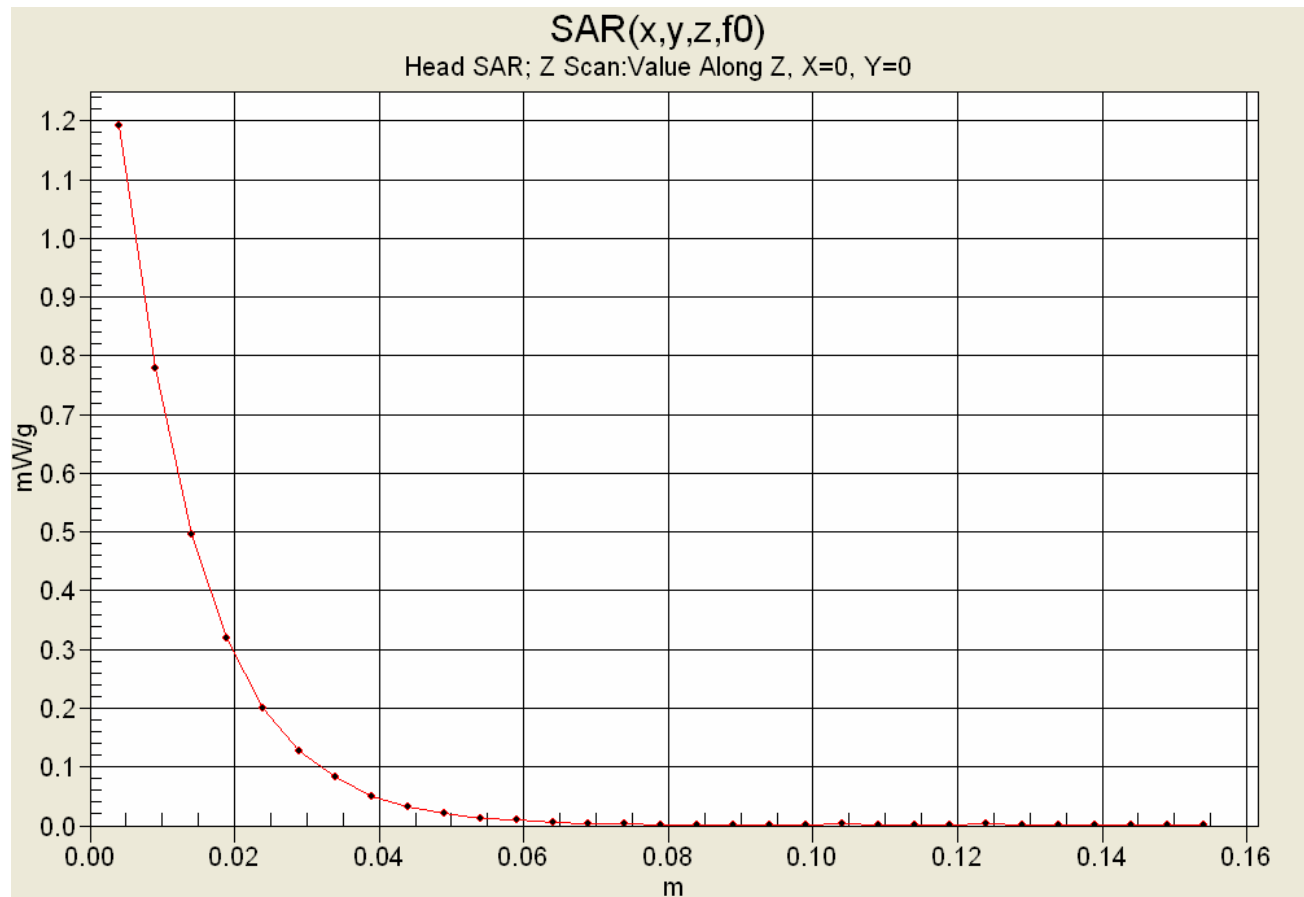

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):		1851.25-1908.75 MHz 824.70-848.31 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report S/N:	12140508F-T705-S24C	Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006	Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093 IC RSS-102 Issue 2

Date Tested: 12/16/2005

Head SAR - PCS CDMA - Left Ear - Tilt Position (15°) - Channel 25

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Ambient Temp: 23.5 °C; Fluid Temp: 23.7 °C; Barometric Pressure: 102.7 kPa; Humidity: 30%

Communication System: PCS CDMA

Li-ion Battery Pack (P/N: 157-10014-00)

RF Output Power: 23.8 dBm (Conducted)

Frequency: 1851.25 MHz; Channel 25; Duty Cycle: 1:1

Medium: HSL1880 ($\sigma = 1.35$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(5.18, 5.18, 5.18); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Head SAR - PCS CDMA - Left Ear - Tilt Position (15°) - Low Channel/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm


Head SAR - PCS CDMA - Left Ear - Tilt Position (15°) - Low Channel/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.2 V/m; Power Drift = -0.127 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.963 mW/g; SAR(10 g) = 0.594 mW/g

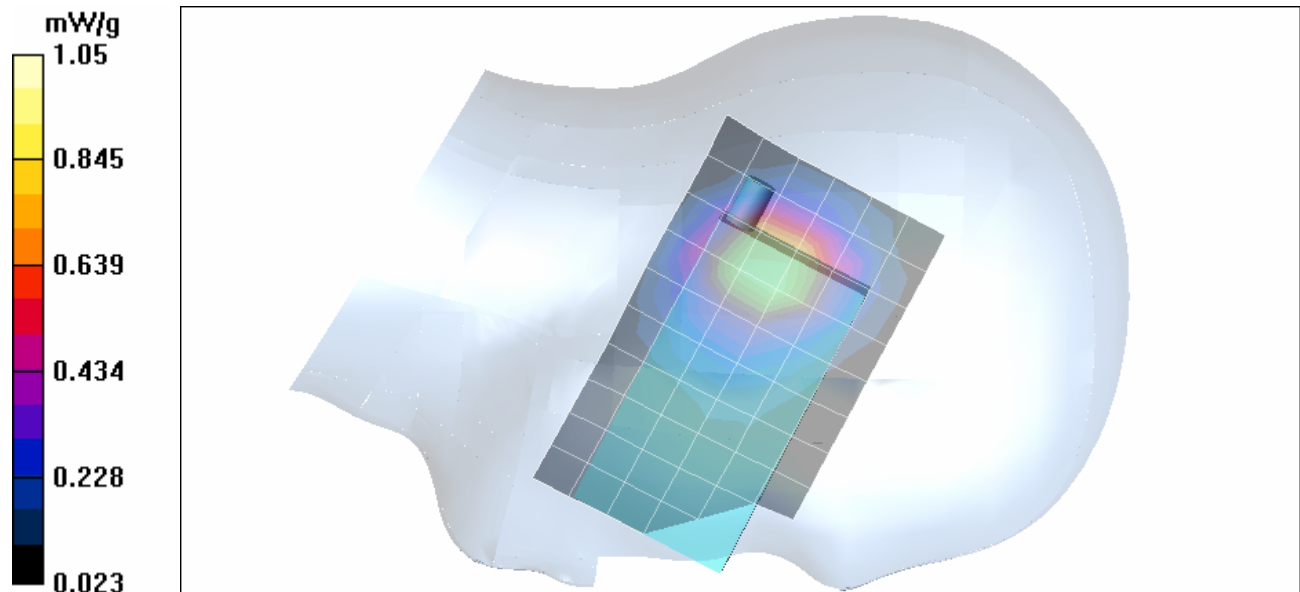

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):	1851.25-1908.75 MHz 824.70-848.31 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 46 of 108

	Test Report S/N:	12140508F-T705-S24C	Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006	Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093 IC RSS-102 Issue 2

Date Tested: 12/19/2005

Head SAR - PCS CDMA - Left Ear - Tilt Position (15°) - Channel 1175

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Ambient Temp: 23.0 °C; Fluid Temp: 23.8 °C; Barometric Pressure: 103.1 kPa; Humidity: 30%

Communication System: PCS CDMA

Li-ion Battery Pack (P/N: 157-10014-00)

RF Output Power: 24.0 dBm (Conducted)

Frequency: 1908.75 MHz; Channel 1175; Duty Cycle: 1:1

Medium: HSL1880 ($\sigma = 1.40$ mho/m; $\epsilon_r = 39.0$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(5.18, 5.18, 5.18); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Head SAR - PCS CDMA - Left Ear - Tilt Position (15°) - High Channel/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm


Head SAR - PCS CDMA - Left Ear - Tilt Position (15°) - High Channel/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.3 V/m; Power Drift = -0.141 dB


Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.877 mW/g; SAR(10 g) = 0.547 mW/g

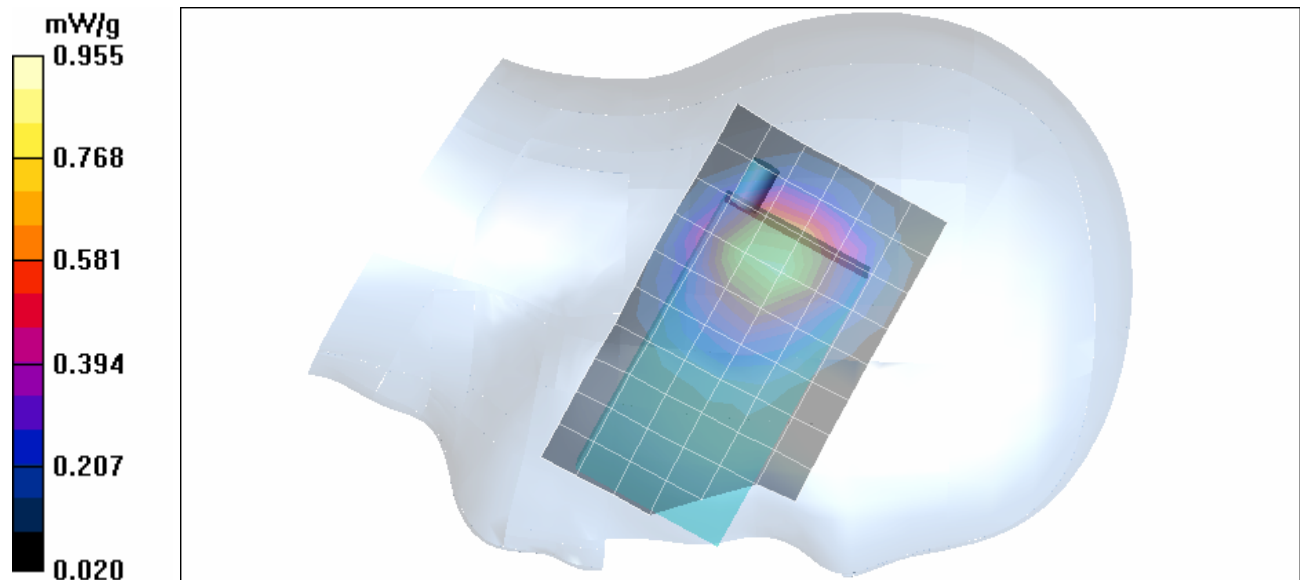

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):		1851.25-1908.75 MHz 824.70-848.31 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 47 of 108

Z-Axis Scan

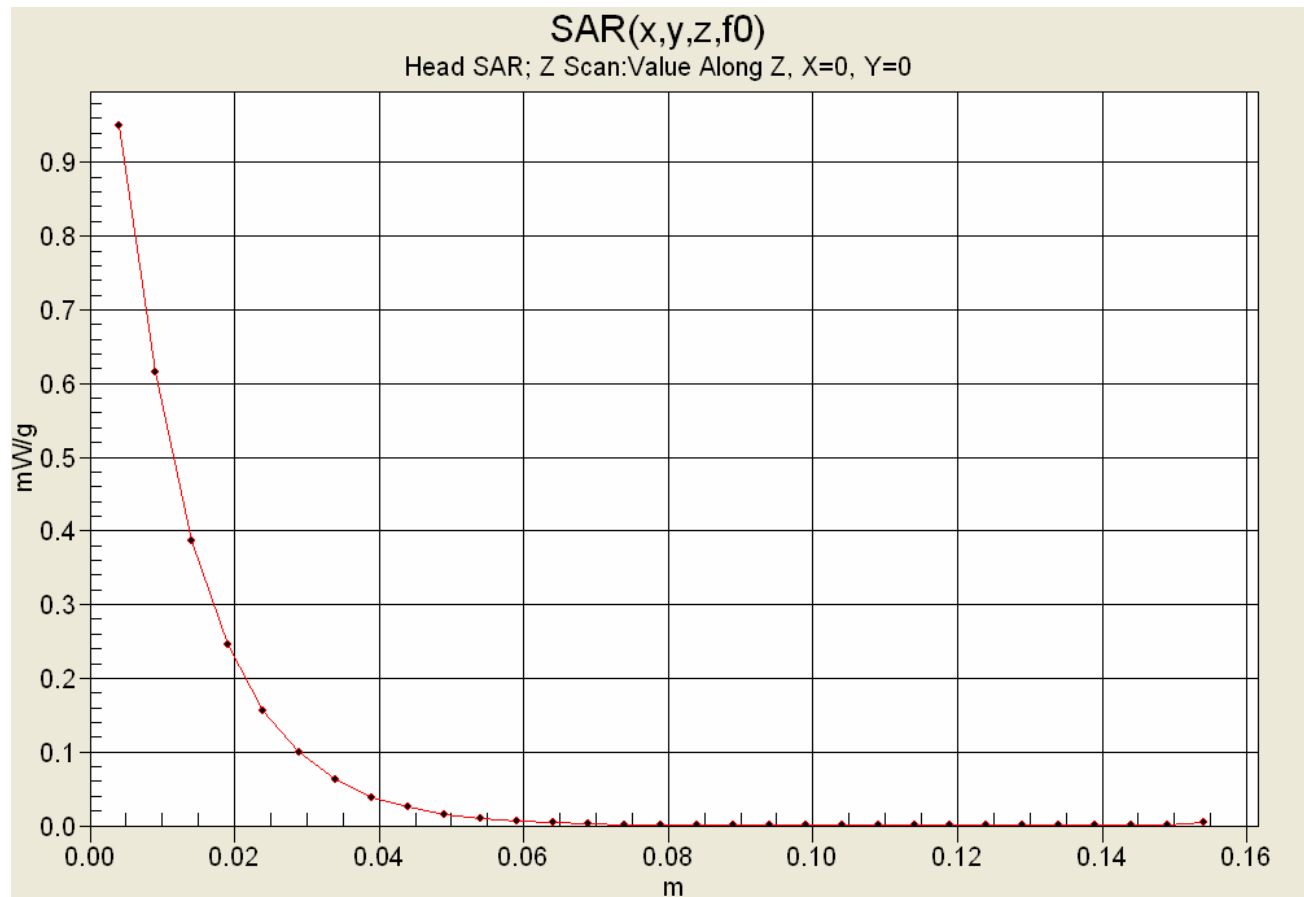

	Test Report S/N:	12140508F-T705-S24C	Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006	Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093 IC RSS-102 Issue 2

Date Tested: 12/19/2005

Body-Worn SAR - PCS CDMA - DUT with Side Case & Belt-Clip (Front Side of DUT) - Channel 600

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Body-Worn Accessories: Leather Side Case with Belt-Clip (SKU#3256WW); **Audio Accessory:** Generic Ear-Microphone

Ambient Temp: 24.0 °C; Fluid Temp: 23.8 °C; Barometric Pressure: 103.0 kPa; Humidity: 30%

Communication System: PCS CDMA

Li-ion Battery Pack (P/N: 157-10014-00)

RF Output Power: 24.7 dBm (Conducted)

Frequency: 1880.00 MHz; Channel 600; Duty Cycle: 1:1

Medium: M1880 ($\sigma = 1.57$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(4.75, 4.75, 4.75); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159


Body-Worn SAR - PCS CDMA - 1.7 cm Leather Side Case & Belt-Clip Separation Distance - Mid Channel Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Body-Worn SAR - PCS CDMA - 1.7 cm Leather Side Case & Belt-Clip Separation Distance - Mid Channel Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.6 V/m; Power Drift = -0.224 dB

Peak SAR (extrapolated) = 0.793 W/kg

SAR(1 g) = 0.542 mW/g; SAR(10 g) = 0.352 mW/g

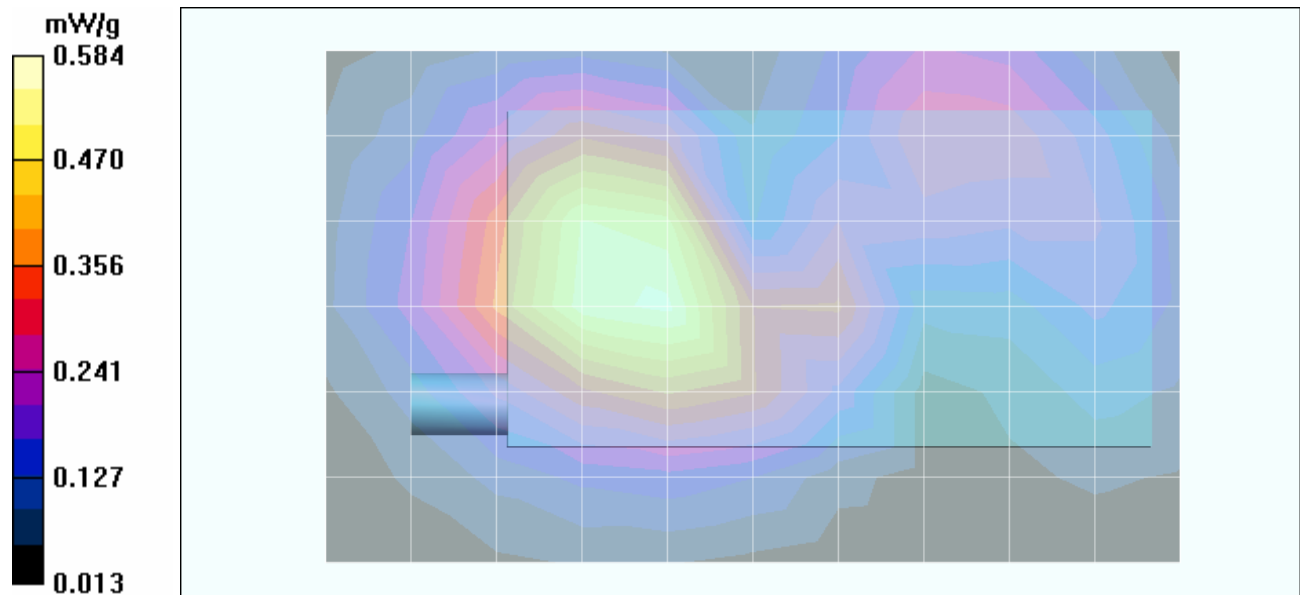

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):	1851.25-1908.75 MHz 824.70-848.31 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 49 of 108

	Test Report S/N:	12140508F-T705-S24C		Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006		Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093	IC RSS-102 Issue 2

Date Tested: 12/19/2005

Body-Worn SAR - PCS CDMA - DUT with Side Case & Belt-Clip (Back Side of DUT) - Channel 600

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Body-Worn Accessories: Leather Side Case with Belt-Clip (SKU#3256WW); Audio Accessory: Generic Ear-Microphone

Ambient Temp: 24.0 °C; Fluid Temp: 23.8 °C; Barometric Pressure: 103.0 kPa; Humidity: 30%

Communication System: PCS CDMA

Li-ion Battery Pack (P/N: 157-10014-00)

RF Output Power: 24.7 dBm (Conducted)

Frequency: 1880.00 MHz; Channel 600; Duty Cycle: 1:1

Medium: M1880 ($\sigma = 1.57$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(4.75, 4.75, 4.75); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159


Body-Worn SAR - PCS CDMA - 1.7 cm Leather Side Case & Belt-Clip Separation Distance - Mid Channel Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Body-Worn SAR - PCS CDMA - 1.7 cm Leather Side Case & Belt-Clip Separation Distance - Mid Channel Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.5 V/m; Power Drift = -0.0618 dB

Peak SAR (extrapolated) = 0.788 W/kg

SAR(1 g) = 0.543 mW/g; SAR(10 g) = 0.355 mW/g

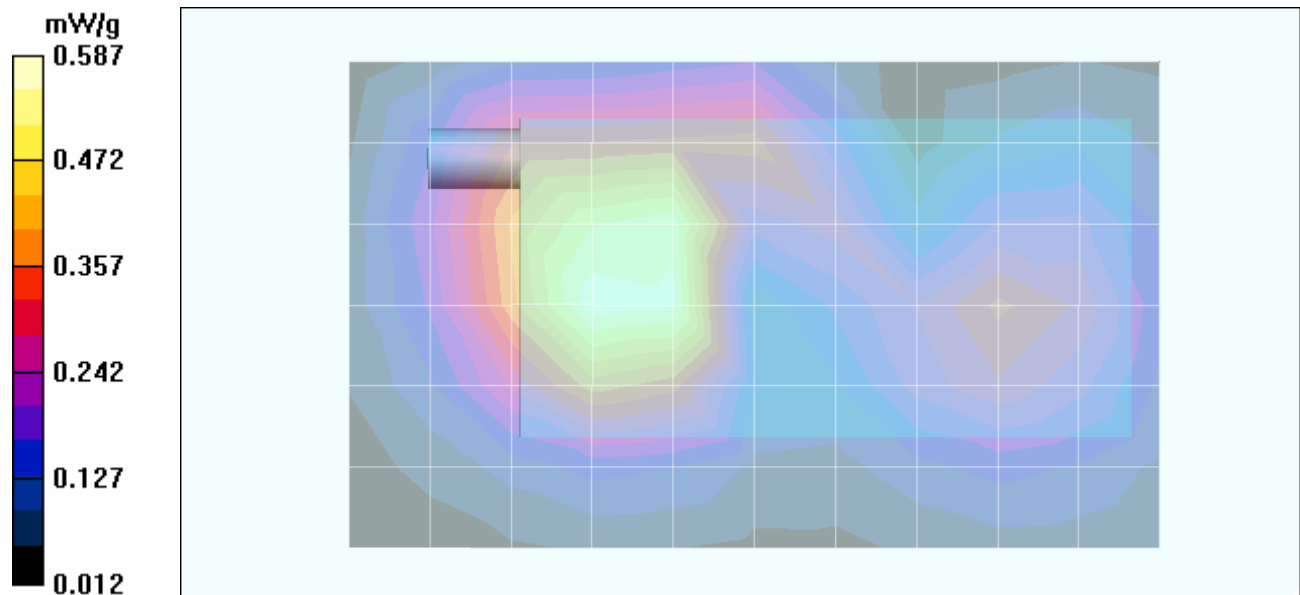

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):		1851.25-1908.75 MHz 824.70-848.31 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report S/N:	12140508F-T705-S24C		Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006		Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093	IC RSS-102 Issue 2

Date Tested: 12/19/2005

Body-Worn SAR - PCS CDMA - DUT with Pouch & Swivel Belt-Clip (Back Side of DUT) - Channel 600

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Body-Worn Accessories: Leather Pouch with Swivel Belt-Clip (SKU#3179WW); **Audio Accessory:** Generic Ear-Microphone

Ambient Temp: 24.0 °C; Fluid Temp: 23.8 °C; Barometric Pressure: 103.0 kPa; Humidity: 30%

Communication System: PCS CDMA

Li-ion Battery Pack (P/N: 157-10014-00)

RF Output Power: 24.7 dBm (Conducted)

Frequency: 1880.00 MHz; Channel 600; Duty Cycle: 1:1

Medium: M1880 ($\sigma = 1.57$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(4.75, 4.75, 4.75); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body-Worn SAR - PCS CDMA - 2.5 cm Leather Pouch & Swivel Belt-Clip Separation Distance - Mid Channel Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm


Body-Worn SAR - PCS CDMA - 2.5 cm Leather Pouch & Swivel Belt-Clip Separation Distance - Mid Channel

Zoom Scan 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.4 V/m; Power Drift = -0.111 dB

Peak SAR (extrapolated) = 0.453 W/kg

SAR(1 g) = 0.288 mW/g; SAR(10 g) = 0.172 mW/g

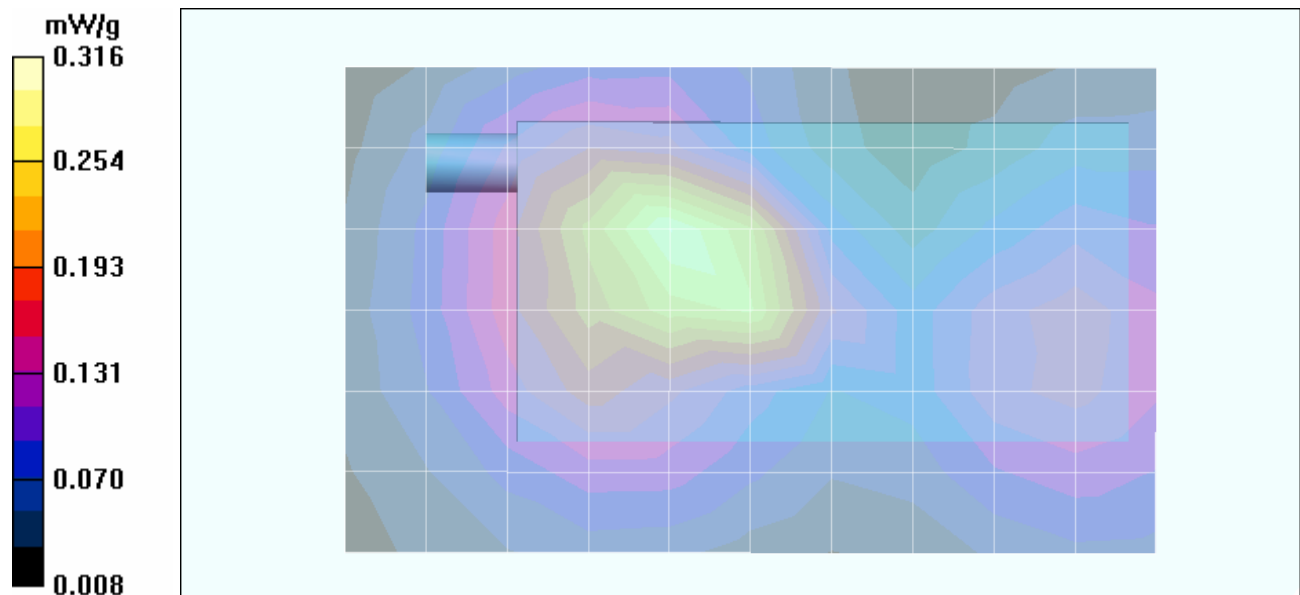

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):	1851.25-1908.75 MHz 824.70-848.31 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 51 of 108

	Test Report S/N:	12140508F-T705-S24C	Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006	Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093 IC RSS-102 Issue 2

Date Tested: 12/19/2005

Body-Worn SAR - PCS CDMA - 1.5 cm Air-Gap Spacing - Back Side of DUT - Channel 600

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Body-Worn Accessories: None - 1.5 cm Air-Gap Spacing from Back of DUT; **Audio Accessory:** Generic Ear-Microphone

Ambient Temp: 24.0 °C; Fluid Temp: 23.8 °C; Barometric Pressure: 103.0 kPa; Humidity: 30%

Communication System: PCS CDMA

Li-ion Battery Pack (P/N: 157-10014-00)

RF Output Power: 24.7 dBm (Conducted)

Frequency: 1880.00 MHz; Channel 600; Duty Cycle: 1:1

Medium: M1880 ($\sigma = 1.57$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(4.75, 4.75, 4.75); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body-Worn SAR - PCS CDMA - 1.5 cm Air-Gap Separation Distance from Back of DUT - Mid Channel

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm


Body-Worn SAR - PCS CDMA - 1.5 cm Air-Gap Separation Distance from Back of DUT - Mid Channel

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.4 V/m; Power Drift = -0.0753 dB

Peak SAR (extrapolated) = 0.864 W/kg

SAR(1 g) = 0.539 mW/g; SAR(10 g) = 0.349 mW/g

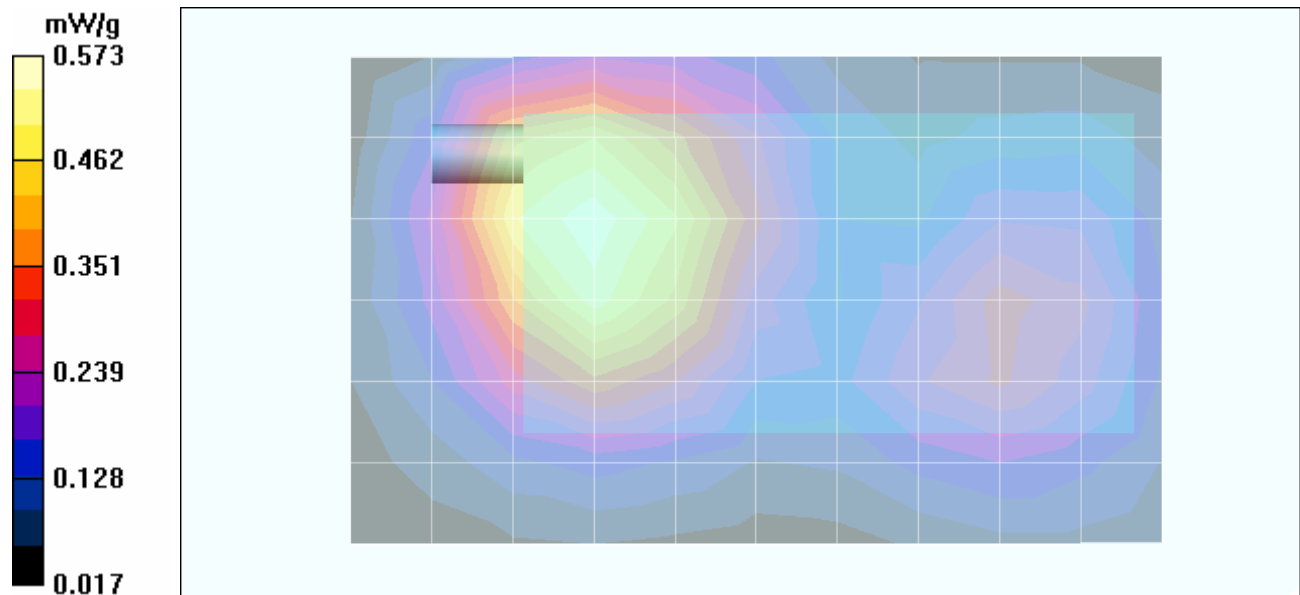

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):		1851.25-1908.75 MHz 824.70-848.31 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 52 of 108

	Test Report S/N:	12140508F-T705-S24C	Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006	Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093 IC RSS-102 Issue 2

Date Tested: 12/19/2005

Body-Worn SAR - PCS CDMA - 1.5 cm Air-Gap Spacing - Front Side of DUT - Channel 600

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Body-Worn Accessories: None - 1.5 cm Air-Gap Spacing from Front of DUT; **Audio Accessory:** Generic Ear-Microphone

Ambient Temp: 24.0 °C; Fluid Temp: 23.8 °C; Barometric Pressure: 103.0 kPa; Humidity: 30%

Communication System: PCS CDMA

Li-ion Battery Pack (P/N: 157-10014-00)

RF Output Power: 24.7 dBm (Conducted)

Frequency: 1880.00 MHz; Channel 600; Duty Cycle: 1:1

Medium: M1880 ($\sigma = 1.57$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(4.75, 4.75, 4.75); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body-Worn SAR - PCS CDMA - 1.5 cm Air-Gap Separation Distance from Front of DUT - Mid Channel

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm


Body-Worn SAR - PCS CDMA - 1.5 cm Air-Gap Separation Distance from Front of DUT - Mid Channel

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.3 V/m; Power Drift = -0.104 dB

Peak SAR (extrapolated) = 0.779 W/kg

SAR(1 g) = 0.537 mW/g; SAR(10 g) = 0.354 mW/g

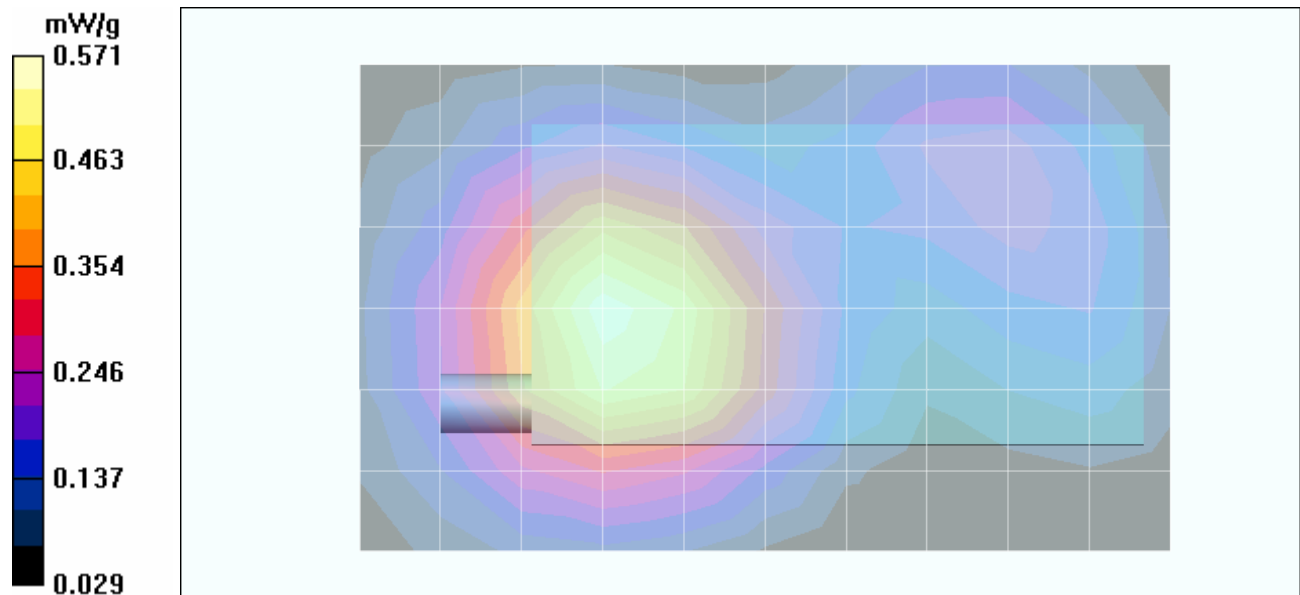

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):	1851.25-1908.75 MHz 824.70-848.31 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 53 of 108

	Test Report S/N:	12140508F-T705-S24C		Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006		Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093	IC RSS-102 Issue 2

Date Tested: 12/19/2005

Body-Worn SAR - PCS CDMA - DUT with Side Case & Belt-Clip (Back Side of DUT) - Channel 600 Simultaneous Transmit with Co-located Bluetooth

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Body-Worn Accessories: Leather Side Case with Belt-Clip (SKU#3256WW); **Audio Accessory:** Generic Ear-Microphone


Ambient Temp: 24.0 °C; Fluid Temp: 23.8 °C; Barometric Pressure: 103.0 kPa; Humidity: 30%

Communication System: PCS CDMA
 Li-ion Battery Pack (P/N: 157-10014-00)
 RF Output Power: 24.7 dBm (Conducted)
 Frequency: 1880.00 MHz; Channel 600; Duty Cycle: 1:1
 Frequency: 2441 MHz; Duty Cycle: 1:1 (Bluetooth)
 RF Output Power: 0 dBm (Peak Conducted) Bluetooth
 Communication System: Modulated Fixed Frequency (Bluetooth)

Medium: M1880 ($\sigma = 1.57$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³)
 - Probe: ET3DV6 - SN1387; ConvF(4.75, 4.75, 4.75); Calibrated: 18/03/2005
 - Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
 - Electronics: DAE4 Sn353; Calibrated: 15/06/2005
 - Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
 - Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body-Worn SAR - PCS CDMA with Bluetooth - 1.7 cm Leather Side Case & Belt-Clip Separation Distance - Mid Channel Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm


Body-Worn SAR - PCS CDMA with Bluetooth - 1.7 cm Leather Side Case & Belt-Clip Separation Distance - Mid Channel Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 20.7 V/m; Power Drift = -0.0693 dB
 Peak SAR (extrapolated) = 0.850 W/kg
SAR(1 g) = 0.589 mW/g; SAR(10 g) = 0.381 mW/g

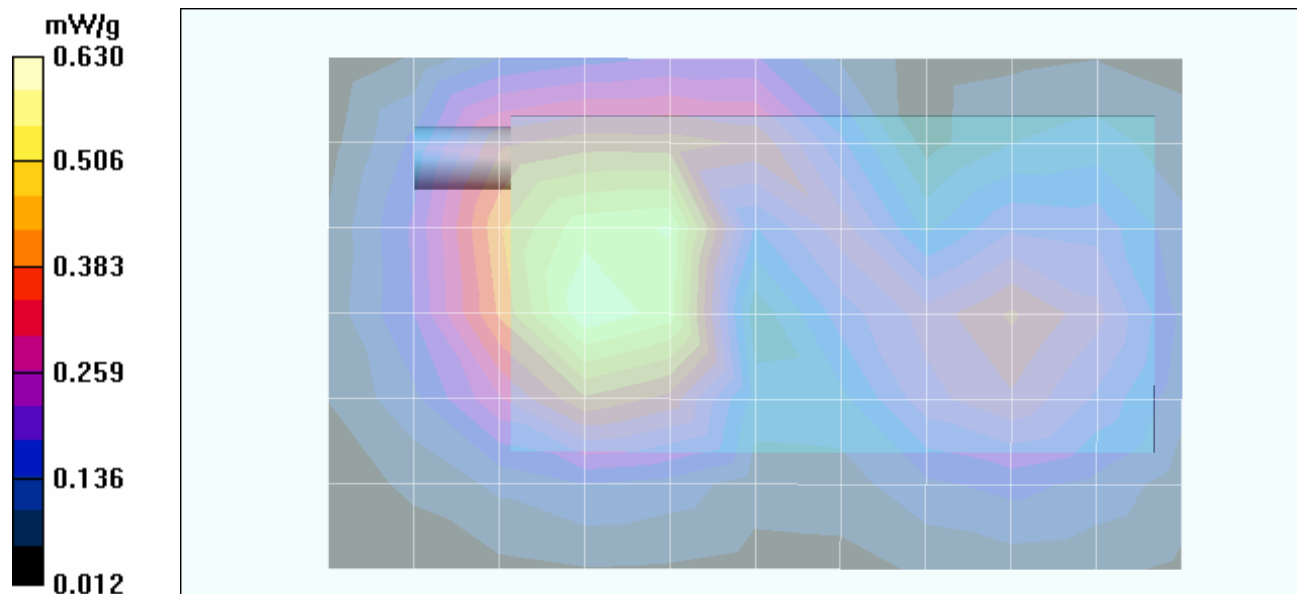

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth				Freq. Range(s):	1851.25-1908.75 MHz 824.70-848.31 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report S/N:	12140508F-T705-S24C		Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006		Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093	IC RSS-102 Issue 2

Z-Axis Scan

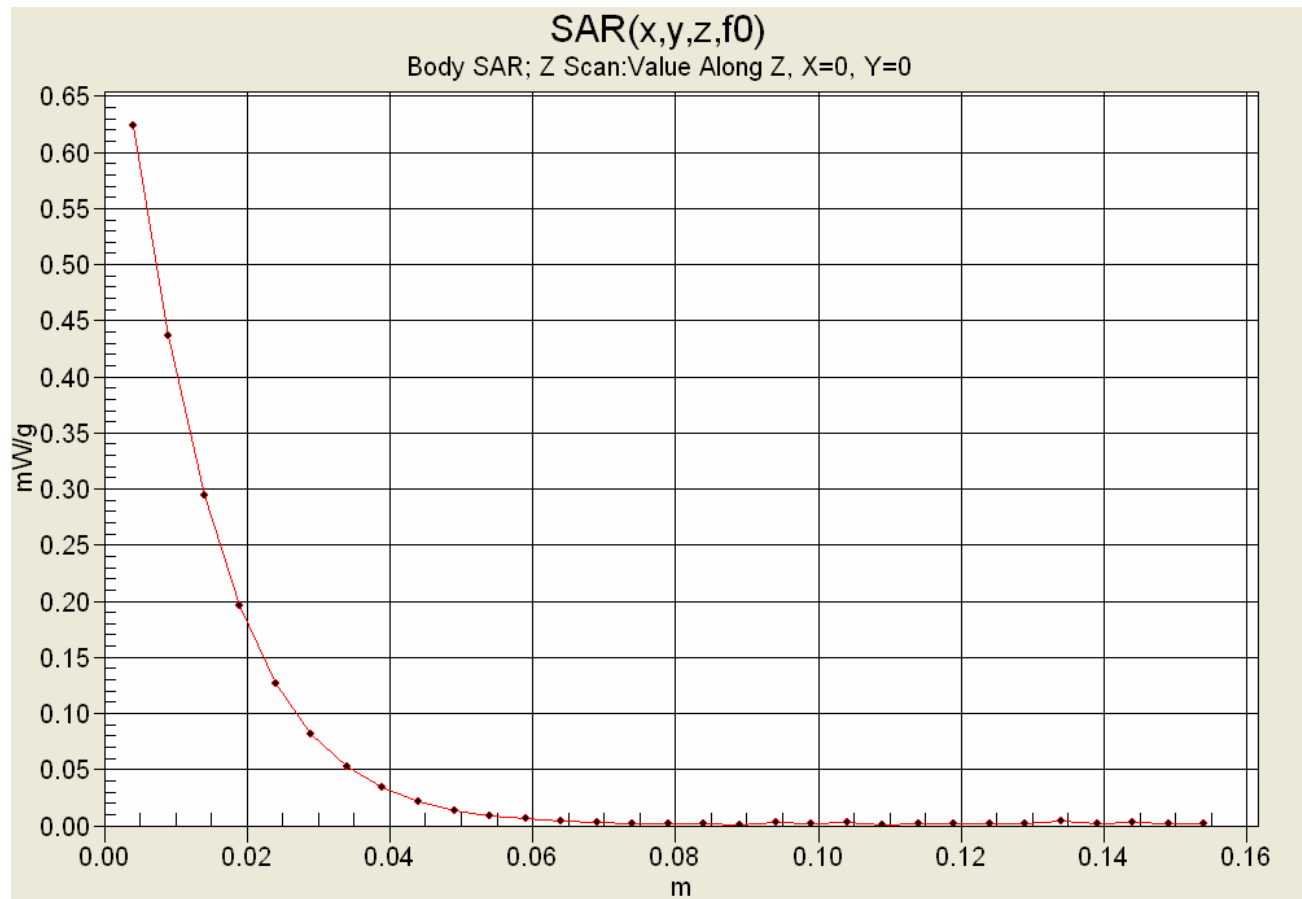

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):		1851.25-1908.75 MHz 824.70-848.31 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report S/N:	12140508F-T705-S24C	Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006	Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093 IC RSS-102 Issue 2

Date Tested: 12/20/2005

Body-Worn SAR - Cellular CDMA - DUT with Side Case & Belt-Clip (Back Side of DUT) - Channel 384

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Body-Worn Accessories: Leather Side Case with Belt-Clip (SKU#3256WW); Audio Accessory: Generic Ear-Microphone

Ambient Temp: 23.5 °C; Fluid Temp: 22.4 °C; Barometric Pressure: 102.8 kPa; Humidity: 30%

Communication System: Cellular CDMA
 Li-ion Battery Pack (P/N: 157-10014-00)
 RF Output Power: 24.4 dBm (Conducted)
 Frequency: 836.52 MHz; Channel 384; Duty Cycle: 1:1
 Medium: M835 ($\sigma = 0.97$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159


Body-Worn SAR - Cellular CDMA - 1.7 cm Leather Side Case & Belt-Clip Separation Distance - Mid Channel Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Body-Worn SAR - Cellular CDMA - 1.7 cm Leather Side Case & Belt-Clip Separation Distance - Mid Channel Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.9 V/m; Power Drift = -0.115 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.824 mW/g; SAR(10 g) = 0.585 mW/g

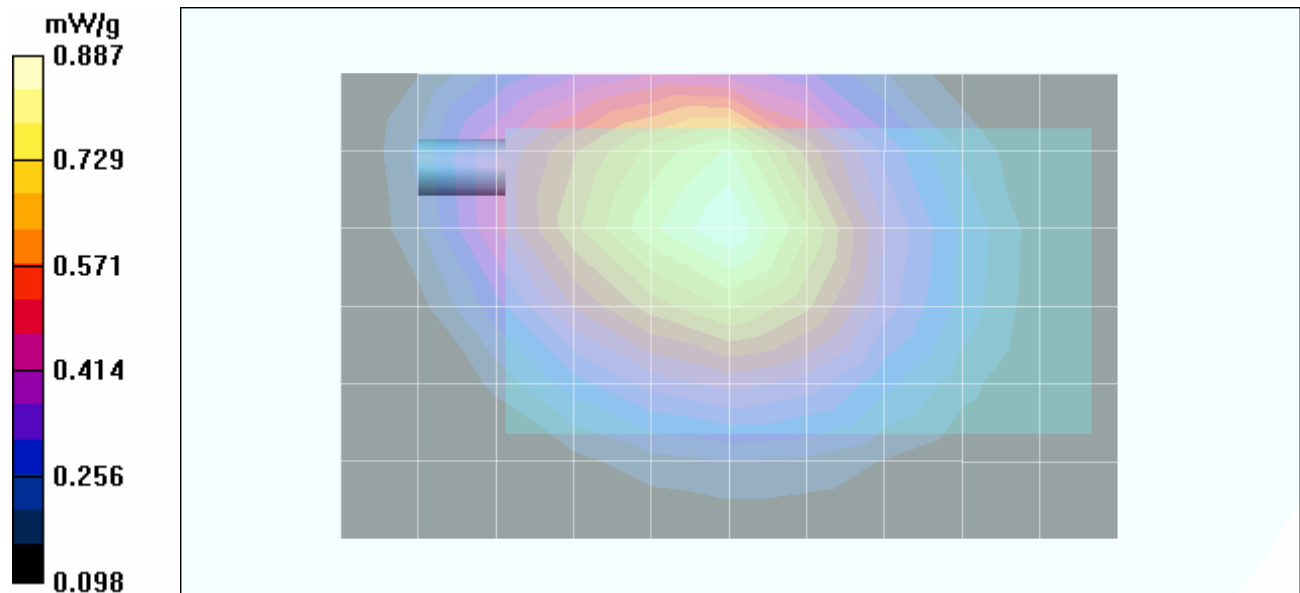

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):		1851.25-1908.75 MHz 824.70-848.31 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 56 of 108

	Test Report S/N:	12140508F-T705-S24C		Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006		Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093	IC RSS-102 Issue 2

Date Tested: 12/20/2005

Body-Worn SAR - Cellular CDMA - DUT with Side Case & Belt-Clip (Back Side of DUT) - Channel 1013

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Body-Worn Accessories: Leather Side Case with Belt-Clip (SKU#3256WW); Audio Accessory: Generic Ear-Microphone

Ambient Temp: 23.5 °C; Fluid Temp: 22.4 °C; Barometric Pressure: 102.8 kPa; Humidity: 30%

Communication System: Cellular CDMA

Li-ion Battery Pack (P/N: 157-10014-00)

RF Output Power: 23.8 dBm (Conducted)

Frequency: 824.70 MHz; Channel 1013; Duty Cycle: 1:1

Medium: M835 ($\sigma = 0.97$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159


Body-Worn SAR - Cellular CDMA - 1.7 cm Leather Side Case & Belt-Clip Separation Distance - Low Channel Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Body-Worn SAR - Cellular CDMA - 1.7 cm Leather Side Case & Belt-Clip Separation Distance - Low Channel Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.7 V/m; Power Drift = 0.00193 dB

Peak SAR (extrapolated) = 0.885 W/kg

SAR(1 g) = 0.650 mW/g; SAR(10 g) = 0.466 mW/g

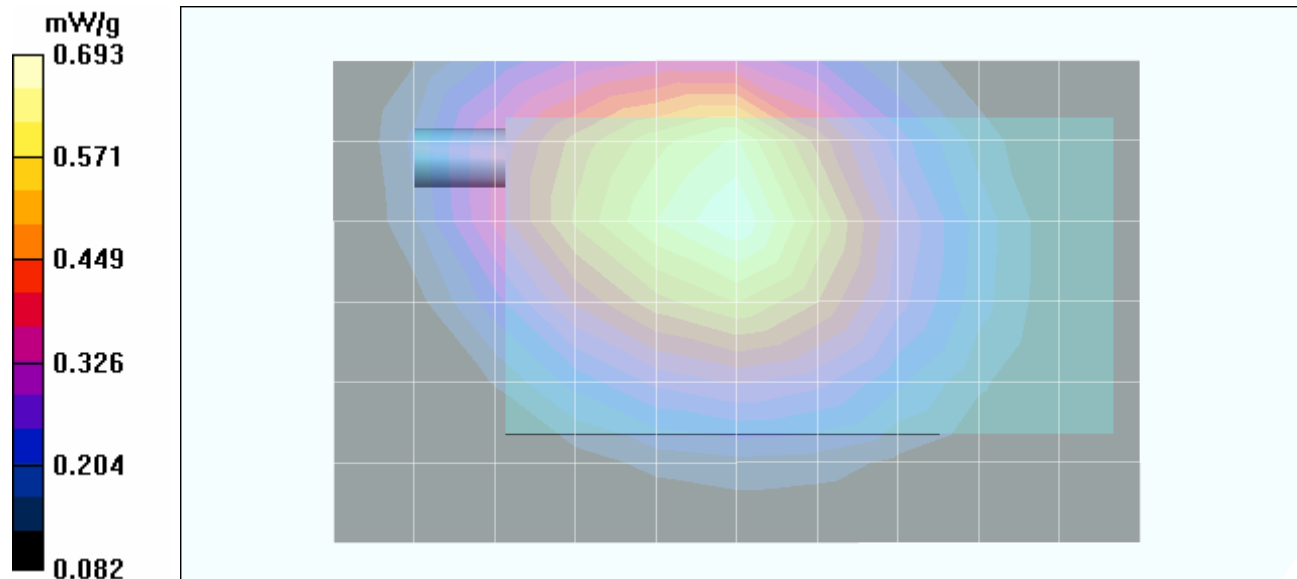

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):	1851.25-1908.75 MHz 824.70-848.31 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 57 of 108

	Test Report S/N:	121405O8F-T705-S24C		Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006		Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093	IC RSS-102 Issue 2

Date Tested: 12/20/2005

Body-Worn SAR - Cellular CDMA - DUT with Side Case & Belt-Clip (Back Side of DUT) - Channel 777

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Body-Worn Accessories: Leather Side Case with Belt-Clip (SKU#3256WW); Audio Accessory: Generic Ear-Microphone

Ambient Temp: 23.5 °C; Fluid Temp: 22.4 °C; Barometric Pressure: 102.8 kPa; Humidity: 30%

Communication System: Cellular CDMA

Li-ion Battery Pack (P/N: 157-10014-00)

RF Output Power: 24.2 dBm (Conducted)

Frequency: 848.31 MHz; Channel 777; Duty Cycle: 1:1

Medium: M835 ($\sigma = 0.97$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159


Body-Worn SAR - Cellular CDMA - 1.7 cm Leather Side Case & Belt-Clip Separation Distance - High Channel Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Body-Worn SAR - Cellular CDMA - 1.7 cm Leather Side Case & Belt-Clip Separation Distance - High Channel Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.6 V/m; Power Drift = -0.0830 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.815 mW/g; SAR(10 g) = 0.575 mW/g

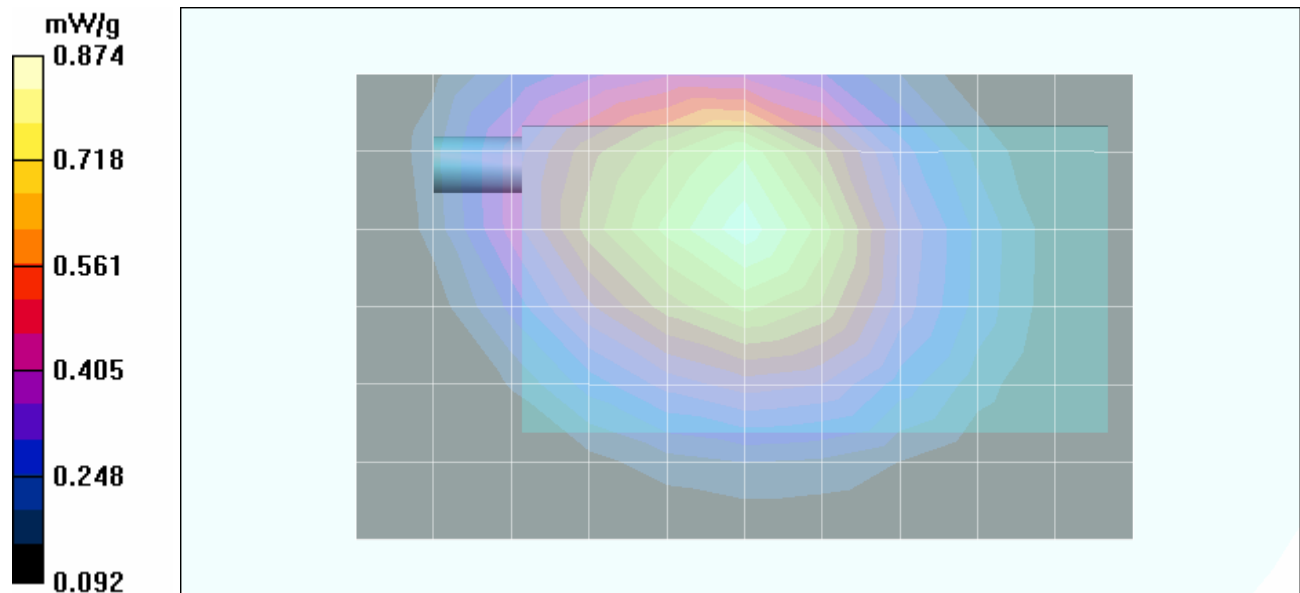

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):		1851.25-1908.75 MHz 824.70-848.31 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report S/N:	12140508F-T705-S24C		Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006		Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093	IC RSS-102 Issue 2

Date Tested: 12/20/2005

Body-Worn SAR - Cellular CDMA - DUT with Side Case & Belt-Clip (Front Side of DUT) - Channel 384

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Body-Worn Accessories: Leather Side Case with Belt-Clip (SKU#3256WW); **Audio Accessory:** Generic Ear-Microphone

Ambient Temp: 23.5 °C; Fluid Temp: 22.4 °C; Barometric Pressure: 102.8 kPa; Humidity: 30%

Communication System: Cellular CDMA
 Li-ion Battery Pack (P/N: 157-10014-00)
 RF Output Power: 24.4 dBm (Conducted)
 Frequency: 836.52 MHz; Channel 384; Duty Cycle: 1:1
 Medium: M835 ($\sigma = 0.97$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body-Worn SAR - Cellular CDMA - 1.7 cm Leather Side Case & Belt-Clip Separation Distance - Mid Channel Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm


Body-Worn SAR - Cellular CDMA - 1.7 cm Leather Side Case & Belt-Clip Separation Distance - Mid Channel

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.1 V/m; Power Drift = 0.0201 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.814 mW/g; SAR(10 g) = 0.571 mW/g

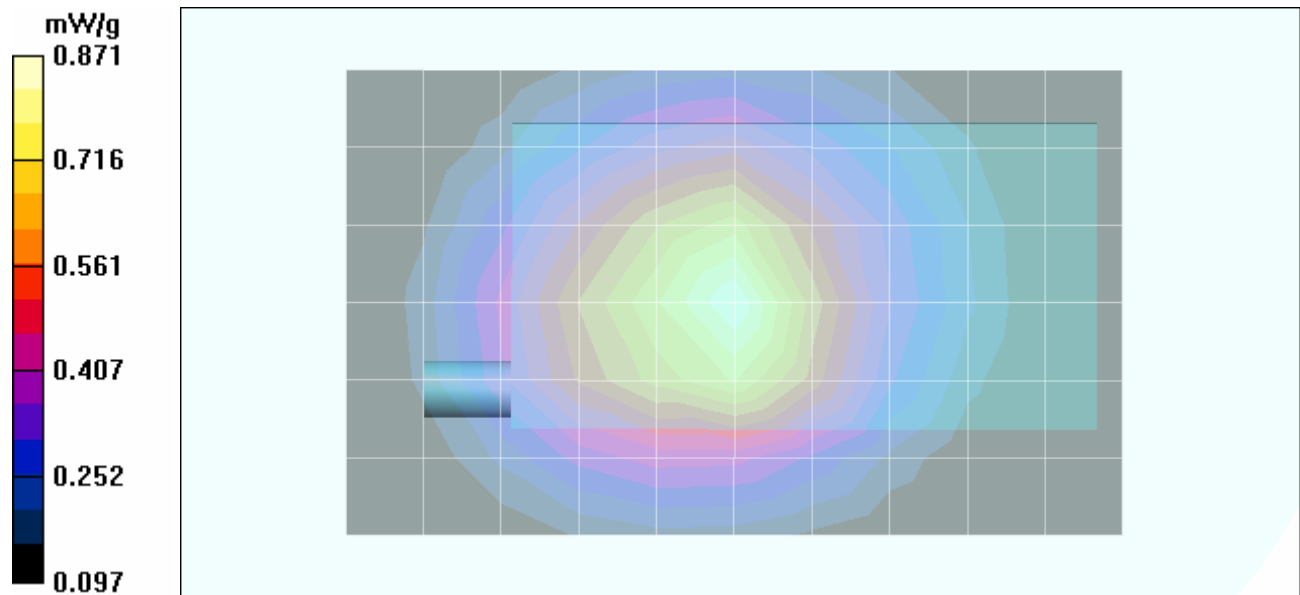

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):	1851.25-1908.75 MHz 824.70-848.31 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report S/N:	12140508F-T705-S24C		Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006		Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093	IC RSS-102 Issue 2

Date Tested: 12/20/2005

Body-Worn SAR - Cellular CDMA - DUT with Side Case & Belt-Clip (Front Side of DUT) - Channel 1013

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Body-Worn Accessories: Leather Side Case with Belt-Clip (SKU#3256WW); Audio Accessory: Generic Ear-Microphone


Ambient Temp: 23.5 °C; Fluid Temp: 22.4 °C; Barometric Pressure: 102.8 kPa; Humidity: 30%

Communication System: Cellular CDMA
 Li-ion Battery Pack (P/N: 157-10014-00)
 RF Output Power: 23.8 dBm (Conducted)
 Frequency: 824.70 MHz; Channel 1013; Duty Cycle: 1:1
 Medium: M835 ($\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 53.5$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body-Worn SAR - Cellular CDMA - 1.7 cm Leather Side Case & Belt-Clip Separation Distance - Low Channel Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Body-Worn SAR - Cellular CDMA - 1.7 cm Leather Side Case & Belt-Clip Separation Distance - Low Channel Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 27.4 V/m; Power Drift = 0.0550 dB
 Peak SAR (extrapolated) = 0.960 W/kg
SAR(1 g) = 0.683 mW/g; SAR(10 g) = 0.479 mW/g

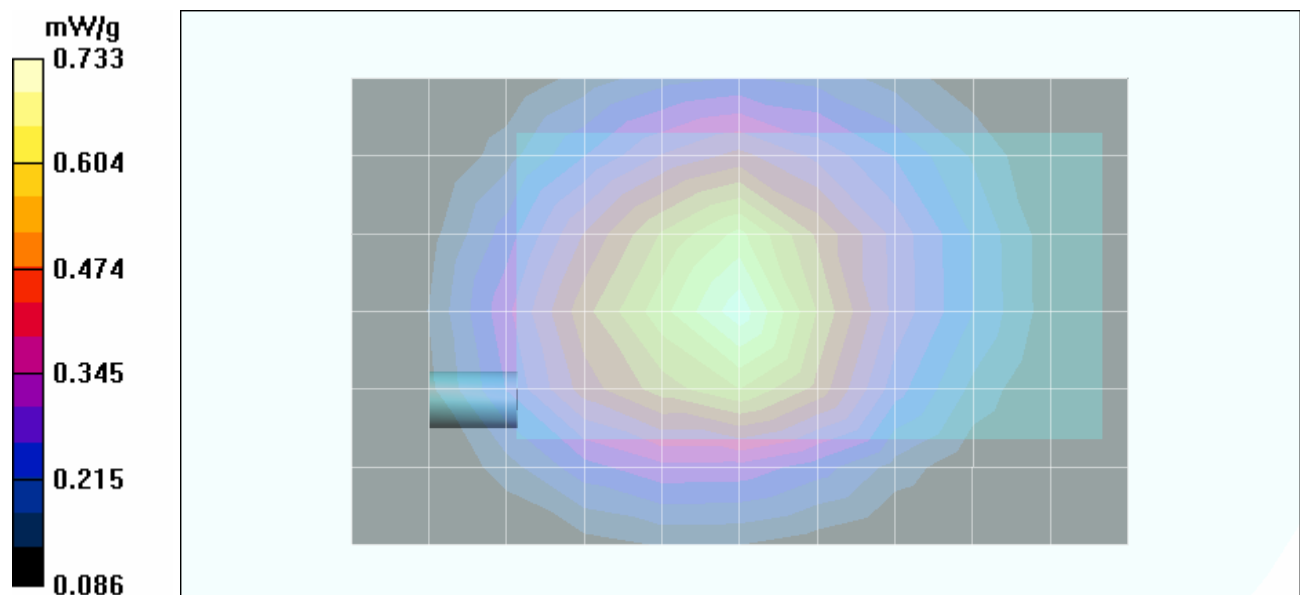

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):	1851.25-1908.75 MHz 824.70-848.31 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 60 of 108

	Test Report S/N:	12140508F-T705-S24C	Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006	Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093 IC RSS-102 Issue 2

Date Tested: 12/20/2005

Body-Worn SAR - Cellular CDMA - DUT with Side Case & Belt-Clip (Front Side of DUT) - Channel 777

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Body-Worn Accessories: Leather Side Case with Belt-Clip (SKU#3256WW); **Audio Accessory:** Generic Ear-Microphone

Ambient Temp: 23.5 °C; Fluid Temp: 22.4 °C; Barometric Pressure: 102.8 kPa; Humidity: 30%

Communication System: Cellular CDMA
 Li-ion Battery Pack (P/N: 157-10014-00)
 RF Output Power: 24.2 dBm (Conducted)
 Frequency: 848.31 MHz; Channel 777; Duty Cycle: 1:1
 Medium: M835 ($\sigma = 0.97$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159


Body-Worn SAR - Cellular CDMA - 1.7 cm Leather Side Case & Belt-Clip Separation Distance - High Channel Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Body-Worn SAR - Cellular CDMA - 1.7 cm Leather Side Case & Belt-Clip Separation Distance - High Channel Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.4 V/m; Power Drift = -0.0387 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.727 mW/g; SAR(10 g) = 0.506 mW/g

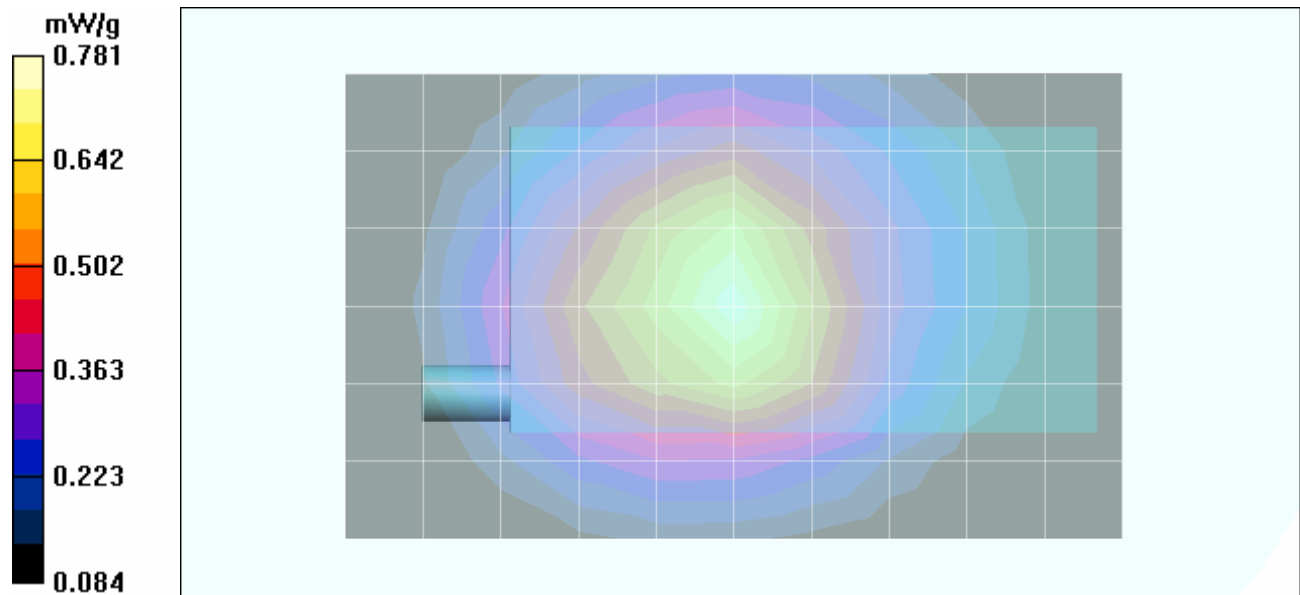

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):	1851.25-1908.75 MHz 824.70-848.31 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 61 of 108

	Test Report S/N:	12140508F-T705-S24C	Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006	Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093 IC RSS-102 Issue 2

Date Tested: 12/20/2005

Body-Worn SAR - Cellular CDMA - DUT with Pouch & Swivel Belt-Clip (Back Side of DUT) - Channel 384

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Body-Worn Accessories: Leather Pouch with Swivel Belt-Clip (SKU#3179WW); Audio Accessory: Generic Ear-Microphone


Ambient Temp: 23.5 °C; Fluid Temp: 22.4 °C; Barometric Pressure: 102.8 kPa; Humidity: 30%

Communication System: Cellular CDMA
 Li-ion Battery Pack (P/N: 157-10014-00)
 RF Output Power: 24.4 dBm (Conducted)
 Frequency: 836.52 MHz; Channel 384; Duty Cycle: 1:1
 Medium: M835 ($\sigma = 0.97$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglas; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body-Worn SAR - Cellular CDMA - 2.5 cm Leather Pouch & Swivel Belt-Clip Separation Distance - Mid Channel Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Body-Worn SAR - Cellular CDMA - 2.5 cm Leather Pouch & Swivel Belt-Clip Separation Distance - Mid Channel Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 24.1 V/m; Power Drift = -0.0999 dB
 Peak SAR (extrapolated) = 0.680 W/kg
SAR(1 g) = 0.533 mW/g; SAR(10 g) = 0.396 mW/g

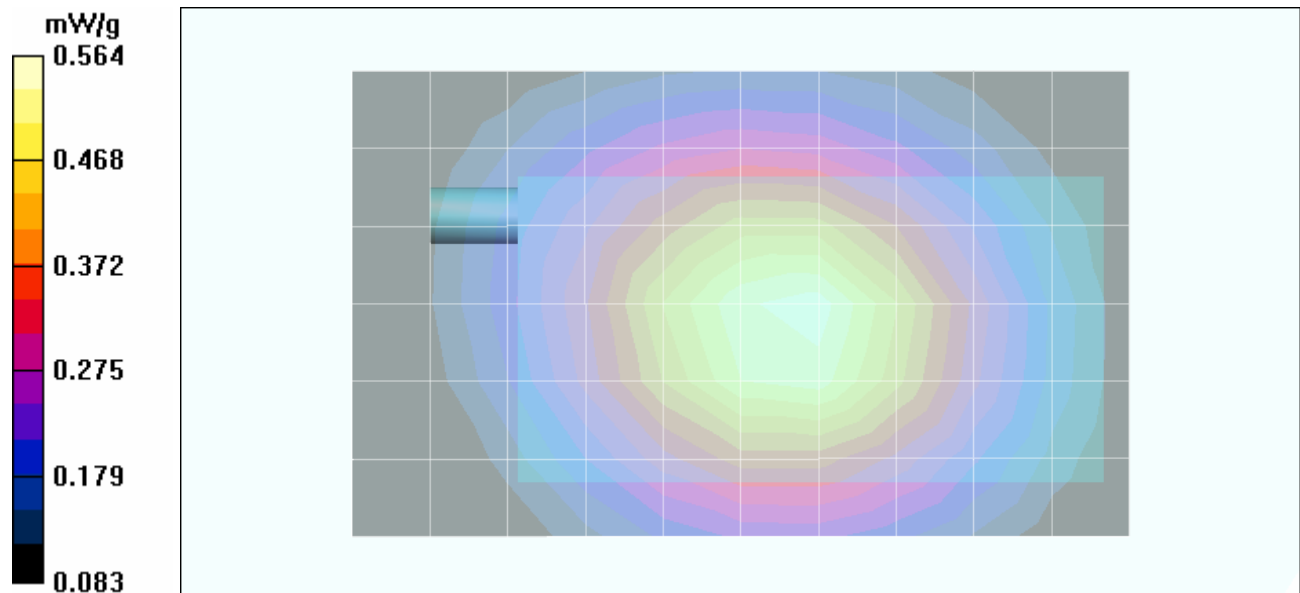

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):	1851.25-1908.75 MHz 824.70-848.31 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 62 of 108

	Test Report S/N:	12140508F-T705-S24C		Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006		Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093	IC RSS-102 Issue 2

Date Tested: 12/20/2005

Body-Worn SAR - Cellular CDMA - 1.5 cm Air-Gap Spacing - Back Side of DUT - Channel 384

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Body-Worn Accessories: None - 1.5 cm Air-Gap Spacing from Back of DUT; **Audio Accessory:** Generic Ear-Microphone


Ambient Temp: 23.5 °C; Fluid Temp: 22.4 °C; Barometric Pressure: 102.8 kPa; Humidity: 30%

Communication System: Cellular CDMA
 Li-ion Battery Pack (P/N: 157-10014-00)
 RF Output Power: 24.4 dBm (Conducted)
 Frequency: 836.52 MHz; Channel 384; Duty Cycle: 1:1
 Medium: M835 ($\sigma = 0.97$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005
-)Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body-Worn SAR - Cellular CDMA - 1.5 cm Air-Gap Separation Distance from Back of DUT - Mid Channel Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Body-Worn SAR - Cellular CDMA - 1.5 cm Air-Gap Separation Distance from Back of DUT - Mid Channel Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 28.4 V/m; Power Drift = -0.103 dB
 Peak SAR (extrapolated) = 0.839 W/kg
SAR(1 g) = 0.664 mW/g; SAR(10 g) = 0.495 mW/g

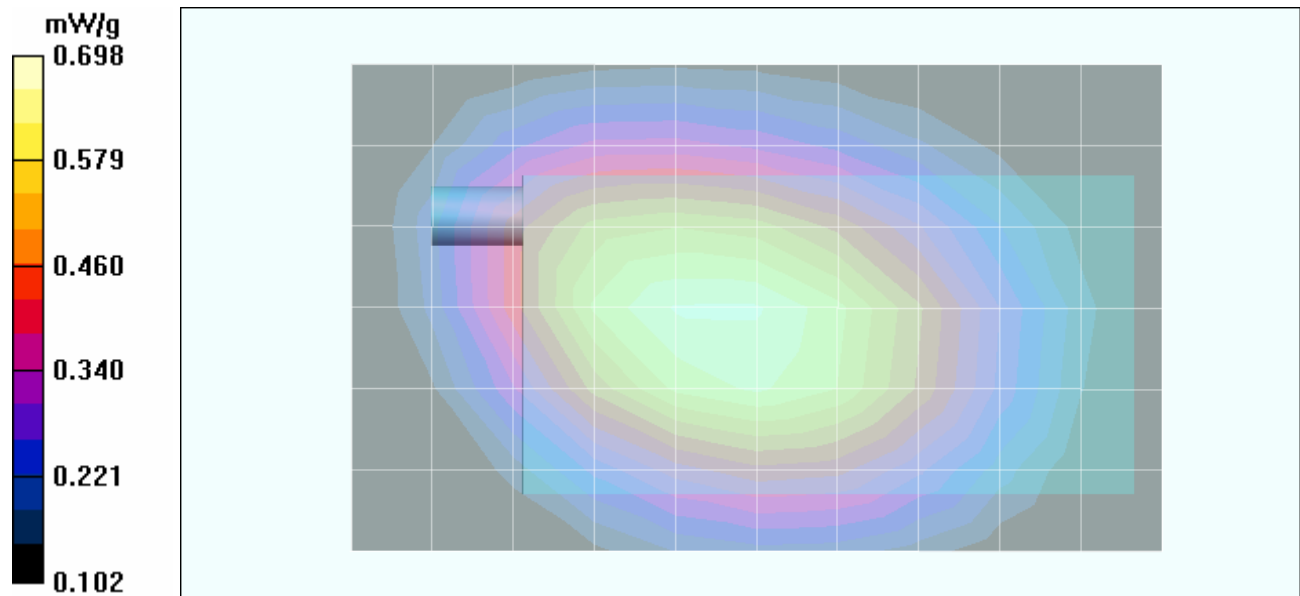

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):		1851.25-1908.75 MHz 824.70-848.31 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report S/N:	12140508F-T705-S24C		Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006		Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093	IC RSS-102 Issue 2

Date Tested: 12/20/2005

Body-Worn SAR - Cellular CDMA - 1.5 cm Air-Gap Spacing - Front Side of DUT - Channel 384

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Body-Worn Accessories: None - 1.5 cm Air-Gap Spacing from Front of DUT; **Audio Accessory:** Generic Ear-Microphone


Ambient Temp: 23.5 °C; Fluid Temp: 22.4 °C; Barometric Pressure: 102.8 kPa; Humidity: 30%

Communication System: Cellular CDMA
 Li-ion Battery Pack (P/N: 157-10014-00)
 RF Output Power: 24.4 dBm (Conducted)
 Frequency: 836.52 MHz; Channel 384; Duty Cycle: 1:1
 Medium: M835 ($\sigma = 0.97$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglas; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body-Worn SAR - Cellular CDMA - 1.5 cm Air-Gap Separation Distance from Front of DUT - Mid Channel Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Body-Worn SAR - Cellular CDMA - 1.5 cm Air-Gap Separation Distance from Front of DUT - Mid Channel Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 25.2 V/m; Power Drift = -0.0686 dB
 Peak SAR (extrapolated) = 0.697 W/kg
SAR(1 g) = 0.544 mW/g; SAR(10 g) = 0.403 mW/g

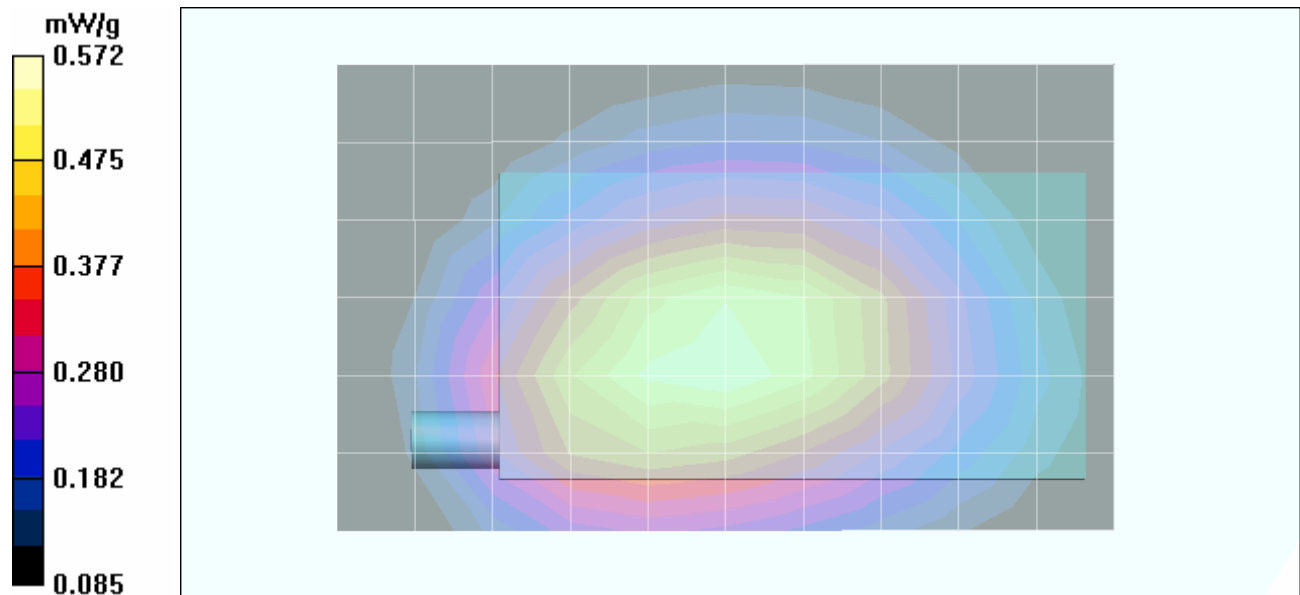

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):		1851.25-1908.75 MHz 824.70-848.31 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report S/N:	12140508F-T705-S24C		Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006		Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093	IC RSS-102 Issue 2

Date Tested: 12/20/2005

Body-Worn SAR - Cellular CDMA - DUT with Side Case & Belt-Clip (Back Side of DUT) - Channel 384 Simultaneous Transmit with Co-located Bluetooth

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Body-Worn Accessories: Leather Side Case with Belt-Clip (SKU#3256WW); **Audio Accessory:** Generic Ear-Microphone


Ambient Temp: 23.5 °C; Fluid Temp: 22.4 °C; Barometric Pressure: 102.8 kPa; Humidity: 30%

Communication System: Cellular CDMA
 Li-ion Battery Pack (P/N: 157-10014-00)
 RF Output Power: 24.4 dBm (Conducted)
 Frequency: 836.52 MHz; Channel 384; Duty Cycle: 1:1
 Frequency: 2441 MHz; Duty Cycle: 1:1 (Bluetooth)
 RF Output Power: 0 dBm (Peak Conducted) Bluetooth
 Communication System: Modulated Fixed Frequency (Bluetooth)

Medium: M835 ($\sigma = 0.97$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³)
 - Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005
 - Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
 - Electronics: DAE4 Sn353; Calibrated: 15/06/2005
 - Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
 - Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body-Worn SAR - Cellular CDMA with Bluetooth - 1.7 cm Leather Side Case & Belt-Clip Separation Distance - Mid Channel Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm


Body-Worn SAR - Cellular CDMA with Bluetooth - 1.7 cm Leather Side Case & Belt-Clip Separation Distance - Mid Channel Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 31.6 V/m; Power Drift = -0.141 dB
 Peak SAR (extrapolated) = 1.26 W/kg
SAR(1 g) = 0.896 mW/g; SAR(10 g) = 0.629 mW/g

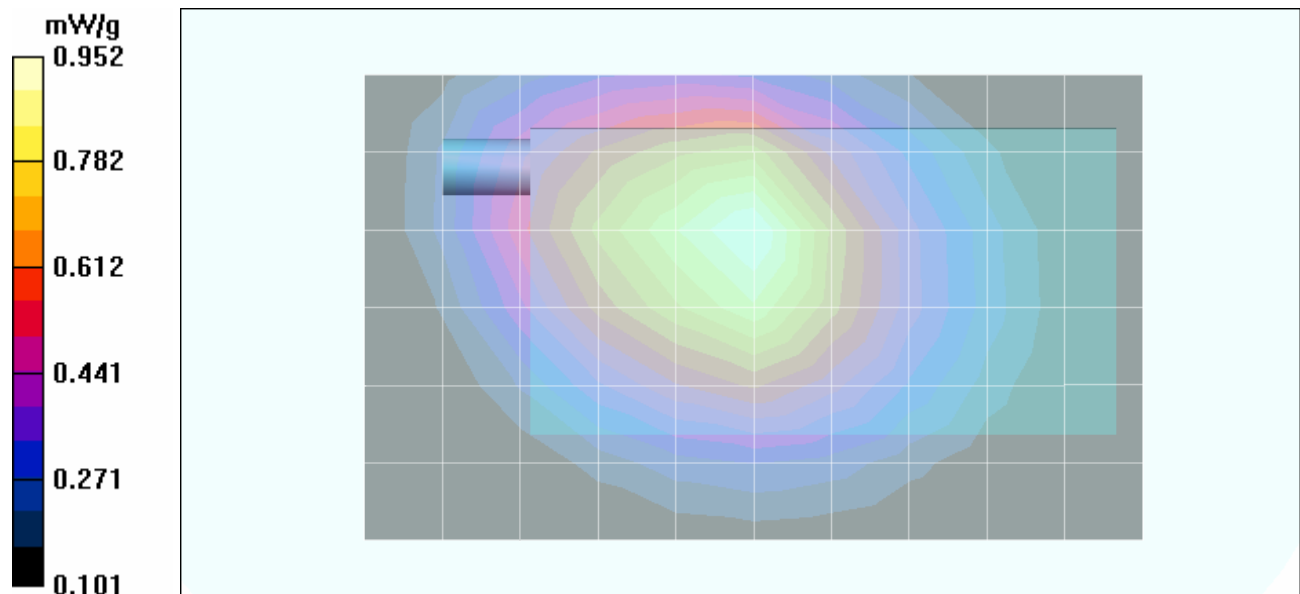

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):		1851.25-1908.75 MHz 824.70-848.31 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report S/N:	12140508F-T705-S24C		Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006		Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093	IC RSS-102 Issue 2

Z-Axis Scan

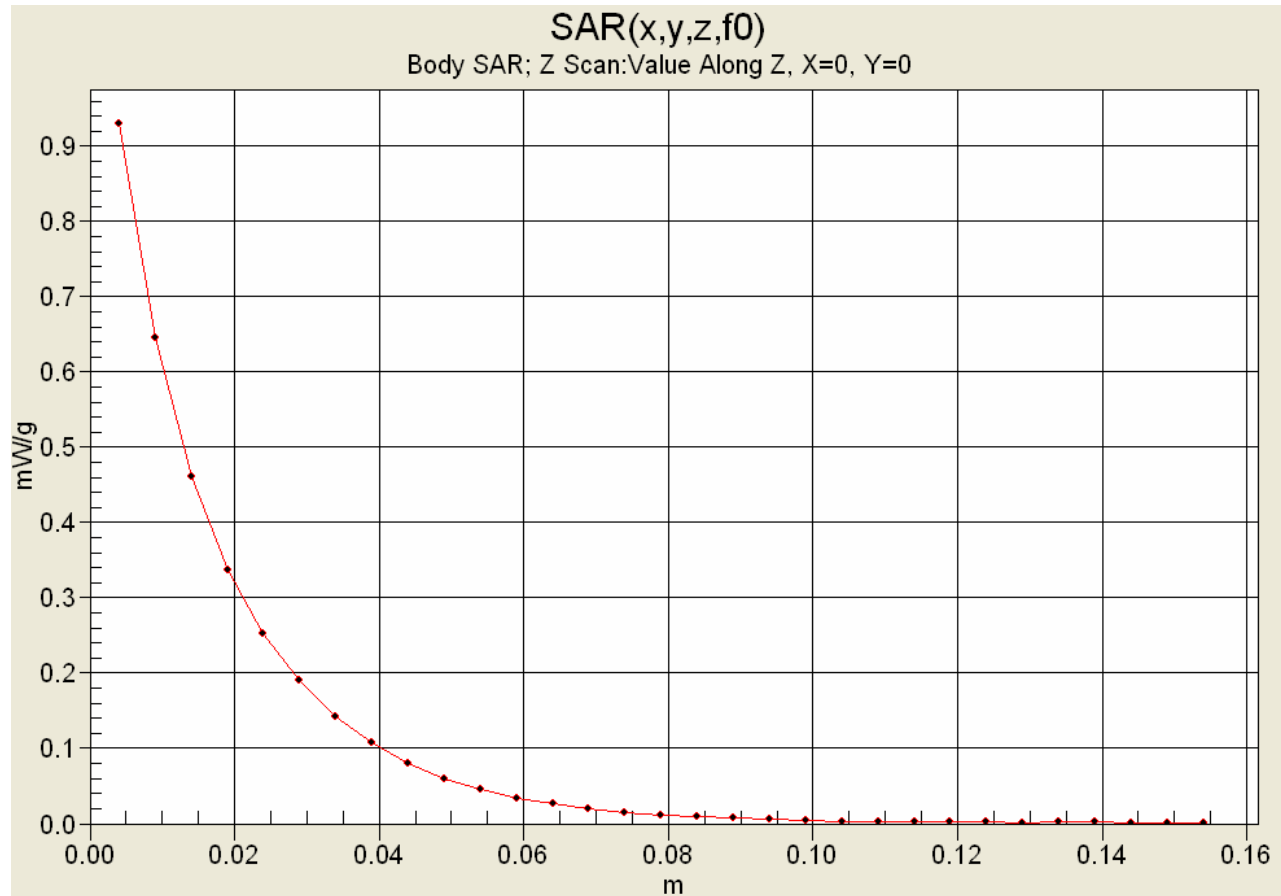

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):		1851.25-1908.75 MHz 824.70-848.31 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report S/N:	12140508F-T705-S24C	Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006	Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093 IC RSS-102 Issue 2

Date Tested: 01/23/2006

Body-Worn SAR - Cellular CDMA (EV-DO) - DUT with Side Case & Belt-Clip (Back Side of DUT) - Ch. 384 Simultaneous Transmit with Co-located Bluetooth

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Body-Worn Accessories: Leather Side Case with Belt-Clip (SKU#3256WW); Audio Accessory: Generic Ear-Microphone


Ambient Temp: 24.1 °C; Fluid Temp: 23.5 °C; Barometric Pressure: 102.2 kPa; Humidity: 30%

Communication System: Cellular CDMA
Li-ion Battery Pack (P/N: 157-10014-00)
RF Output Power: 24.1 dBm (Conducted)
Frequency: 836.52 MHz; Channel 384; Duty Cycle: 1:1
Medium: M835 ($\sigma = 0.96$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DVB - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body-Worn SAR - Cellular CDMA (EV-DO) with Bluetooth - 1.7 cm Leather Side Case & Belt-Clip Spacing - Mid Channel Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm


Body-Worn SAR - Cellular CDMA (EV-DO) with Bluetooth - 1.7 cm Leather Side Case & Belt-Clip Spacing - Mid Channel Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 28.6 V/m; Power Drift = -0.068 dB
Peak SAR (extrapolated) = 1.09 W/kg
SAR(1 g) = 0.801 mW/g; SAR(10 g) = 0.573 mW/g

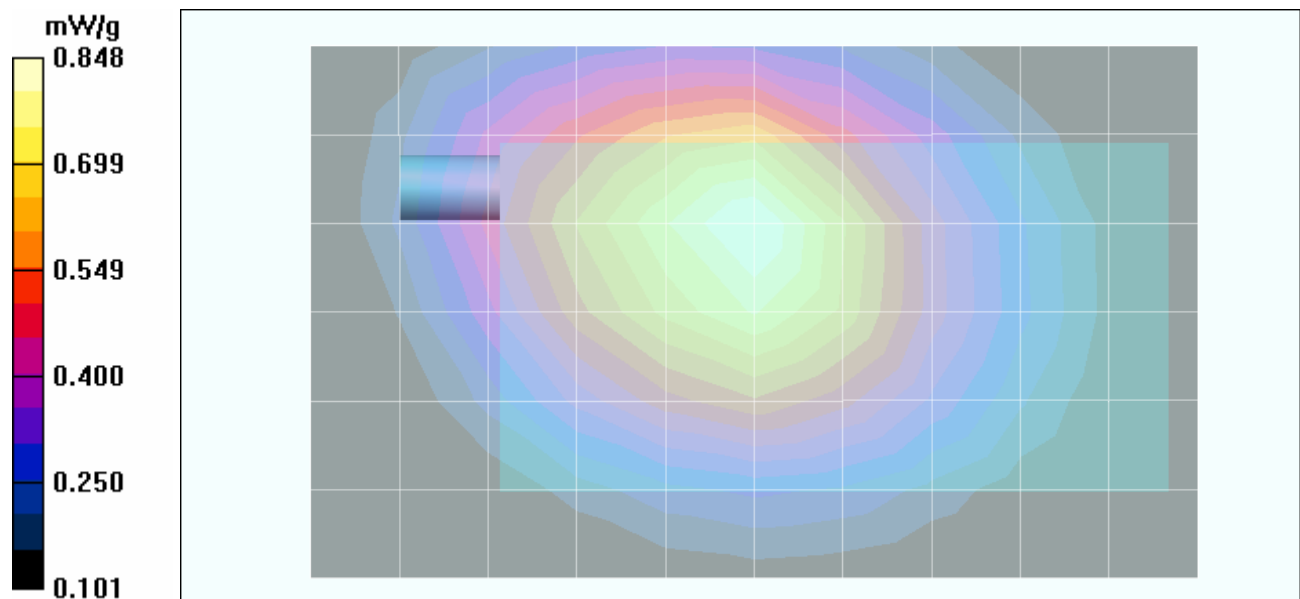

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):		1851.25-1908.75 MHz 824.70-848.31 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 67 of 108

	Test Report S/N:	12140508F-T705-S24C		Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006		Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093	IC RSS-102 Issue 2

Z-Axis Scan

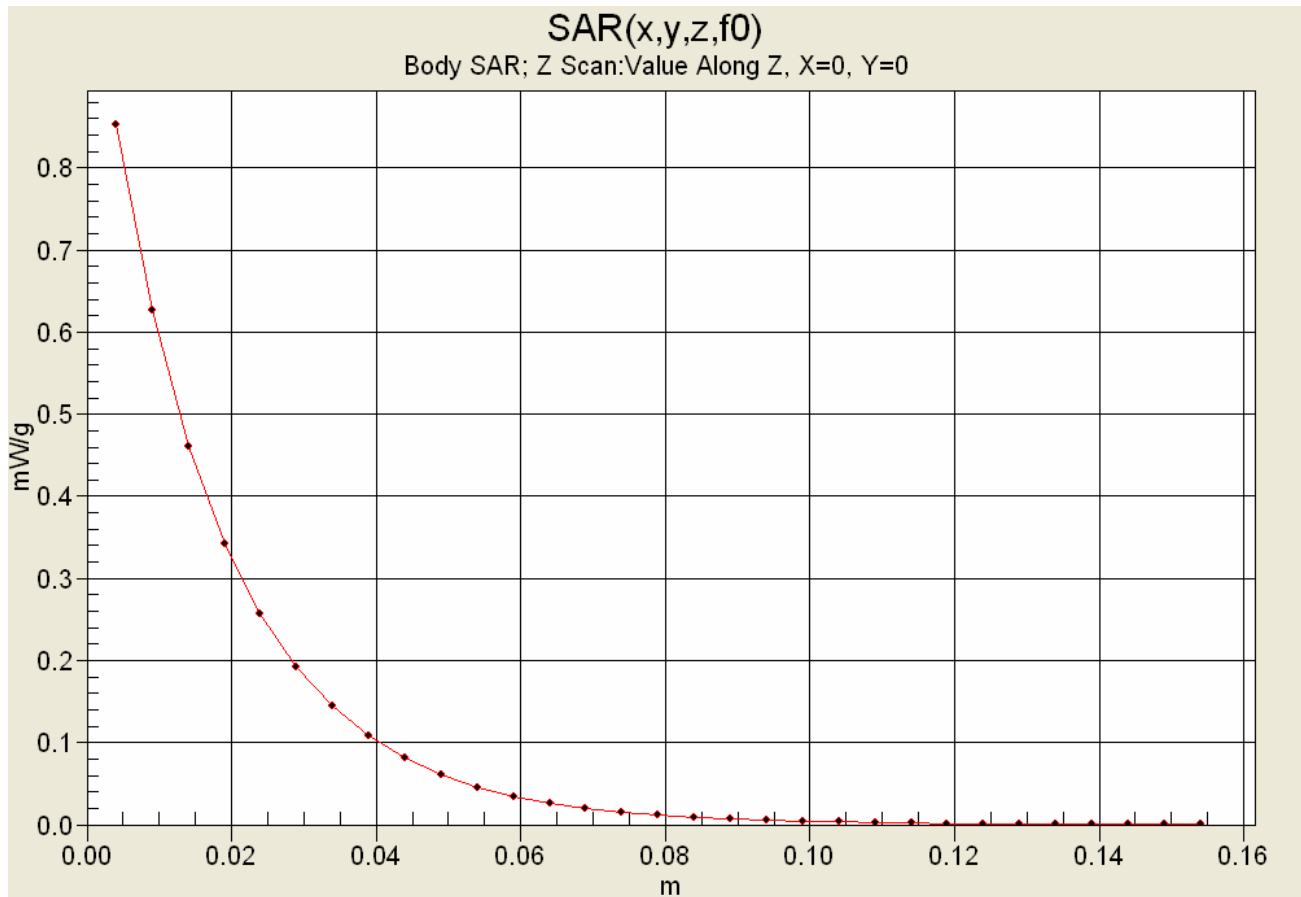

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth				Freq. Range(s):	1851.25-1908.75 MHz 824.70-848.31 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report S/N:	121405O8F-T705-S24C		Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006		Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093	IC RSS-102 Issue 2

Date Tested: 01/23/2006

Body-Worn SAR - Cellular CDMA (EV-DO) - DUT with Side Case & Belt-Clip (Back Side of DUT) - Ch. 384

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Body-Worn Accessories: Leather Side Case with Belt-Clip (SKU#3256WW); Audio Accessory: Generic Ear-Microphone

Ambient Temp: 24.1 °C; Fluid Temp: 23.5 °C; Barometric Pressure: 102.2 kPa; Humidity: 30%

Communication System: Cellular CDMA
 Li-ion Battery Pack (P/N: 157-10014-00)
 RF Output Power: 24.1 dBm (Conducted)
 Frequency: 836.52 MHz; Channel 384; Duty Cycle: 1:1
 Medium: M835 ($\sigma = 0.96$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159


Body-Worn SAR - Cellular CDMA (EV-DO) - 1.7 cm Leather Side Case & Belt-Clip Separation Distance - Mid Channel Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Body-Worn SAR - Cellular CDMA (EV-DO) - 1.7 cm Leather Side Case & Belt-Clip Separation Distance - Mid Channel Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.3 V/m; Power Drift = -0.060 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.790 mW/g; SAR(10 g) = 0.561 mW/g

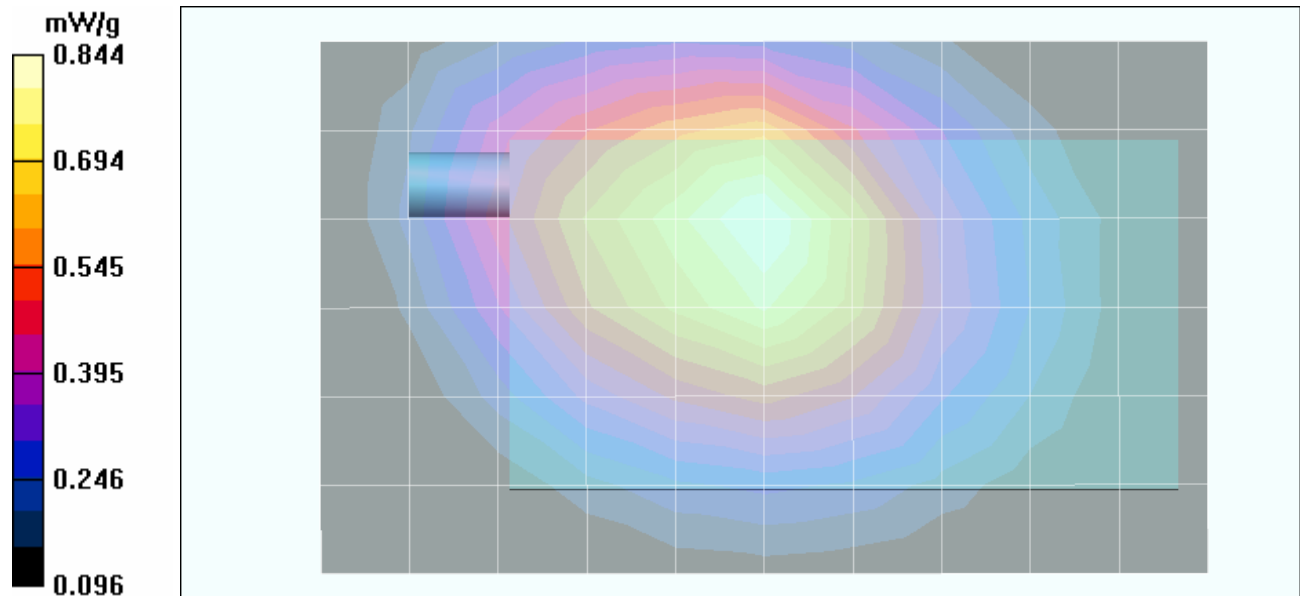

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):	1851.25-1908.75 MHz 824.70-848.31 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 69 of 108	

	Test Report S/N:	12140508F-T705-S24C		Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006		Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093	IC RSS-102 Issue 2

Date Tested: 01/24/2006

Body-Worn SAR - PCS CDMA (EV-DO) - DUT with Side Case & Belt-Clip (Back Side of DUT) - Ch. 600 Simultaneous Transmit with Co-located Bluetooth

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Body-Worn Accessories: Leather Side Case with Belt-Clip (SKU#3256WW); Audio Accessory: Generic Ear-Microphone

Ambient Temp: 25.5 °C; Fluid Temp: 23.5 °C; Barometric Pressure: 101.8 kPa; Humidity: 30%

Communication System: PCS CDMA

Li-ion Battery Pack (P/N: 157-10014-00)

RF Output Power: 24.3 dBm (Conducted)

Frequency: 1880.00 MHz; Channel 600; Duty Cycle: 1:1

Medium: M1880 ($\sigma = 1.48 \text{ mho/m}$; $\epsilon_r = 51.1$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(4.75, 4.75, 4.75); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body-Worn SAR - PCS CDMA (EV-DO) with Bluetooth - 1.7 cm Leather Side Case & Belt-Clip Spacing - Mid Channel Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm


Body-Worn SAR - PCS CDMA (EV-DO) with Bluetooth - 1.7 cm Leather Side Case & Belt-Clip Spacing - Mid Channel

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.1 V/m; Power Drift = -0.157 dB

Peak SAR (extrapolated) = 0.906 W/kg

SAR(1 g) = 0.632 mW/g; SAR(10 g) = 0.407 mW/g

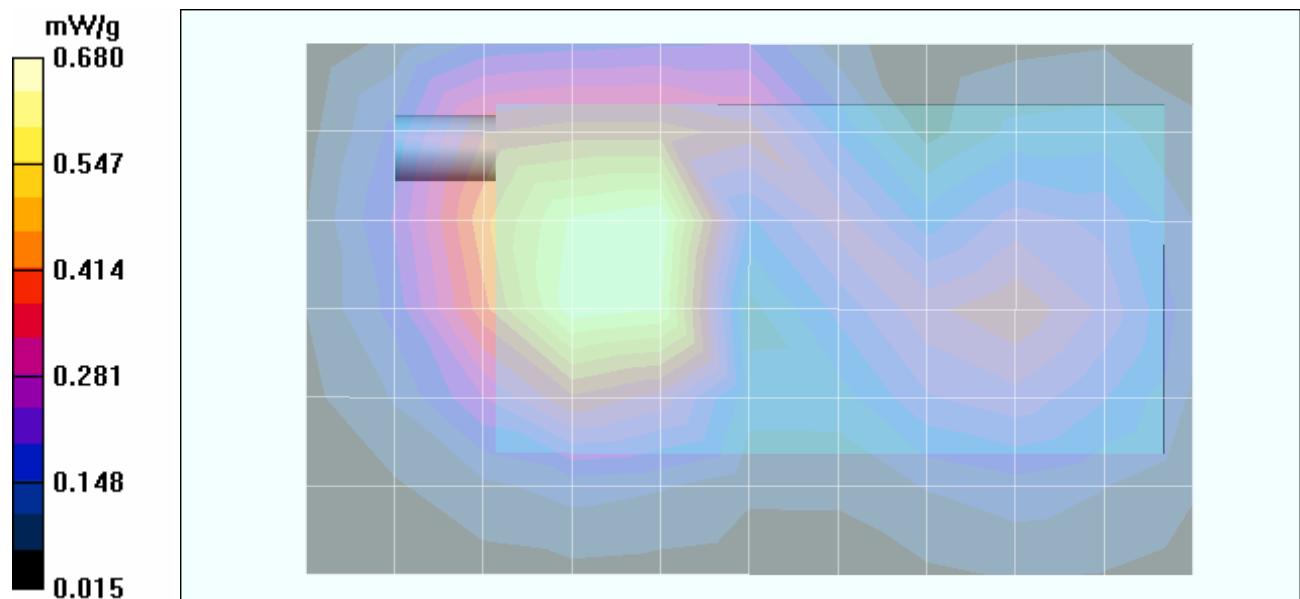

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):	1851.25-1908.75 MHz 824.70-848.31 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 70 of 108	

	Test Report S/N:	12140508F-T705-S24C	Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006	Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093 IC RSS-102 Issue 2

Date Tested: 01/24/2006

Body-Worn SAR - PCS CDMA (EV-DO) - DUT with Side Case & Belt-Clip (Back Side of DUT) - Ch. 25 Simultaneous Transmit with Co-located Bluetooth

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Body-Worn Accessories: Leather Side Case with Belt-Clip (SKU#3256WW); **Audio Accessory:** Generic Ear-Microphone

Ambient Temp: 25.5 °C; Fluid Temp: 23.5 °C; Barometric Pressure: 101.8 kPa; Humidity: 30%

Communication System: PCS CDMA

Li-ion Battery Pack (P/N: 157-10014-00)

RF Output Power: 24.1 dBm (Conducted)

Frequency: 1851.25 MHz; Channel 25; Duty Cycle: 1:1

Medium: M1880 ($\sigma = 1.48 \text{ mho/m}$; $\epsilon_r = 51.1$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(4.75, 4.75, 4.75); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body-Worn SAR - PCS CDMA (EV-DO) with Bluetooth - 1.7 cm Leather Side Case & Belt-Clip Spacing - Low Channel Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm


Body-Worn SAR - PCS CDMA (EV-DO) with Bluetooth - 1.7 cm Leather Side Case & Belt-Clip Spacing - Low Channel

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.3 V/m; Power Drift = -0.148 dB


Peak SAR (extrapolated) = 0.961 W/kg

SAR(1 g) = 0.678 mW/g; SAR(10 g) = 0.442 mW/g

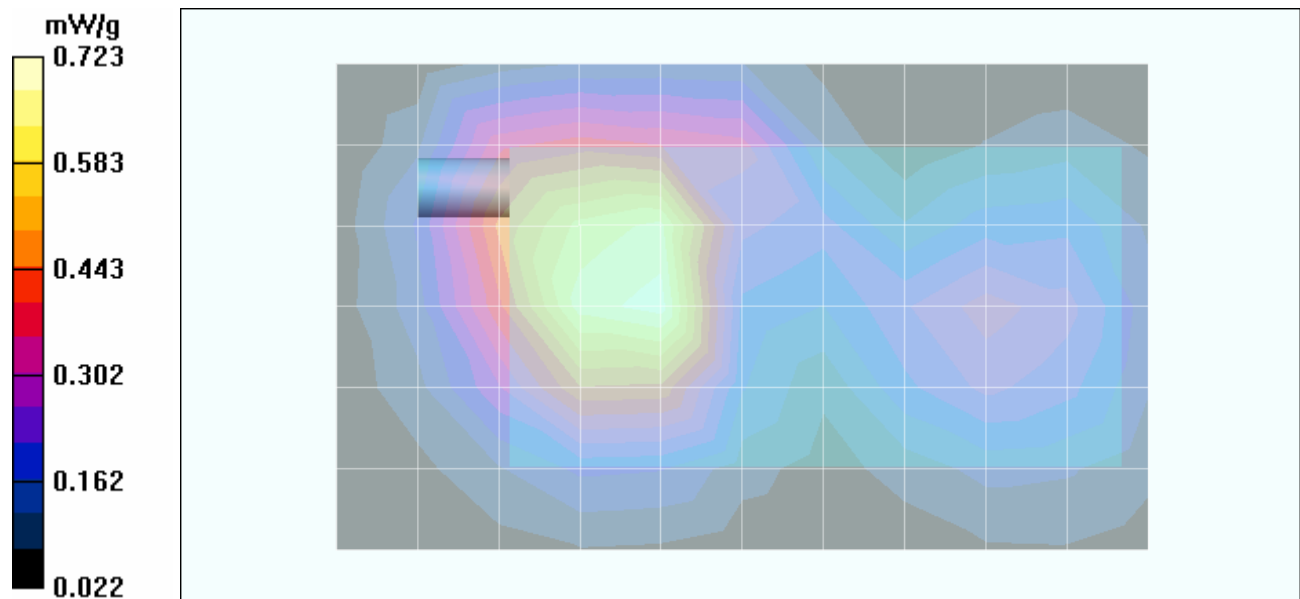

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):	1851.25-1908.75 MHz 824.70-848.31 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 71 of 108

Z-Axis Scan

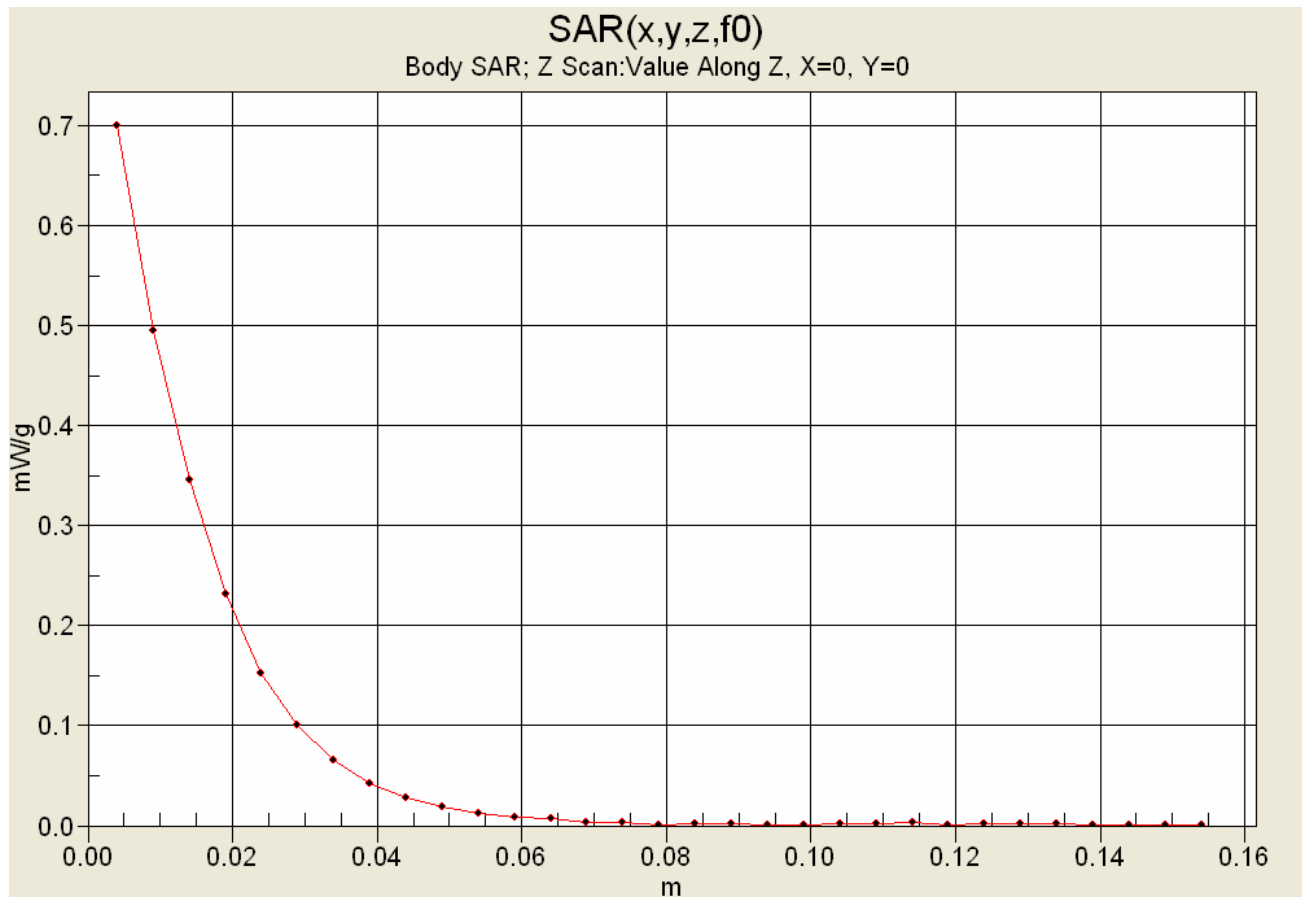

	Test Report S/N:	12140508F-T705-S24C	Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006	Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093 IC RSS-102 Issue 2

Date Tested: 01/24/2006

Body-Worn SAR - PCS CDMA (EV-DO) - DUT with Side Case & Belt-Clip (Back Side of DUT) - Ch. 1175 Simultaneous Transmit with Co-located Bluetooth

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Body-Worn Accessories: Leather Side Case with Belt-Clip (SKU#3256WW); Audio Accessory: Generic Ear-Microphone

Ambient Temp: 25.5 °C; Fluid Temp: 23.5 °C; Barometric Pressure: 101.8 kPa; Humidity: 30%

Communication System: PCS CDMA

Li-ion Battery Pack (P/N: 157-10014-00)

RF Output Power: 23.8 dBm (Conducted)

Frequency: 1908.75 MHz; Channel 1175; Duty Cycle: 1:1

Medium: M1880 ($\sigma = 1.48 \text{ mho/m}$; $\epsilon_r = 51.1$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(4.75, 4.75, 4.75); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body-Worn SAR - PCS CDMA (EV-DO) with Bluetooth - 1.7 cm Leather Side Case & Belt-Clip Spacing - High Channel Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm


Body-Worn SAR - PCS CDMA (EV-DO) with Bluetooth - 1.7 cm Leather Side Case & Belt-Clip Spacing - High Channel

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.4 V/m; Power Drift = -0.151 dB

Peak SAR (extrapolated) = 0.663 W/kg

SAR(1 g) = 0.453 mW/g; SAR(10 g) = 0.288 mW/g

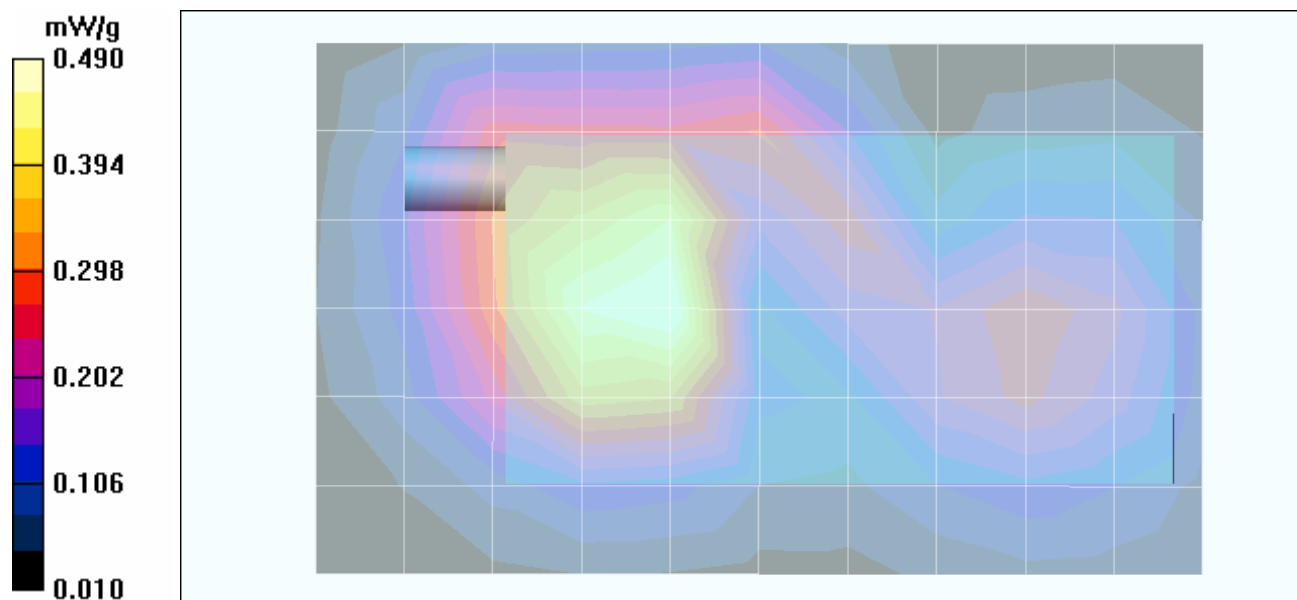

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):		1851.25-1908.75 MHz 824.70-848.31 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 73 of 108

	Test Report S/N:	12140508F-T705-S24C	Report Issue Date:	February 01, 2006
	Test Date(s):	Dec.15-16, 19-20, 2005 & Jan. 23-24, 2006	Report Issue No.:	S705C-020106-R0
	Test Type(s):	RF Exposure	SAR Evaluation	FCC 47 CFR 2.1093 IC RSS-102 Issue 2

Date Tested: 01/24/2006

Body-Worn SAR - PCS CDMA (EV-DO) - DUT with Side Case & Belt-Clip (Back Side of DUT) - Ch. 600

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA-2000 Phone with Bluetooth; Serial: VC1CUBX50184

Body-Worn Accessories: Leather Side Case with Belt-Clip (SKU#3256WW); Audio Accessory: Generic Ear-Microphone

Ambient Temp: 25.5 °C; Fluid Temp: 23.5 °C; Barometric Pressure: 101.8 kPa; Humidity: 30%

Communication System: PCS CDMA

Li-ion Battery Pack (P/N: 157-10014-00)

RF Output Power: 24.3 dBm (Conducted)

Frequency: 1880.00 MHz; Channel 600; Duty Cycle: 1:1

Medium: M1880 ($\sigma = 1.48$ mho/m; $\epsilon_r = 51.1$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(4.75, 4.75, 4.75); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body-Worn SAR - PCS CDMA (EV-DO) - 1.7 cm Leather Side Case & Belt-Clip Separation Distance - Mid Channel Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm


Body-Worn SAR - PCS CDMA (EV-DO) - 1.7 cm Leather Side Case & Belt-Clip Separation Distance - Mid Channel

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.3 V/m; Power Drift = -0.170 dB

Peak SAR (extrapolated) = 0.821 W/kg

SAR(1 g) = 0.572 mW/g; SAR(10 g) = 0.369 mW/g

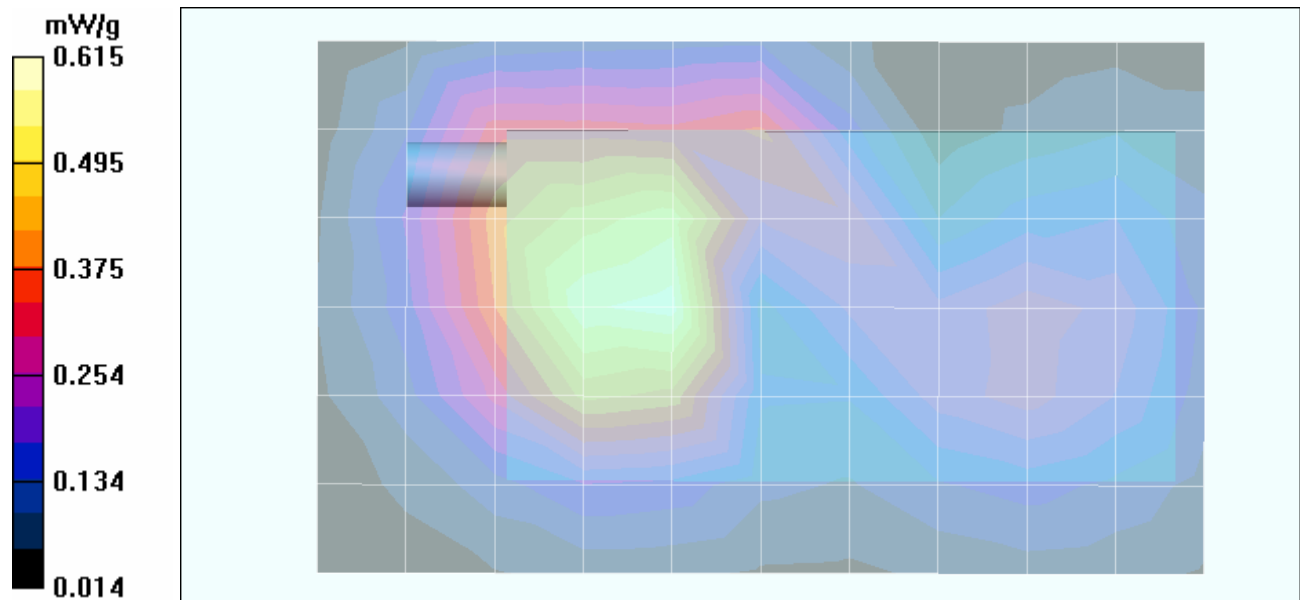

Applicant:	Palm, Inc.	FCC ID:	O8F93001	IC ID:	3905A-93001	Model:	Treo XXX	
DUT Type:	Portable Dual-Band CDMA-2000 Phone with Bluetooth			Freq. Range(s):	1851.25-1908.75 MHz 824.70-848.31 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 74 of 108