


	Test Report Serial No.: 08220508F-T664-S24CW		Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Z-Axis Scan

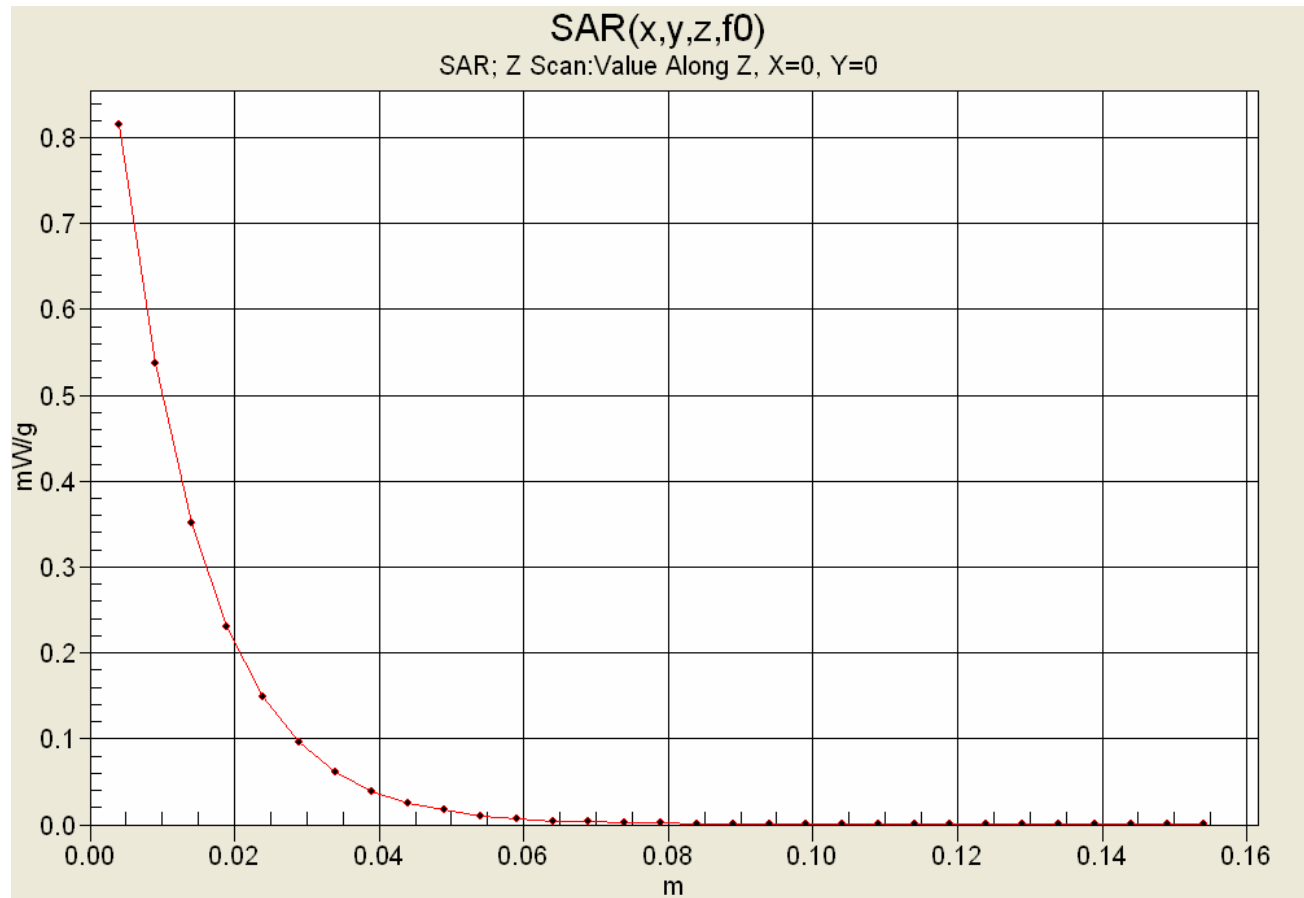

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						55 of 132

	Test Report Serial No.: 08220508F-T664-S24CW		Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 08/23/2005 (PCS CDMA)
Date Tested: 05/26/2005 (802.11b SDIO)

PCS CDMA Head SAR - 802.11b SDIO Head SAR - Multi-Band Grid Summation

Head SAR - Left Ear - Tilt Position (15°)

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PWVC0835H0AX

PCS CDMA: Ambient Temp: 25.3 °C; Fluid Temp: 23.3 °C; Barometric Pressure: 101.5 kPa; Humidity: 30%

802.11b WLAN: Ambient Temp: 24.8 °C; Fluid Temp: 23.3 °C; Barometric Pressure: 102.9 kPa; Humidity: 31%

Li-ion Battery Pack (P/N: 157-10014-00)

Communication System: PCS CDMA

Frequency: 1851.25 MHz Channel 25; Duty Cycle: 1:1

RF Output Power: 23.8 dBm (Conducted) PCS CDMA

Medium: HSL1880 ($\sigma = 1.40$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³)

Communication System: DSSS WLAN

Frequency: 2412; Channel 1; Duty Cycle: 1:1

RF Output Power: 15.2 dBm (Conducted) 802.11b WLAN

Medium: HSL2450 ($\sigma = 1.85$ mho/m, $\epsilon_r = 37.5$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF (5.18, 5.18, 5.18) & (4.56, 4.56, 4.56); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005


- Electronics: DAE3 Sn353; Calibrated: 06/07/2004

- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Multi-Band Grid Summation:

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.597 mW/g

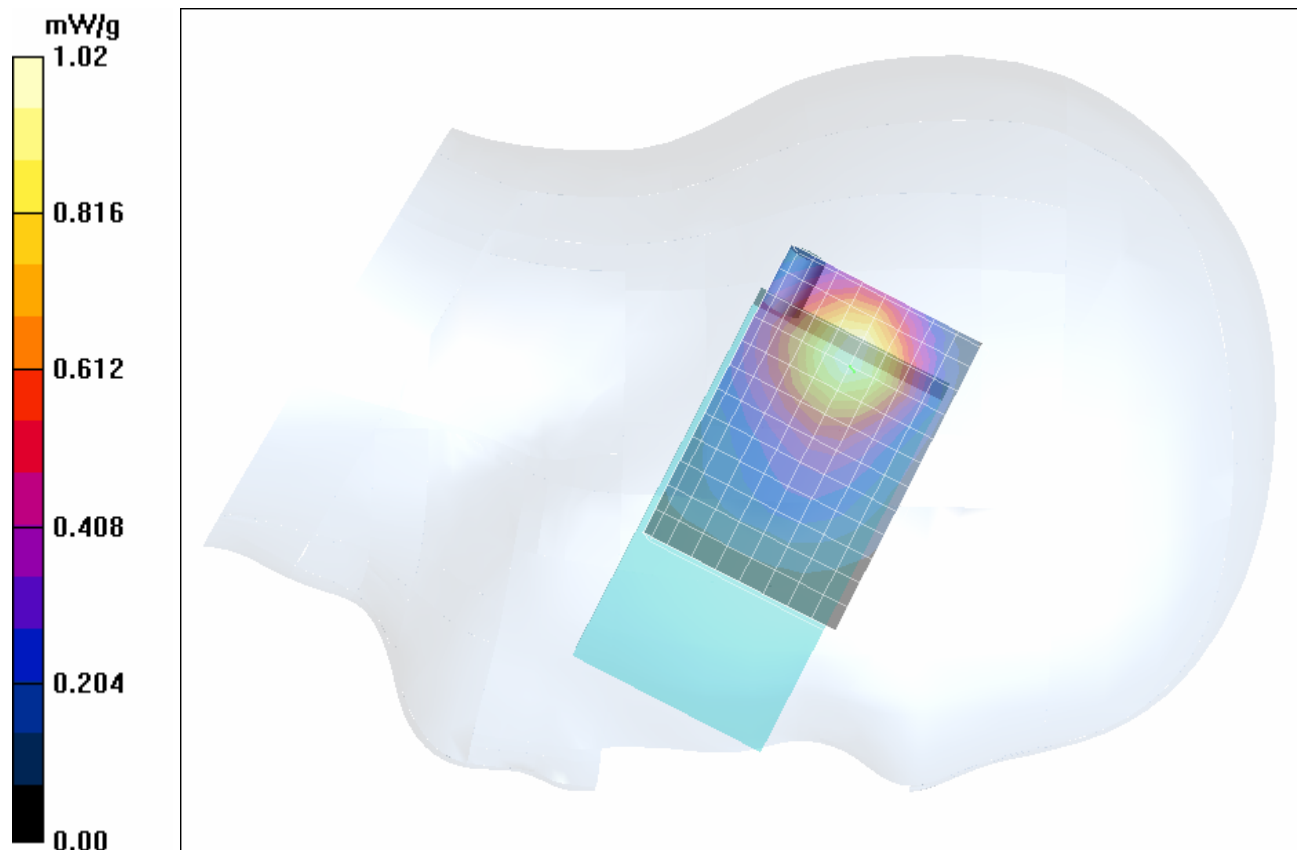

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report Serial No.: 08220508F-T664-S24CW		Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 08/26/2005

Body SAR - 802.11b WLAN SDIO - Phone with Fitted Pouch (Back Side of DUT) - Channel 6 - Area/Zoom Scan

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PWVC0835H0AX

Body-Worn Accessories: Fitted Pouch with Swivel Belt-Clip (SKU#3179WW); Audio Accessory: Generic Ear-Microphone

Ambient Temp: 25.3 °C; Fluid Temp: 23.9 °C; Barometric Pressure: 101.5 kPa; Humidity: 31%

Communication System: DSSS WLAN
RF Output Power: 14.7 dBm (Conducted)
Frequency: 2437 MHz; Channel 6; Duty Cycle: 1:1
Power: Li-ion Battery Pack in Treo Phone (P/N: 157-10014-00)
Medium: M2450 ($\sigma = 1.92 \text{ mho/m}$; $\epsilon_r = 50.7$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(4.3, 4.3, 4.3); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146


Body-Worn SAR - 802.11b SDIO in Treo XXX Phone - 2.5 cm Pouch & Swivel Belt-Clip Separation Distance - Mid Channel Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Body-Worn SAR - 802.11b SDIO in Treo XXX Phone - 2.5 cm Pouch & Swivel Belt-Clip Separation Distance - Mid Channel Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.60 V/m; Power Drift = -0.251 dB

Peak SAR (extrapolated) = 0.057 W/kg

SAR(1 g) = 0.0305 mW/g; SAR(10 g) = 0.018 mW/g

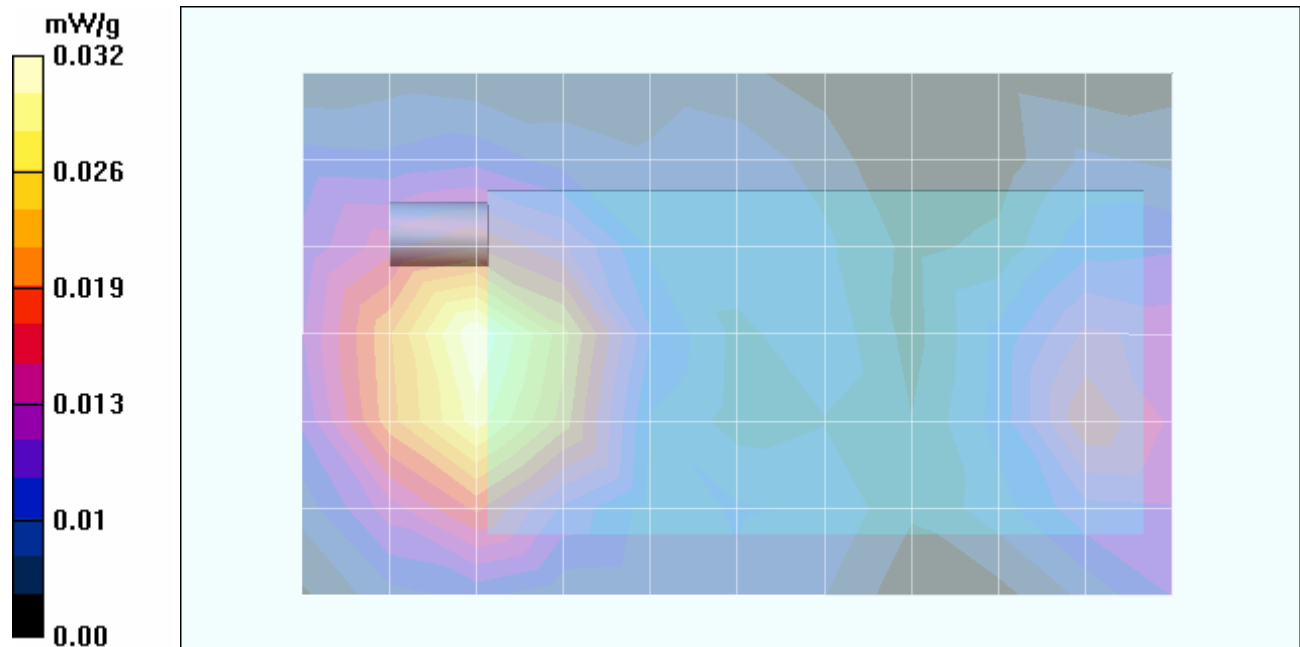

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						57 of 132

	Test Report Serial No.: 08220508F-T664-S24CW		Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 08/26/2005

Body SAR - 802.11b WLAN SDIO - 1.5 cm Air-Gap Spacing - Back Side of DUT - Channel 6 - Area/Zoom Scan

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PWVC0835H0AX

Body-Worn Accessories: None (1.5 cm Air-Gap Spacing); **Audio Accessory:** Generic Ear-Microphone

Ambient Temp: 25.3 °C; Fluid Temp: 23.9 °C; Barometric Pressure: 101.5 kPa; Humidity: 31%


Communication System: DSSS WLAN
 RF Output Power: 14.7 dBm (Conducted)
 Frequency: 2437 MHz; Channel 6; Duty Cycle: 1:1
 Power: Li-ion Battery Pack in Treo Phone (P/N: 157-10014-00)
 Medium: M2450 ($\sigma = 1.92 \text{ mho/m}$; $\epsilon_r = 50.7$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(4.3, 4.3, 4.3); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn SAR - 802.11b SDIO in Treo XXX Phone - 1.5 cm Air-Gap Separation Distance from Back of DUT - Mid Channel Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Body-Worn SAR - 802.11b SDIO in Treo XXX Phone - 1.5 cm Air-Gap Separation Distance from Back of DUT - Mid Channel Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 3.59 V/m; Power Drift = 0.255 dB
 Peak SAR (extrapolated) = 0.137 W/kg
SAR(1 g) = 0.0685 mW/g; SAR(10 g) = 0.038 mW/g

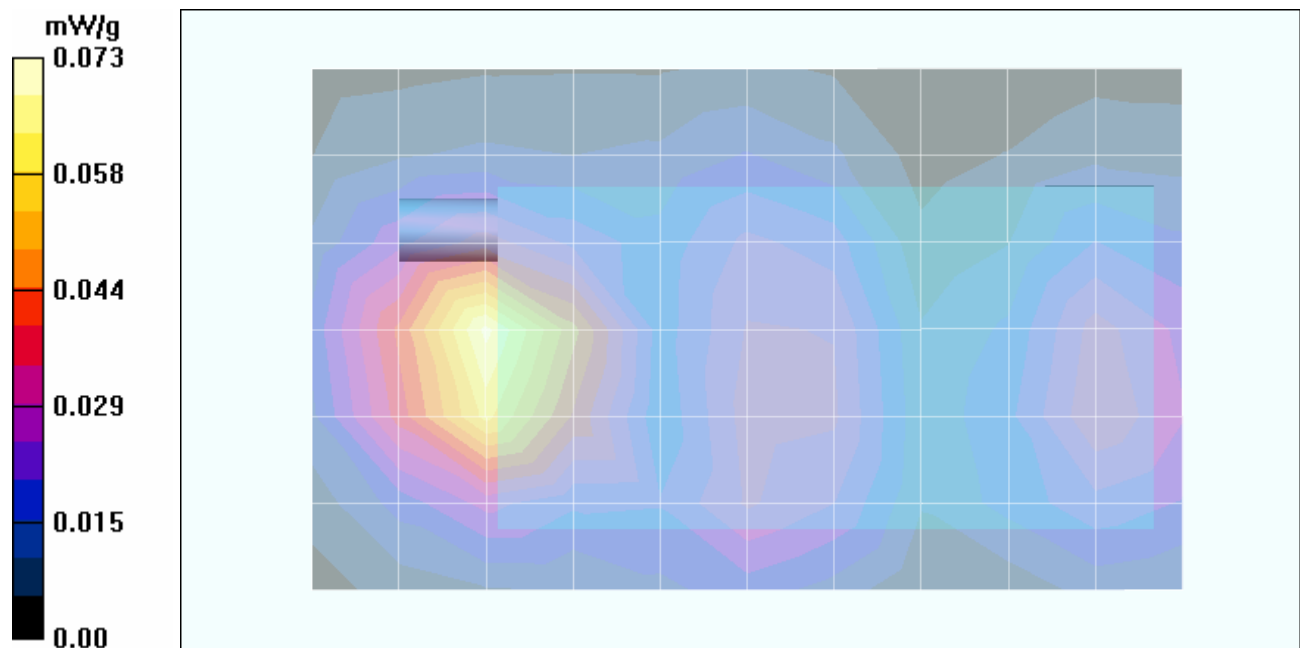

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report Serial No.: 08220508F-T664-S24CW		Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102



Z-Axis Scan

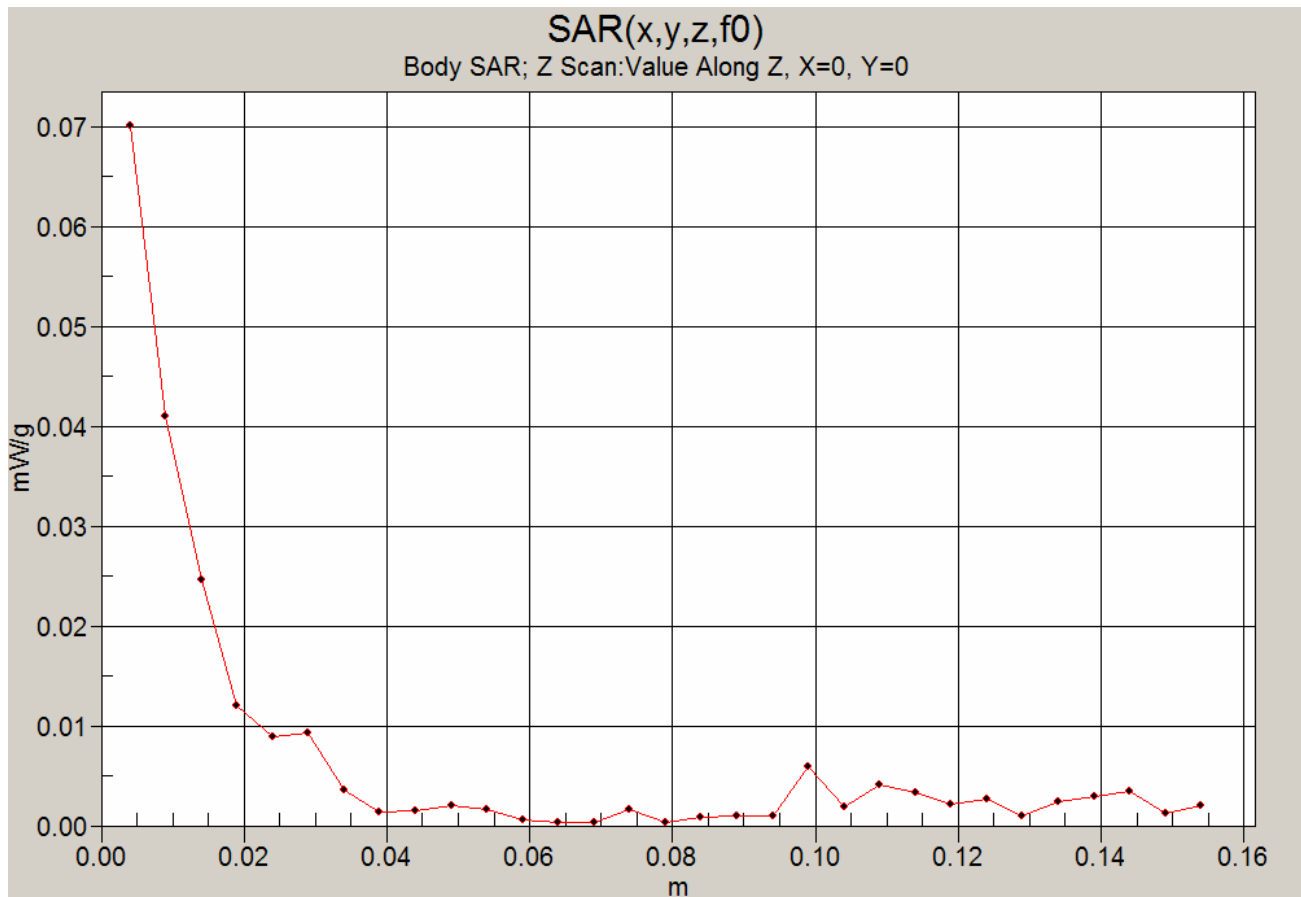

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						59 of 132

	Test Report Serial No.: 08220508F-T664-S24CW		Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Fluid Depth ($\geq 15\text{cm}$)

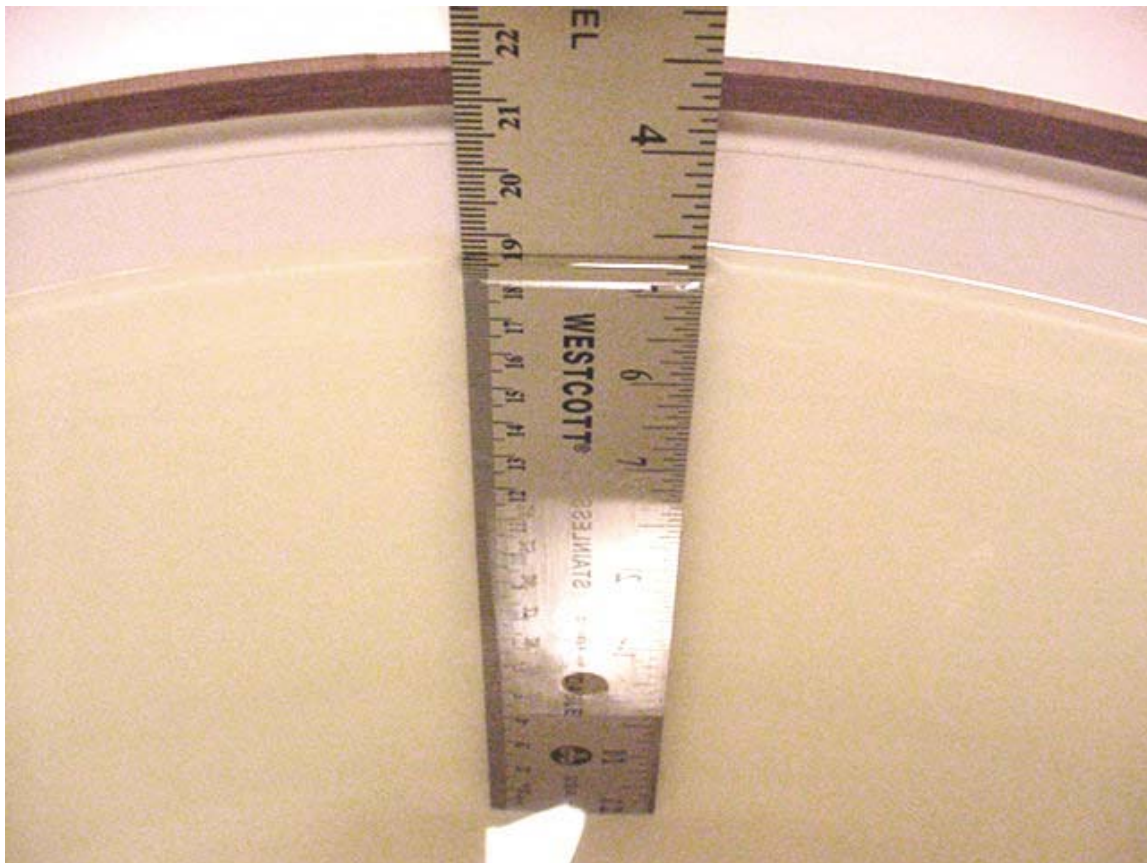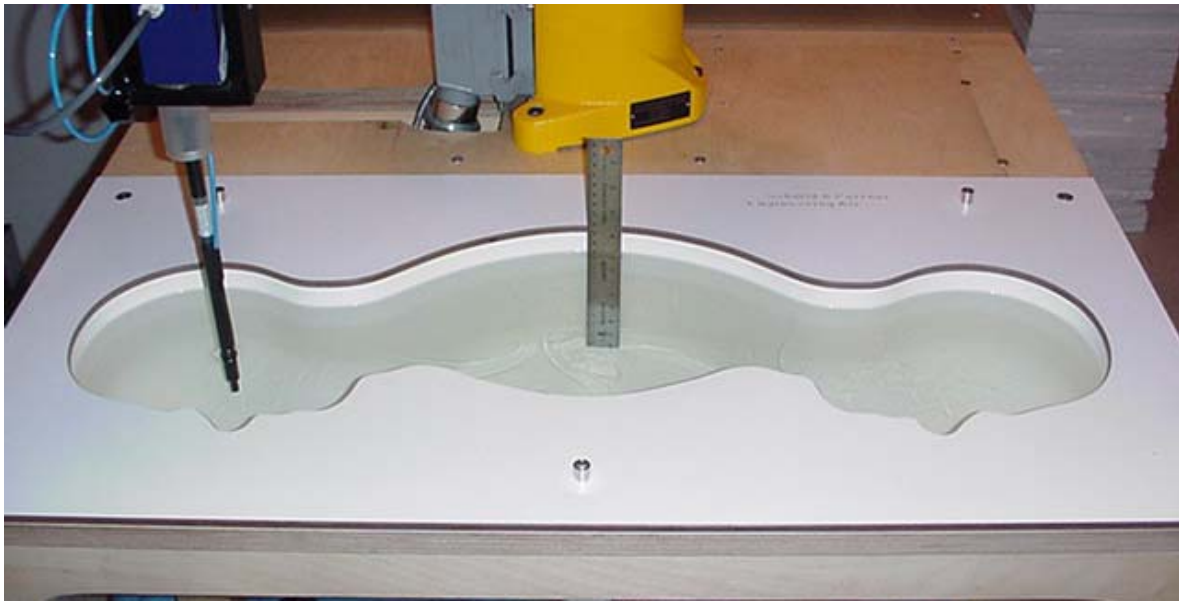

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						60 of 132

	Test Report Serial No.: 08220508F-T664-S24CW		Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 08/26/2005

Body SAR - 802.11b WLAN SDIO - 1.5 cm Air-Gap Spacing - Front Side of DUT - Channel 6 - Area/Zoom Scan

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PWVC0835H0AX

Body-Worn Accessories: None (1.5 cm Air-Gap Spacing); Audio Accessory: Generic Ear-Microphone

Ambient Temp: 25.3 °C; Fluid Temp: 23.9 °C; Barometric Pressure: 101.5 kPa; Humidity: 31%

Communication System: DSSS WLAN

RF Output Power: 14.7 dBm (Conducted)

Frequency: 2437 MHz; Channel 6; Duty Cycle: 1:1

Power: Li-ion Battery Pack in Treo Phone (P/N: 157-10014-00)

Medium: M2450 ($\sigma = 1.92 \text{ mho/m}$; $\epsilon_r = 50.7$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(4.3, 4.3, 4.3); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146


Body-Worn SAR - 802.11b SDIO in Treo XXX Phone - 1.5 cm Air-Gap Separation Distance from Front of DUT - Mid Channel Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Body-Worn SAR - 802.11b SDIO in Treo XXX Phone - 1.5 cm Air-Gap Separation Distance from Front of DUT - Mid Channel Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.75 V/m; Power Drift = 0.0123 dB

Peak SAR (extrapolated) = 0.092 W/kg

SAR(1 g) = 0.0429 mW/g; SAR(10 g) = 0.024 mW/g

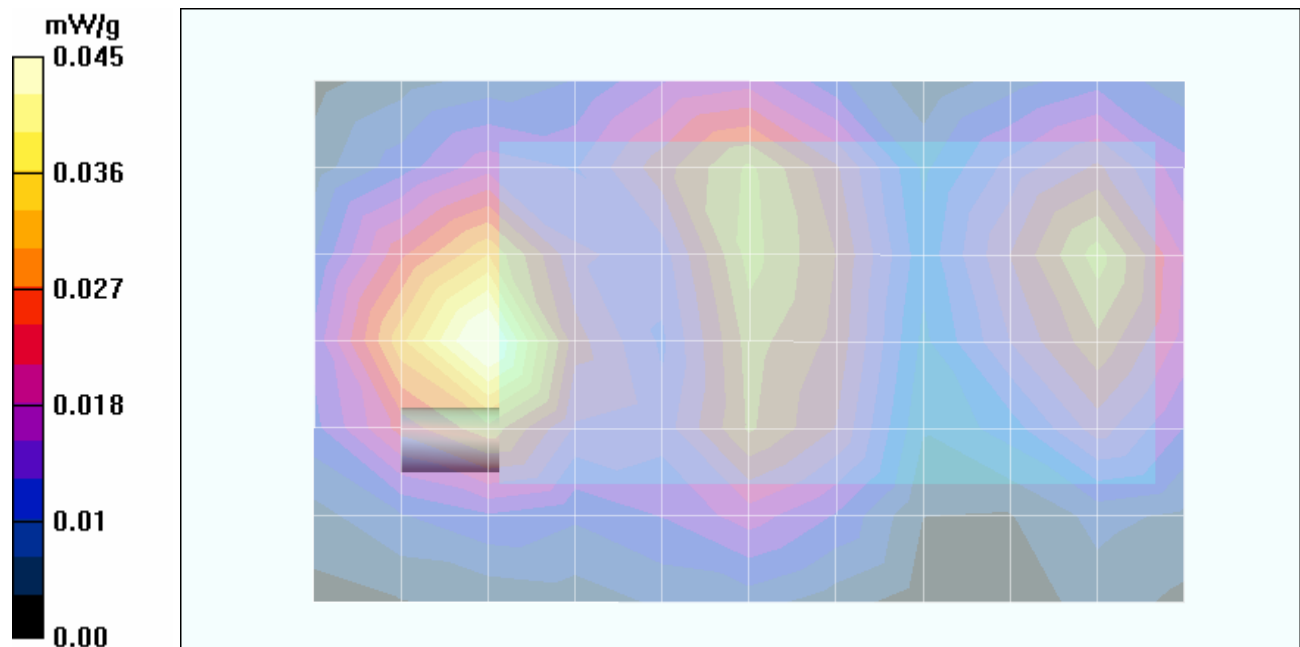

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report Serial No.: 08220508F-T664-S24CW		Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 08/30/2005

Body SAR - 802.11b WLAN SDIO - 1.5 cm Air-Gap Spacing - Back Side of DUT - Channel 1 - Area/Zoom Scan

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PWVC0835H0AX

Body-Worn Accessories: None (1.5 cm Air-Gap Spacing); Audio Accessory: Generic Ear-Microphone

Ambient Temp: 25.0 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 102.2 kPa; Humidity: 30%

Communication System: DSSS WLAN

RF Output Power: 15.2 dBm (Conducted)

Frequency: 2412 MHz; Channel 1; Duty Cycle: 1:1

Power: Li-ion Battery Pack in Treo Phone (P/N: 157-10014-00)

Medium: M2450 ($\sigma = 2.01$ mho/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(4.3, 4.3, 4.3); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146


Body-Worn SAR - 802.11b SDIO in Treo XXX Phone - 1.5 cm Air-Gap Separation Distance from Back of DUT - Low Channel Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Body-Worn SAR - 802.11b SDIO in Treo XXX Phone - 1.5 cm Air-Gap Separation Distance from Back of DUT - Low Channel Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.78 V/m; Power Drift = -0.0463 dB

Peak SAR (extrapolated) = 0.109 W/kg

SAR(1 g) = 0.0549 mW/g; SAR(10 g) = 0.031 mW/g

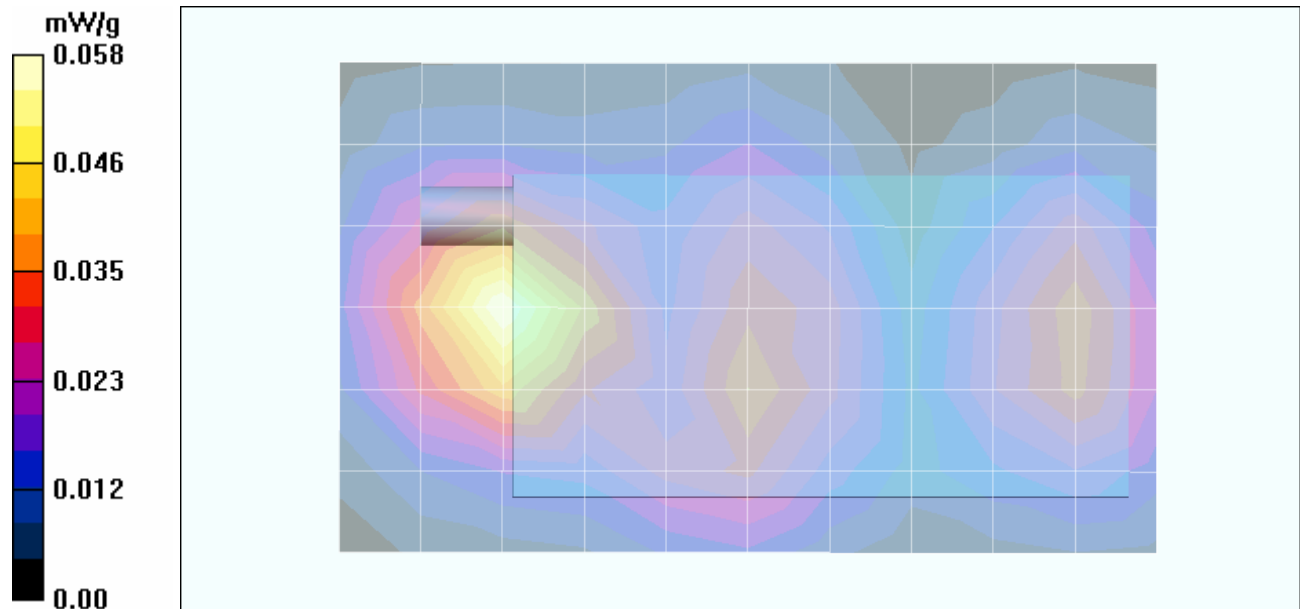

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report Serial No.: 08220508F-T664-S24CW		Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 08/30/2005

Body SAR - 802.11b WLAN SDIO - 1.5 cm Air-Gap Spacing - Back Side of DUT - Channel 6 - Volume Scan

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PWVC0835H0AX

Body-Worn Accessories: None (1.5 cm Air-Gap Spacing); Audio Accessory: Generic Ear-Microphone

Ambient Temp: 25.0 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 102.2 kPa; Humidity: 30%

Communication System: DSSS WLAN

RF Output Power: 14.7 dBm (Conducted)

Frequency: 2437 MHz; Channel 6; Duty Cycle: 1:1

Power: Li-ion Battery Pack in Treo Phone (P/N: 157-10014-00)

Medium: M2450 ($\sigma = 2.01$ mho/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(4.3, 4.3, 4.3); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146


Body-Worn SAR - 802.11b SDIO in Treo XXX Phone - 1.5 cm Air-Gap Separation Distance from Back of DUT - Mid Channel Volume Scan (9x21x7): Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 3.69 V/m; Power Drift = -0.296 dB

Peak SAR (extrapolated) = 0.129 W/kg

SAR(1 g) = 0.0580 mW/g; SAR(10 g) = 0.032 mW/g

Total Absorbed Power = 0.00272282 W

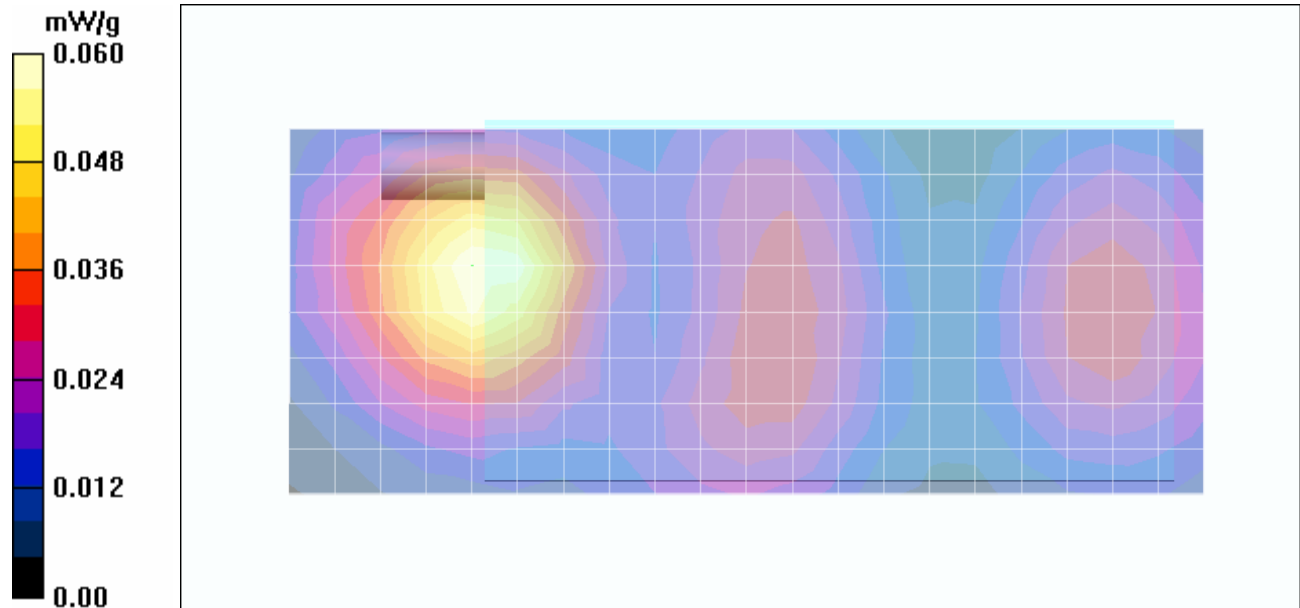

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report Serial No.: 08220508F-T664-S24CW		Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 08/30/2005

Body SAR - 802.11b WLAN SDIO - 1.5 cm Air-Gap Spacing - Back Side of DUT - Channel 6 - Area/Zoom Scan Simultaneous Transmit with Co-located Bluetooth

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PWVC0835H0AX

Body-Worn Accessories: None (1.5 cm Air-Gap Spacing); Audio Accessory: Generic Ear-Microphone


Ambient Temp: 25.0 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 102.2 kPa; Humidity: 30%

Communication System: DSSS WLAN
RF Output Power: 14.7 dBm (Conducted)
Frequency: 2437 MHz; Channel 6; Duty Cycle: 1:1
Communication System: FHSS (Bluetooth)
RF Output Power: 0 dBm (Peak Conducted)
Power: Li-ion Battery Pack in Treo Phone (P/N: 157-10014-00)
Medium: M2450 ($\sigma = 2.01$ mho/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(4.3, 4.3, 4.3); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

**Body-Worn SAR - 802.11b SDIO IN Treo XXX Phone with Bluetooth - 1.5 cm Air-Gap Separation Distance from Back of DUT
Mid Channel/Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

**Body-Worn SAR - 802.11b SDIO IN Treo XXX Phone with Bluetooth - 1.5 cm Air-Gap Separation Distance from Back of DUT
Mid Channel/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.95 V/m; Power Drift = -0.221 dB
Peak SAR (extrapolated) = 0.131 W/kg
SAR(1 g) = 0.0609 mW/g; SAR(10 g) = 0.033 mW/g

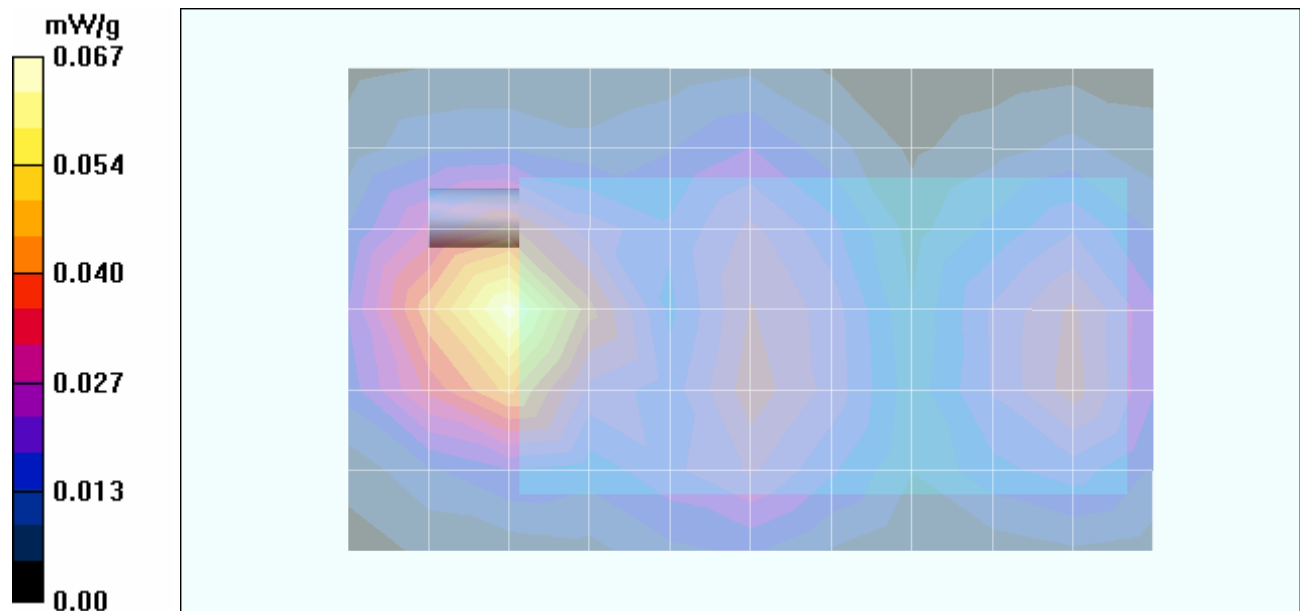

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report Serial No.: 08220508F-T664-S24CW		Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 08/30/2005

Body SAR - 802.11b WLAN SDIO - 1.5 cm Air-Gap Spacing - Back Side of DUT - Channel 6 - Volume Scan Simultaneous Transmit with Co-located Bluetooth

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PWVC0835H0AX


Body-Worn Accessories: None (1.5 cm Air-Gap Spacing); Audio Accessory: Generic Ear-Microphone

Ambient Temp: 25.0 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 102.2 kPa; Humidity: 30%

Communication System: DSSS WLAN
RF Output Power: 14.7 dBm (Conducted)
Frequency: 2437 MHz; Channel 6; Duty Cycle: 1:1
Communication System: FHSS (Bluetooth)
RF Output Power: 0 dBm (Peak Conducted)
Power: Li-ion Battery Pack in Treo Phone (P/N: 157-10014-00)
Medium: M2450 ($\sigma = 2.01$ mho/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(4.3, 4.3, 4.3); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn SAR - 802.11b SDIO IN Treo XXX Phone with Bluetooth - 1.5 cm Air-Gap Separation Distance from Back of DUT
Mid Channel/Volume Scan (9x21x7): Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 3.87 V/m; Power Drift = 0.115 dB
Peak SAR (extrapolated) = 0.200 W/kg
SAR(1 g) = 0.0610 mW/g; SAR(10 g) = 0.033 mW/g
Total Absorbed Power = 0.00299191 W

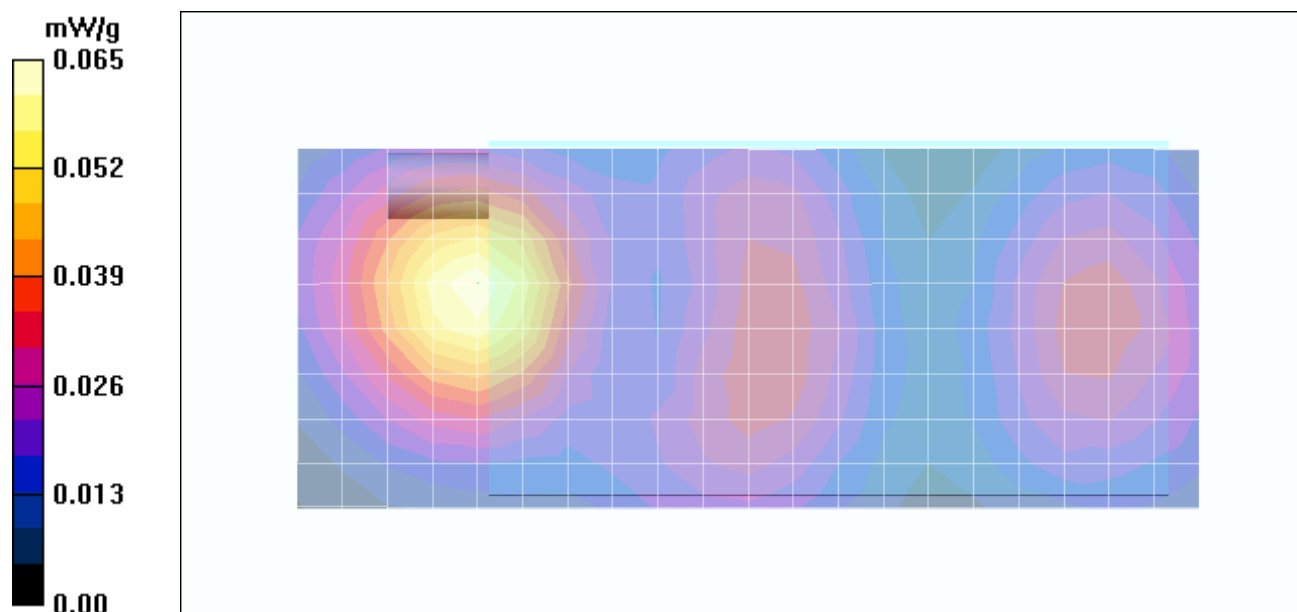

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

Z-Axis Scan

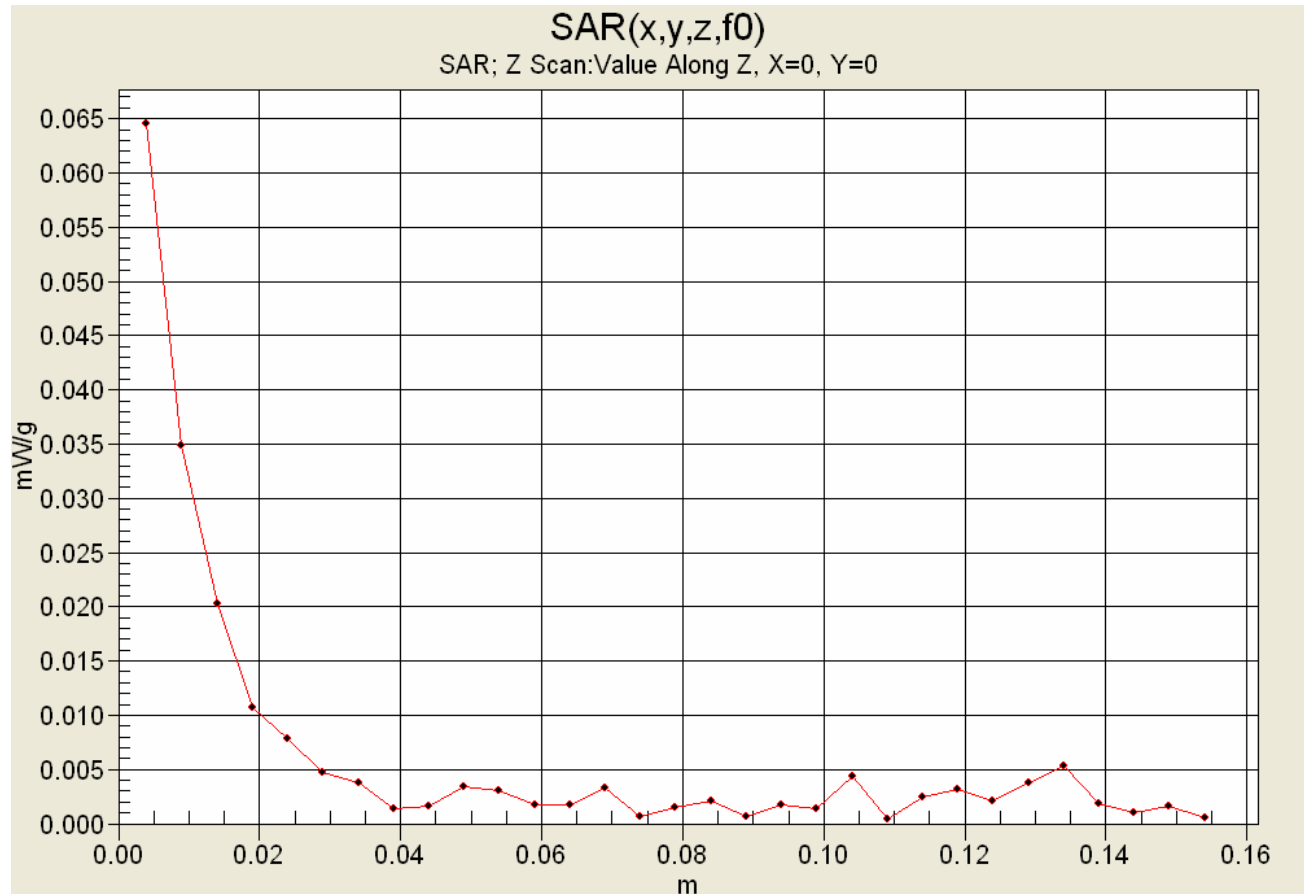

	Test Report Serial No.:	08220508F-T664-S24CW	Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 08/30/2005

Body SAR - 802.11b WLAN SDIO - 1.5 cm Air-Gap Spacing - Back Side of DUT - Channel 11 - Area/Zoom Scan

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PWVC0835H0AX

Body-Worn Accessories: None (1.5 cm Air-Gap Spacing); Audio Accessory: Generic Ear-Microphone

Ambient Temp: 25.0 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 102.2 kPa; Humidity: 30%

Communication System: DSSS WLAN

RF Output Power: 14.2 dBm (Conducted)

Frequency: 2462 MHz; Channel 11; Duty Cycle: 1:1

Power: Li-ion Battery Pack in Treo Phone (P/N: 157-10014-00)

Medium: M2450 ($\sigma = 2.01$ mho/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(4.3, 4.3, 4.3); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146


Body-Worn SAR - 802.11b SDIO IN Treo XXX Phone - 1.5 cm Air-Gap Separation Distance from Back of DUT - High Channel Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Body-Worn SAR - 802.11b SDIO IN Treo XXX Phone - 1.5 cm Air-Gap Separation Distance from Back of DUT - High Channel Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.62 V/m; Power Drift = 0.229 dB

Peak SAR (extrapolated) = 0.063 W/kg

SAR(1 g) = 0.0325 mW/g; SAR(10 g) = 0.018 mW/g

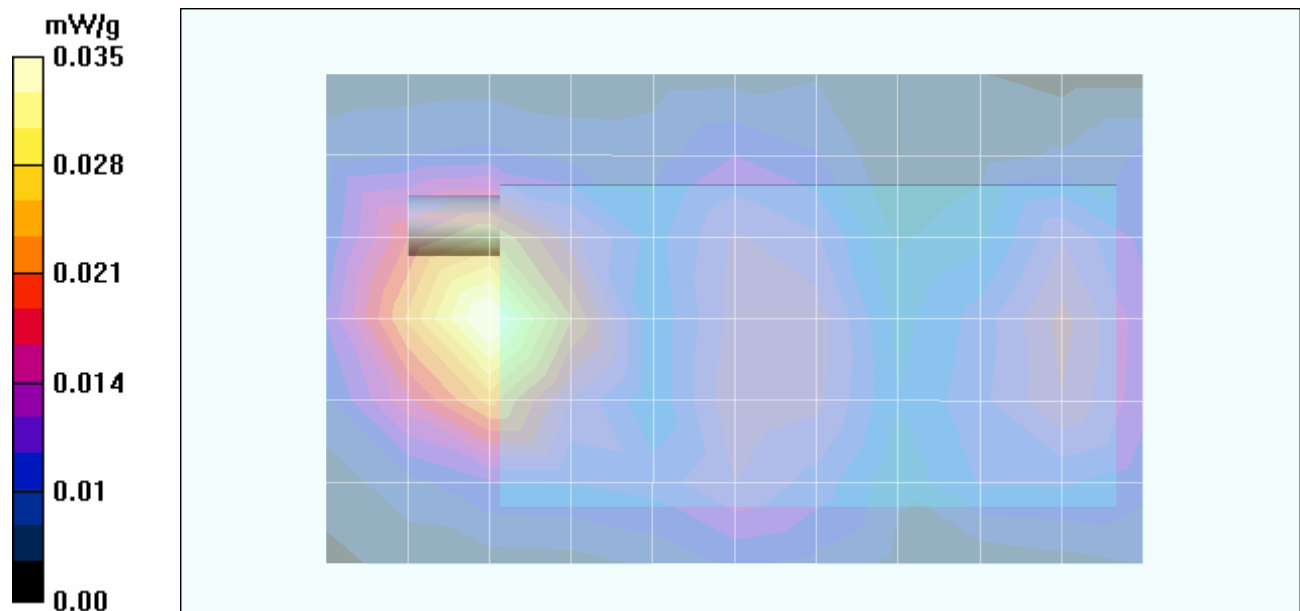

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report Serial No.: 082205O8F-T664-S24CW		Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 08/25/2005

Body SAR - Cellular CDMA - 802.11b Installed - Phone with Fitted Pouch (Back Side) - Ch. 384 - Area/Zoom Scan

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PWVC0835H0AX

Body-Worn Accessories: Fitted Pouch with Swivel Belt-Clip (SKU#3179WW); **Audio Accessory:** Generic Ear-Microphone


Ambient Temp: 24.1 °C; Fluid Temp: 23.5 °C; Barometric Pressure: 102.2 kPa; Humidity: 30%

Communication System: Cellular CDMA
 RF Output Power: 23.8 dBm (Conducted)
 Frequency: 836.52 MHz; Channel 384; Duty Cycle: 1:1
 Li-ion Battery Pack (P/N: 157-10014-00)
 Medium: M835 ($\sigma = 0.98$ mho/m; $\epsilon_r = 54.0$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn SAR - Cellular CDMA - 802.11b Installed - 2.5 cm Fitted Pouch & Swivel Belt-Clip Separation Distance
Mid Channel/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Body-Worn SAR - Cellular CDMA - 802.11b Installed - 2.5 cm Fitted Pouch & Swivel Belt-Clip Separation Distance
Mid Channel/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 16.7 V/m; Power Drift = -0.0592 dB
 Peak SAR (extrapolated) = 0.316 W/kg
SAR(1 g) = 0.253 mW/g; SAR(10 g) = 0.189 mW/g

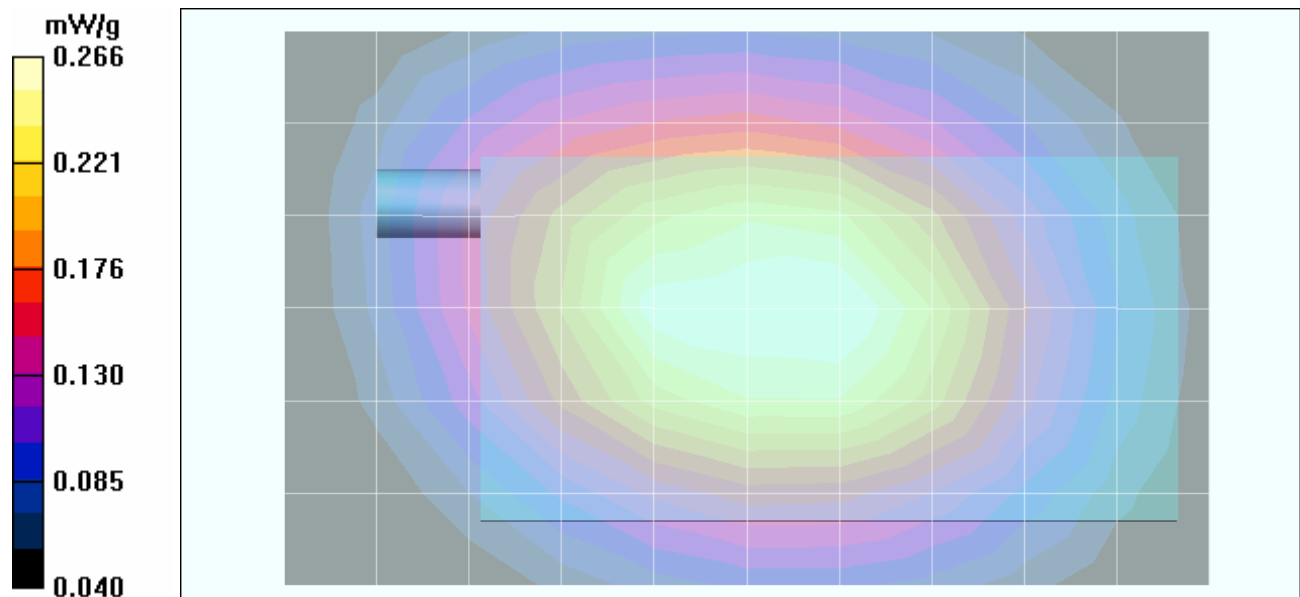

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report Serial No.: 08220508F-T664-S24CW		Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 08/25/2005

Body SAR - Cellular CDMA - 802.11b Installed - 1.5 cm Air-Gap Spacing - Back Side - Ch. 384 - Area/Zoom Scan

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PWVC0835H0AX

Body-Worn Accessories: None (1.5 cm Air-Gap Spacing); Audio Accessory: Generic Ear-Microphone

Ambient Temp: 24.1 °C; Fluid Temp: 23.5 °C; Barometric Pressure: 102.2 kPa; Humidity: 30%

Communication System: Cellular CDMA

RF Output Power: 23.8 dBm (Conducted)

Frequency: 836.52 MHz; Channel 384; Duty Cycle: 1:1

Li-ion Battery Pack (P/N: 157-10014-00)

Medium: M835 ($\sigma = 0.98$ mho/m; $\epsilon_r = 54.0$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146


Body-Worn SAR - Cellular CDMA - 802.11b Installed - 1.5 cm Air-Gap Separation Distance from Back of DUT - Mid Channel Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Body-Worn SAR - Cellular CDMA - 802.11b Installed - 1.5 cm Air-Gap Separation Distance from Back of DUT - Mid Channel Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.6 V/m; Power Drift = 0.0129 dB


Peak SAR (extrapolated) = 0.682 W/kg

SAR(1 g) = 0.524 mW/g; SAR(10 g) = 0.384 mW/g

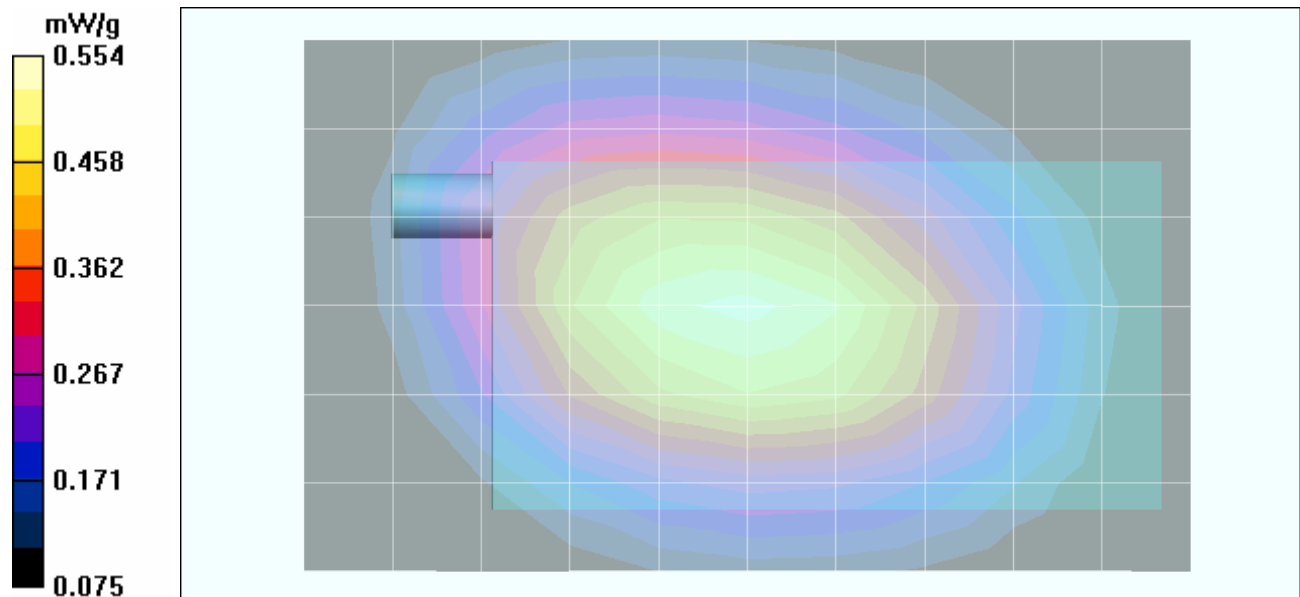

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

Z-Axis Scan

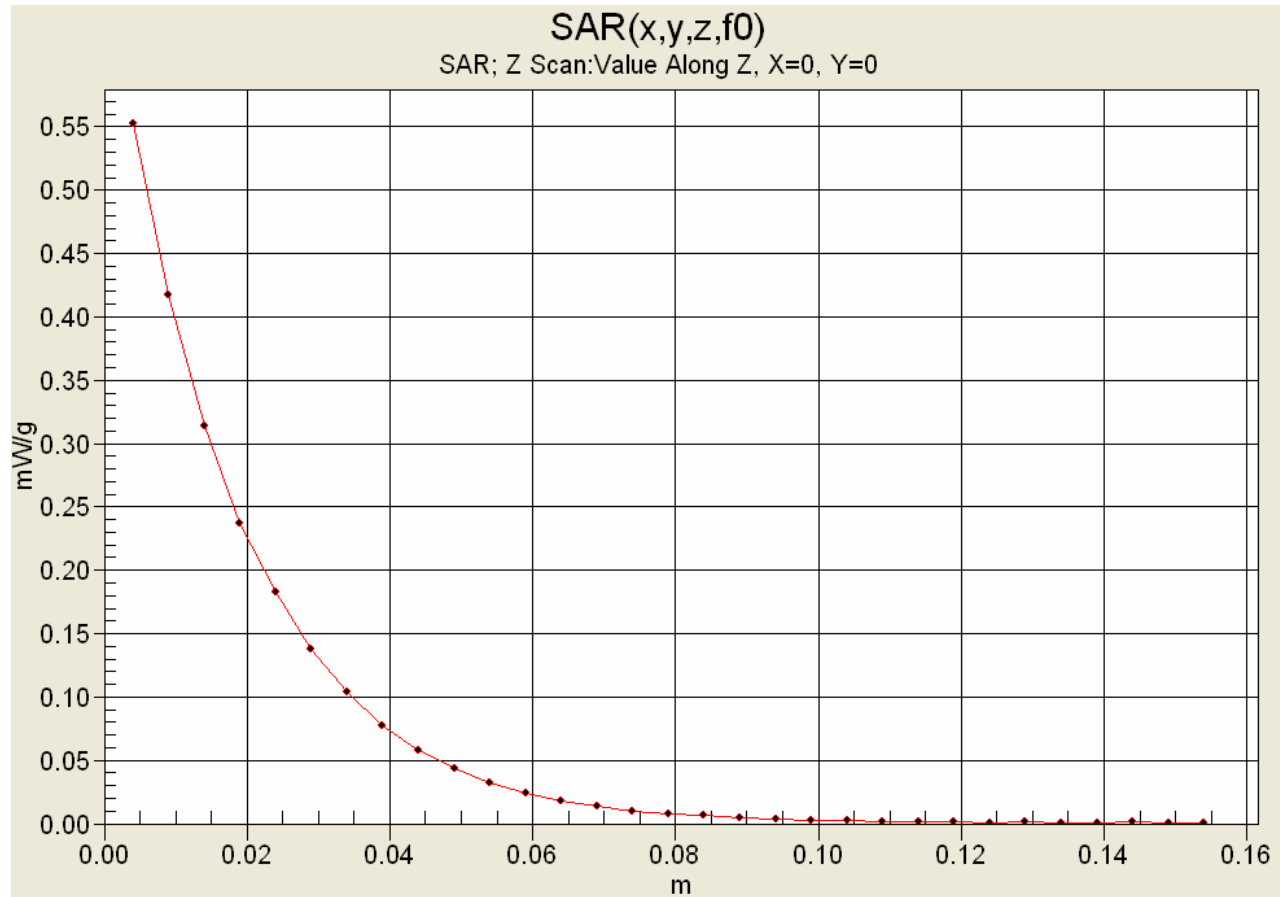

	Test Report Serial No.: 08220508F-T664-S24CW		Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 08/30/2005

Body SAR - Cellular CDMA - 802.11b Installed - 1.5 cm Air-Gap Spacing - Back Side - Ch. 384 - Area/Zoom Scan
Simultaneous Transmit with Co-located Bluetooth

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PWVC0835H0AX

Body-Worn Accessories: None (1.5 cm Air-Gap Spacing); Audio Accessory: Generic Ear-Microphone


Ambient Temp: 24.2 °C; Fluid Temp: 23.3 °C; Barometric Pressure: 102.2 kPa; Humidity: 34%

Communication System: Cellular CDMA
RF Output Power: 23.8 dBm (Conducted)
Frequency: 836.52 MHz; Channel 384; Duty Cycle: 1:1
Li-ion Battery Pack (P/N: 157-10014-00)
Communication System: FHSS (Bluetooth)
RF Output Power: 0 dBm (Peak Conducted)
Medium: M835 ($\sigma = 0.97$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146


Body-Worn SAR - Cellular CDMA with Bluetooth - 802.11b Installed - 1.5 cm Air-Gap Separation Distance from Back of DUT
Mid Channel/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Body-Worn SAR - Cellular CDMA with Bluetooth - 802.11b Installed - 1.5 cm Air-Gap Separation Distance from Back of DUT
Mid Channel/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 25.1 V/m; Power Drift = -0.0625 dB
Peak SAR (extrapolated) = 0.719 W/kg
SAR(1 g) = 0.560 mW/g; SAR(10 g) = 0.411 mW/g

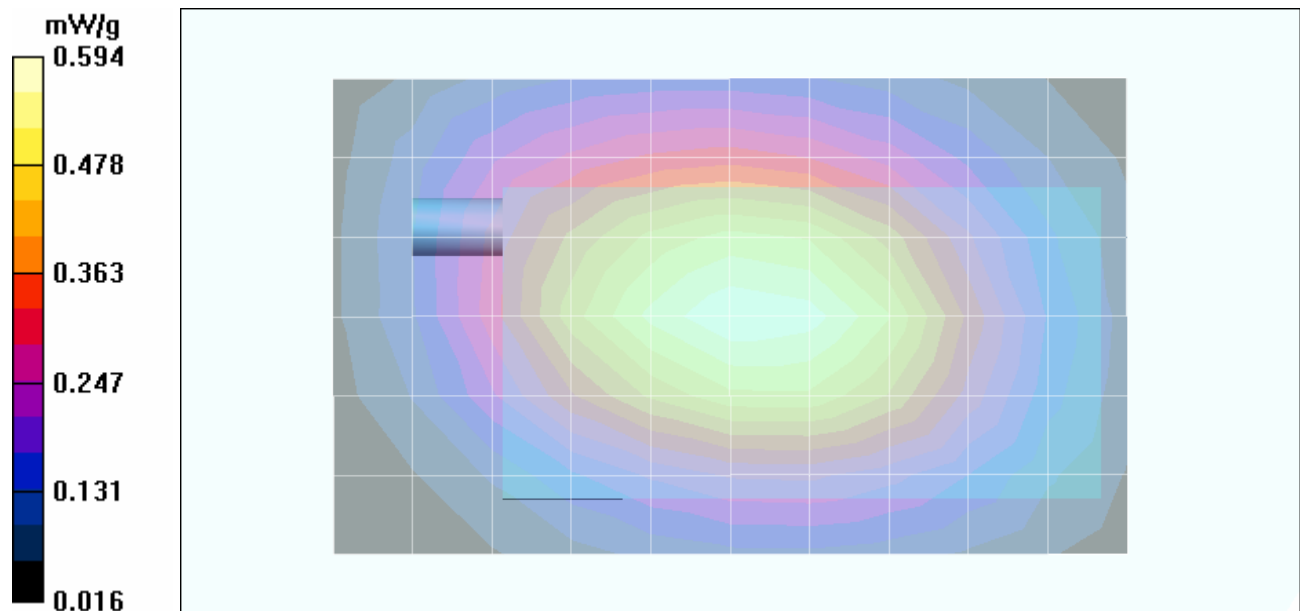

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

Z-Axis Scan

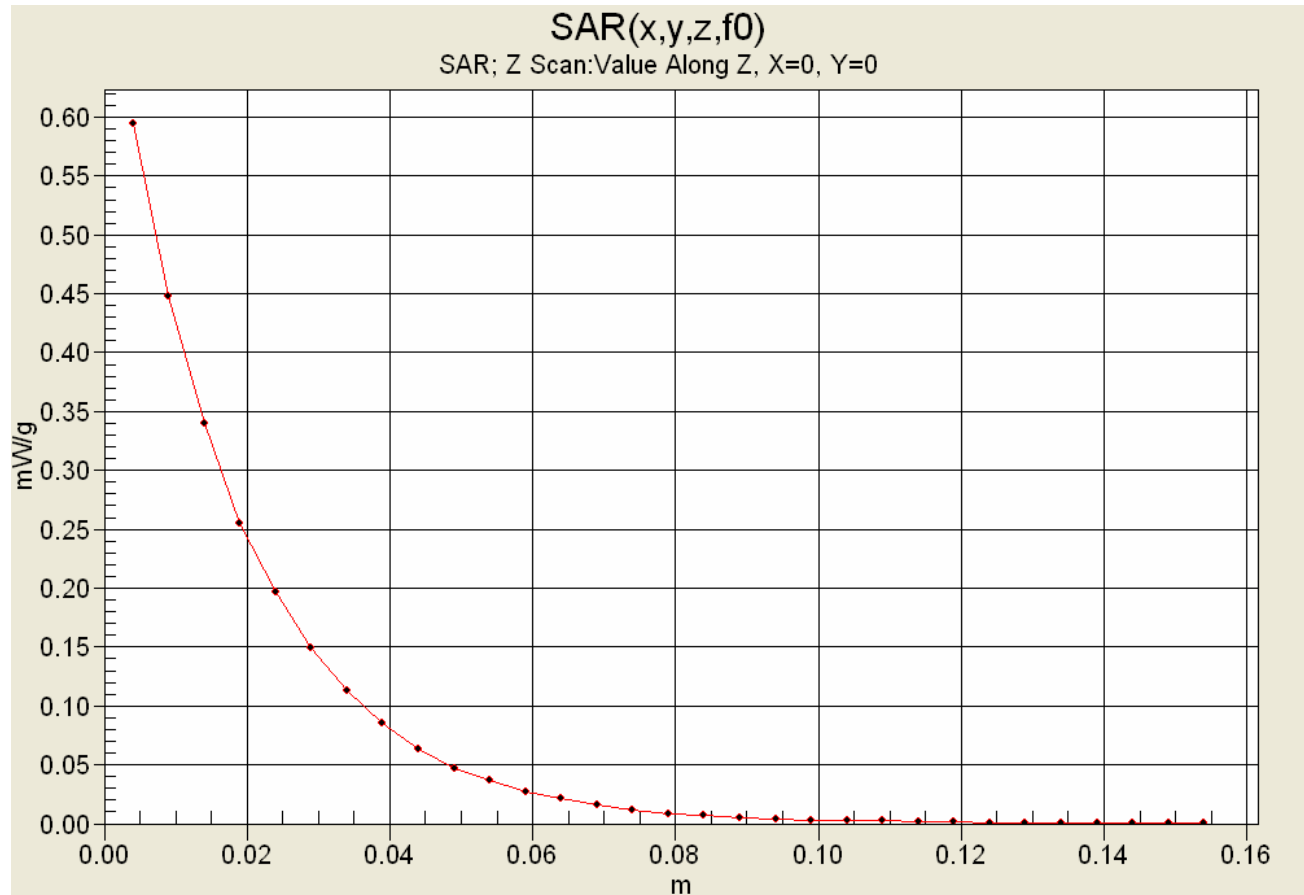

	Test Report Serial No.: 08220508F-T664-S24CW		Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 08/30/2005

Body SAR - Cellular CDMA - 802.11b Installed - 1.5 cm Air-Gap Spacing - Back Side - Ch. 384 - Volume Scan

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PWVC0835H0AX

Body-Worn Accessories: None (1.5 cm Air-Gap Spacing); Audio Accessory: Generic Ear-Microphone

Ambient Temp: 24.2 °C; Fluid Temp: 23.3 °C; Barometric Pressure: 102.2 kPa; Humidity: 34%

Communication System: Cellular CDMA

RF Output Power: 23.8 dBm (Conducted)

Frequency: 836.52 MHz; Channel 384; Duty Cycle: 1:1

Li-ion Battery Pack (P/N: 157-10014-00)

Medium: M835 ($\sigma = 0.97$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146


Body-Worn SAR - Cellular CDMA - 802.11b Installed - 1.5 cm Air-Gap Separation Distance from Back of DUT - Mid Channel Volume Scan (9x13x7): Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 25.6 V/m; Power Drift = -0.100 dB

Peak SAR (extrapolated) = 0.745 W/kg

SAR(1 g) = 0.555 mW/g; SAR(10 g) = 0.407 mW/g

Total Absorbed Power = 0.0471219 W

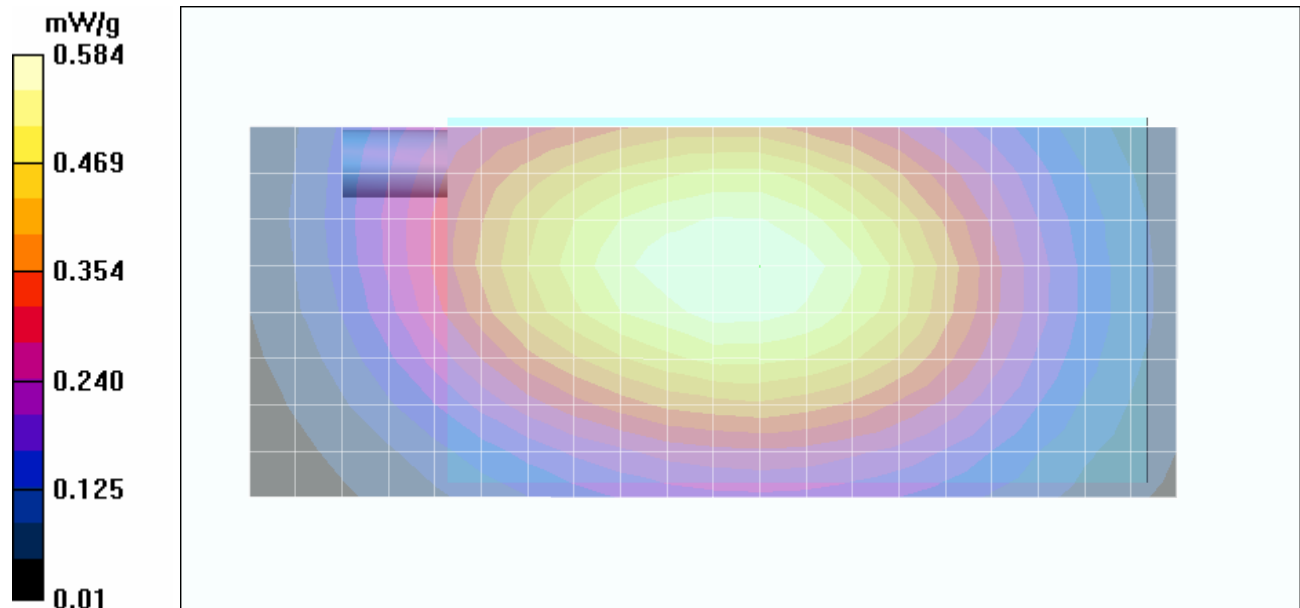

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.							

	Test Report Serial No.: 08220508F-T664-S24CW		Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 08/30/2005 (Cellular CDMA)
Date Tested: 08/30/2005 (802.11b SDIO)

Cellular CDMA Body SAR - 802.11b SDIO Body SAR - Multi-Band Grid Summation

Body-Worn SAR - 1.5 cm Air-Gap Spacing - Back Side of Treo XXX Phone

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PWVC0835H0AX

Body-Worn Accessories: None (1.5 cm Air-Gap Spacing); Audio Accessory: Generic Ear-Microphone

Cellular CDMA: Ambient Temp: 24.2 °C; Fluid Temp: 23.3 °C; Barometric Pressure: 102.2 kPa; Humidity: 34%
802.11b WLAN: Ambient Temp: 25.0 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 102.2 kPa; Humidity: 30%

Li-ion Battery Pack in Treo Phone (P/N: 157-10014-00)


Communication System: Cellular CDMA
Frequency: 836.52 MHz; Channel 384; Duty Cycle: 1:1
RF Output Power: 23.8 dBm (Conducted)
Medium: M835 ($\sigma = 0.97$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³)

Communication System: DSSS WLAN
Frequency: 2437 MHz; Channel 6; Duty Cycle: 1:1
RF Output Power: 14.7 dBm (Conducted)
Medium: M2450 ($\sigma = 2.01$ mho/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1) & ConvF(4.3, 4.3, 4.3); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: SAM 4.0; Type: Fiberglas; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Multi-Band Grid Summation:

SAR(1 g) = 0.582 mW/g; SAR(10 g) = 0.422 mW/g

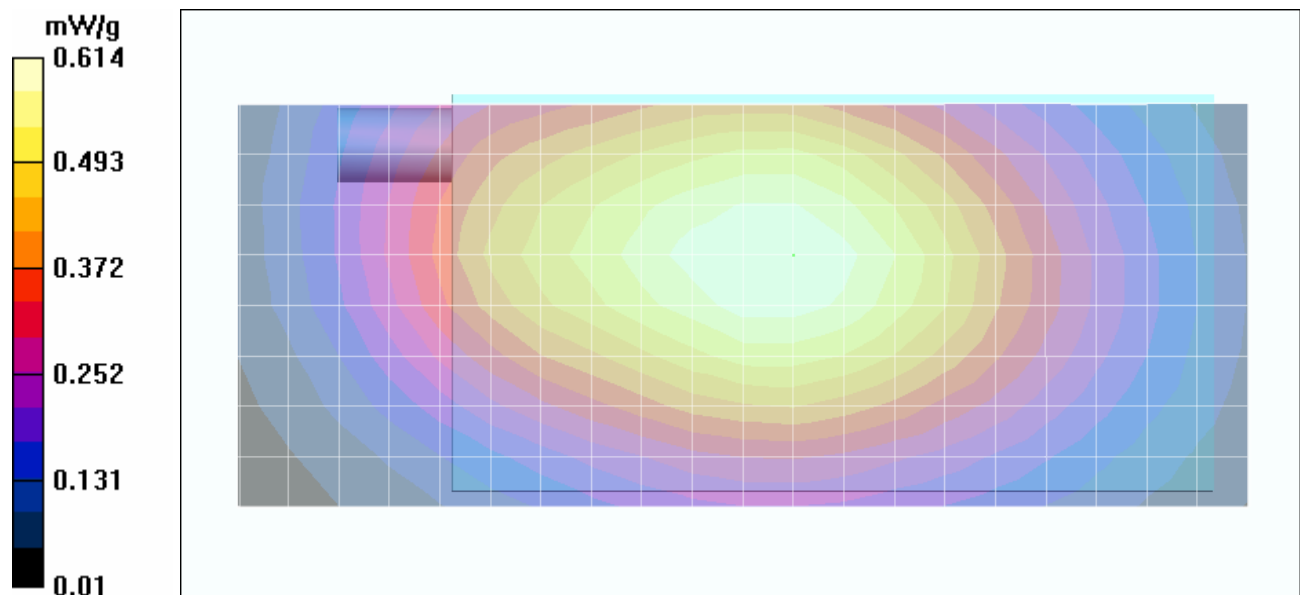

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report Serial No.: 08220508F-T664-S24CW		Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 08/30/2005 (Cellular CDMA)
Date Tested: 08/30/2005 (802.11b SDIO & Bluetooth)

Cellular CDMA Body SAR - 802.11b SDIO & Bluetooth Body SAR - Multi-Band Grid Summation

Body-Worn SAR - 1.5 cm Air-Gap Spacing - Back Side of Treo XXX Phone

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PWVC0835H0AX

Body-Worn Accessories: None (1.5 cm Air-Gap Spacing); Audio Accessory: Generic Ear-Microphone

Cellular CDMA: Ambient Temp: 24.2 °C; Fluid Temp: 23.3 °C; Barometric Pressure: 102.2 kPa; Humidity: 34%
802.11b WLAN: Ambient Temp: 25.0 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 102.2 kPa; Humidity: 30%

Li-ion Battery Pack in Treo Phone (P/N: 157-10014-00)

Communication System: Cellular CDMA
Frequency: 836.52 MHz; Channel 384; Duty Cycle: 1:1
RF Output Power: 23.8 dBm (Conducted)
Medium: M835 ($\sigma = 0.97$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³)


Communication System: DSSS WLAN
Frequency: 2437 MHz; Channel 6; Duty Cycle: 1:1
RF Output Power: 14.7 dBm (Conducted)
Medium: M2450 ($\sigma = 2.01$ mho/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³)

Communication System: FHSS Bluetooth
RF Output Power: 0 dBm (Peak Conducted)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1) & ConvF(4.3, 4.3, 4.3); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Multi-Band Grid Summation:

SAR(1 g) = 0.586 mW/g; SAR(10 g) = 0.425 mW/g

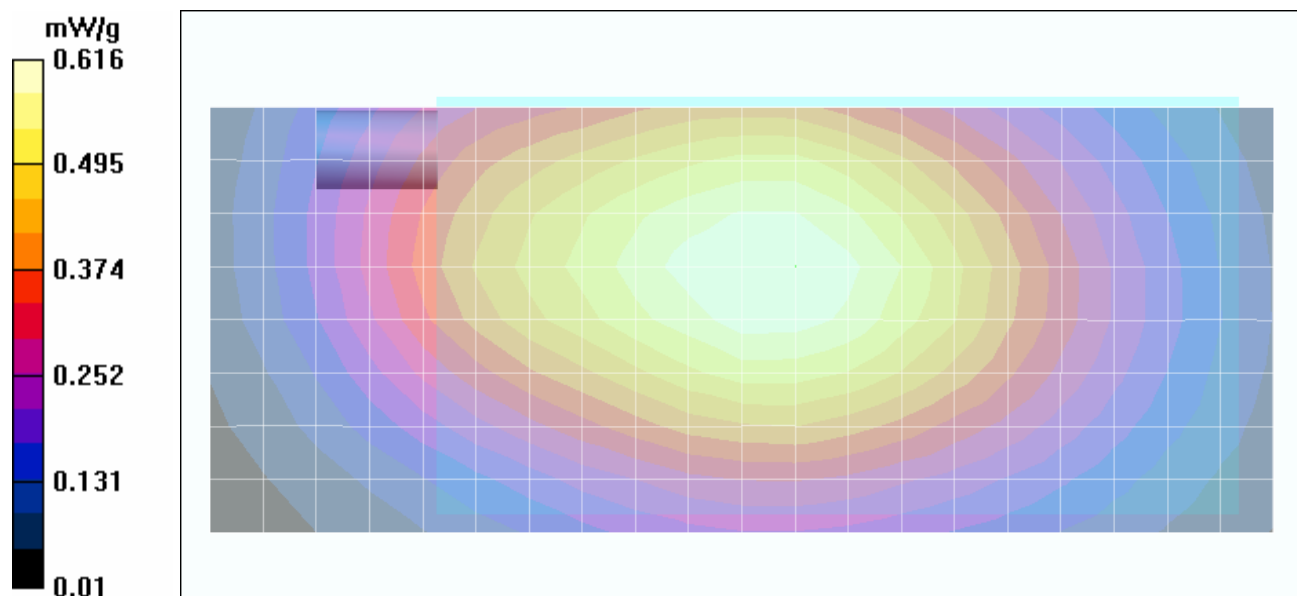

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report Serial No.: 08220508F-T664-S24CW		Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 08/25/2005

Body SAR - Cellular CDMA - 802.11b Installed - 1.5 cm Air-Gap Spacing - Front Side - Ch. 384 - Area/Zoom Scan

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PWVC0835H0AX

Body-Worn Accessories: None (1.5 cm Air-Gap Spacing); Audio Accessory: Generic Ear-Microphone

Ambient Temp: 24.1 °C; Fluid Temp: 23.5 °C; Barometric Pressure: 102.2 kPa; Humidity: 30%

Communication System: Cellular CDMA
RF Output Power: 23.8 dBm (Conducted)
Frequency: 836.52 MHz; Channel 384; Duty Cycle: 1:1
Li-ion Battery Pack (P/N: 157-10014-00)
Medium: M835 ($\sigma = 0.98 \text{ mho/m}$ $\epsilon_r = 54.0$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146


Body-Worn SAR - Cellular CDMA - 802.11b Installed - 1.5 cm Air-Gap Separation Distance from Front of DUT - Mid Channel Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Body-Worn SAR - Cellular CDMA - 802.11b Installed - 1.5 cm Air-Gap Separation Distance from Front of DUT - Mid Channel Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.4 V/m; Power Drift = 0.0370 dB

Peak SAR (extrapolated) = 0.656 W/kg

SAR(1 g) = 0.522 mW/g; SAR(10 g) = 0.390 mW/g

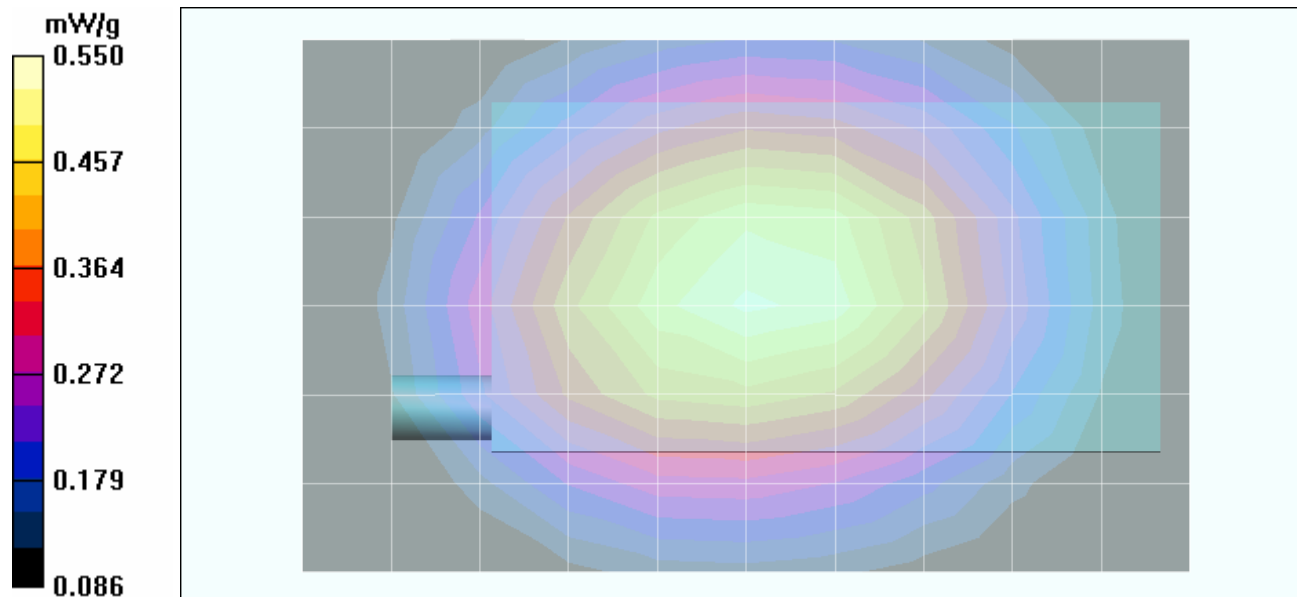

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report Serial No.: 08220508F-T664-S24CW		Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 08/24/2005

Body SAR - PCS CDMA - 802.11b Installed - Phone with Fitted Pouch (Back Side) - Ch. 600 - Area/Zoom Scan

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PWVC0835H0AX

Body-Worn Accessories: Fitted Pouch with Swivel Belt-Clip (SKU#3179WW); **Audio Accessory:** Generic Ear-Microphone

Ambient Temp: 25.5 °C; Fluid Temp: 23.5 °C; Barometric Pressure: 101.8 kPa; Humidity: 30%

Communication System: PCS CDMA

RF Output Power: 23.8 dBm (Conducted)

Frequency: 1880.00 MHz; Channel 600; Duty Cycle: 1:1

Li-ion Battery Pack (P/N: 157-10014-00)

Medium: M1880 ($\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 51.0$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(4.75, 4.75, 4.75); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146


Body-Worn SAR - PCS CDMA - 802.11b Installed - 2.5 cm Pouch & Swivel Belt-Clip Separation Distance - Mid Channel Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Body-Worn SAR - PCS CDMA - 802.11b Installed - 2.5 cm Pouch & Swivel Belt-Clip Separation Distance - Mid Channel Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.18 V/m; Power Drift = -0.00461 dB

Peak SAR (extrapolated) = 0.145 W/kg

SAR(1 g) = 0.101 mW/g; SAR(10 g) = 0.066 mW/g

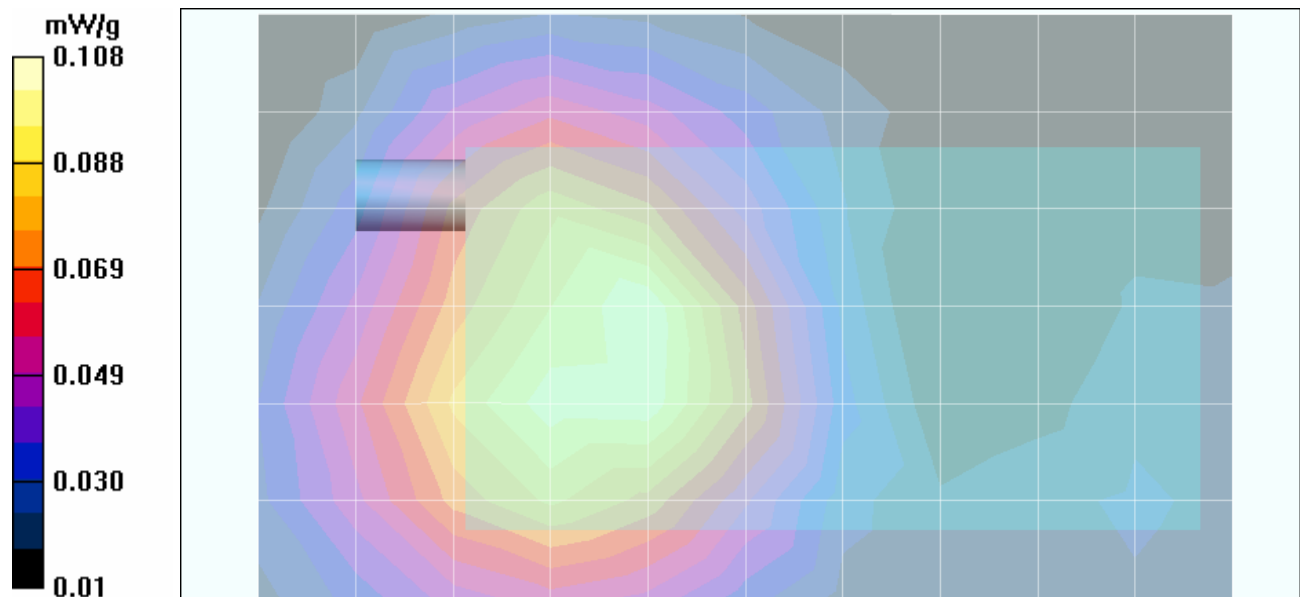

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report Serial No.: 08220508F-T664-S24CW		Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 08/24/2005

Body SAR - PCS CDMA - 802.11b Installed - 1.5 cm Air-Gap Spacing - Back Side - Ch. 600 - Area/Zoom Scan

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PWVC0835H0AX

Body-Worn Accessories: None (1.5 cm Air-Gap Spacing); Audio Accessory: Generic Ear-Microphone

Ambient Temp: 25.5 °C; Fluid Temp: 23.5 °C; Barometric Pressure: 101.8 kPa; Humidity: 30%

Communication System: PCS CDMA

RF Output Power: 23.8 dBm (Conducted)

Frequency: 1880.00 MHz; Channel 600; Duty Cycle: 1:1

Li-ion Battery Pack (P/N: 157-10014-00)

Medium: M1880 ($\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 51.0$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(4.75, 4.75, 4.75); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146


Body-Worn SAR - PCS CDMA - 802.11b Installed - 1.5 cm Air-Gap Separation Distance from Back of DUT - Mid Channel Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Body-Worn SAR - PCS CDMA - 802.11b Installed - 1.5 cm Air-Gap Separation Distance from Back of DUT - Mid Channel Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.8 V/m; Power Drift = -0.0976 dB

Peak SAR (extrapolated) = 0.379 W/kg


SAR(1 g) = 0.258 mW/g; SAR(10 g) = 0.167 mW/g

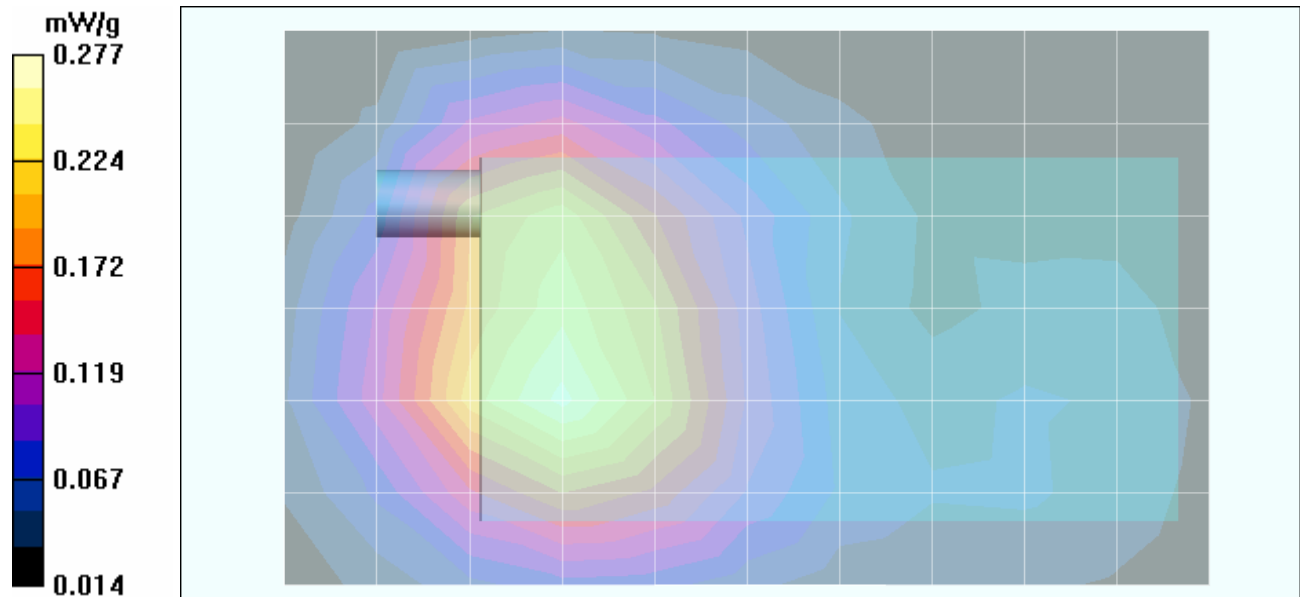

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report Serial No.: 08220508F-T664-S24CW		Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Z-Axis Scan

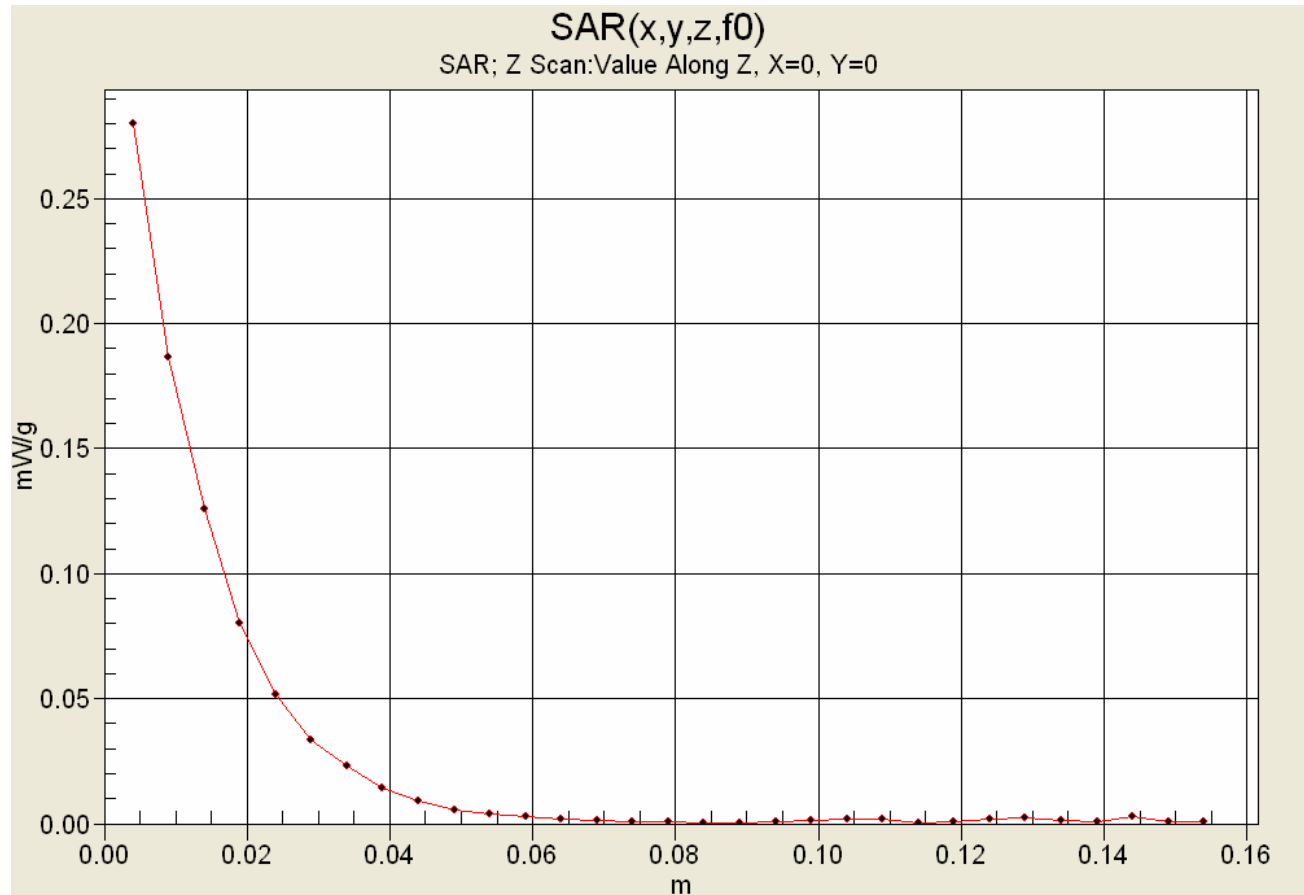

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						79 of 132

	Test Report Serial No.: 08220508F-T664-S24CW		Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 08/30/2005

Body SAR - PCS CDMA - 802.11b Installed - 1.5 cm Air-Gap Spacing - Back Side - Ch. 600 - Area/Zoom Scan
Simultaneous Transmit with Co-located Bluetooth

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PWVC0835H0AX

Body-Worn Accessories: None (1.5 cm Air-Gap Spacing); Audio Accessory: Generic Ear-Microphone


Ambient Temp: 23.4 °C; Fluid Temp: 23.5 °C; Barometric Pressure: 102.2 kPa; Humidity: 34%

Communication System: PCS CDMA
RF Output Power: 23.8 dBm (Conducted)
Frequency: 1880.00 MHz; Channel 600; Duty Cycle: 1:1
Li-ion Battery Pack (P/N: 157-10014-00)
Communication System: FHSS (Bluetooth)
RF Output Power: 0 dBm (Peak Conducted)
Medium: M1880 ($\sigma = 1.58$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(4.75, 4.75, 4.75); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn SAR - PCS CDMA with Bluetooth - 802.11b Installed - 1.5 cm Air-Gap Separation Distance from Back of DUT
Mid Channel/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Body-Worn SAR - PCS CDMA with Bluetooth - 802.11b Installed - 1.5 cm Air-Gap Separation Distance from Back of DUT
Mid Channel/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 10.9 V/m; Power Drift = -0.0152 dB
Peak SAR (extrapolated) = 0.408 W/kg
SAR(1 g) = 0.276 mW/g; SAR(10 g) = 0.180 mW/g

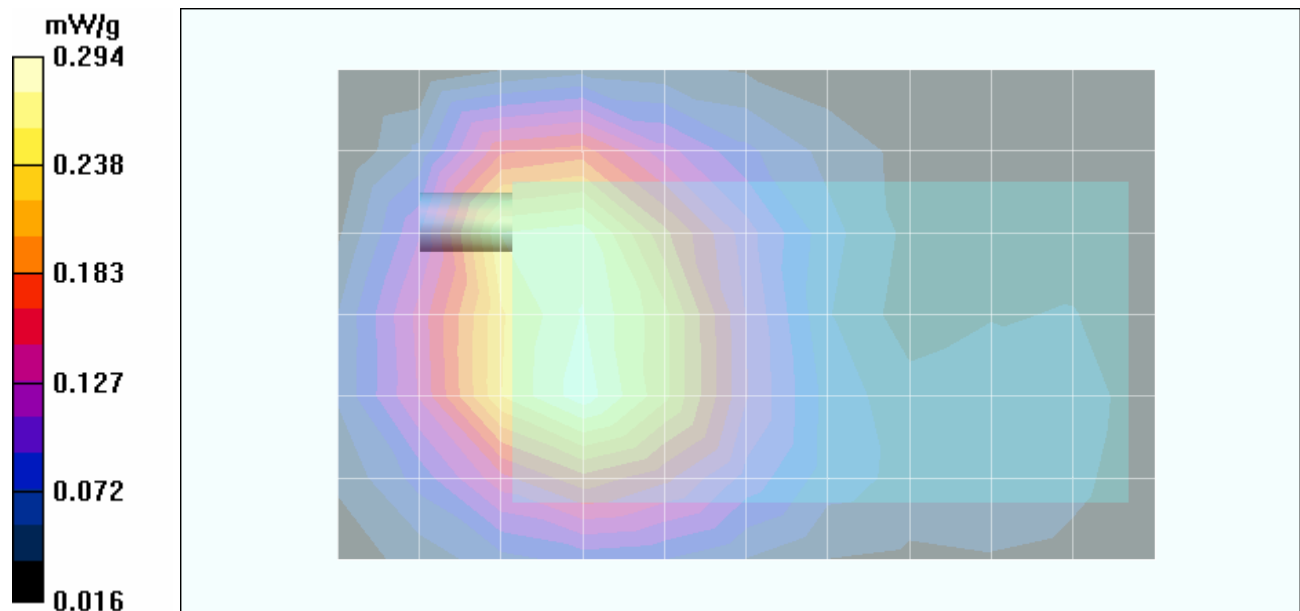

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report Serial No.: 08220508F-T664-S24CW		Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 08/30/2005

Body SAR - PCS CDMA - 802.11b Installed - 1.5 cm Air-Gap Spacing - Back Side - Ch. 600 - Volume Scan

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PWVC0835H0AX

Body-Worn Accessories: None (1.5 cm Air-Gap Spacing); Audio Accessory: Generic Ear-Microphone

Ambient Temp: 23.4 °C; Fluid Temp: 23.5 °C; Barometric Pressure: 102.2 kPa; Humidity: 34%

Communication System: PCS CDMA

RF Output Power: 23.8 dBm (Conducted)

Frequency: 1880.00 MHz; Channel 600; Duty Cycle: 1:1

Li-ion Battery Pack (P/N: 157-10014-00)

Medium: M1880 ($\sigma = 1.58 \text{ mho/m}$; $\epsilon_r = 50.9$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(4.75, 4.75, 4.75); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146


Body-Worn SAR - PCS CDMA - 802.11b Installed - 1.5 cm Air-Gap Separation Distance from Back of DUT - Mid Channel Volume Scan (9x13x7): Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.8 V/m; Power Drift = -0.211 dB

Peak SAR (extrapolated) = 0.368 W/kg


SAR(1 g) = 0.474 mW/g; SAR(10 g) = 0.308 mW/g

Total Absorbed Power = 0.0295869 W

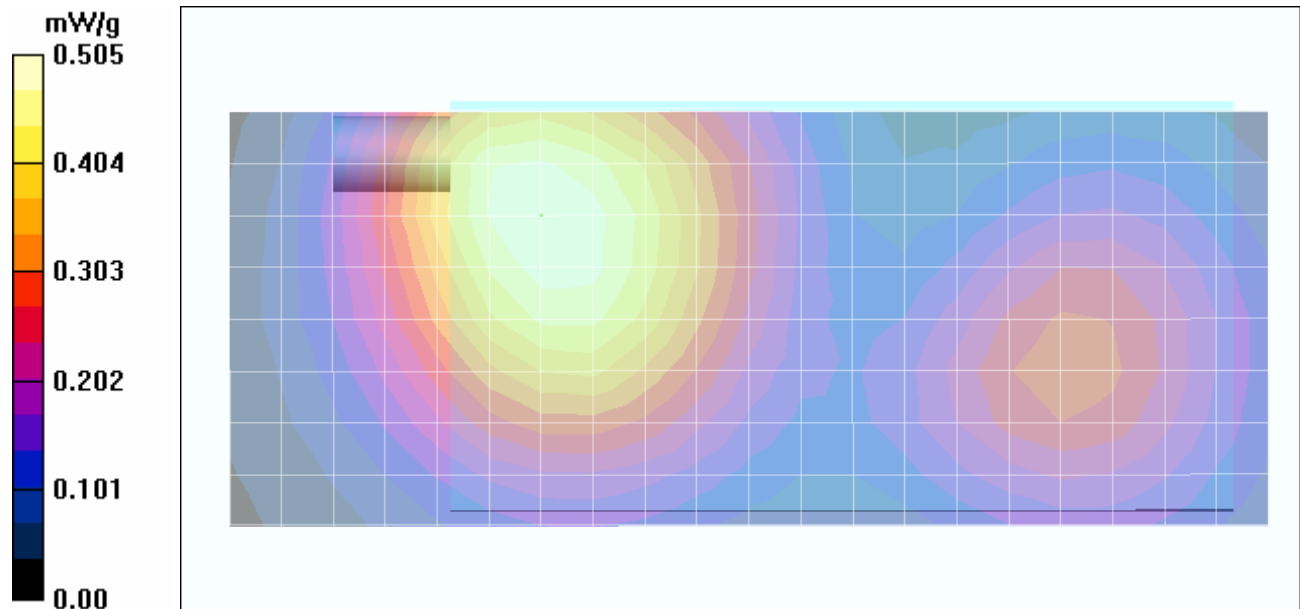

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

Z-Axis Scan

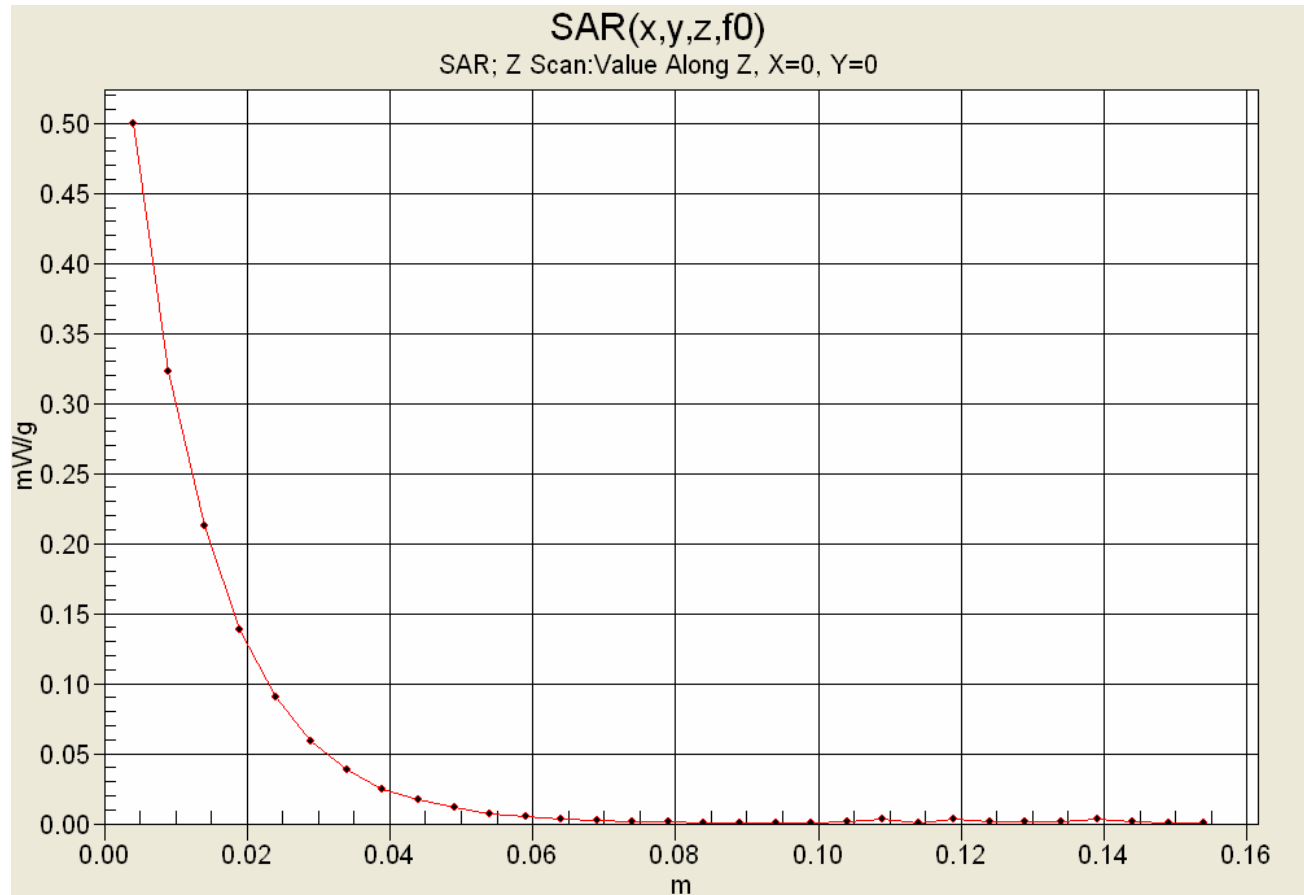

	Test Report Serial No.: 08220508F-T664-S24CW		Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 08/30/2005 (PCS CDMA)
Date Tested: 08/30/2005 (802.11b SDIO)

PCS CDMA Body SAR - 802.11b SDIO Body SAR - Multi-Band Grid Summation

Body-Worn SAR - 1.5 cm Air-Gap Spacing - Back Side of Treo XXX Phone

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PWVC0835H0AX

Body-Worn Accessories: None (1.5 cm Air-Gap Spacing); Audio Accessory: Generic Ear-Microphone

PCS CDMA: Ambient Temp: 23.4 °C; Fluid Temp: 23.5 °C; Barometric Pressure: 102.2 kPa; Humidity: 34%
802.11b WLAN: Ambient Temp: 25.0 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 102.2 kPa; Humidity: 30%

Li-ion Battery Pack in Treo Phone (P/N: 157-10014-00)


Communication System: PCS CDMA
Frequency: 1880.00 MHz; Channel 600; Duty Cycle: 1:1
RF Output Power: 23.8 dBm (Conducted)
Medium: M1880 ($\sigma = 1.58$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³)

Communication System: DSSS WLAN
Frequency: 2437 MHz; Channel 6; Duty Cycle: 1:1
RF Output Power: 14.7 dBm (Conducted)
Medium: M2450 ($\sigma = 2.01$ mho/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(4.75, 4.75, 4.75) & ConvF(4.3, 4.3, 4.3); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Multi-Band Grid Summation:

SAR(1 g) = 0.508 mW/g; SAR(10 g) = 0.328 mW/g

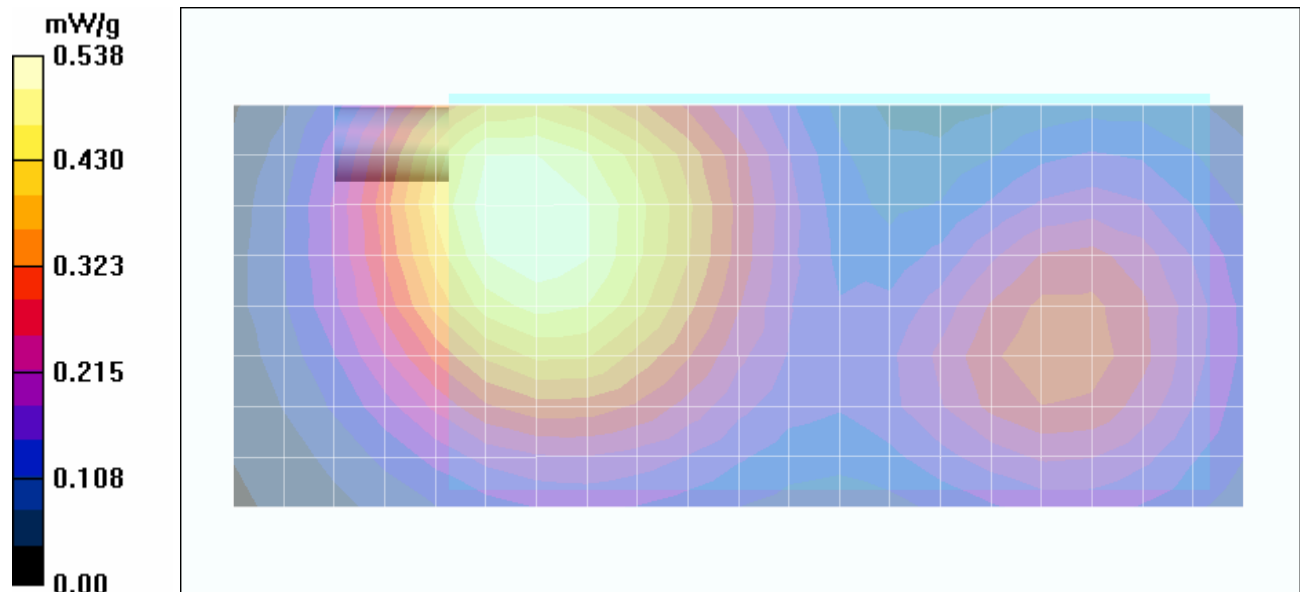

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report Serial No.: 08220508F-T664-S24CW		Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 08/30/2005 (PCS CDMA with Bluetooth)
Date Tested: 08/30/2005 (802.11b SDIO)

PCS CDMA Body SAR - 802.11b SDIO & Bluetooth Body SAR - Multi-Band Grid Summation

Body-Worn SAR - 1.5 cm Air-Gap Spacing - Back Side of Treo XXX Phone

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PWVC0835H0AX

Body-Worn Accessories: None (1.5 cm Air-Gap Spacing); Audio Accessory: Generic Ear-Microphone

PCS CDMA: Ambient Temp: 23.4 °C; Fluid Temp: 23.5 °C; Barometric Pressure: 102.2 kPa; Humidity: 34%
802.11b WLAN: Ambient Temp: 25.0 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 102.2 kPa; Humidity: 30%

Li-ion Battery Pack in Treo Phone (P/N: 157-10014-00)

Communication System: PCS CDMA
Frequency: 1880.00 MHz; Channel 600; Duty Cycle: 1:1
RF Output Power: 23.8 dBm (Conducted)
Medium: M1880 ($\sigma = 1.58$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³)


Communication System: DSSS WLAN
Frequency: 2437 MHz; Channel 6; Duty Cycle: 1:1
RF Output Power: 14.7 dBm (Conducted)
Medium: M2450 ($\sigma = 2.01$ mho/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³)

Communication System: FHSS Bluetooth
RF Output Power: 0 dBm (Peak Conducted)

- Probe: ET3DV6 - SN1387; ConvF(4.75, 4.75, 4.75) & ConvF(4.3, 4.3, 4.3); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Multi-Band Grid Summation:

SAR(1 g) = 0.506 mW/g; SAR(10 g) = 0.327 mW/g

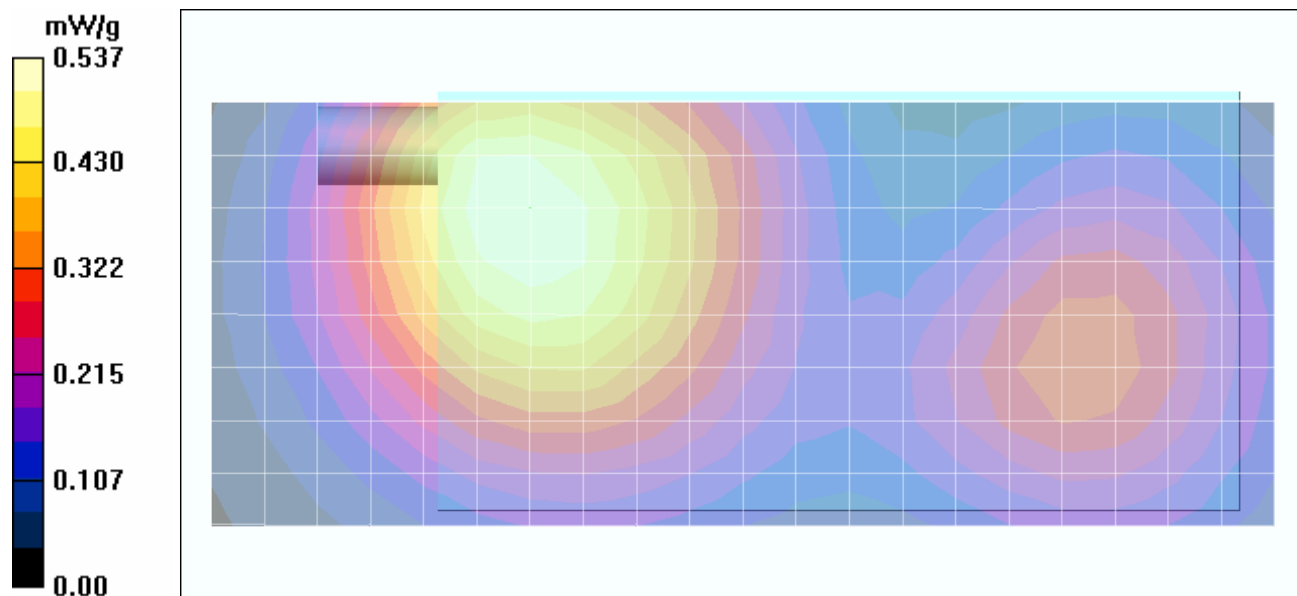

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report Serial No.: 08220508F-T664-S24CW		Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 08/24/2005

Body SAR - PCS CDMA - 802.11b Installed - 1.5 cm Air-Gap Spacing - Front Side - Ch. 600 - Area/Zoom Scan

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PWVC0835H0AX

Body-Worn Accessories: None (1.5 cm Air-Gap Spacing); Audio Accessory: Generic Ear-Microphone

Ambient Temp: 25.5 °C; Fluid Temp: 23.5 °C; Barometric Pressure: 101.8 kPa; Humidity: 30%

Communication System: PCS CDMA

RF Output Power: 23.8 dBm (Conducted)

Frequency: 1880.00 MHz; Channel 600; Duty Cycle: 1:1

Li-ion Battery Pack (P/N: 157-10014-00)

Medium: M1880 ($\sigma = 1.51$ mho/m; $\epsilon_r = 51.0$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(4.75, 4.75, 4.75); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146


Body-Worn SAR - PCS CDMA - 802.11b Installed - 1.5 cm Air-Gap Separation Distance from Front of DUT - Mid Channel Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Body-Worn SAR - PCS CDMA - 802.11b Installed - 1.5 cm Air-Gap Separation Distance from Front of DUT - Mid Channel Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.89 V/m; Power Drift = -0.102 dB

Peak SAR (extrapolated) = 0.242 W/kg

SAR(1 g) = 0.162 mW/g; SAR(10 g) = 0.106 mW/g

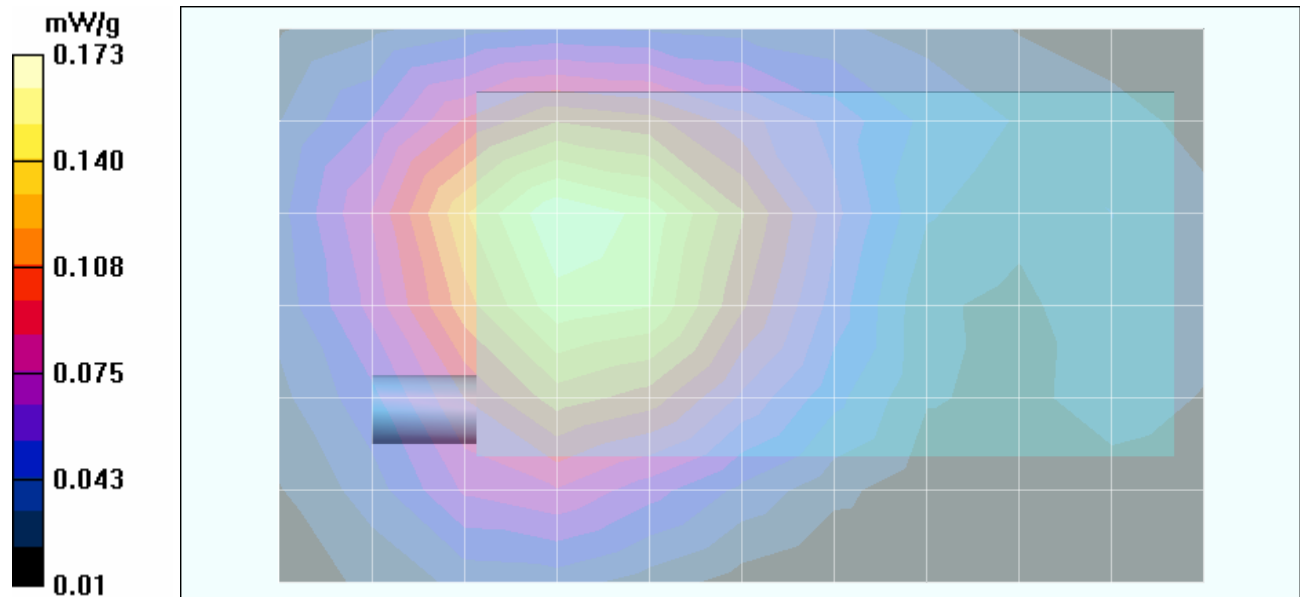

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						85 of 132