


Appendix B

RF Power Output

FCC Part 24 E

Output power conducted

EUT	GSM / GPRS MODULE
Model	Q2686H / G0M20602-0211-S-2
Approval Holder	WAVECOM
Temperature / Voltage	24°C / Unom: 3.8 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC Part 24 Subpart E - Broadband PCS
Test Case	Channel: 512
Comment 1	
Comment 2	

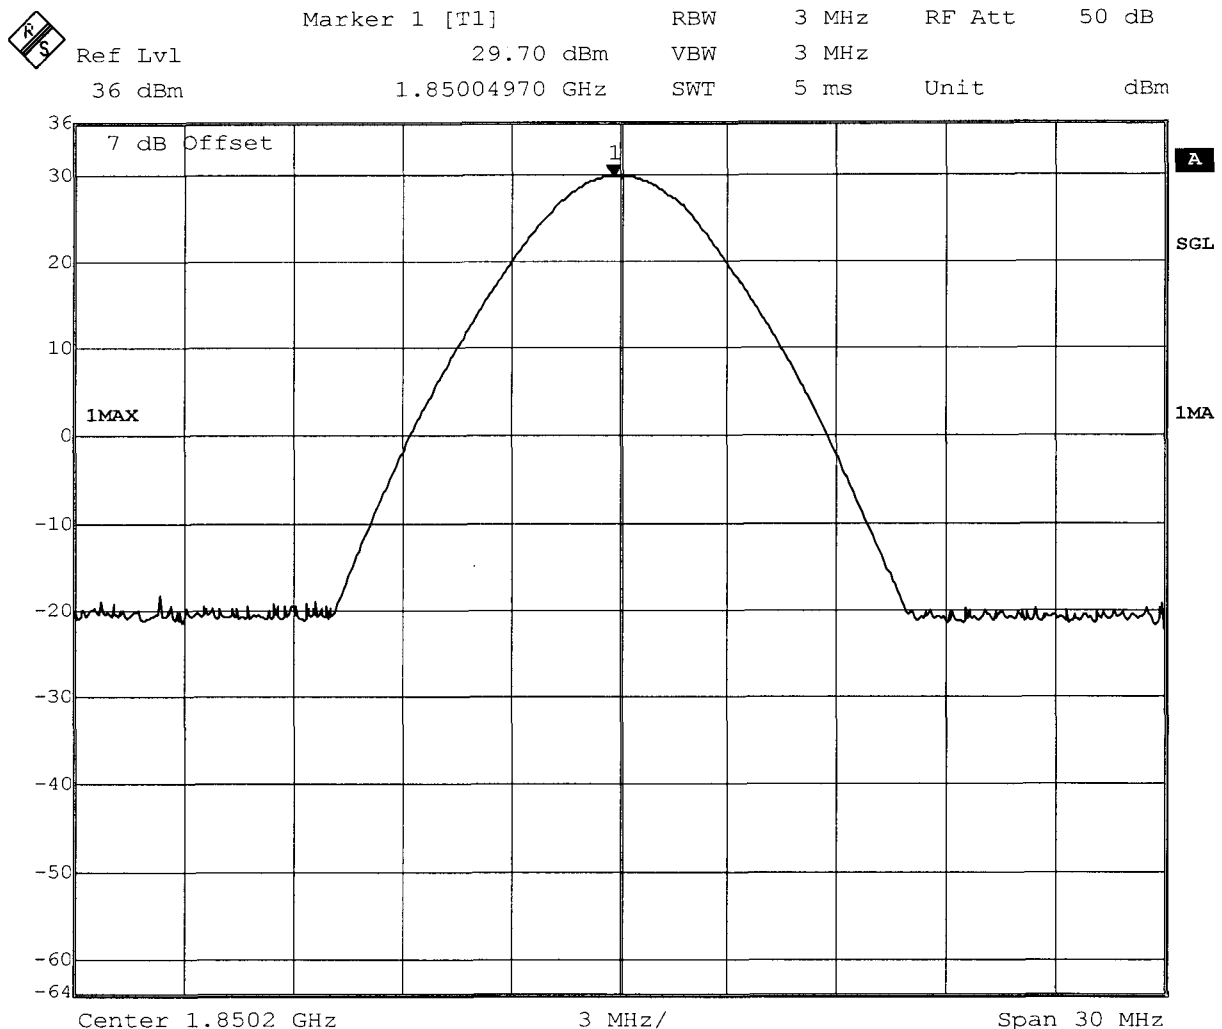


Date: 6.MAR.2006 08:20:50

Measurement diagram

FCC Part 24 E

Output power conducted

EUT	GSM / GPRS MODULE
Model	Q2686H / G0M20602-0211-S-2
Approval Holder	WAVECOM
Temperature / Voltage	24°C / Unom: 3.8 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC Part 24 Subpart E - Broadband PCS
Test Case	Channel: 661
Comment 1	
Comment 2	

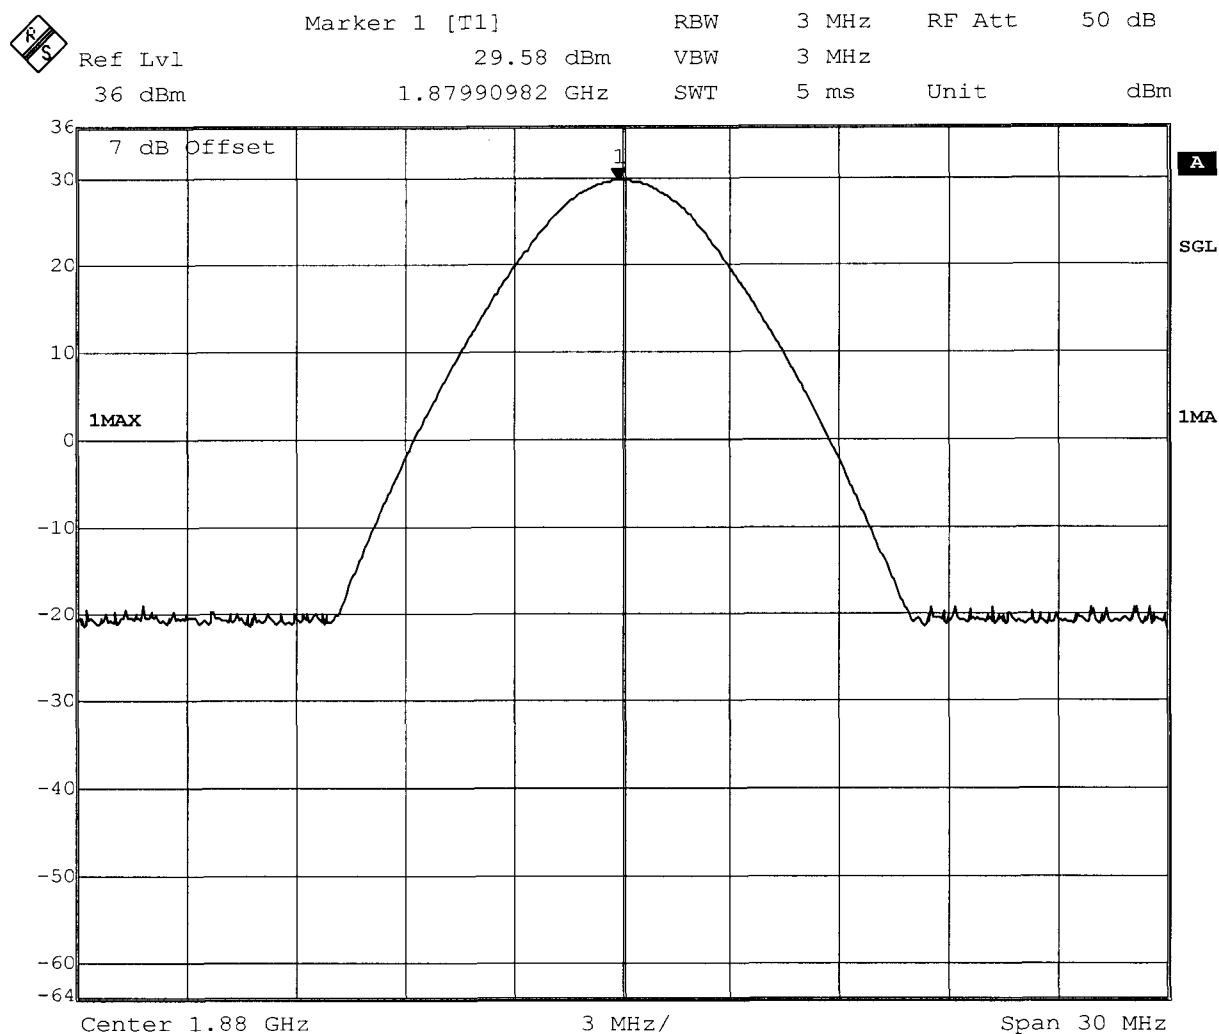


Date: 6.MAR.2006 08:22:39

Measurement diagram

FCC Part 24 E**Output power conducted**

EUT	GSM / GPRS MODULE
Model	Q2686H / G0M20602-0211-S-2
Approval Holder	WAVECOM
Temperature / Voltage	24°C / Unom: 3.8 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC Part 24 Subpart E - Broadband PCS
Test Case	Channel: 810
Comment 1	
Comment 2	

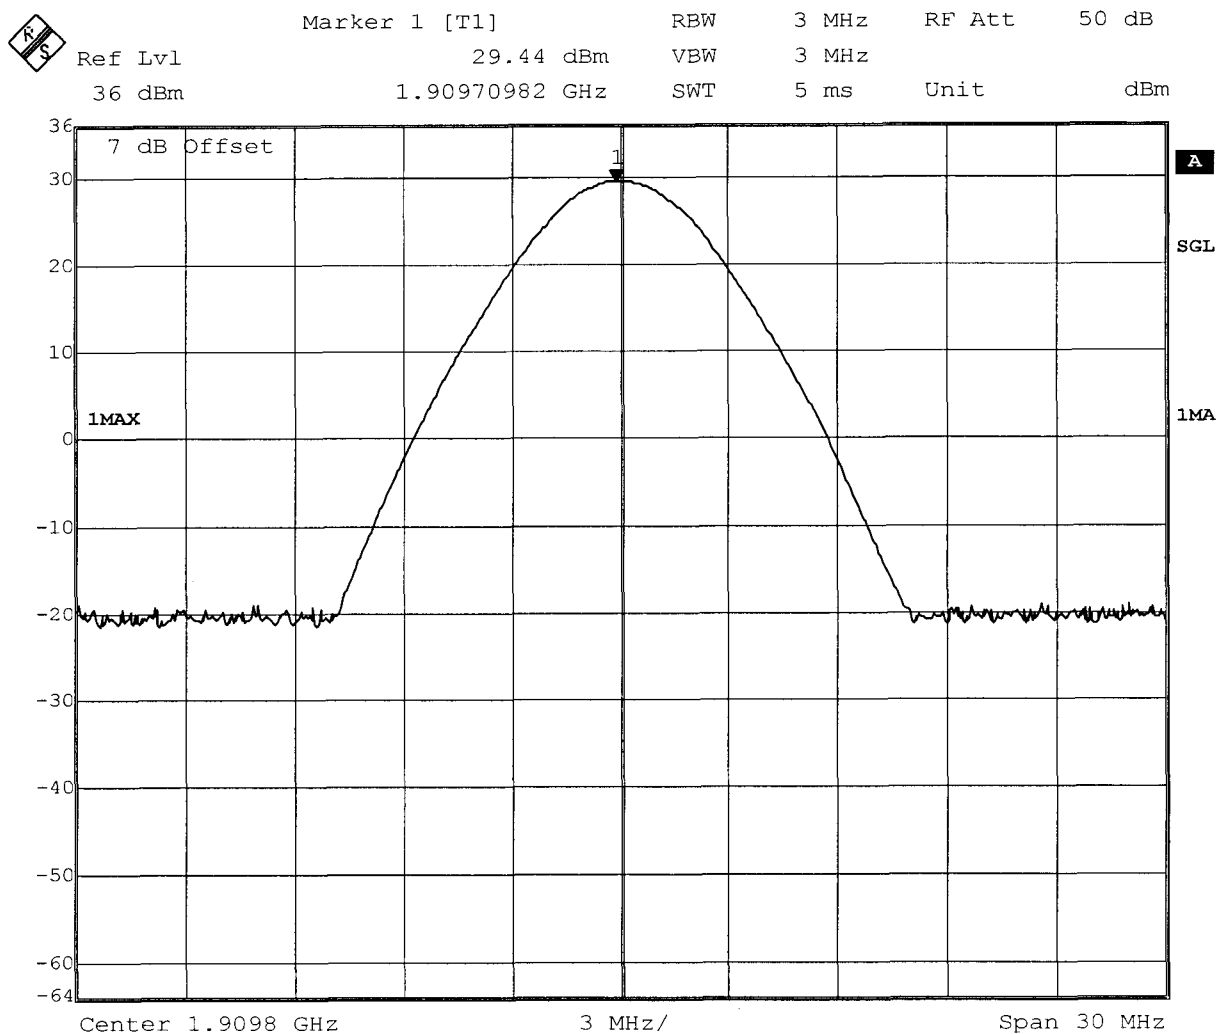


Date: 6.MAR.2006 08:24:03

Measurement diagram

FCC Part 22 H**Output power conducted**

EUT	GSM / GPRS MODULE
Model	Q2686H / G0M20602-0211-S-2
Approval Holder	WAVECOM
Temperature / Voltage	24°C / Unom: 3.8 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC Part 22 Subpart H - Cellular Radiotelephone Service
Test Case	Channel: 128
Comment 1	
Comment 2	

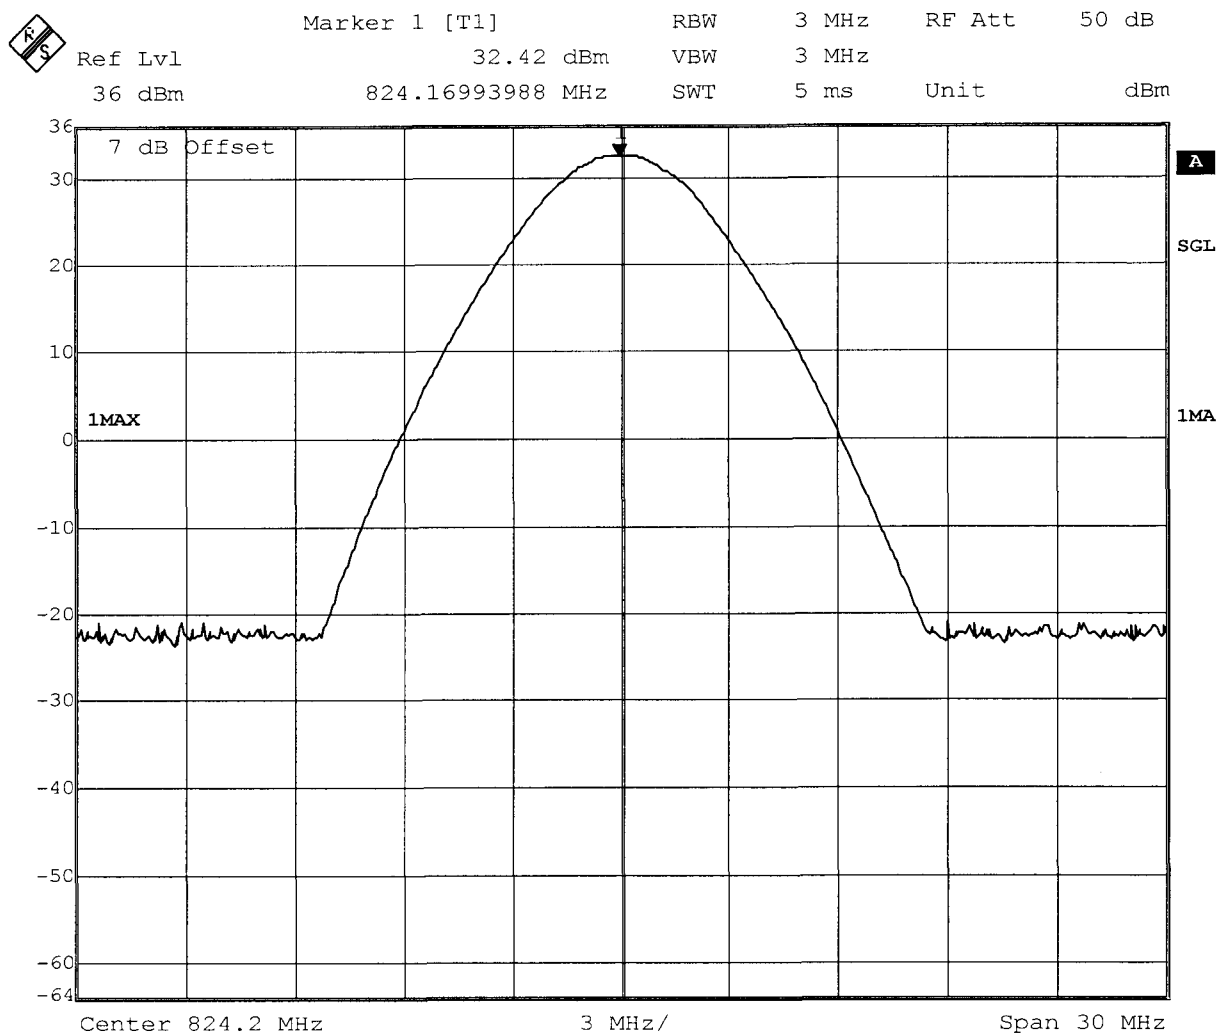


Date: 6.MAR.2006 07:02:30

Measurement diagram

FCC Part 22 H

Output power conducted

EUT	GSM / GPRS MODULE
Model	Q2686H / G0M20602-0211-S-2
Approval Holder	WAVECOM
Temperature / Voltage	24°C / Unom: 3.8 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC Part 22 Subpart H - Cellular Radiotelephone Service
Test Case	Channel: 188
Comment 1	
Comment 2	

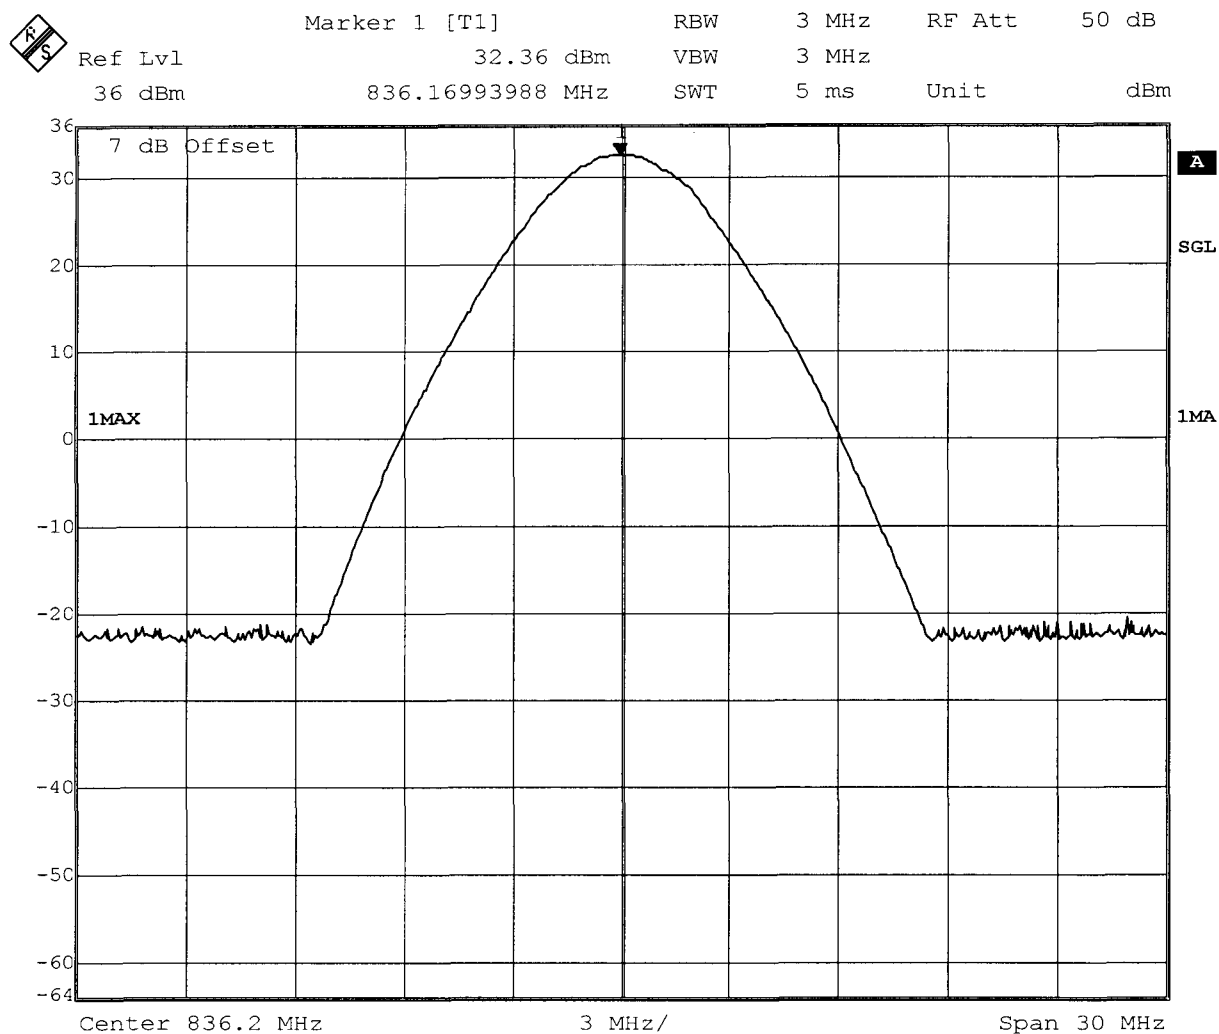


Date: 6.MAR.2006 07:05:20

Measurement diagram

FCC Part 22 H**Output power conducted**

EUT	GSM / GPRS MODULE
Model	Q2686H / G0M20602-0211-S-2
Approval Holder	WAVECOM
Temperature / Voltage	24°C / Unom: 3.8 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC Part 22 Subpart H - Cellular Radiotelephone Service
Test Case	Channel: 251
Comment 1	
Comment 2	

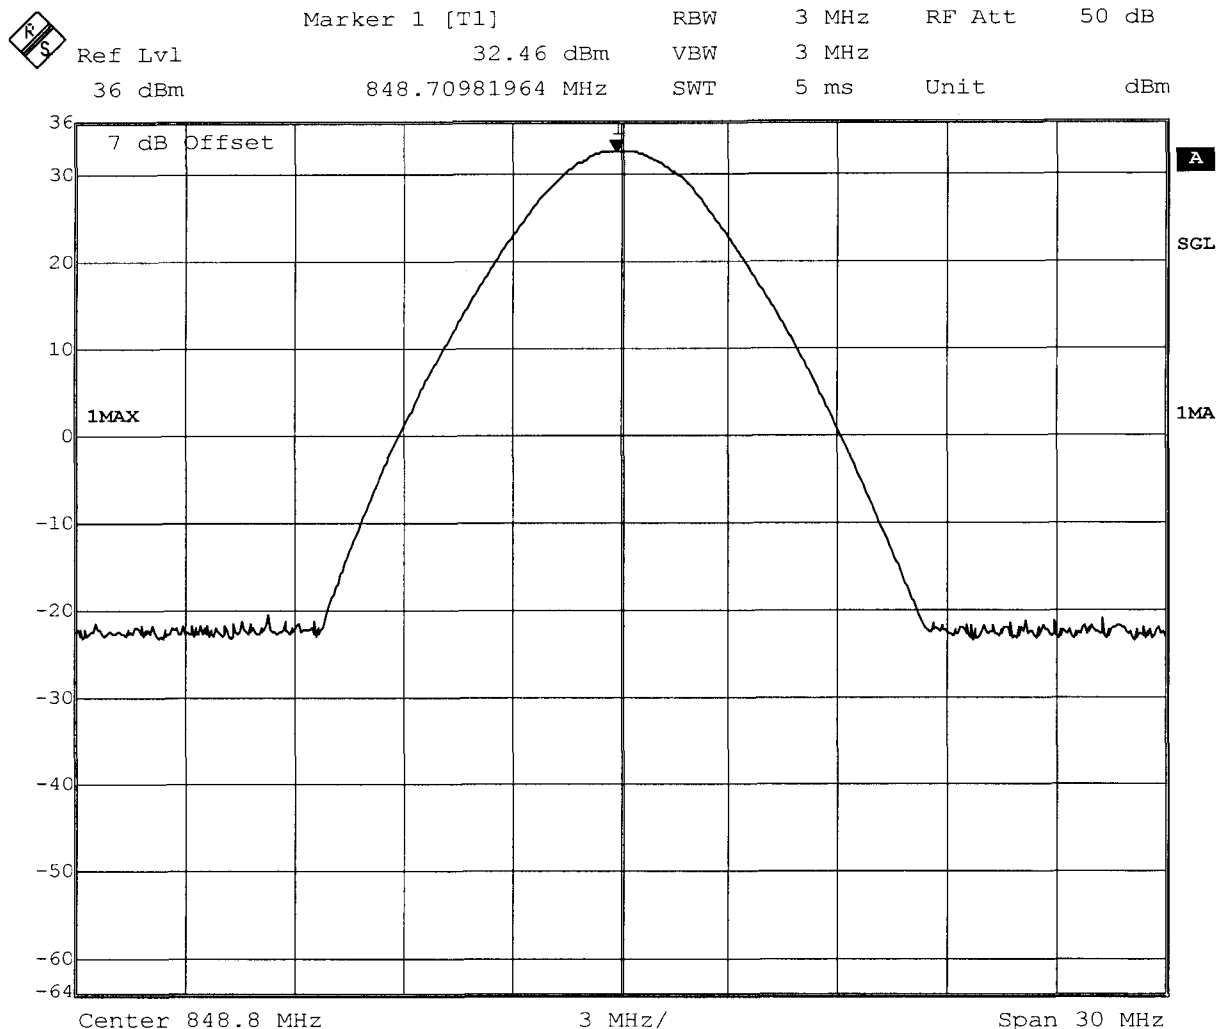

Date: 6.MAR.2006 07:10:14


Measurement diagram

Appendix C

ERP, EIRP


Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 512
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.232
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0
Comment 2: Freq: 1.851GHz, Pmax: 13.62dBm, RBW: 3MHz

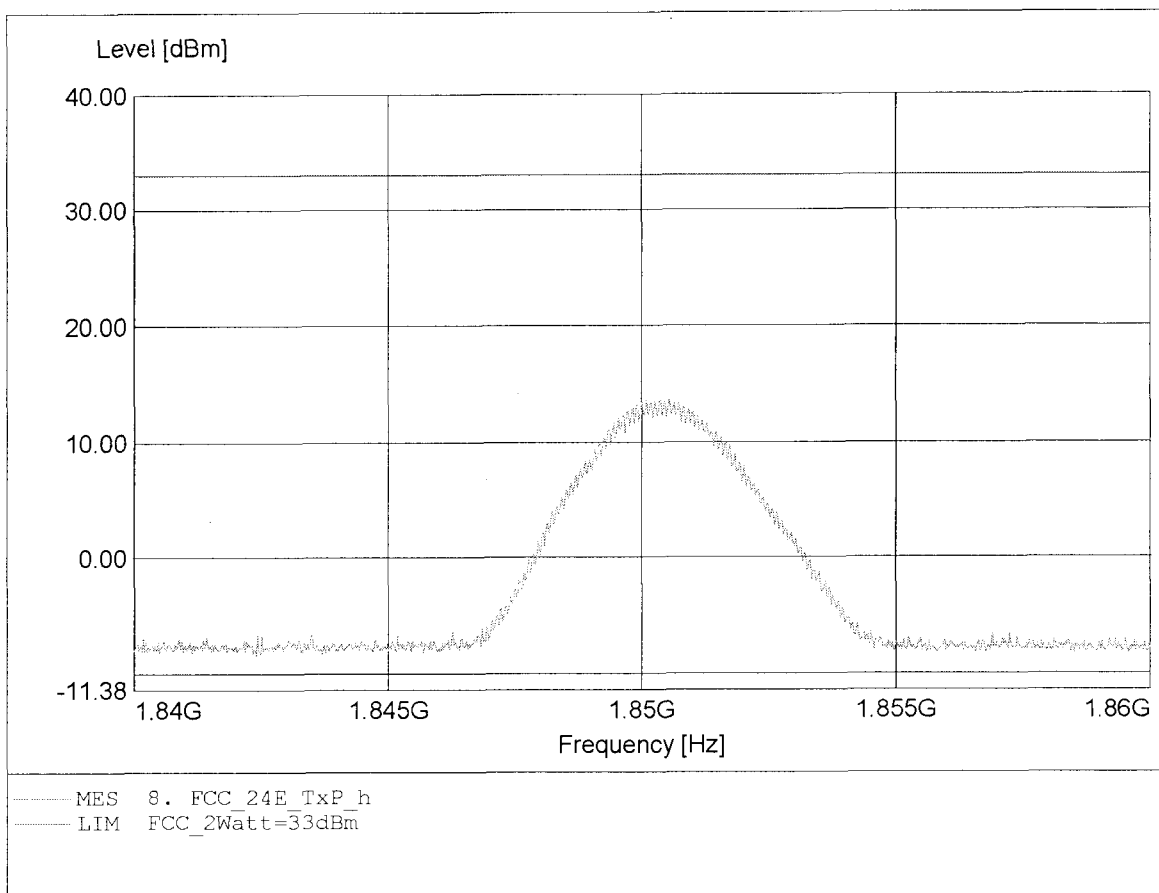


Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 512
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.232
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0
Comment 2: Freq: 1.850GHz, Pmax: 24.13dBm, RBW: 3MHz

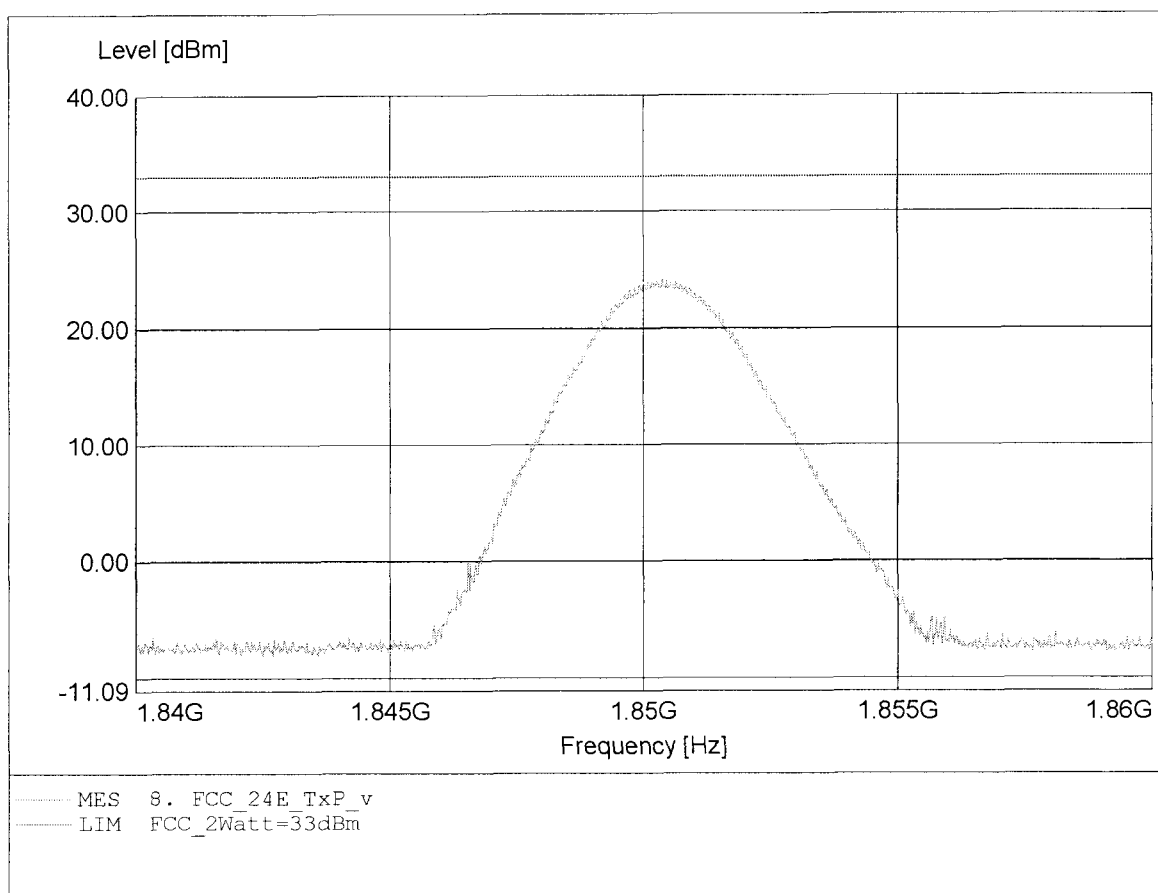


Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 661
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.232
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0
Comment 2: Freq: 1.880GHz, Pmax: 14.40dBm, RBW: 3MHz

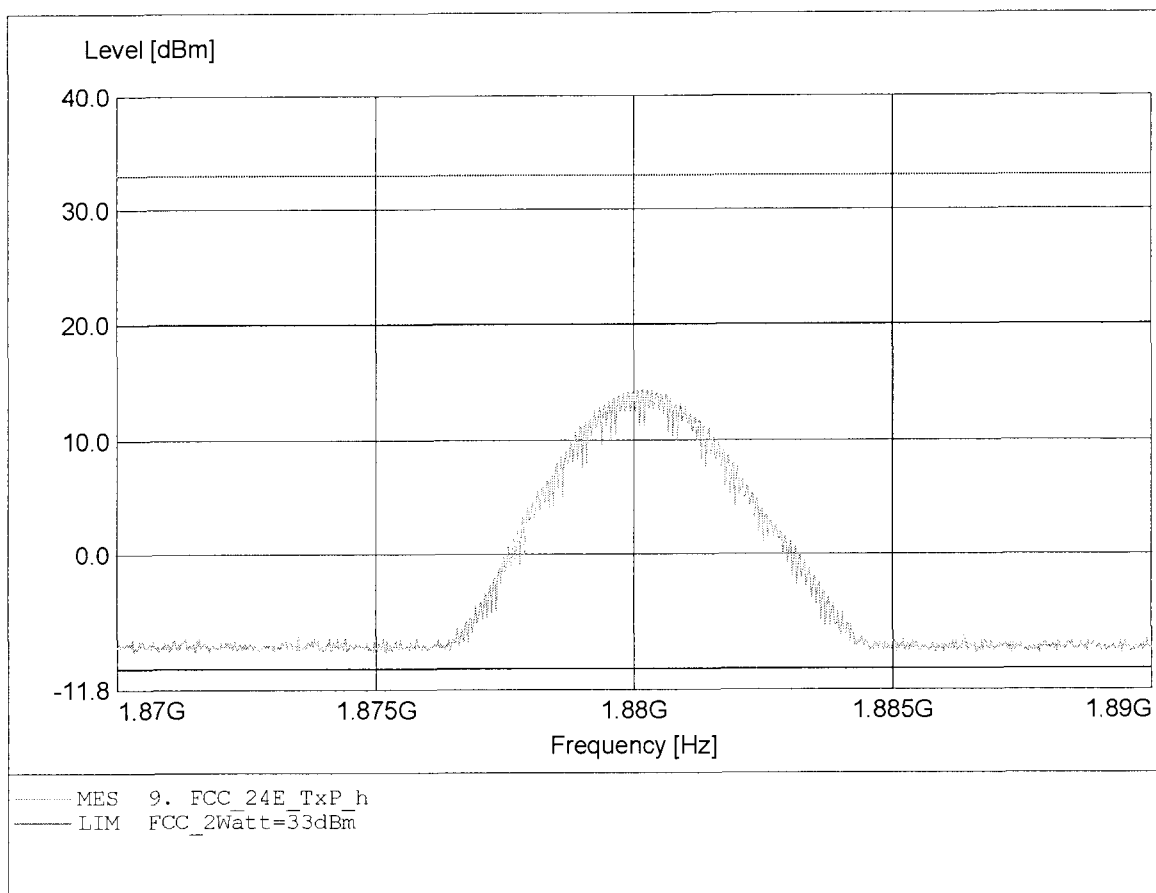


**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 661
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.232
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0
Comment 2: Freq: 1.880GHz, Pmax: 23.74dBm, RBW: 3MHz

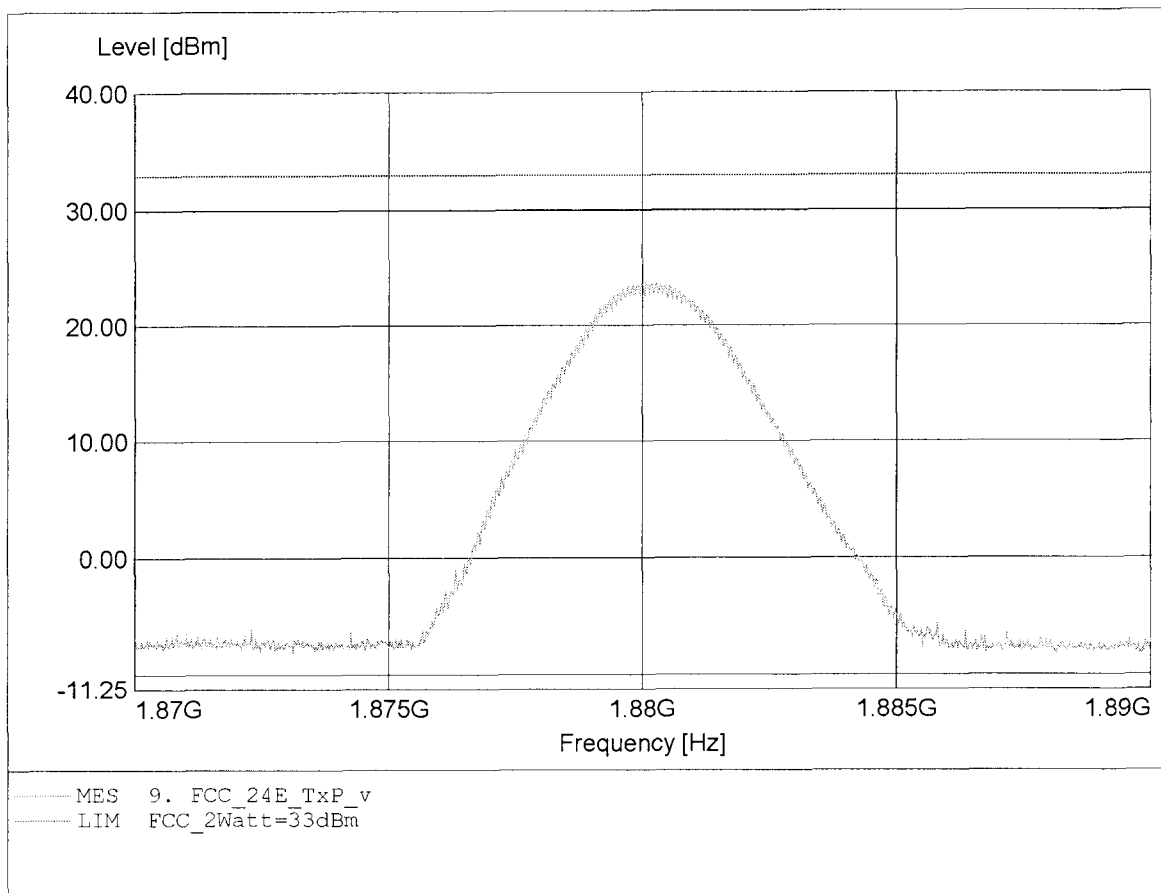


Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 810
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.232
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0
Comment 2: Freq: 1.910GHz, Pmax: 13.59dBm, RBW: 3MHz

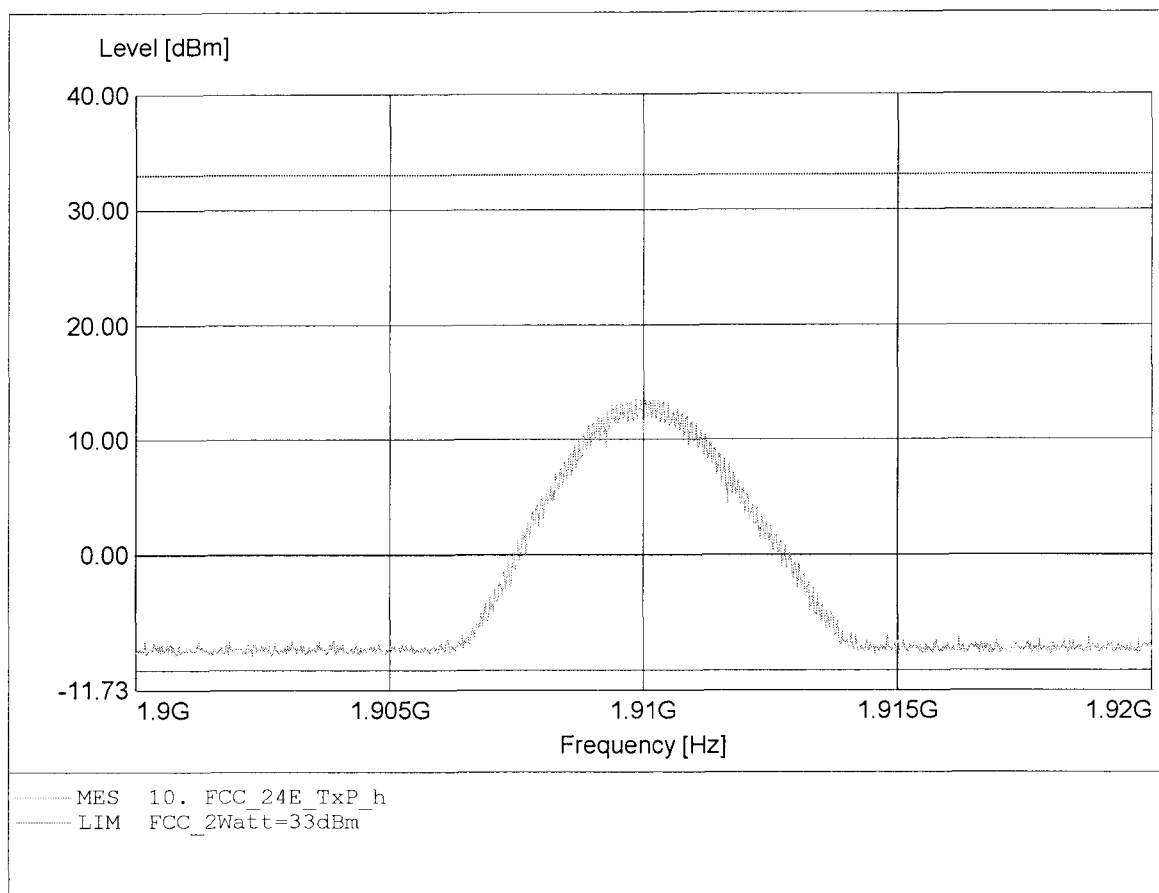


Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 810
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.232
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0
Comment 2: Freq: 1.910GHz, Pmax: 23.75dBm, RBW: 3MHz

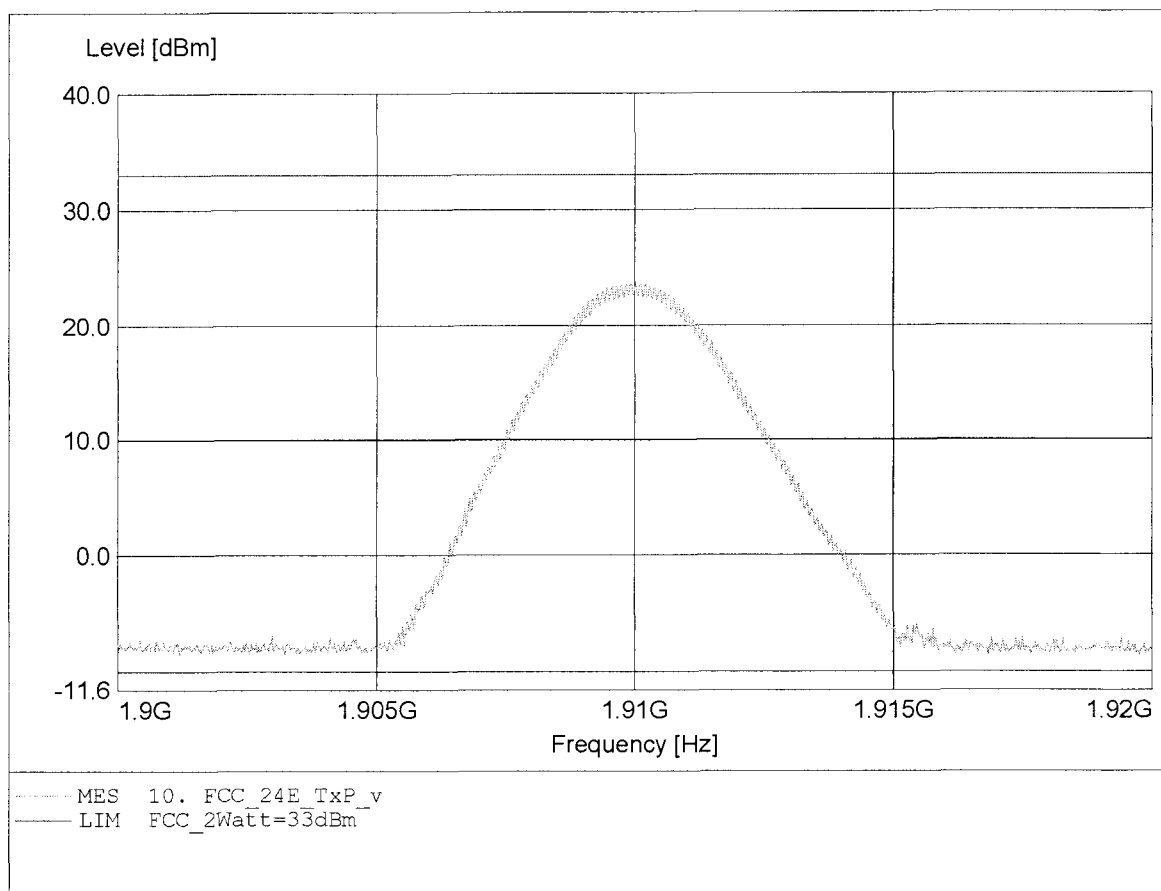


Effective Radiated Power
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 128
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to S22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 824.111MHz, Pmax: 16.11dBm, RBW: 3MHz

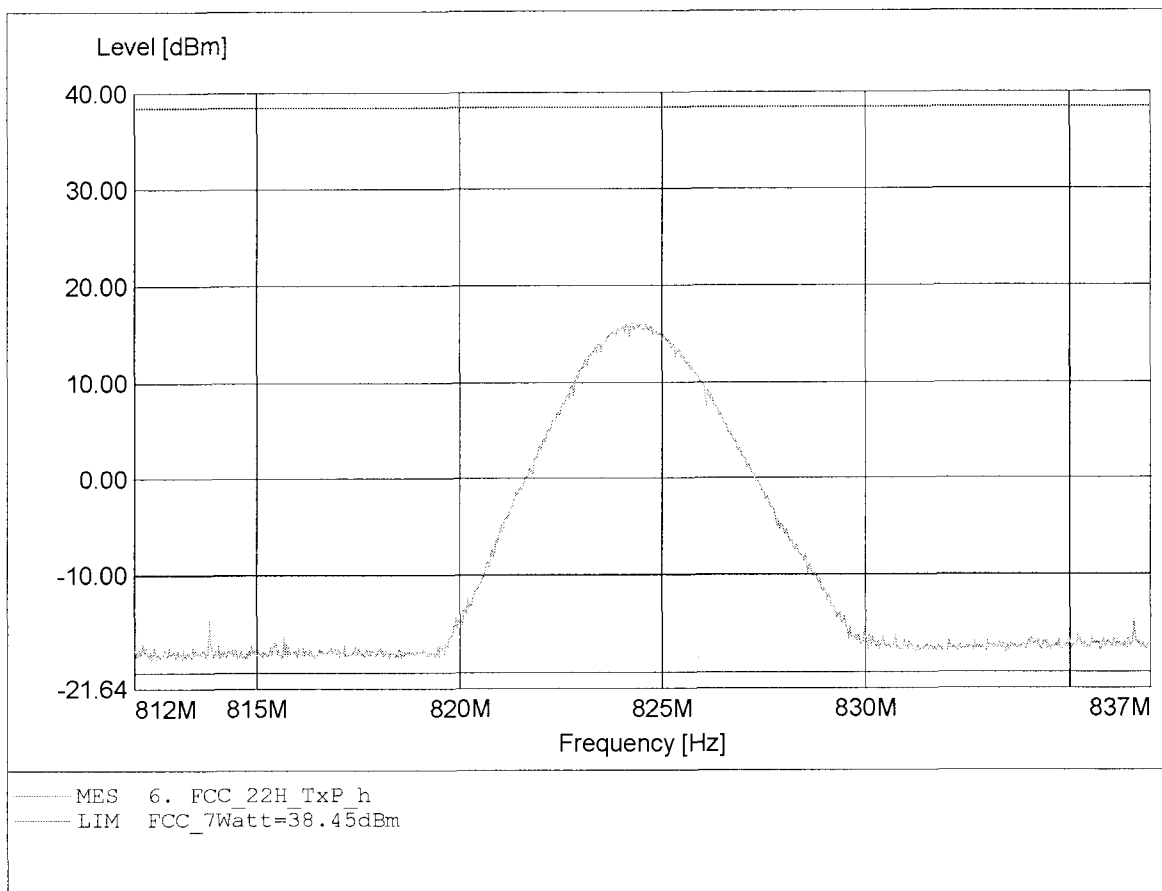


Effective Radiated Power
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 128
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to S22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 824.278MHz, Pmax: 24.63dBm, RBW: 3MHz

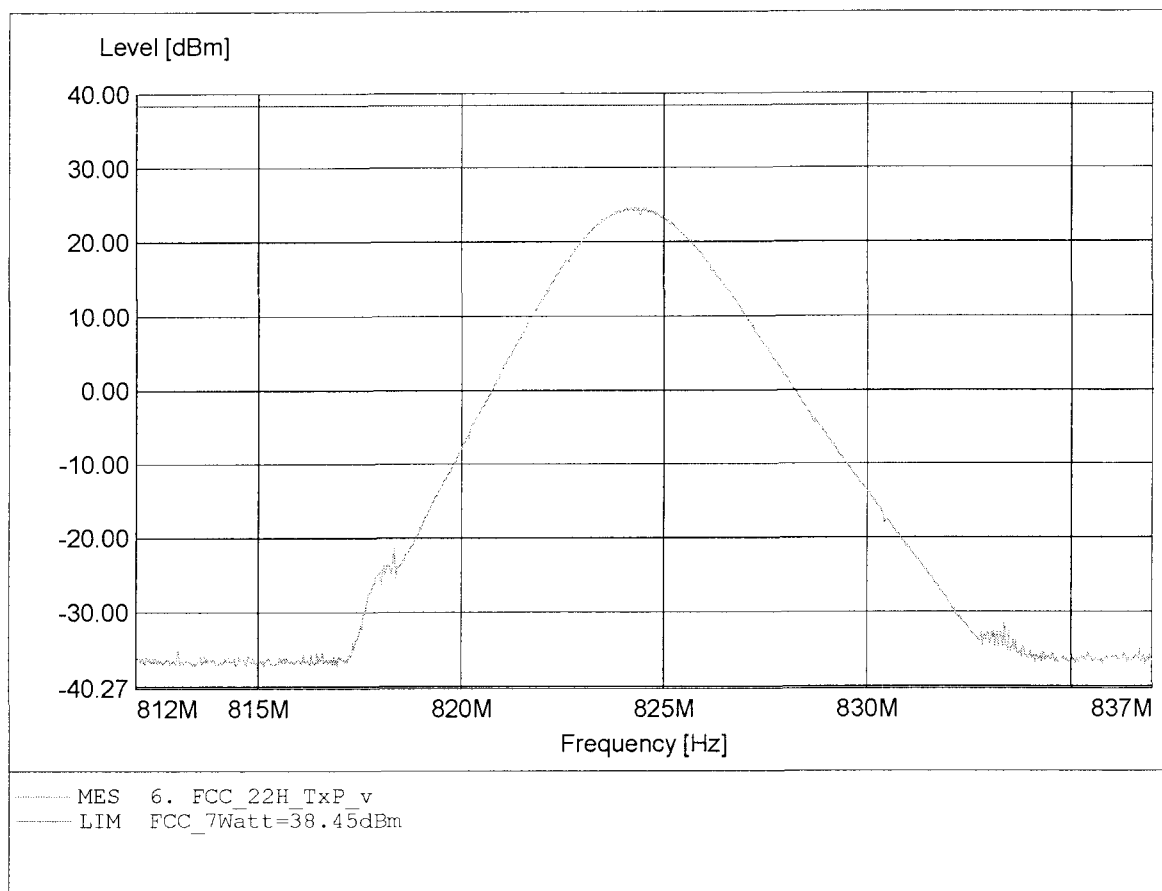


Effective Radiated Power
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 188
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 836.293MHz, Pmax: 14.01dBm, RBW: 3MHz

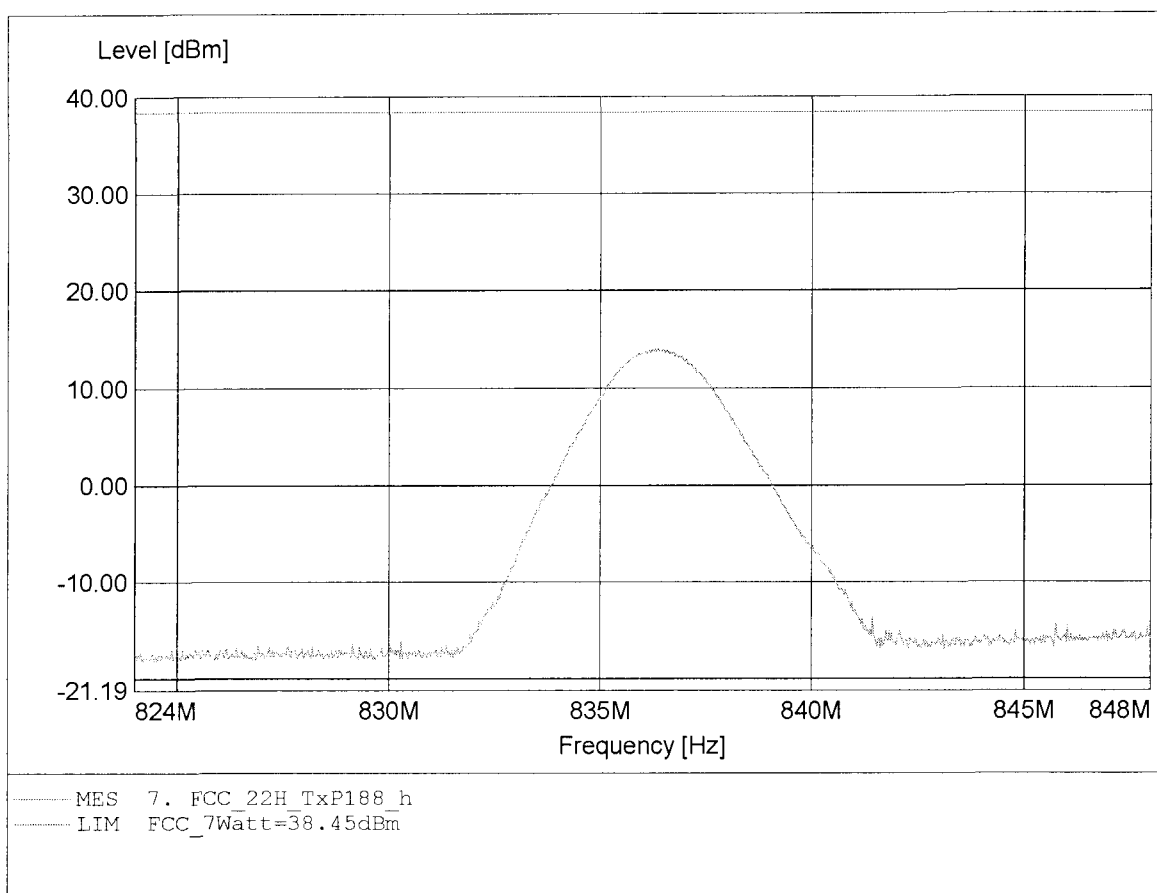


Effective Radiated Power
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 188
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to S22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 836.267MHz, Pmax: 22.30dBm, RBW: 3MHz

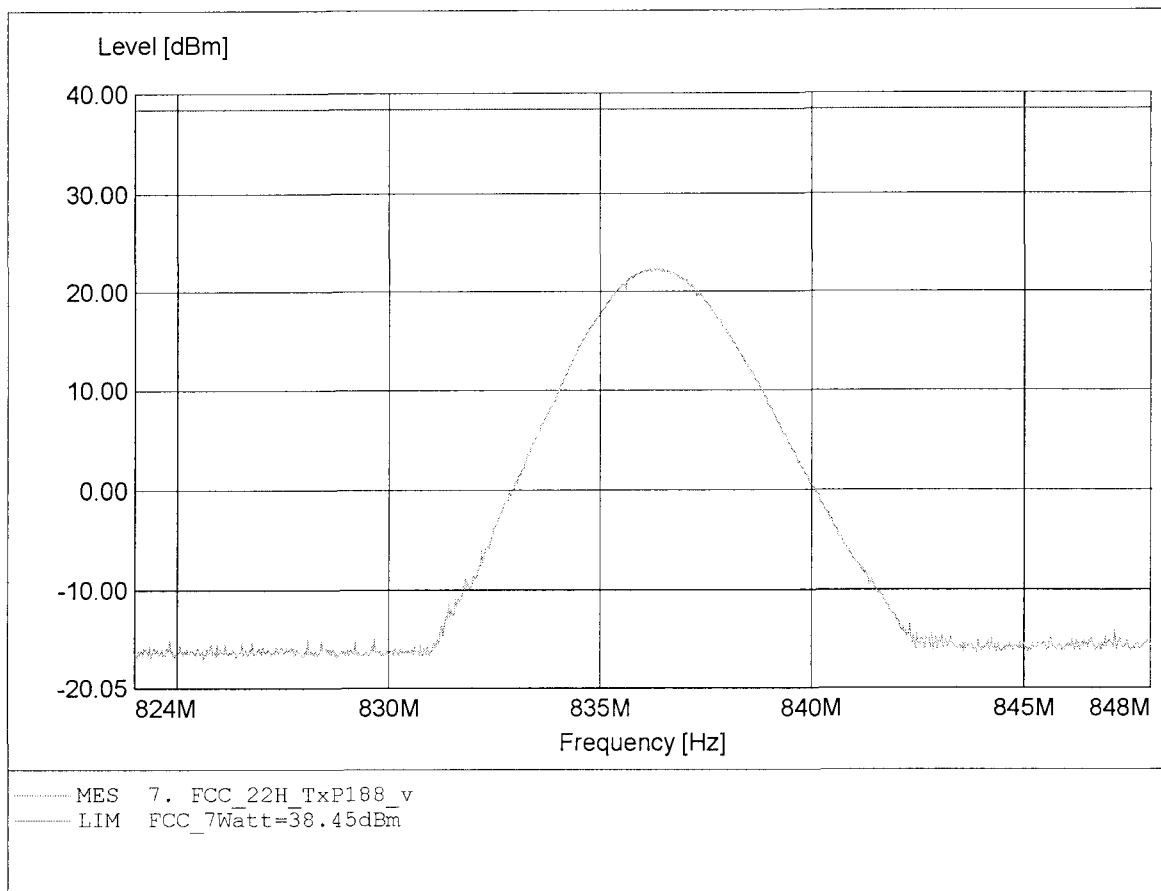


Effective Radiated Power
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 251
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 849.053MHz, Pmax: 18.98dBm, RBW: 3MHz

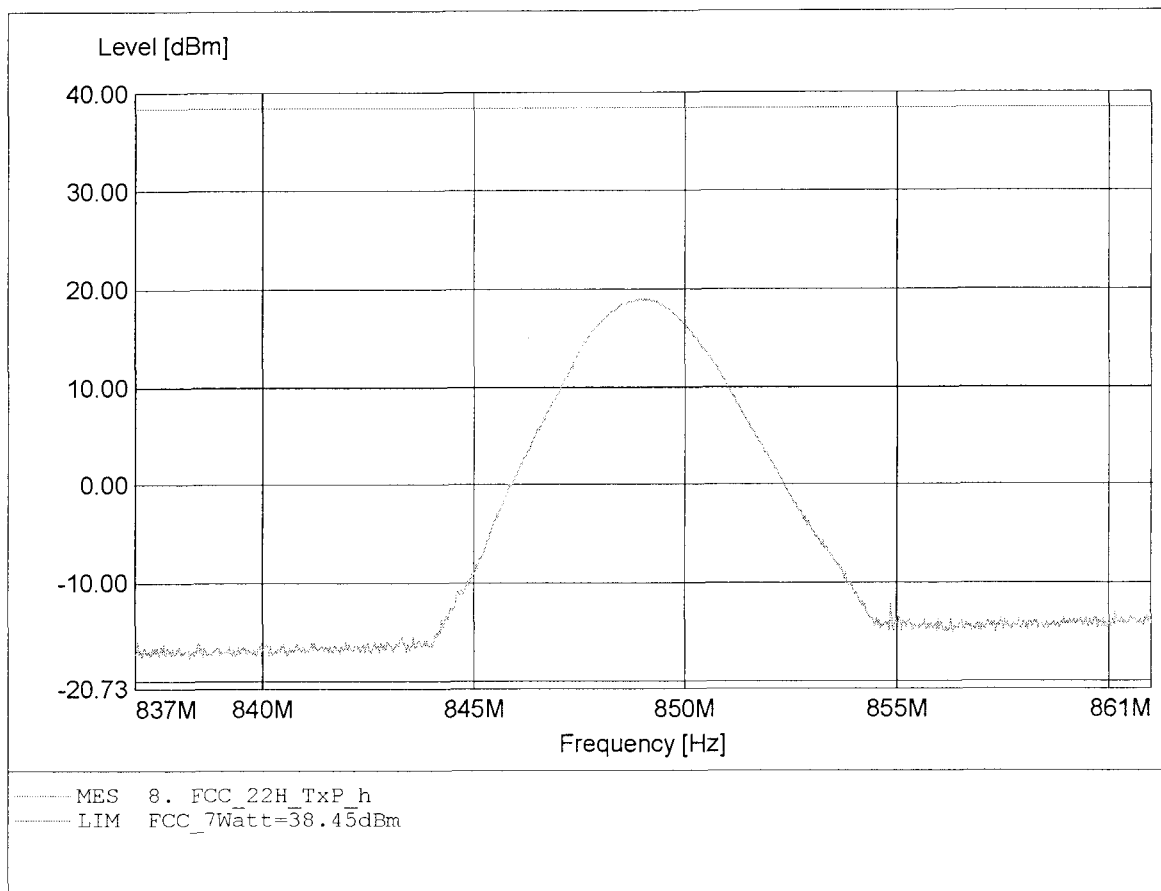

Effective Radiated Power
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 251
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 848.893MHz, Pmax: 25.72dBm, RBW: 3MHz

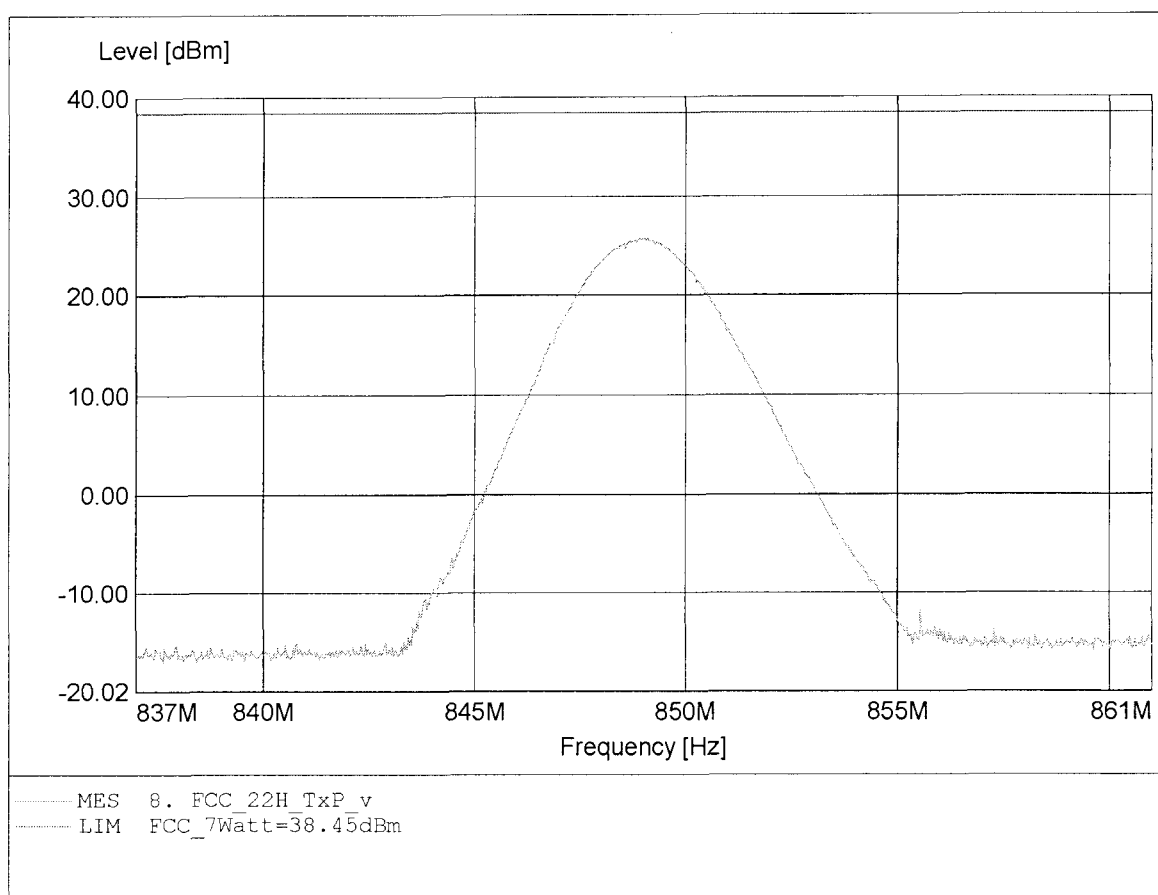

Appendix D

Modulation Requirements

Appendix E

Audio Filter Characteristics

Appendix F


Emission Limitation

Appendix G

Occupied Bandwidth

FCC Part 24 E Occupied Bandwidth

EUT	GSM / GPRS MODULE
Model	Q2686H / G0M20602-0211-S-2
Approval Holder	WAVECOM
Temperature / Voltage	24°C / Unom: 3.8 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC Part 24 Subpart E - Broadband PCS
Test Case	Channel: 512
Comment 1	
Comment 2	

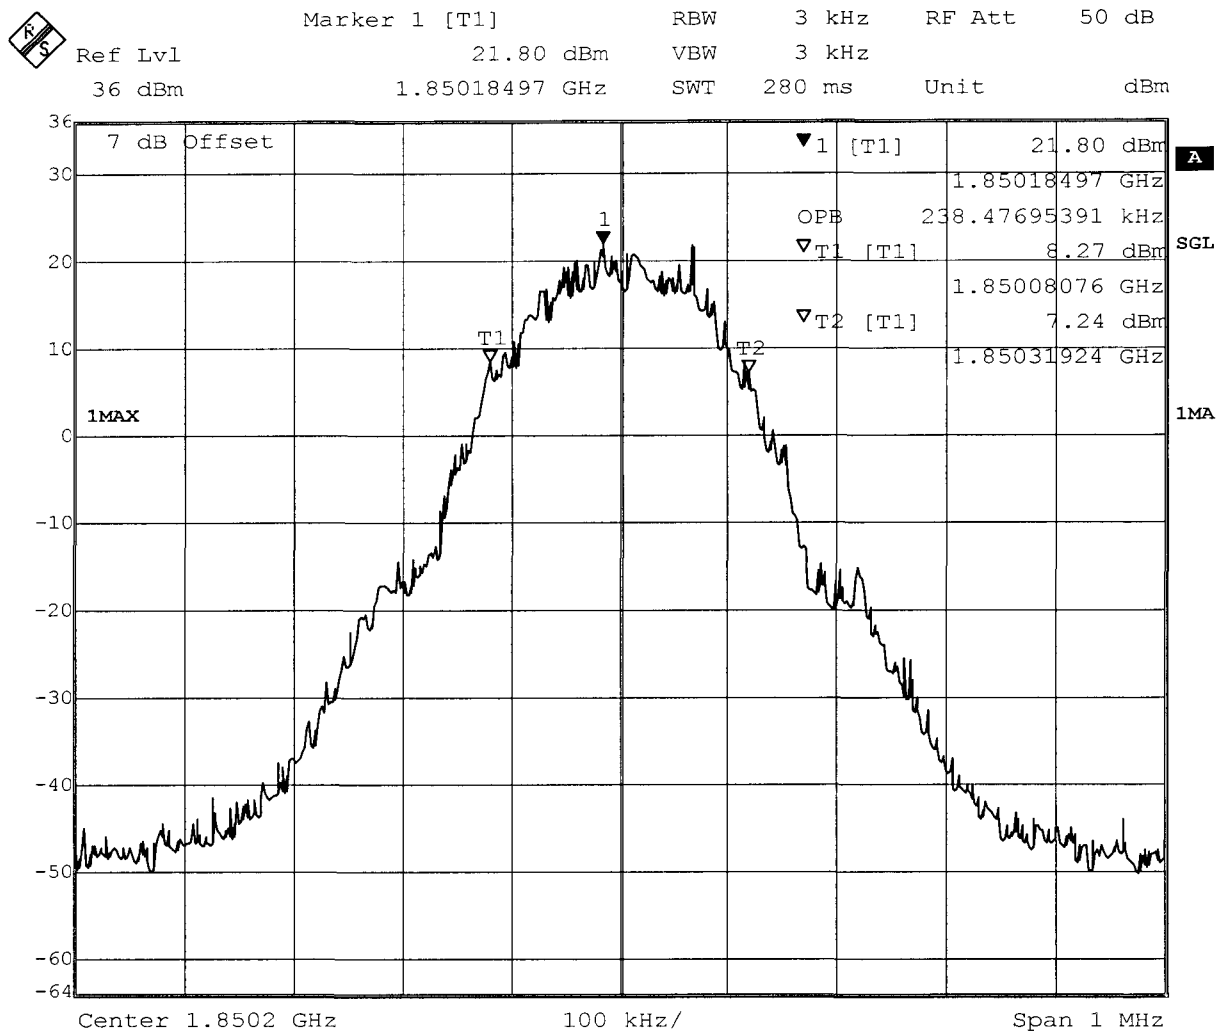


Date: 6.MAR.2006 08:33:48

Measurement diagram

FCC Part 24 E Occupied Bandwidth

EUT	GSM / GPRS MODULE
Model	Q2686H / G0M20602-0211-S-2
Approval Holder	WAVECOM
Temperature / Voltage	24°C / Unom: 3.8 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC Part 24 Subpart E - Broadband PCS
Test Case	Channel: 661
Comment 1	
Comment 2	

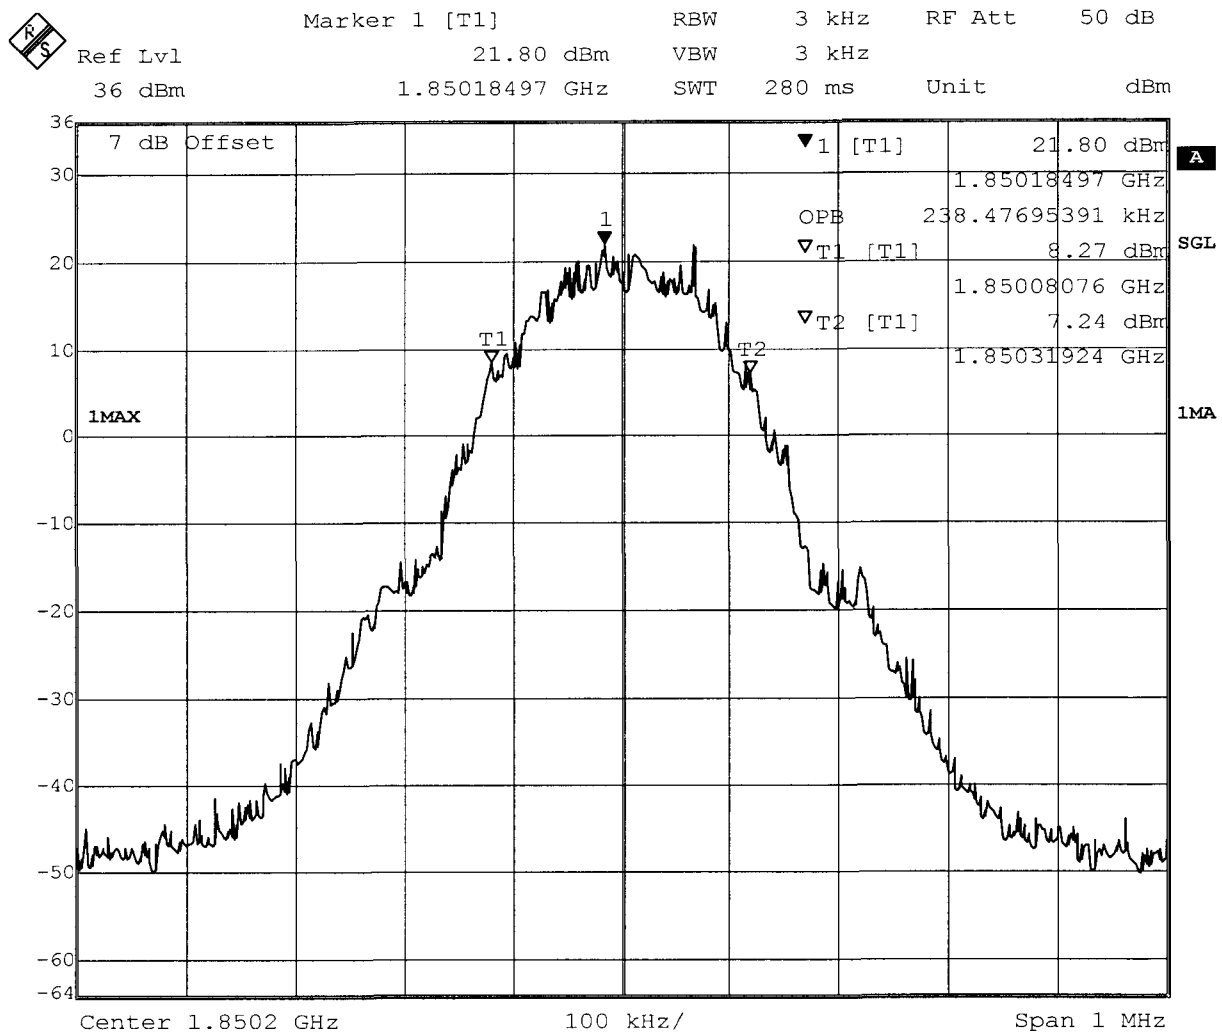


Date: 6.MAR.2006 08:33:48

Measurement diagram

FCC Part 24 E Occupied Bandwidth

EUT	GSM / GPRS MODULE
Model	Q2686H / G0M20602-0211-S-2
Approval Holder	WAVECOM
Temperature / Voltage	24°C / Unom: 3.8 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC Part 24 Subpart E - Broadband PCS
Test Case	Channel: 810
Comment 1	
Comment 2	

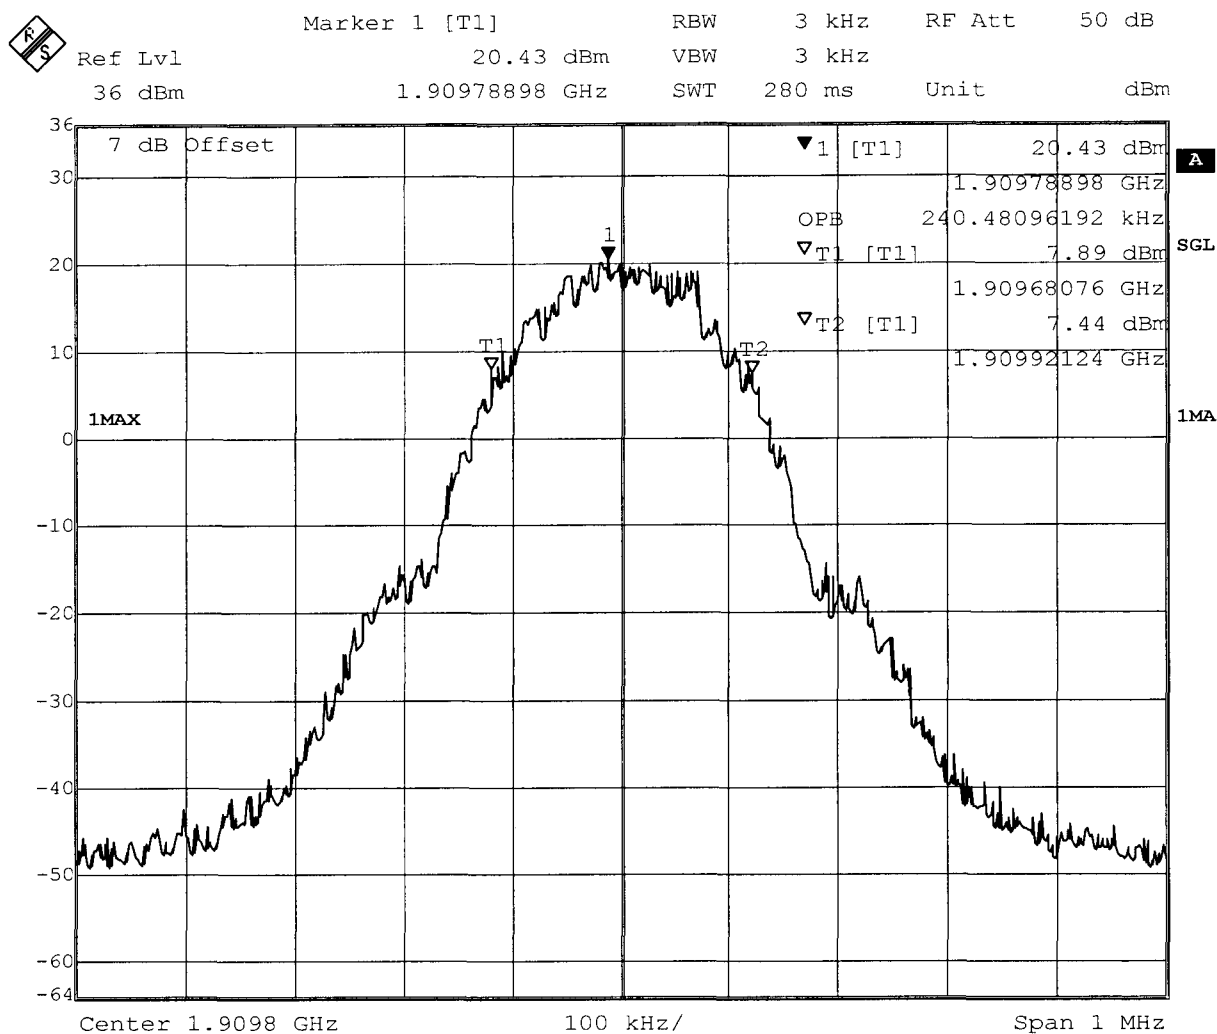


Date: 6.MAR.2006 08:47:34

Measurement diagram

FCC Part 24 E
Emission Bandwidth

EUT	GSM / GPRS MODULE
Model	Q2686H / G0M20602-0211-S-2
Approval Holder	WAVECOM
Temperature / Voltage	24°C / Unom: 3.8 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC Part 24 Subpart E - Broadband PCS
Test Case	Channel: 512
Comment 1	-26 dB Emission Bandwidth
Comment 2	

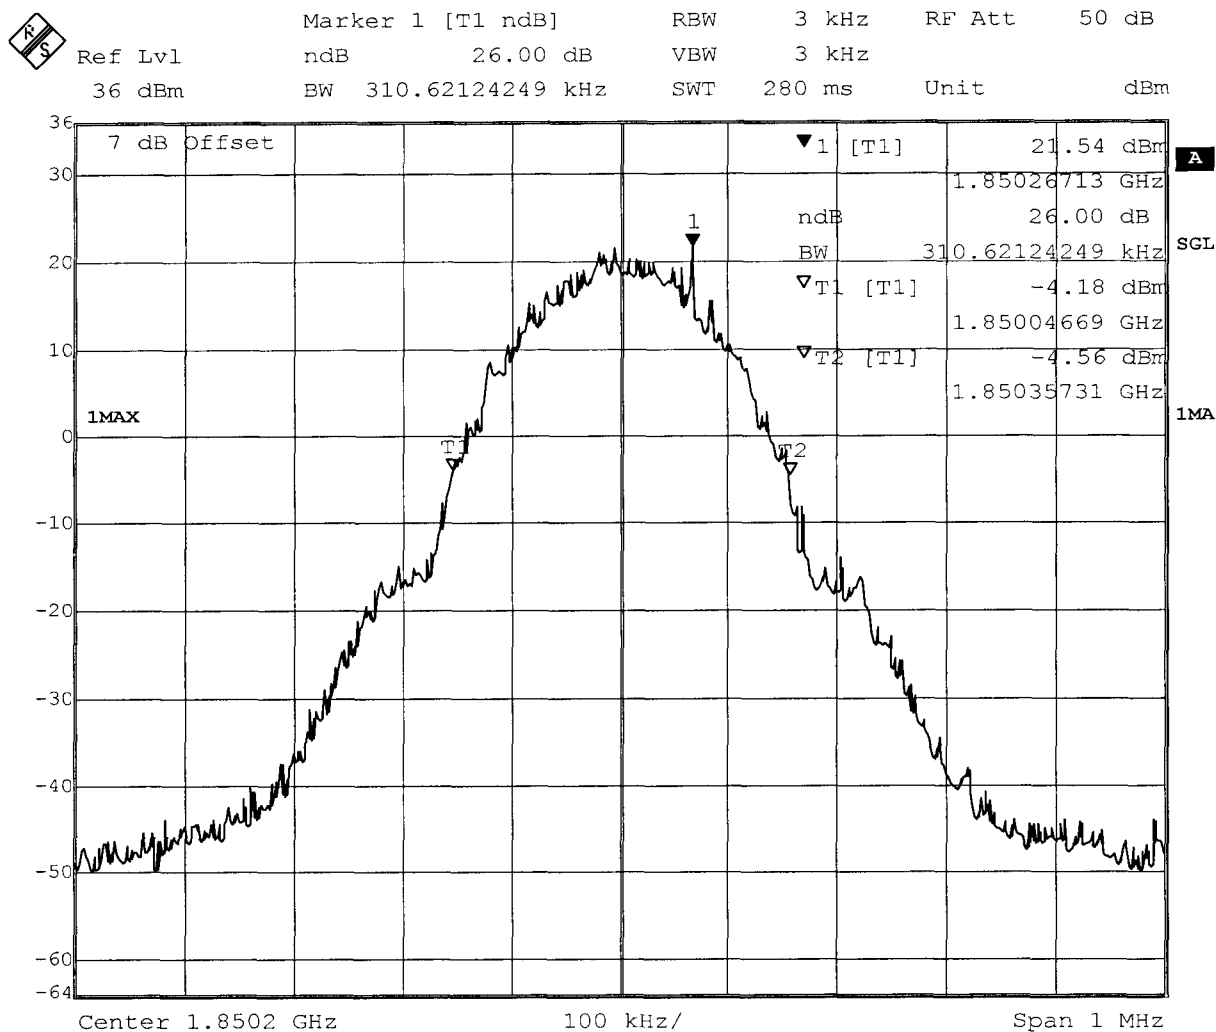


Date: 6.MAR.2006 08:49:39

Measurement diagram

FCC Part 24 E Emission Bandwidth

EUT	GSM / GPRS MODULE
Model	Q2686H / G0M20602-0211-S-2
Approval Holder	WAVECOM
Temperature / Voltage	24°C / Unom: 3.8 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC Part 24 Subpart E - Broadband PCS
Test Case	Channel: 661
Comment 1	-26 dB Emission Bandwidth
Comment 2	

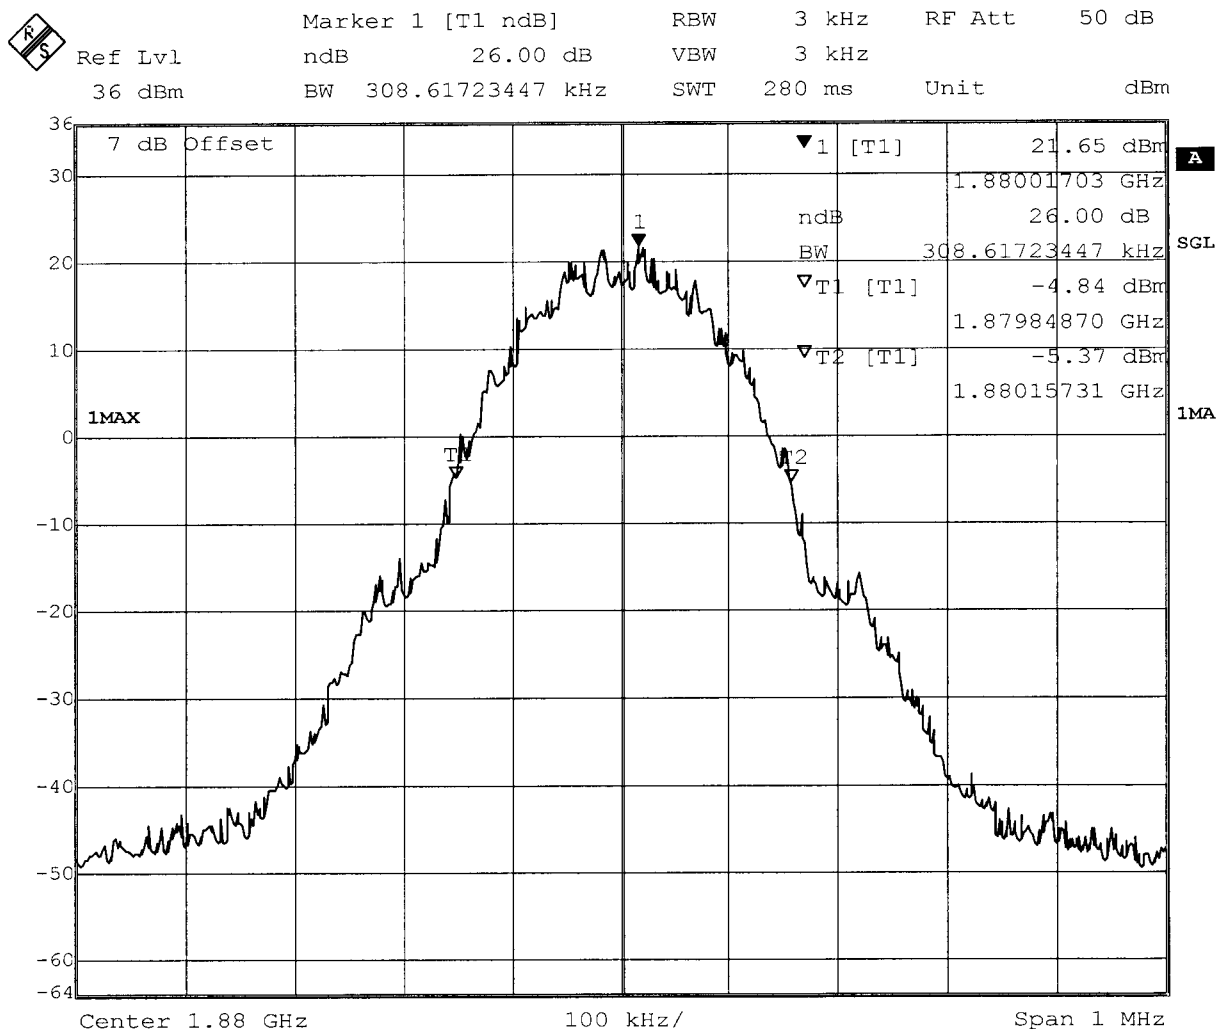


Date: 6.MAR.2006 08:51:52

Measurement diagram

FCC Part 24 E
Emission Bandwidth

EUT	GSM / GPRS MODULE
Model	Q2686H / G0M20602-0211-S-2
Approval Holder	WAVECOM
Temperature / Voltage	24°C / Unom: 3.8 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC Part 24 Subpart E - Broadband PCS
Test Case	Channel: 810
Comment 1	-26 dB Emission Bandwidth
Comment 2	

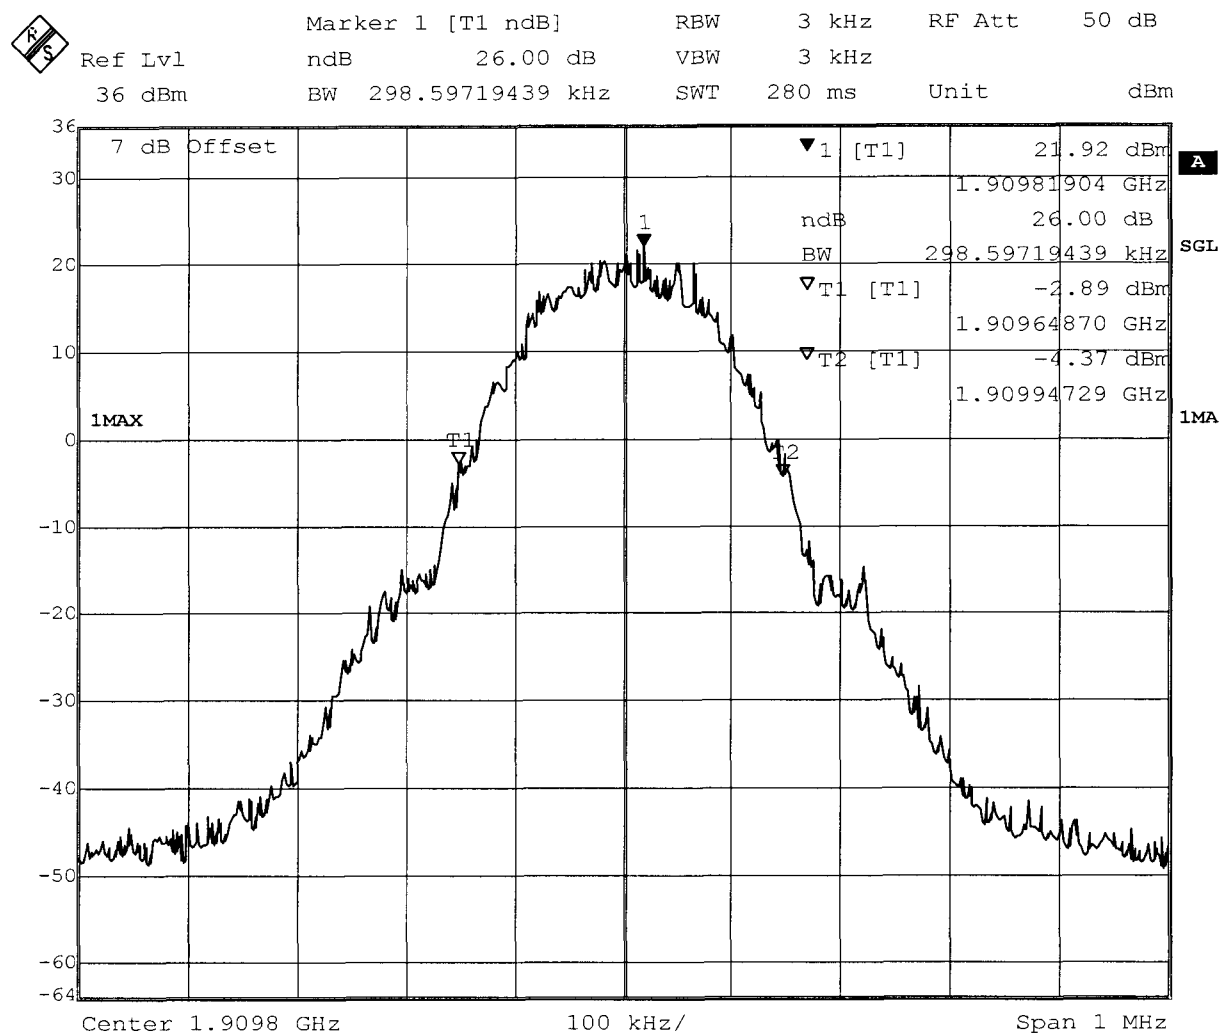


Date: 6.MAR.2006 08:53:49

Measurement diagram

FCC Part 22 H Occupied Bandwidth

EUT	GSM / GPRS MODULE
Model	Q2686H / G0M20602-0211-S-2
Approval Holder	WAVECOM
Temperature / Voltage	24°C / Unom: 3.8 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC Part 22 Subpart H - Cellular Radiotelephone Service
Test Case	Channel: 128
Comment 1	
Comment 2	

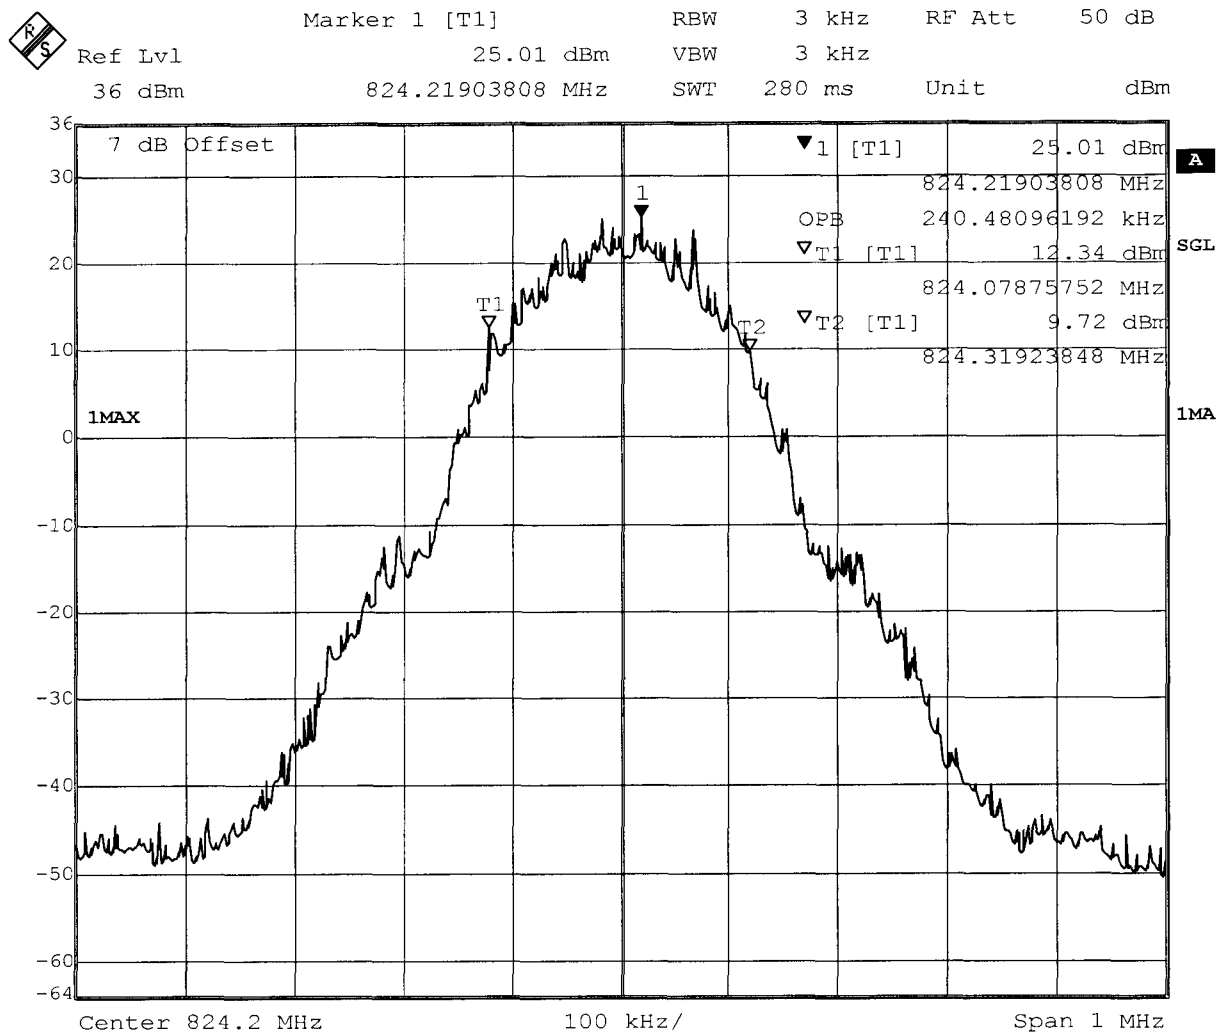


Date: 6.MAR.2006 07:27:44

Measurement diagram

FCC Part 22 H Occupied Bandwidth

EUT	GSM / GPRS MODULE
Model	Q2686H / G0M20602-0211-S-2
Approval Holder	WAVECOM
Temperature / Voltage	24°C / Unom: 3.8 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC Part 22 Subpart H - Cellular Radiotelephone Service
Test Case	Channel: 188
Comment 1	
Comment 2	

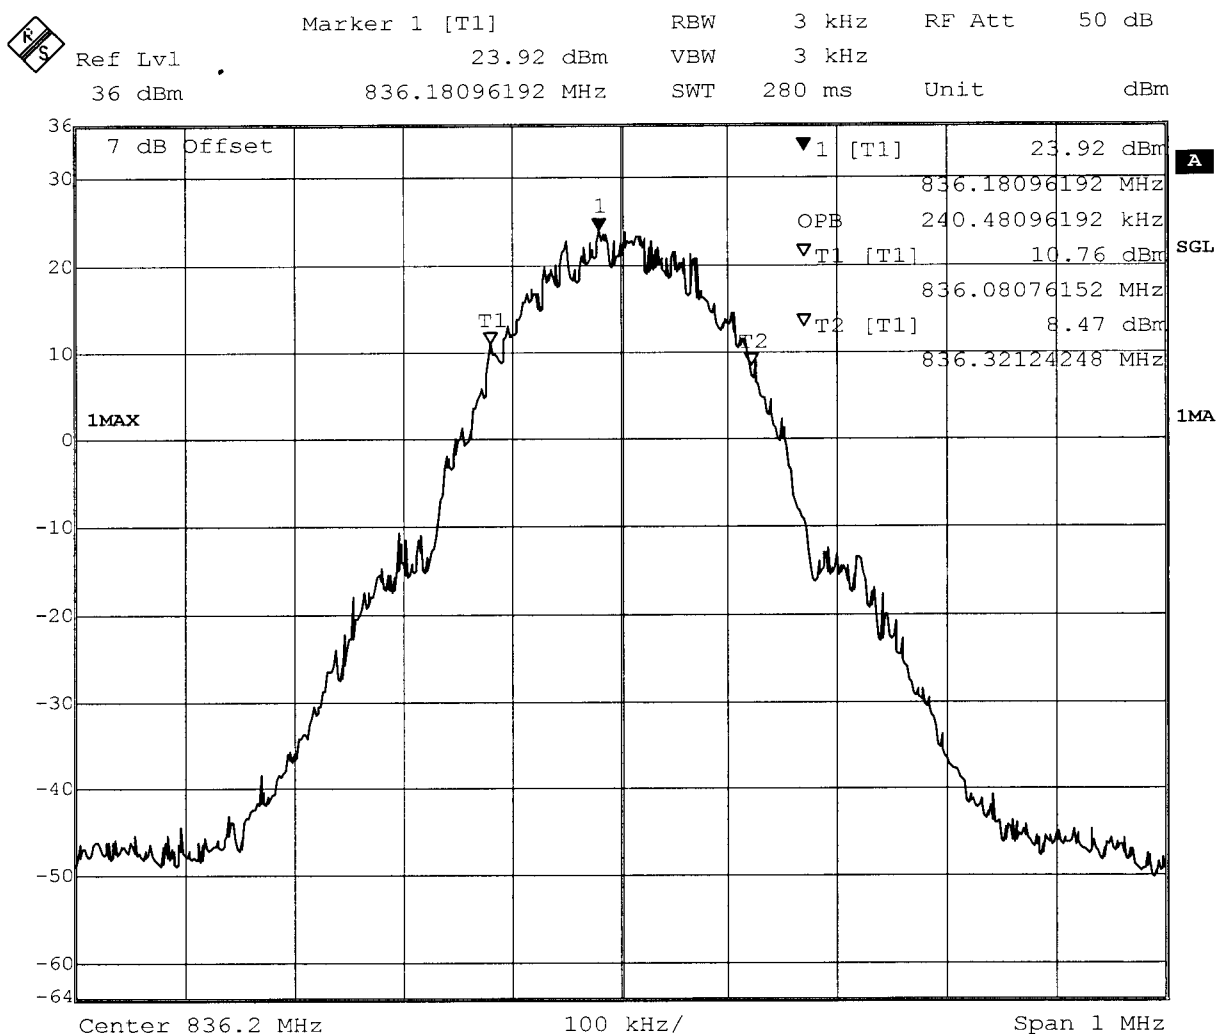


Date: 6.MAR.2006 07:32:02

Measurement diagram

FCC Part 22 H Occupied Bandwidth

EUT	GSM / GPRS MODULE
Model	Q2686H / G0M20602-0211-S-2
Approval Holder	WAVECOM
Temperature / Voltage	24°C / Unom: 3.8 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC Part 22 Subpart H - Cellular Radiotelephone Service
Test Case	Channel: 251
Comment 1	
Comment 2	

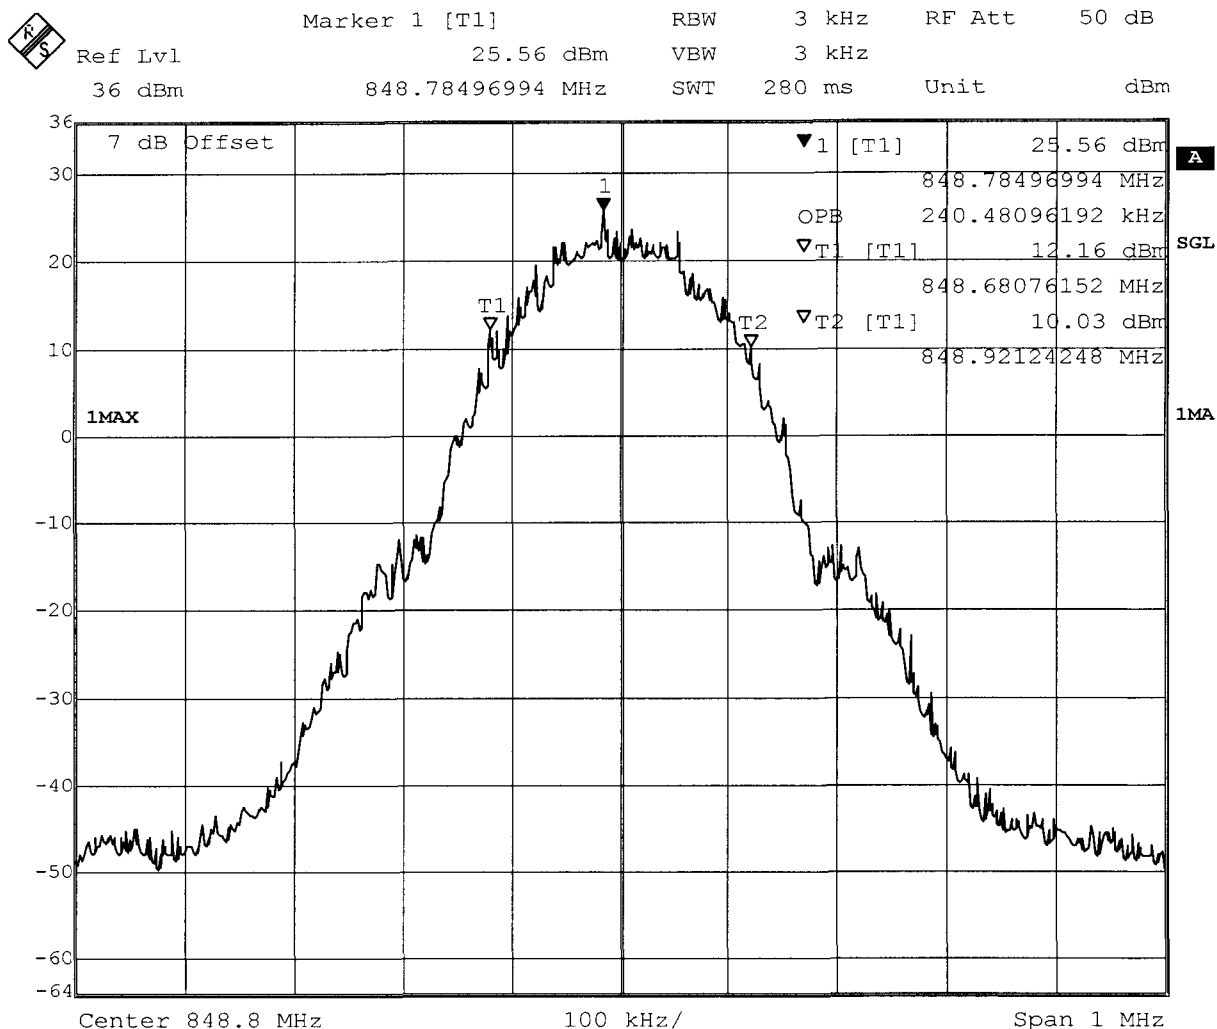


Date: 6.MAR.2006 07:35:10

Measurement diagram

FCC Part 22 H
Emission Bandwidth

EUT	GSM / GPRS MODULE
Model	Q2686H / G0M20602-0211-S-2
Approval Holder	WAVECOM
Temperature / Voltage	24°C / Unom: 3.8 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC Part 22 Subpart H - Cellular Radiotelephone Service
Test Case	Channel: 128
Comment 1	-26 dB Emission Bandwidth
Comment 2	

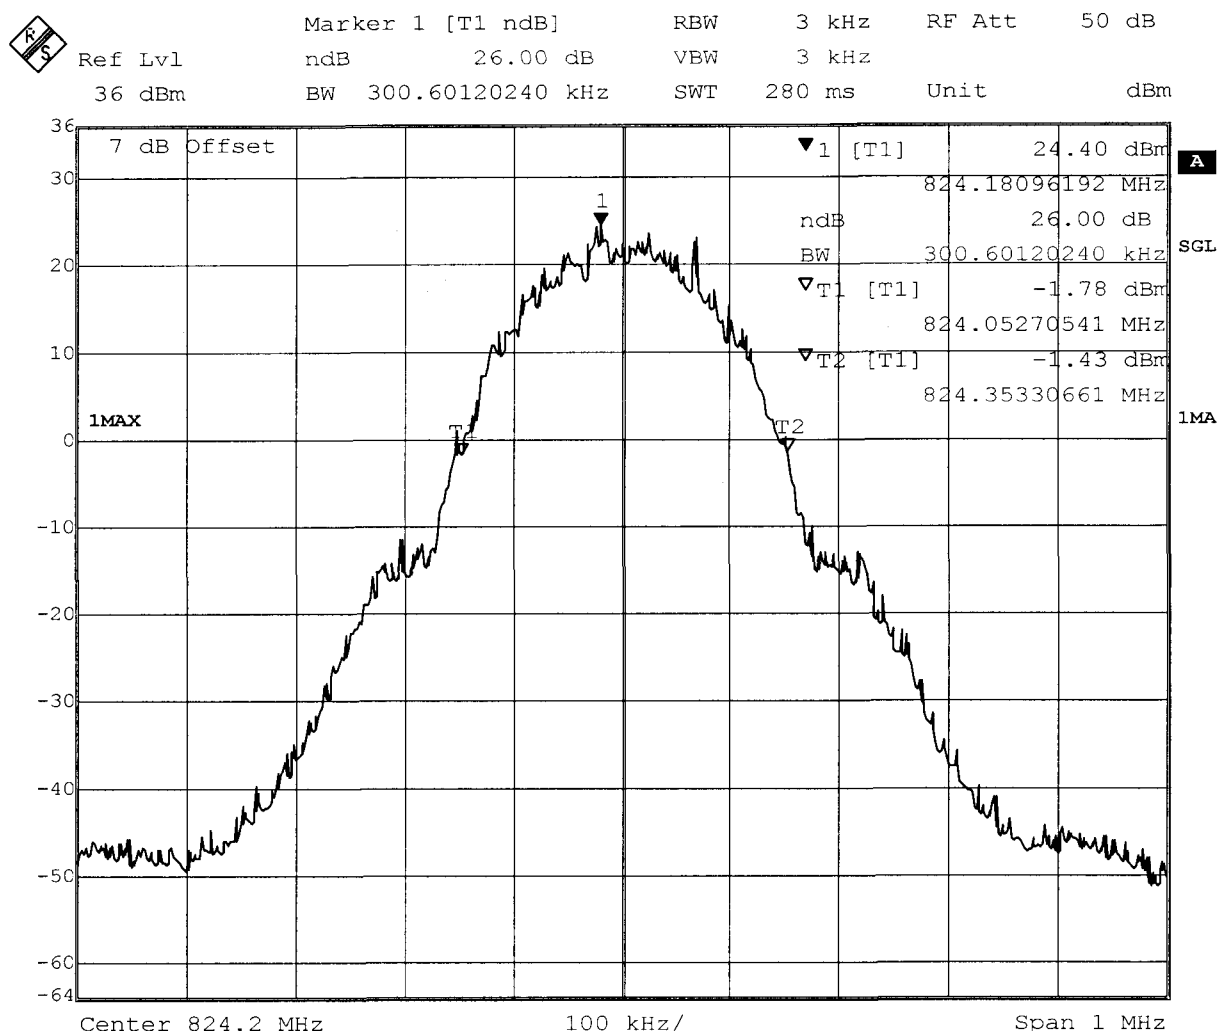


Date: 6.MAR.2006 07:38:02

Measurement diagram

FCC Part 22 H
Emission Bandwidth

EUT	GSM / GPRS MODULE
Model	Q2686H / G0M20602-0211-S-2
Approval Holder	WAVECOM
Temperature / Voltage	24°C / Unom: 3.8 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC Part 22 Subpart H - Cellular Radiotelephone Service
Test Case	Channel: 188
Comment 1	-26 dB Emission Bandwidth
Comment 2	

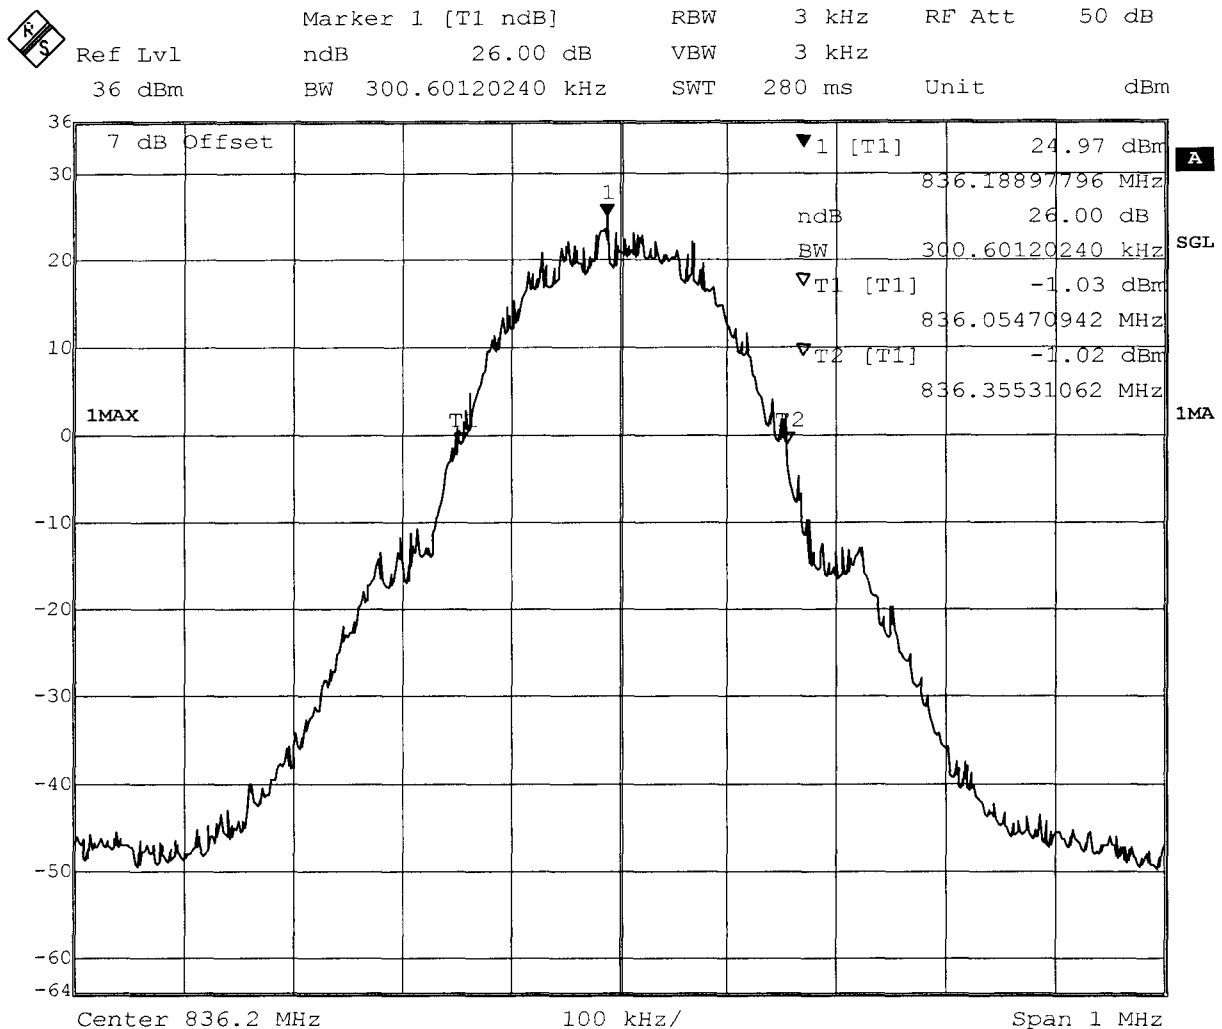


Date: 6.MAR.2006 07:41:00

Measurement diagram

FCC Part 22 H
Emission Bandwidth

EUT	GSM / GPRS MODULE
Model	Q2686H / G0M20602-0211-S-2
Approval Holder	WAVECOM
Temperature / Voltage	24°C / Unom: 3.8 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC Part 22 Subpart H - Cellular Radiotelephone Service
Test Case	Channel: 251
Comment 1	-26 dB Emission Bandwidth
Comment 2	

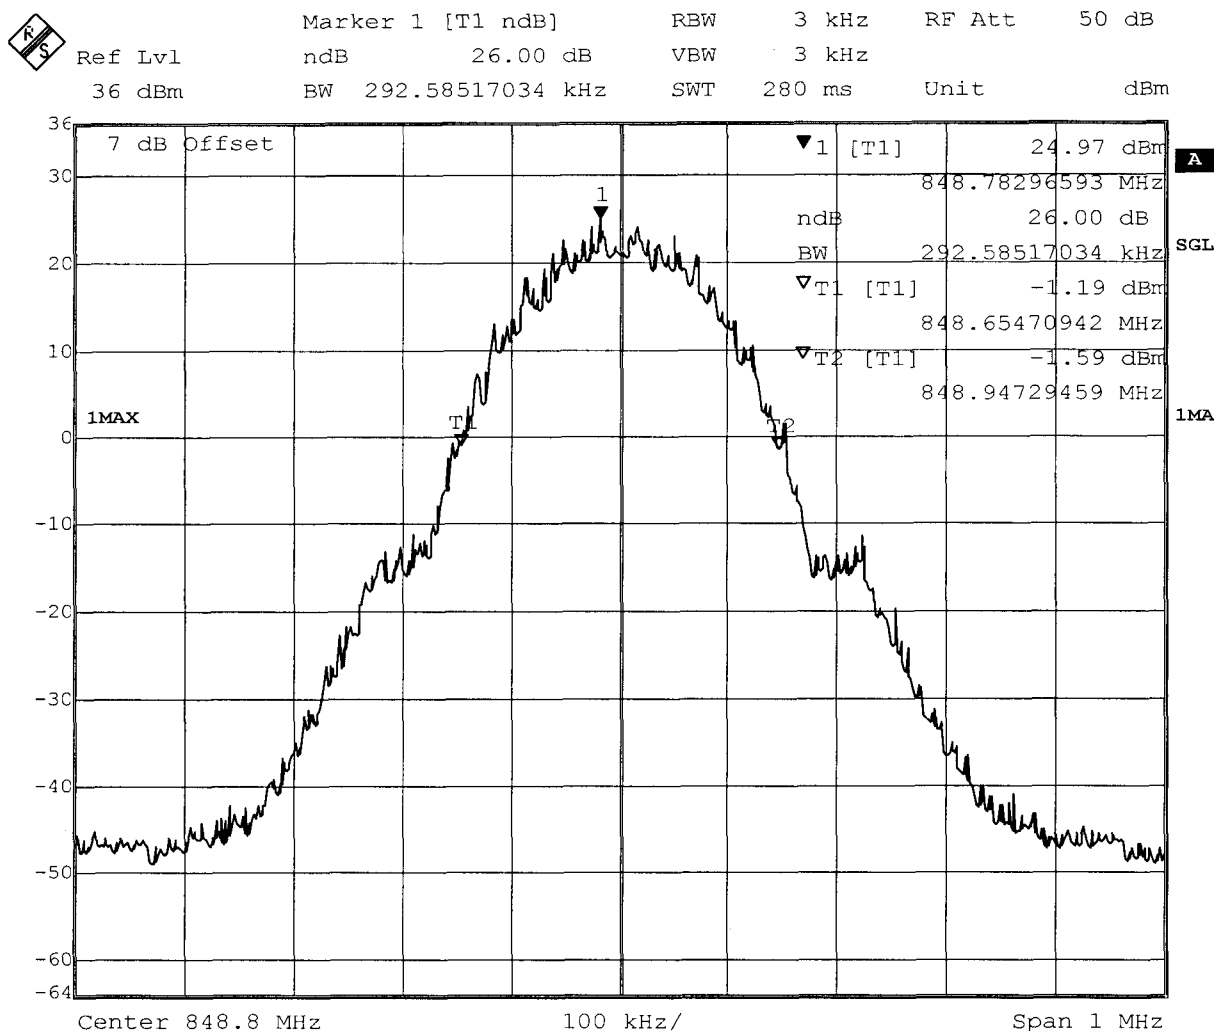

Date: 6.MAR.2006 07:44:51

Measurement diagram

Appendix H


Out of Band Emission at Antenna Terminals Mobile Emissions In Base
Frequency Range

Appendix I

Spurious Radiation


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 512
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 78.733MHz, Pmax: -52.34dBm, RBW: 1MHz

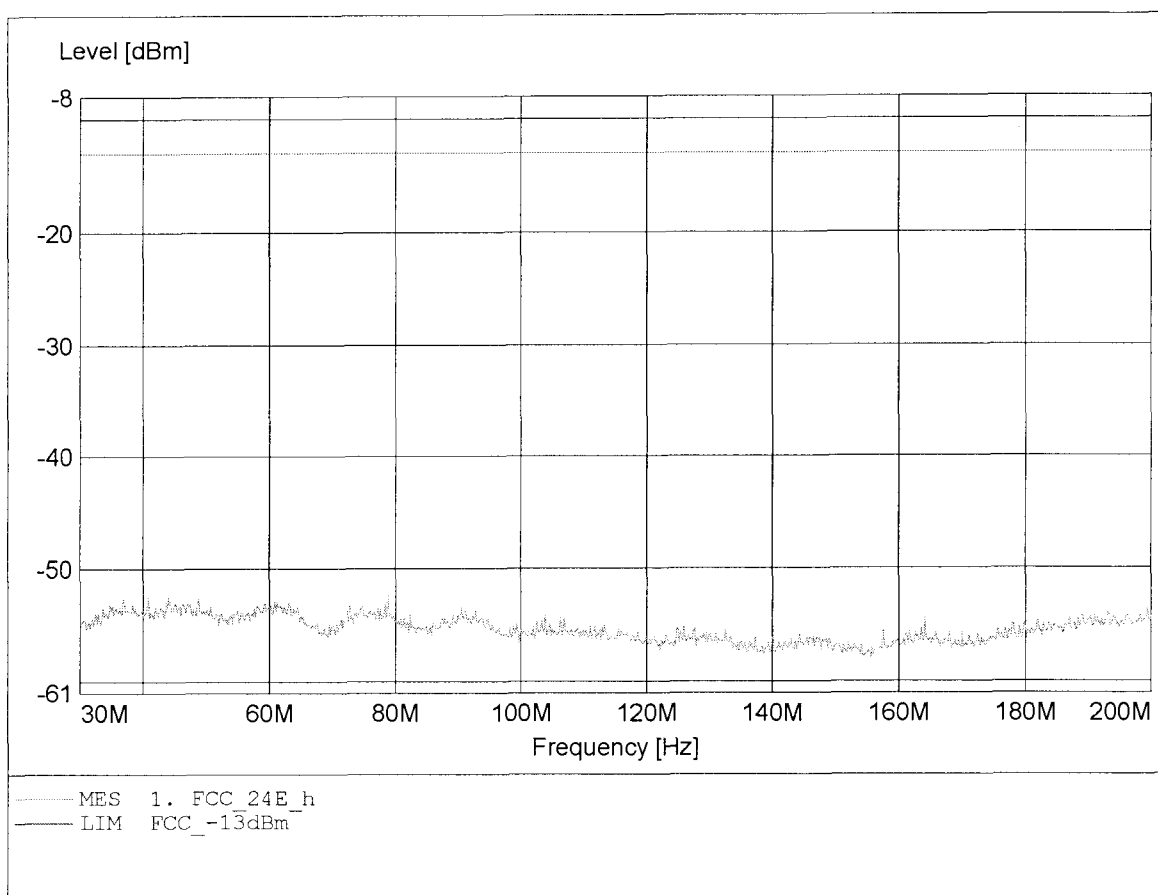


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 512
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 61.544MHz, Pmax: -52.56dBm, RBW: 1MHz

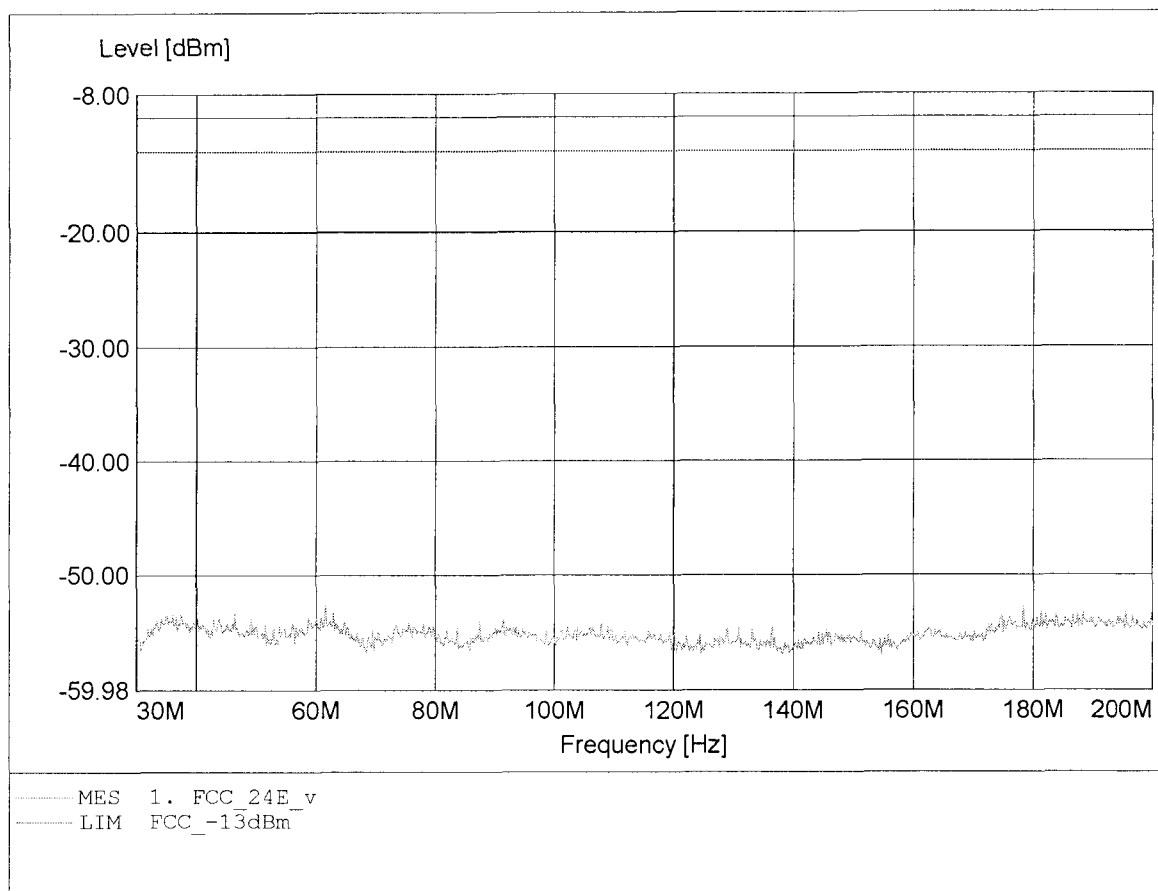


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 512
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 850.667MHz, Pmax: -38.63dBm, RBW: 1MHz

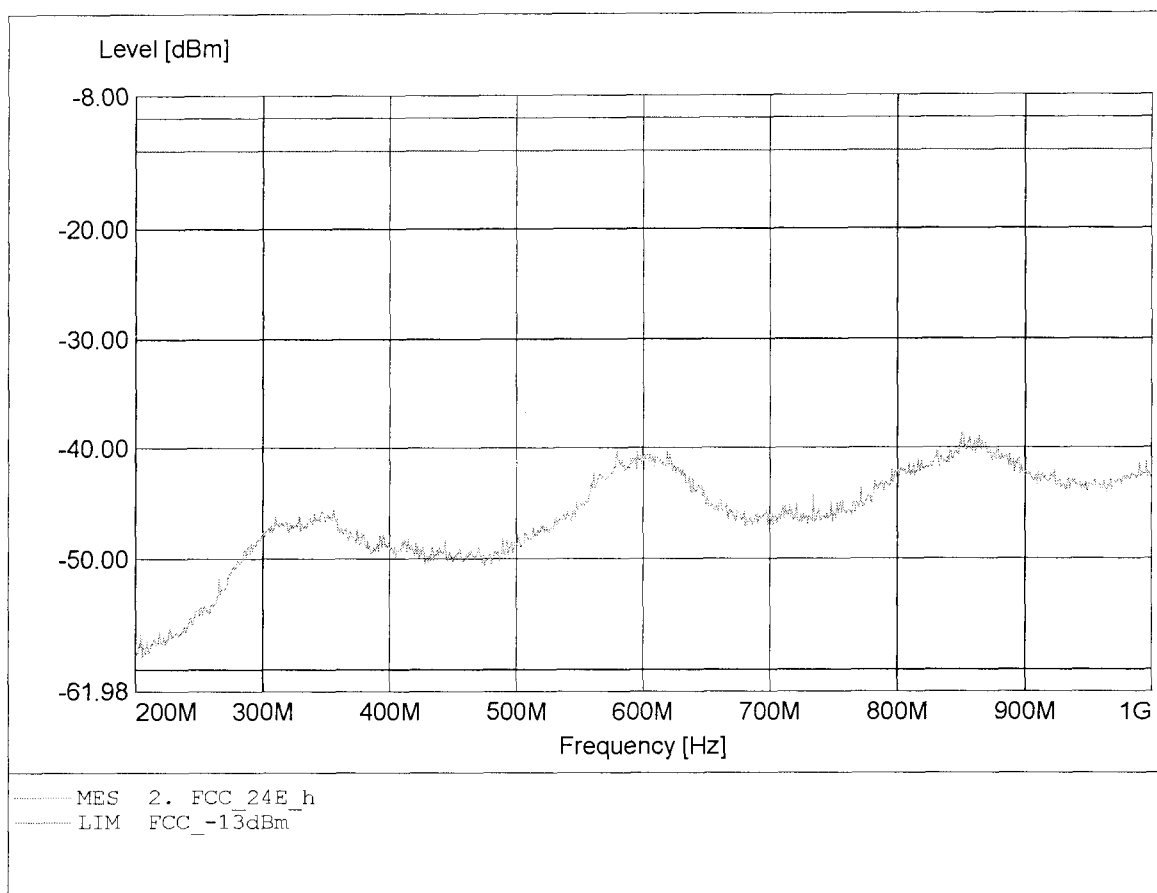


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 512
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 1000.000MHz, Pmax: -40.48dBm, RBW: 1MHz

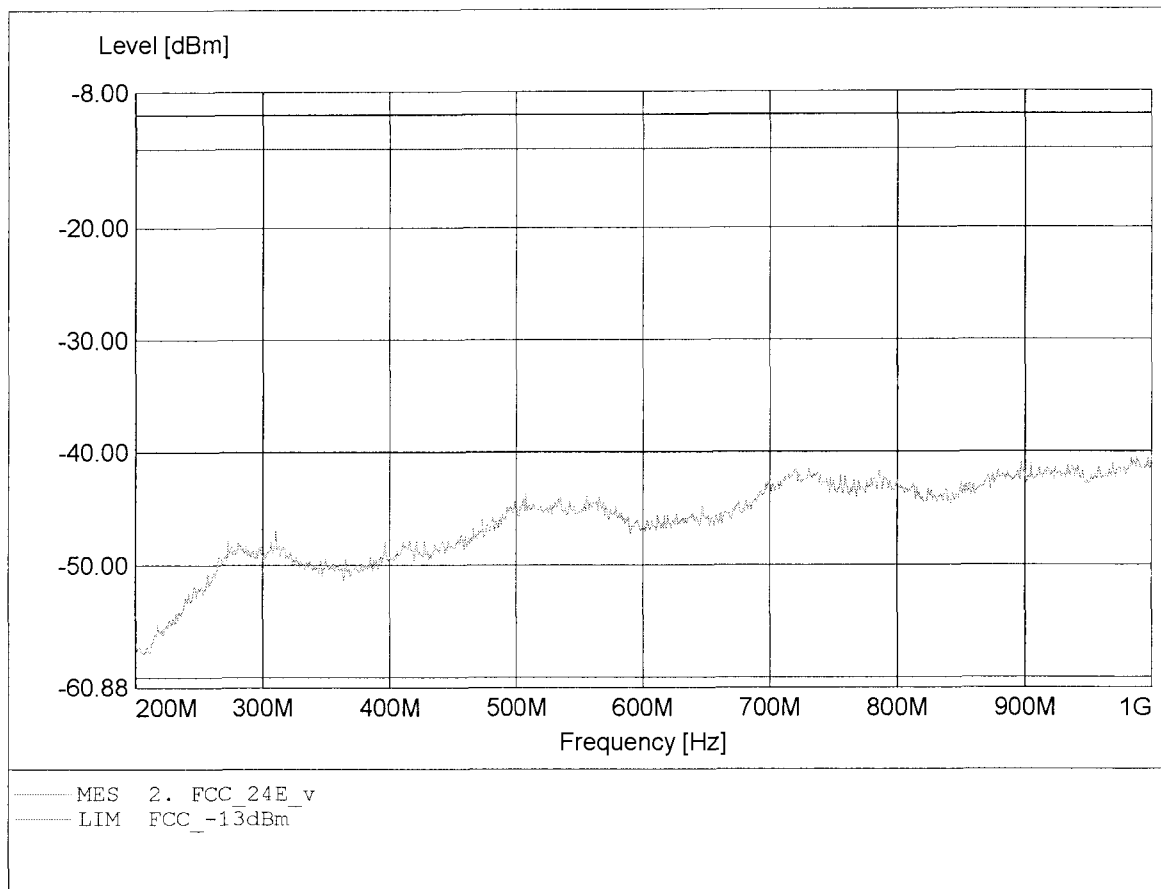


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 512
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.984GHz, Pmax: -22.51dBm, RBW: 1MHz/3kHz

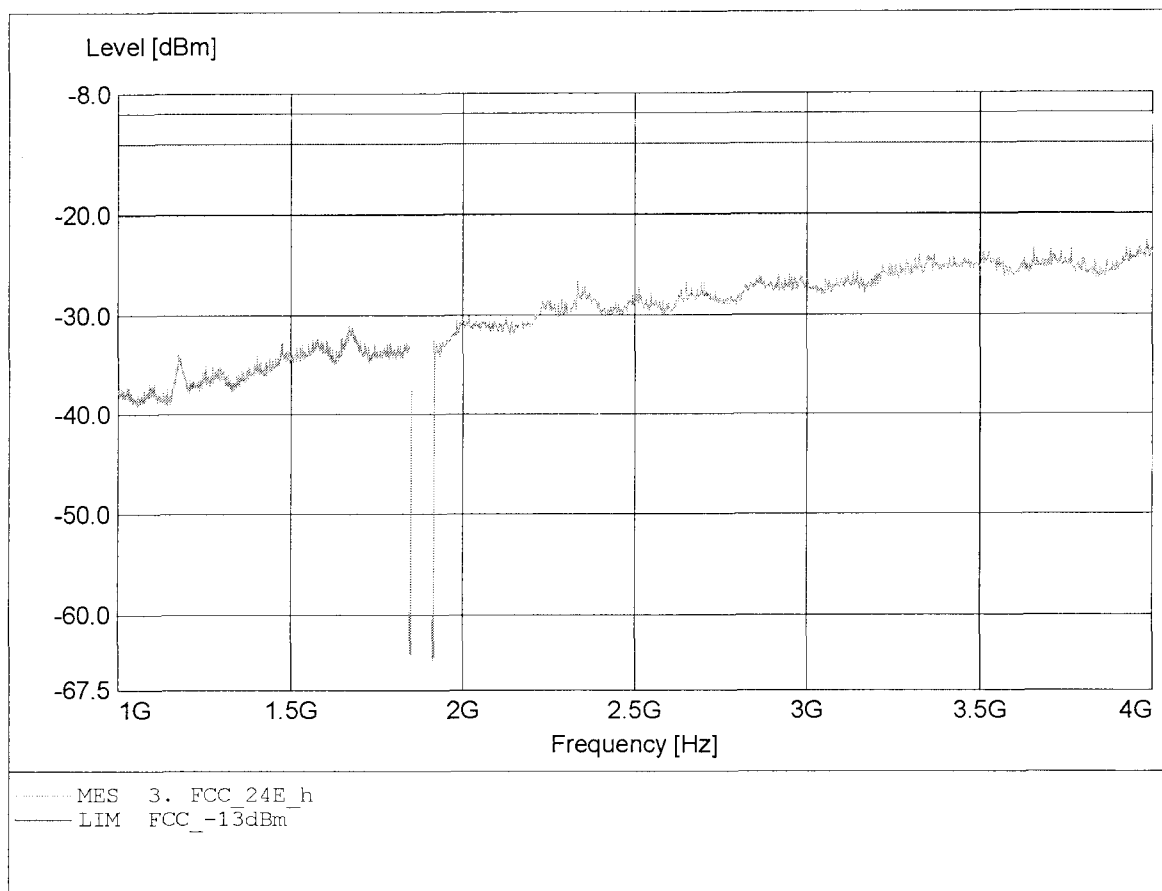


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 512
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.629GHz, Pmax: -22.21dBm, RBW: 1MHz/3kHz

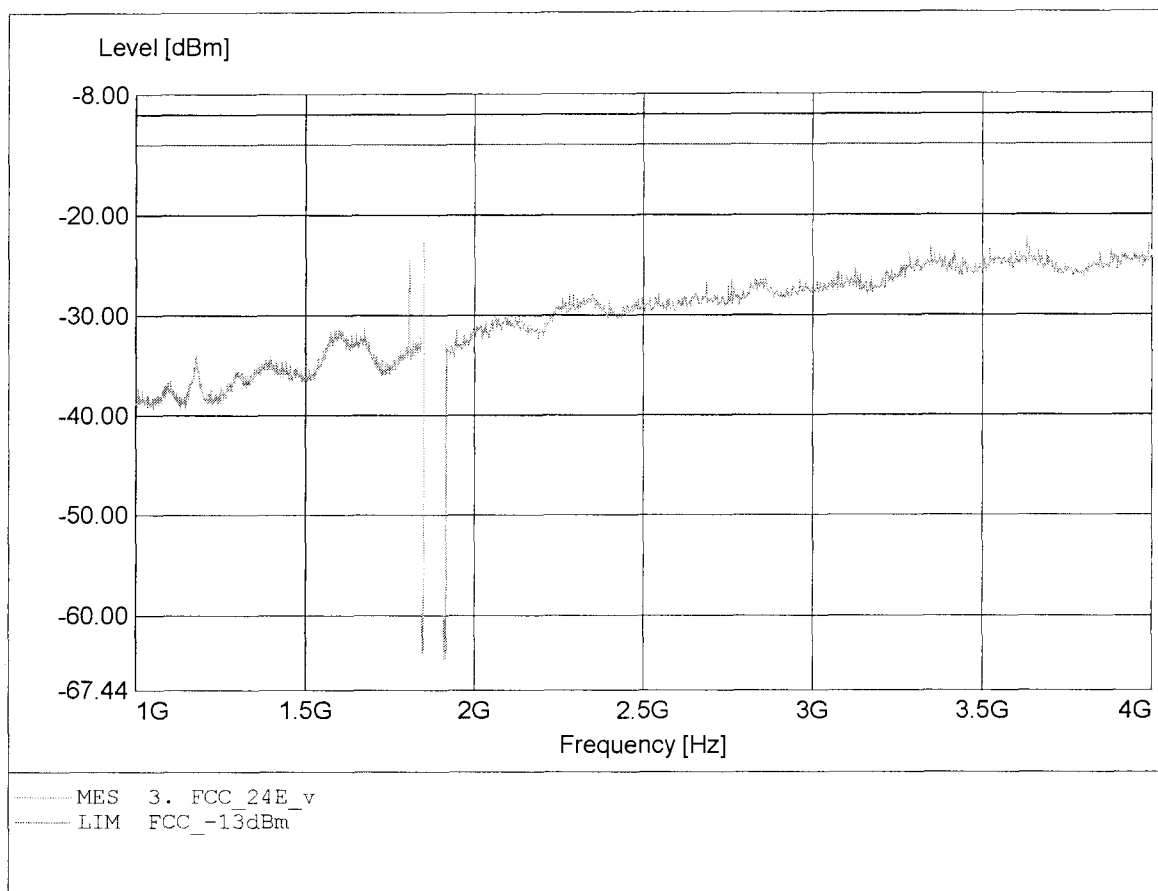


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 512
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.982GHz, Pmax: -44.43dBm, RBW: 1MHz

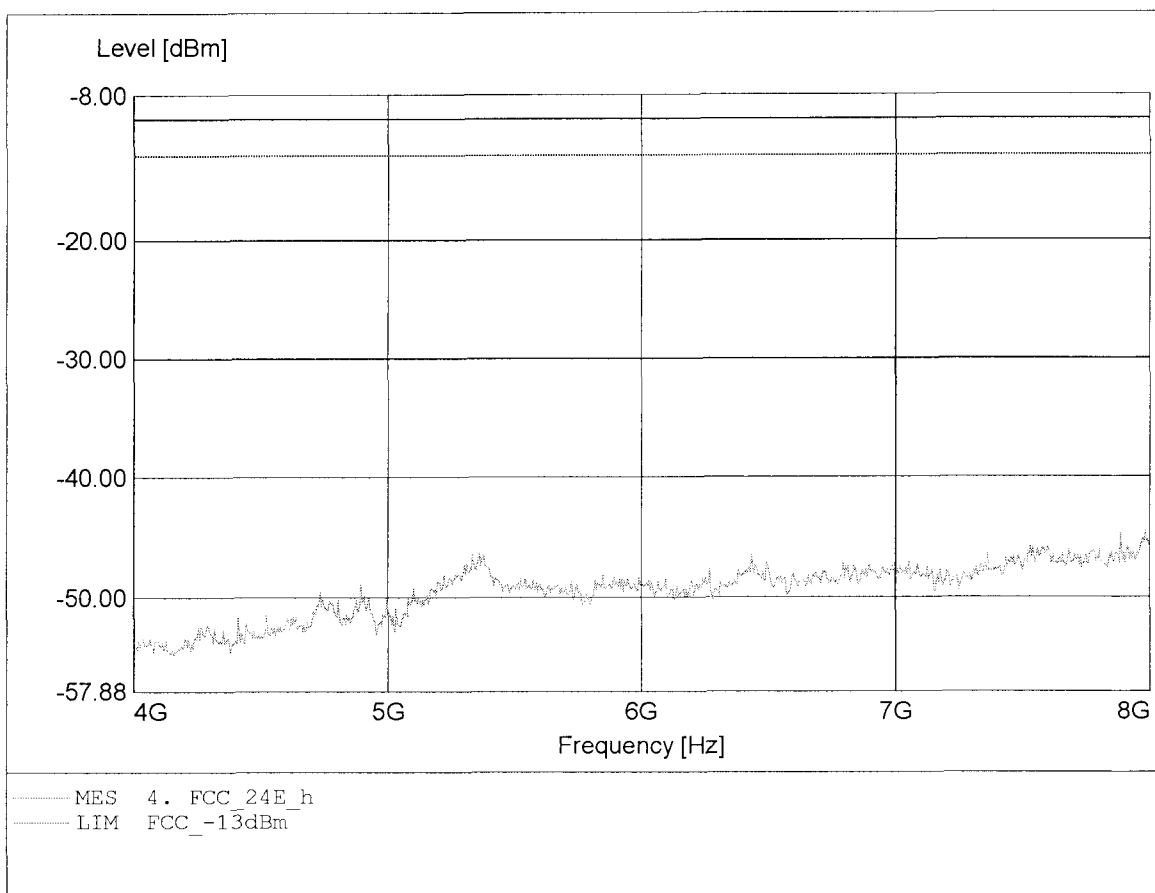


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 512
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.991GHz, Pmax: -44.82dBm, RBW: 1MHz

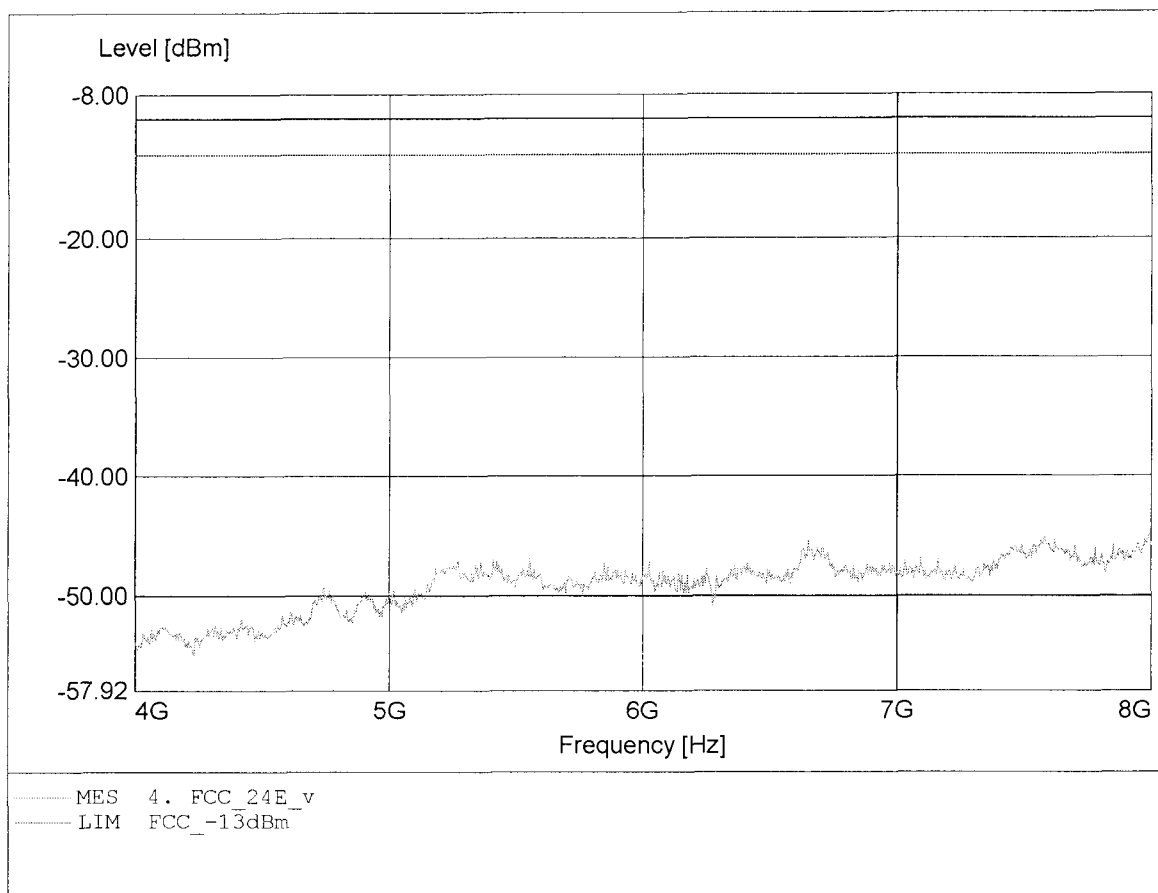


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 512
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.693GHz, Pmax: -39.73dBm, RBW: 1MHz

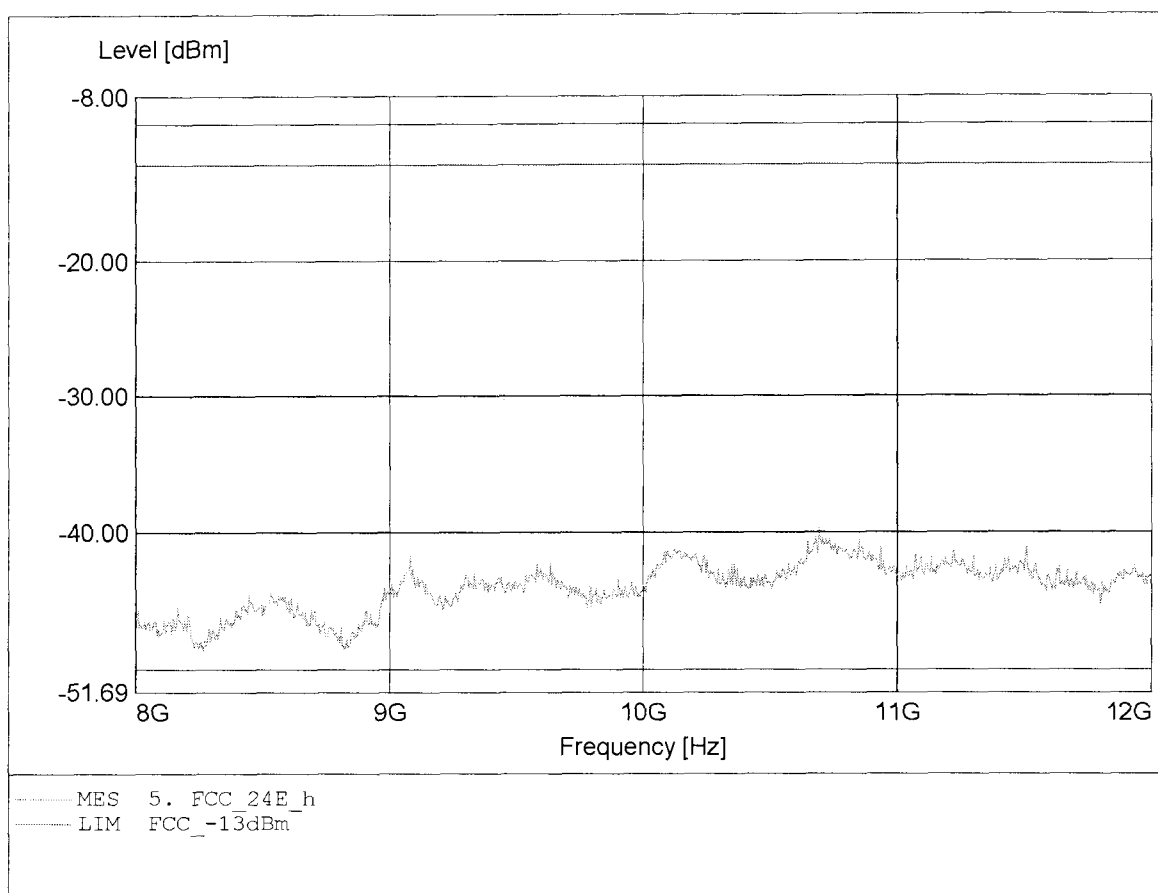


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 512
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.773GHz, Pmax: -40.58dBm, RBW: 1MHz

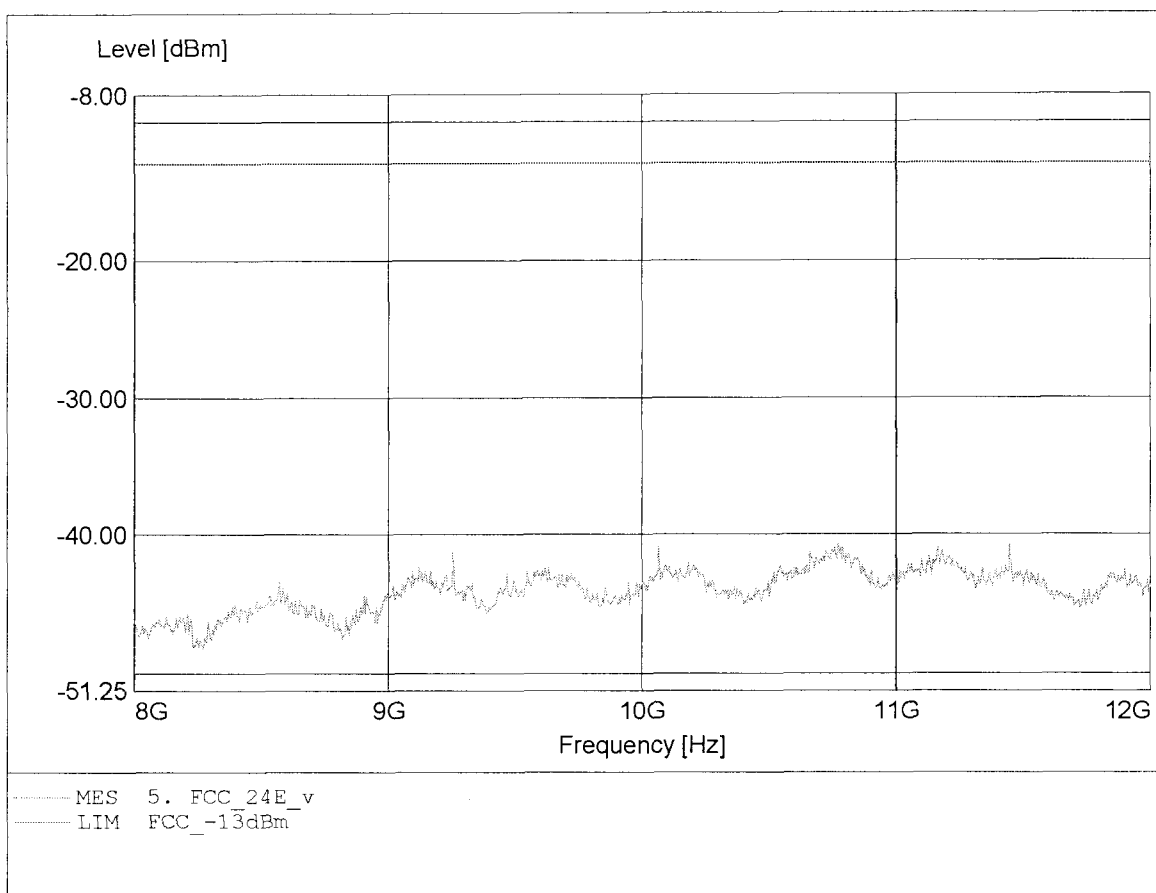


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 512
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.760GHz, Pmax: -31.88dBm, RBW: 1MHz

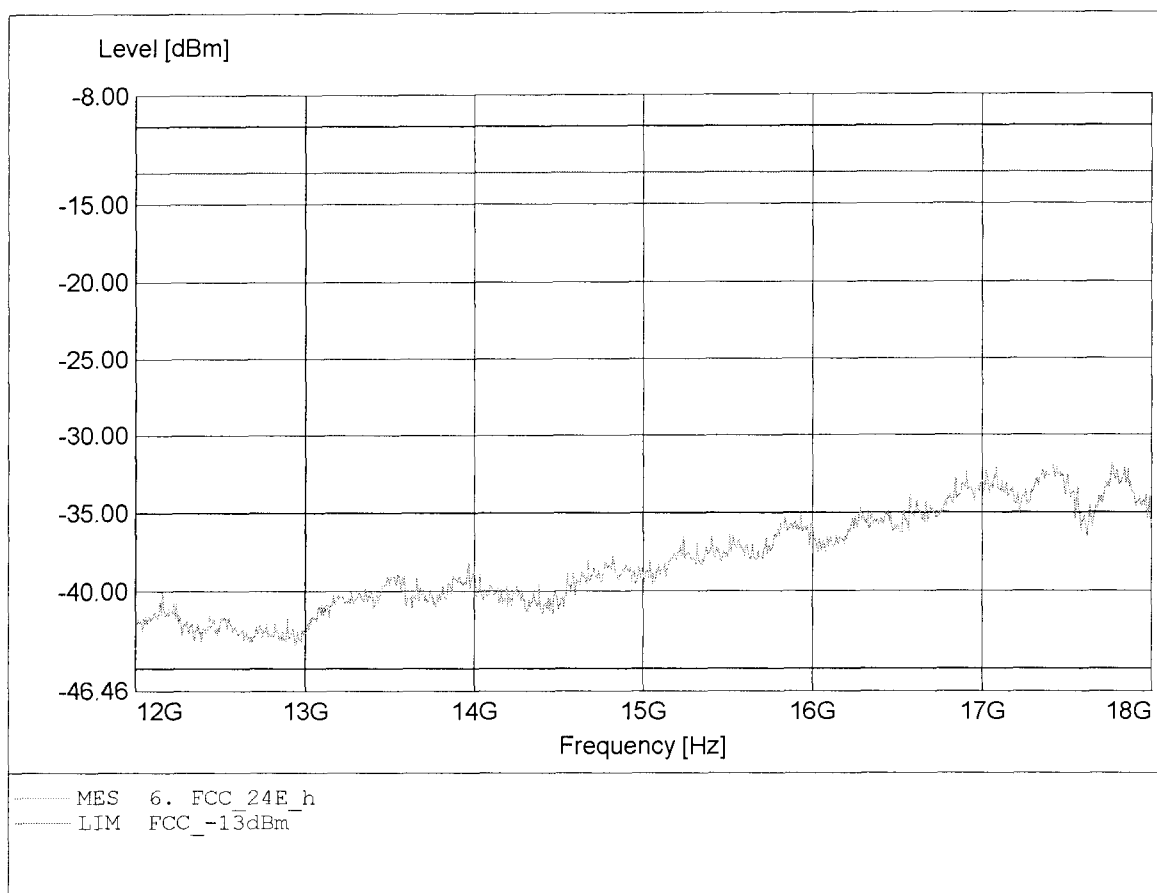


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 512
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.440GHz, Pmax: -32.25dBm, RBW: 1MHz

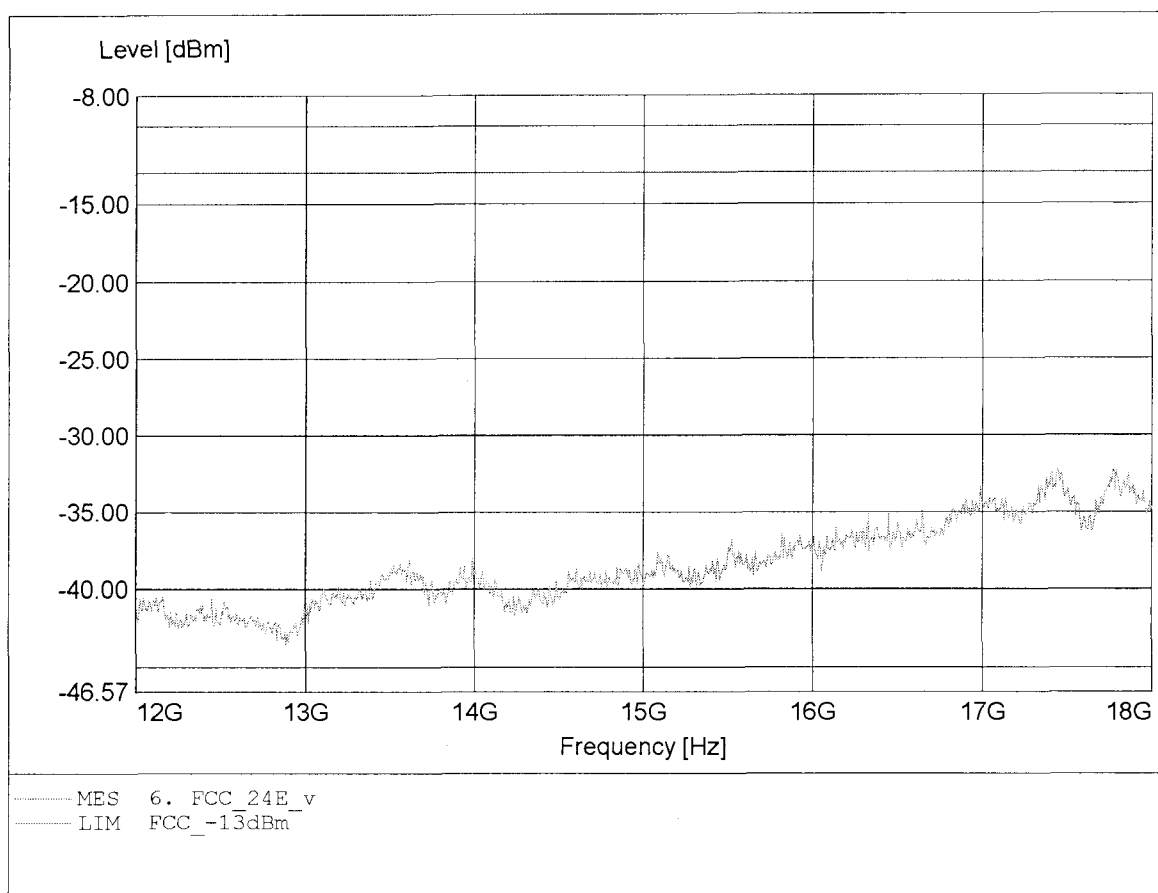


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 512
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 18.463GHz, Pmax: -23.19dBm, RBW: 1MHz

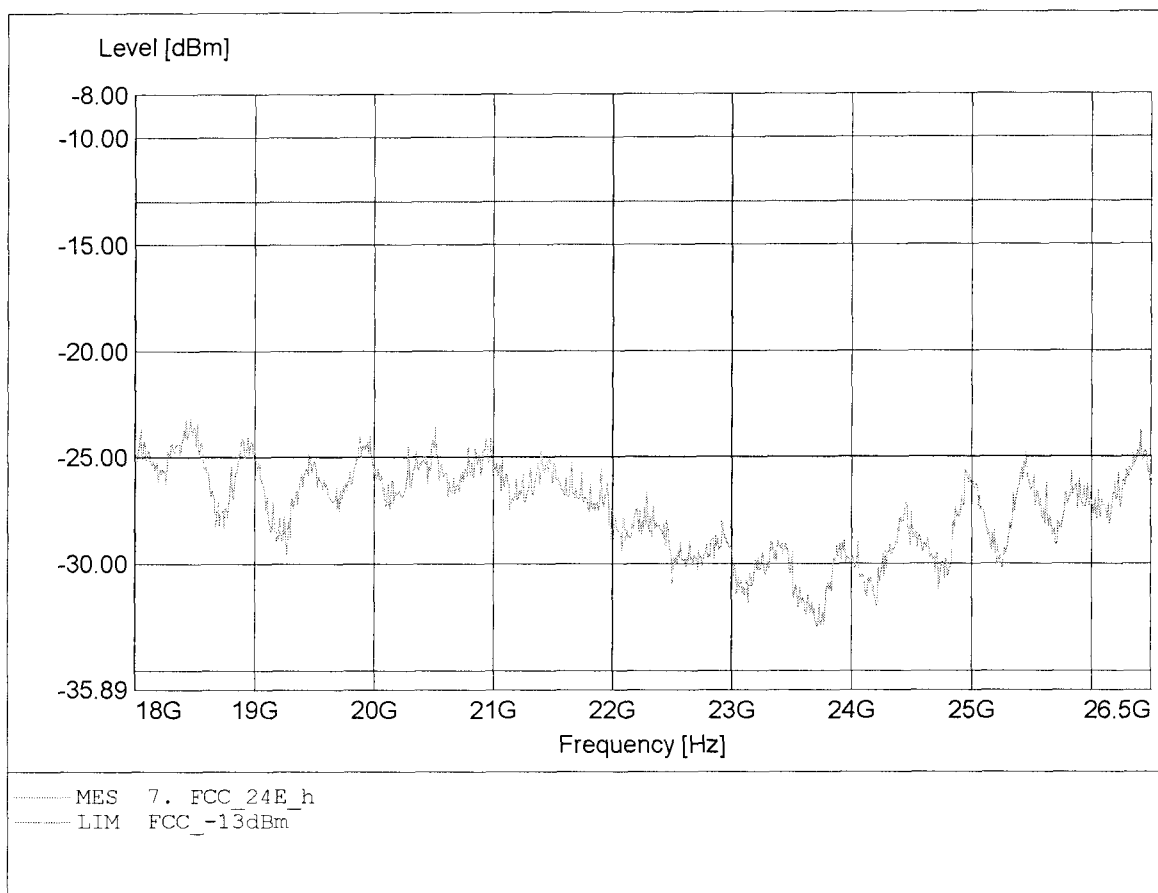


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 512
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 18.963GHz, Pmax: -22.68dBm, RBW: 1MHz

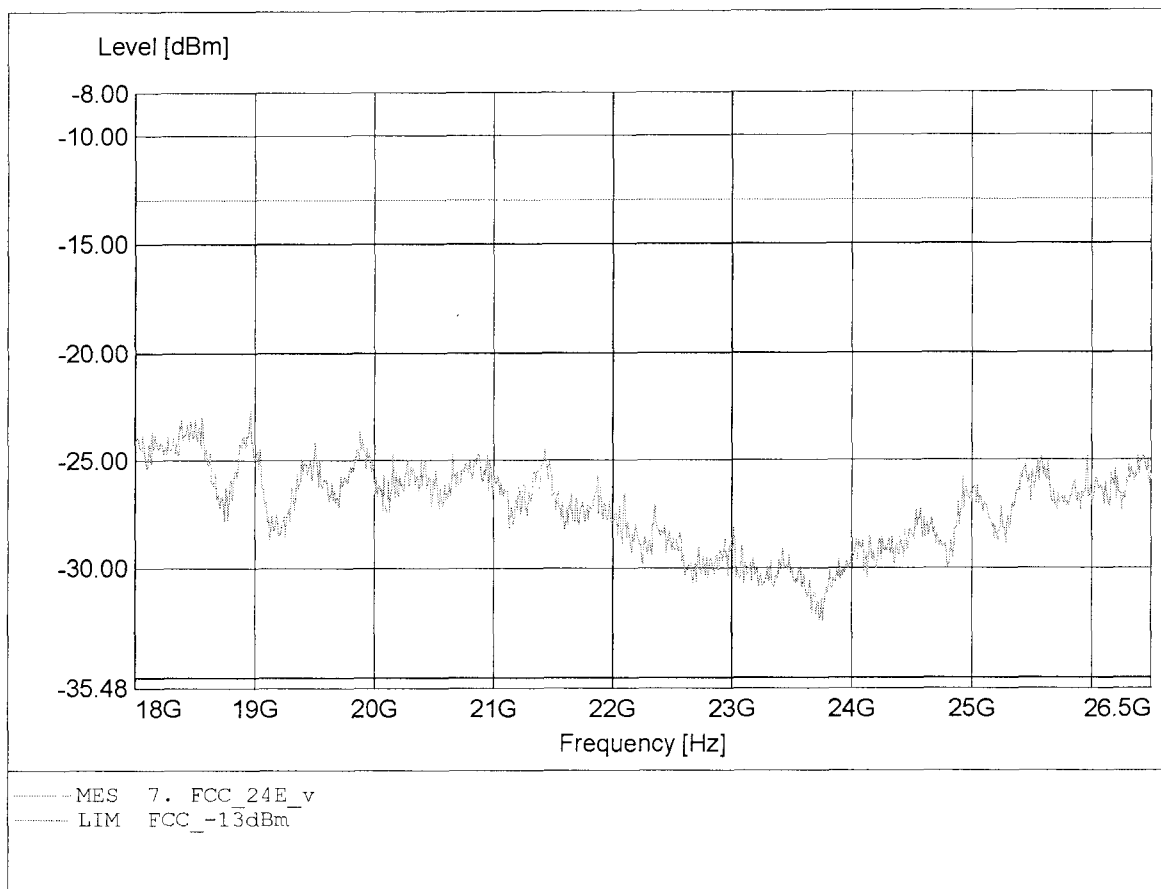


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 661
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 47.189MHz, Pmax: -52.78dBm, RBW: 1MHz

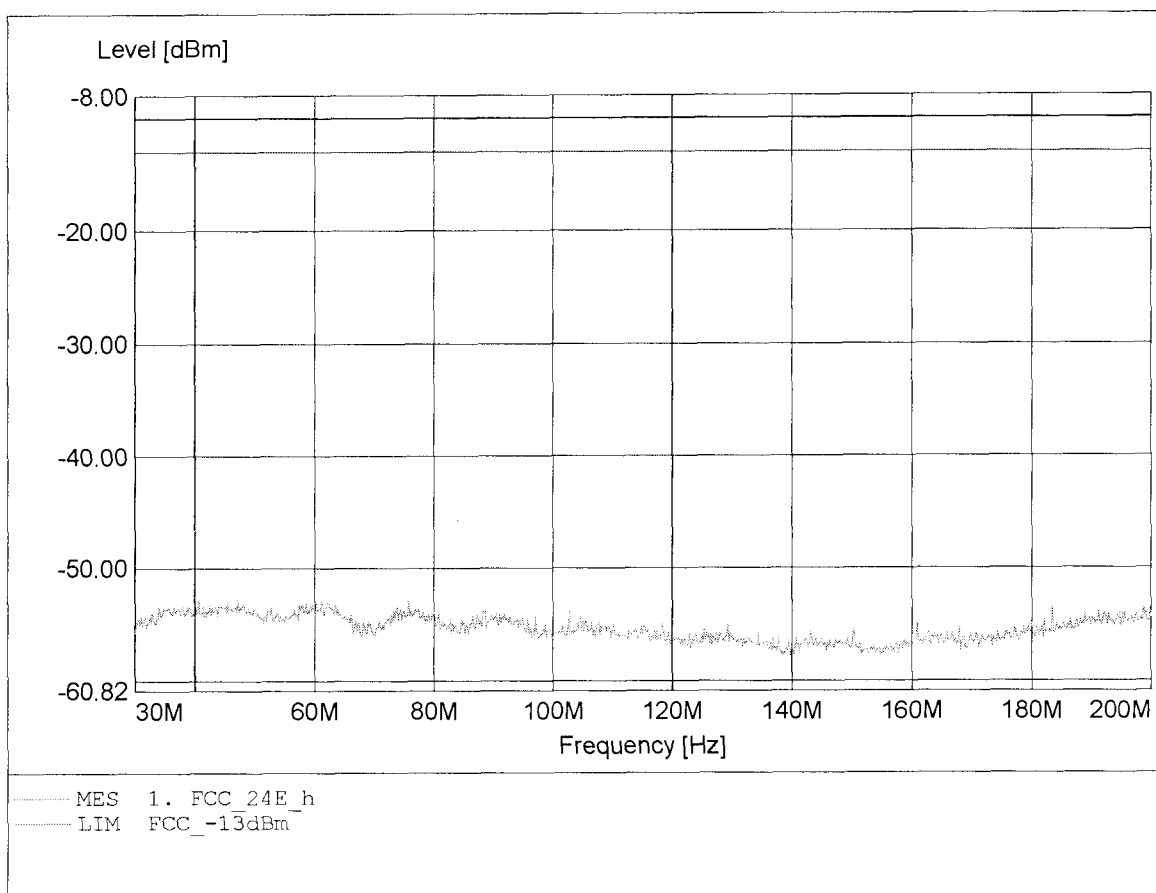


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 661
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 35.289MHz, Pmax: -52.70dBm, RBW: 1MHz

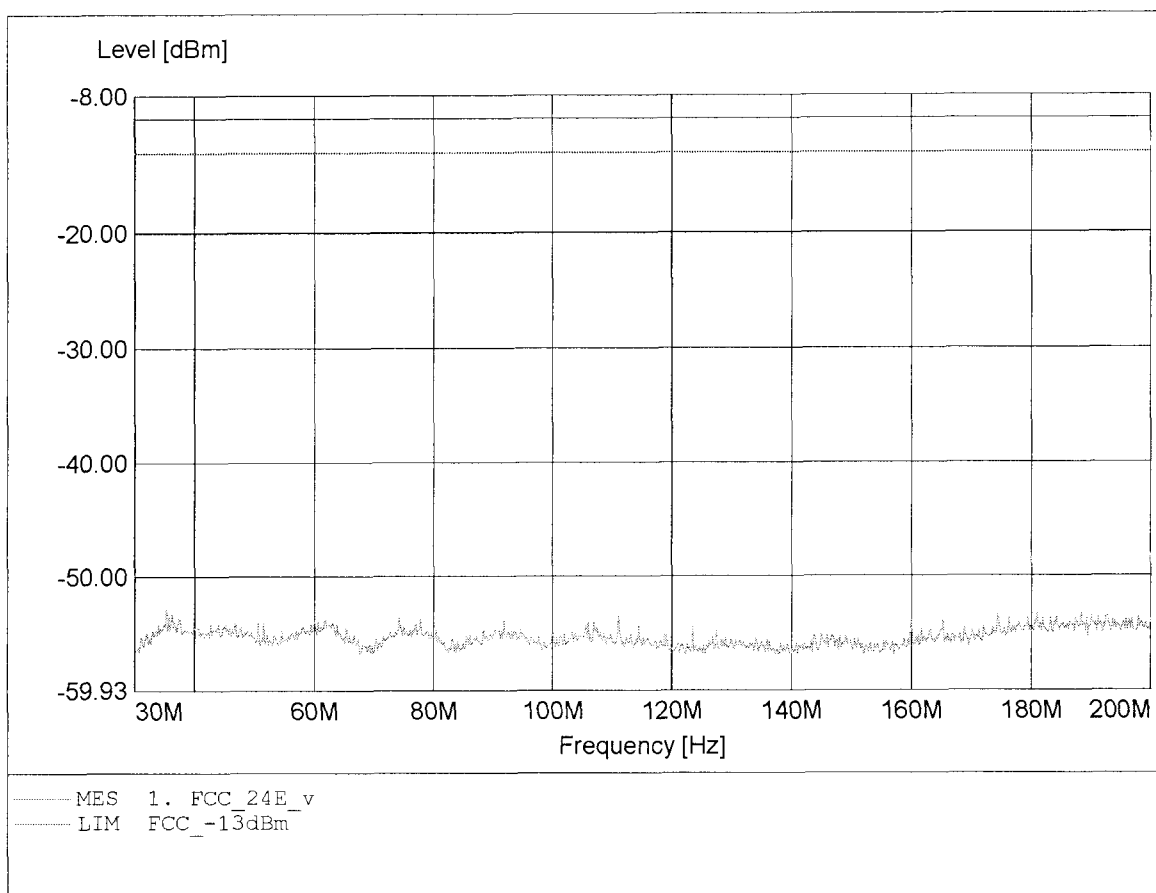


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 661
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 849.778MHz, Pmax: -38.81dBm, RBW: 1MHz

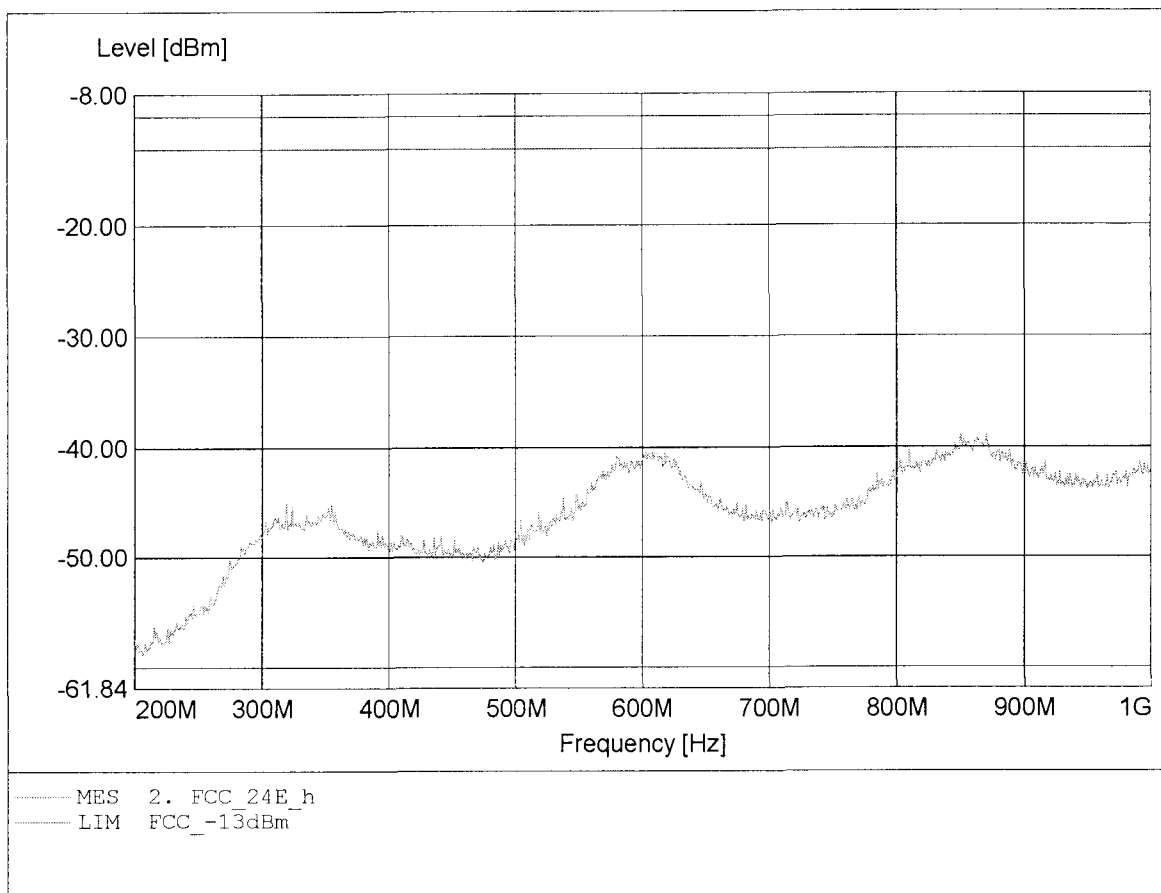


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 661
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 993.778MHz, Pmax: -40.54dBm, RBW: 1MHz

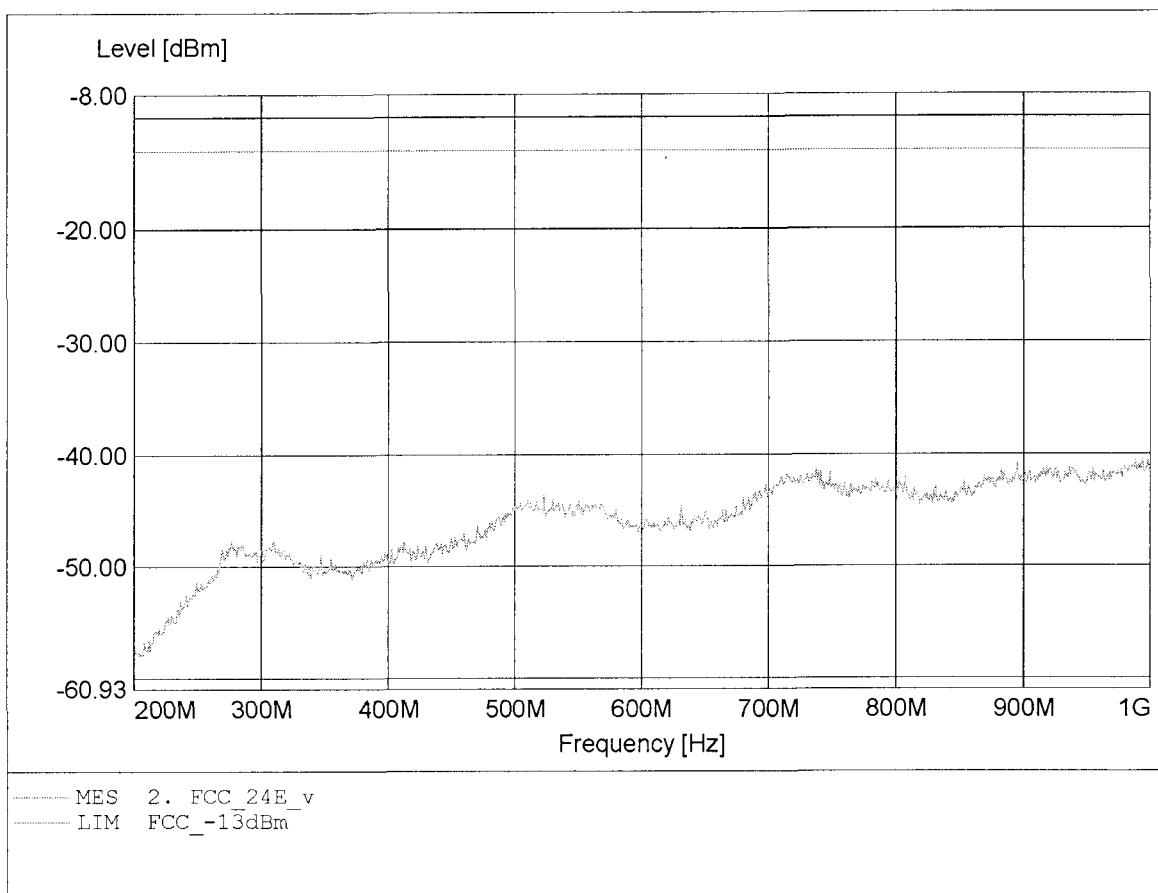


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 661
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.970GHz, Pmax: -22.94dBm, RBW: 1MHz/3kHz

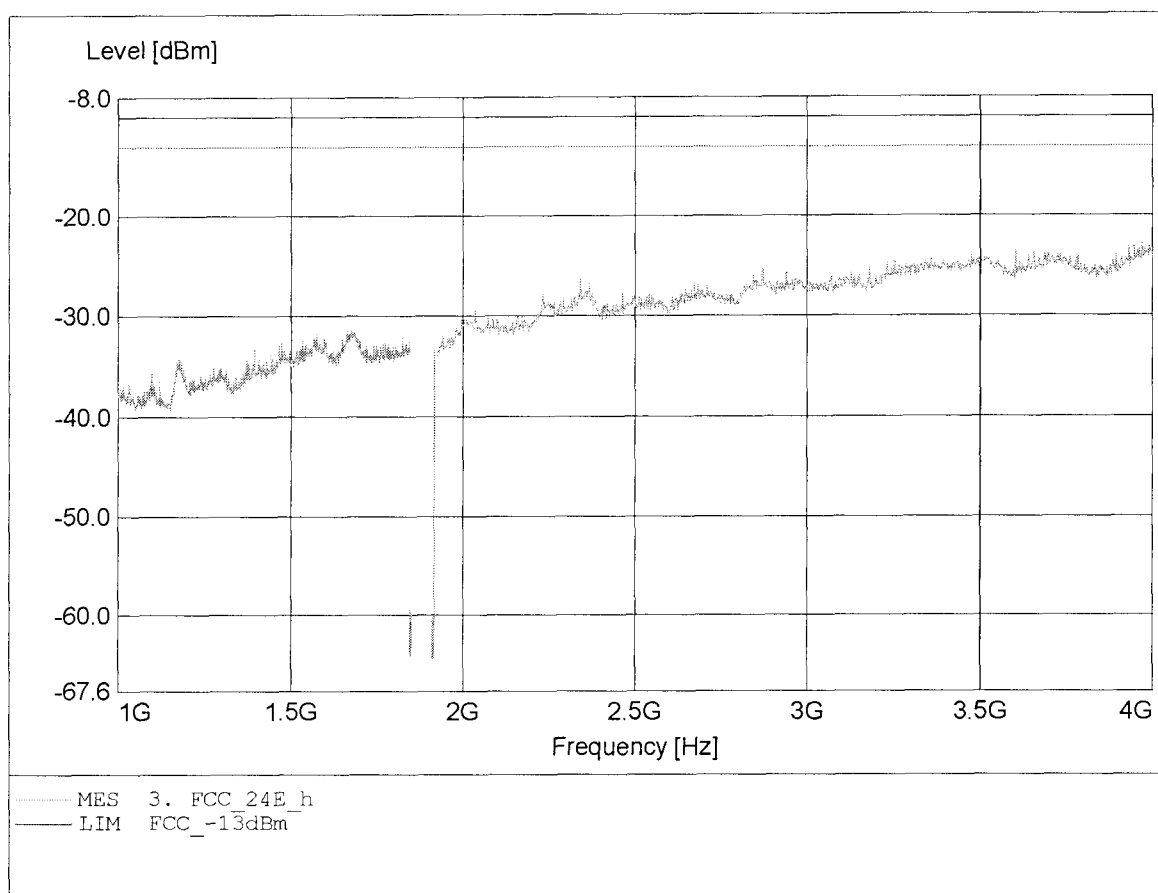


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 661
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.321GHz, Pmax: -22.03dBm, RBW: 1MHz/3kHz

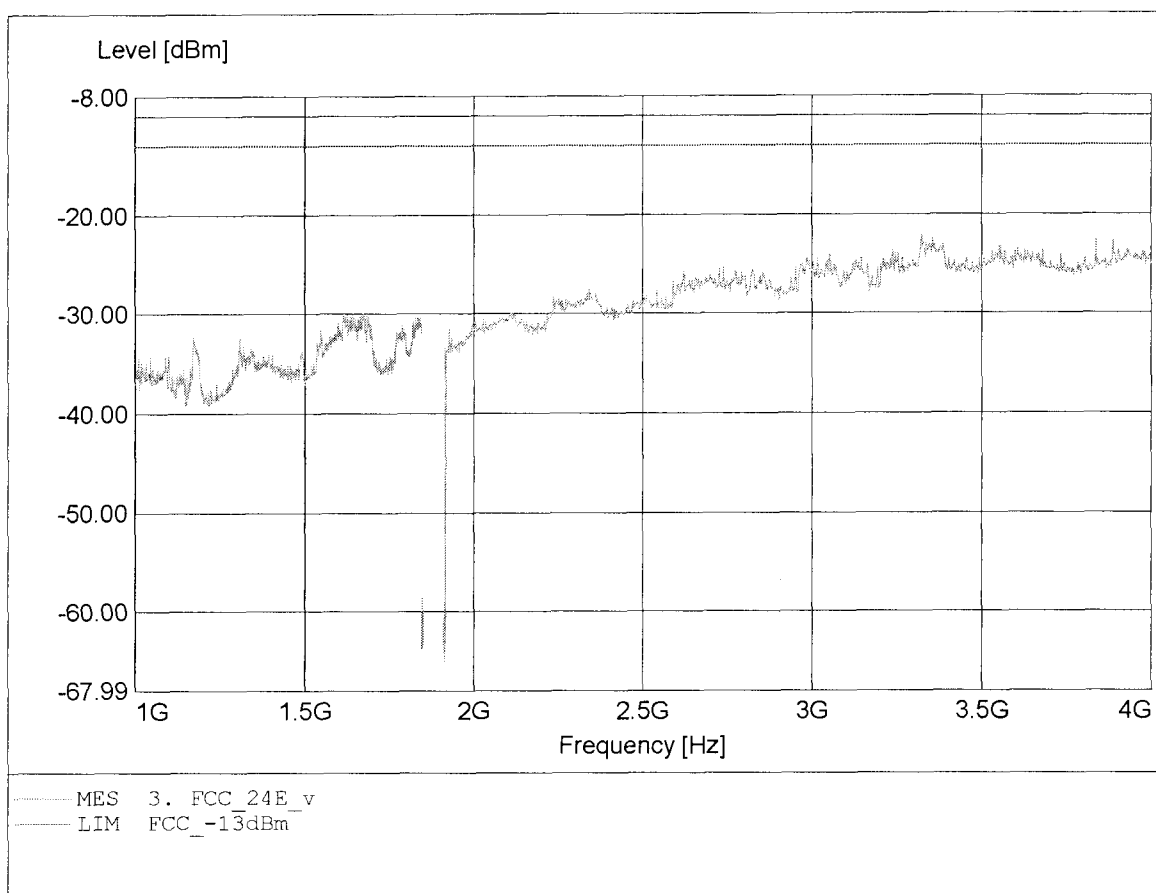


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 661
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.987GHz, Pmax: -45.23dBm, RBW: 1MHz

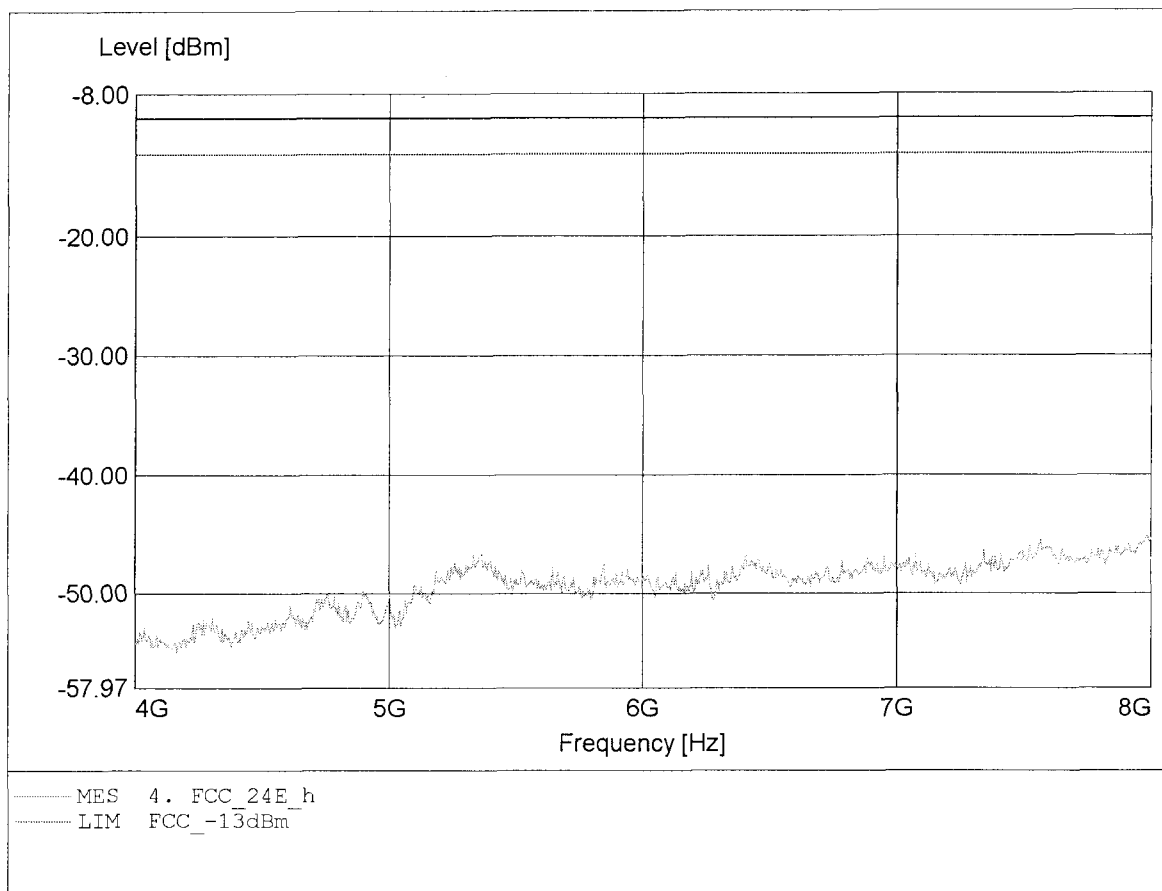


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 661
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.556GHz, Pmax: -45.13dBm, RBW: 1MHz

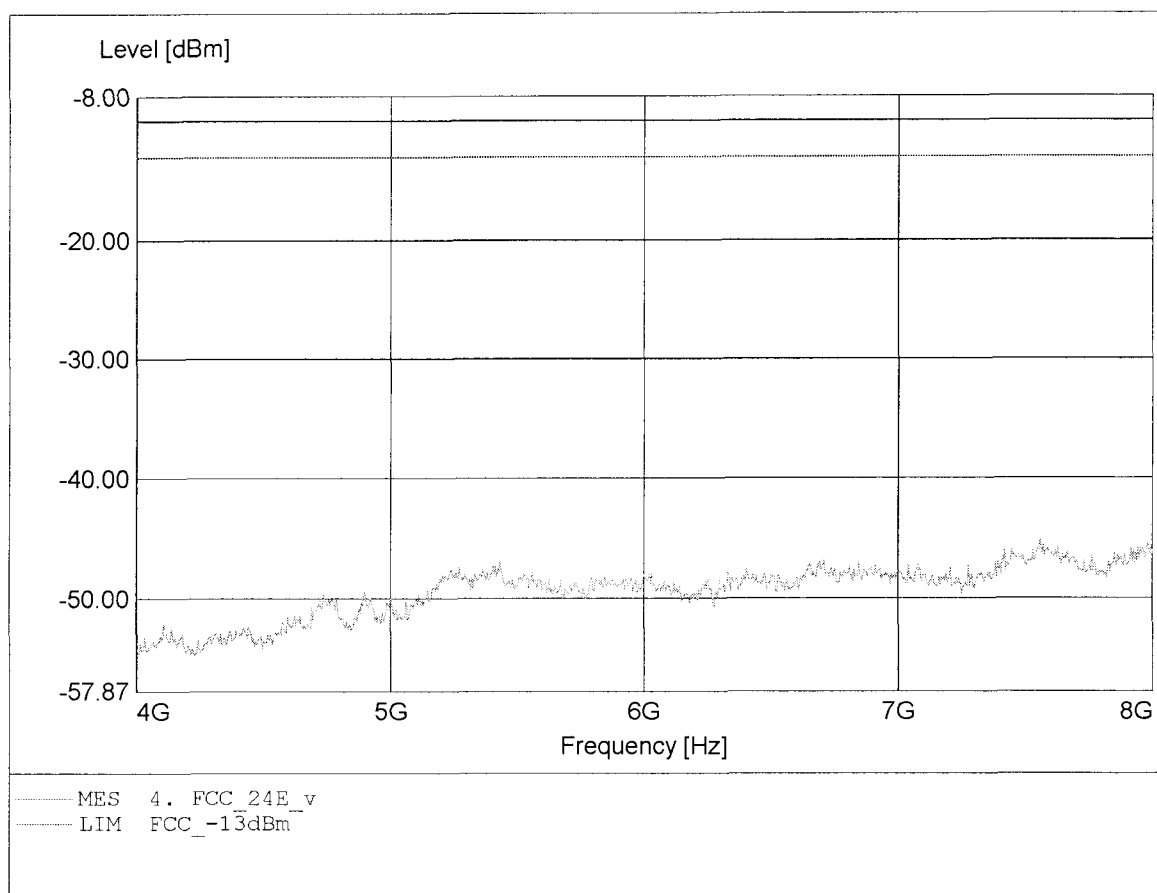


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 661
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.720GHz, Pmax: -39.78dBm, RBW: 1MHz

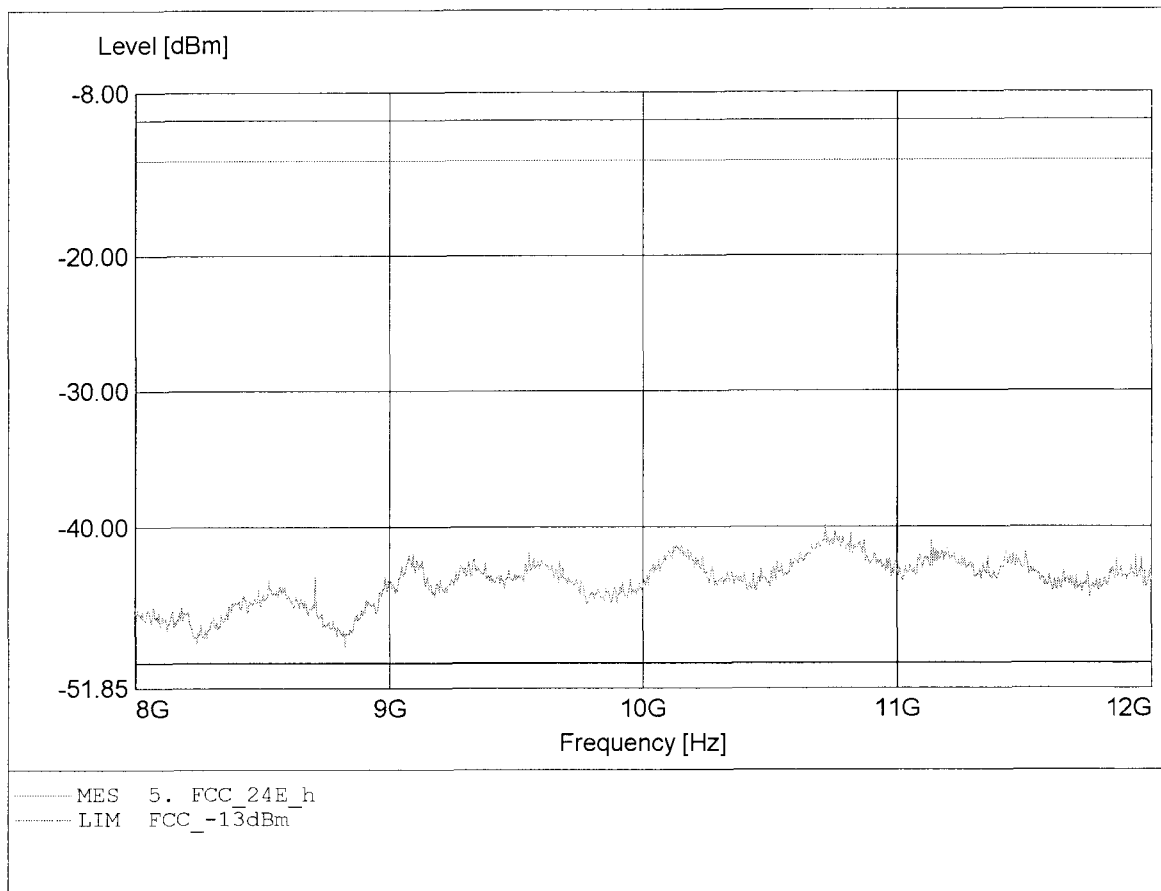


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 661
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.804GHz, Pmax: -40.25dBm, RBW: 1MHz

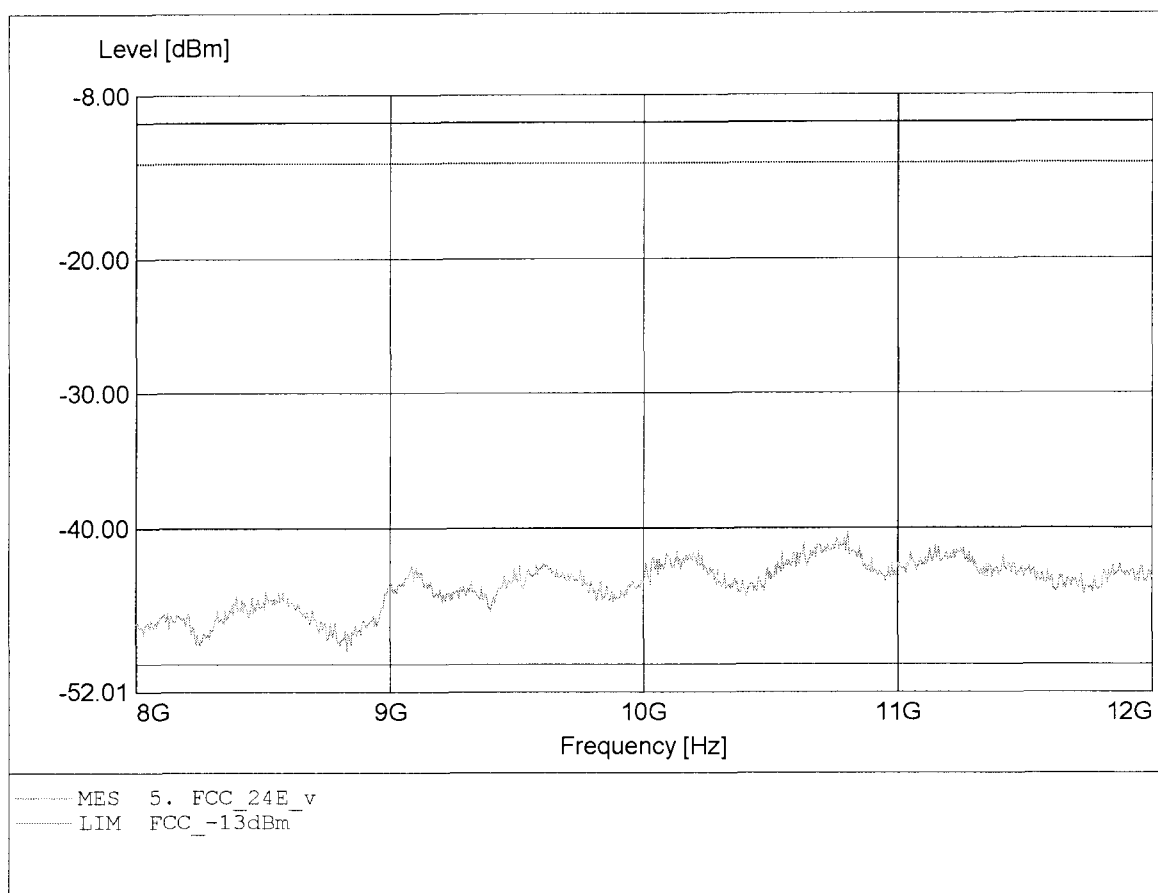


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 661
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.427GHz, Pmax: -32.12dBm, RBW: 1MHz

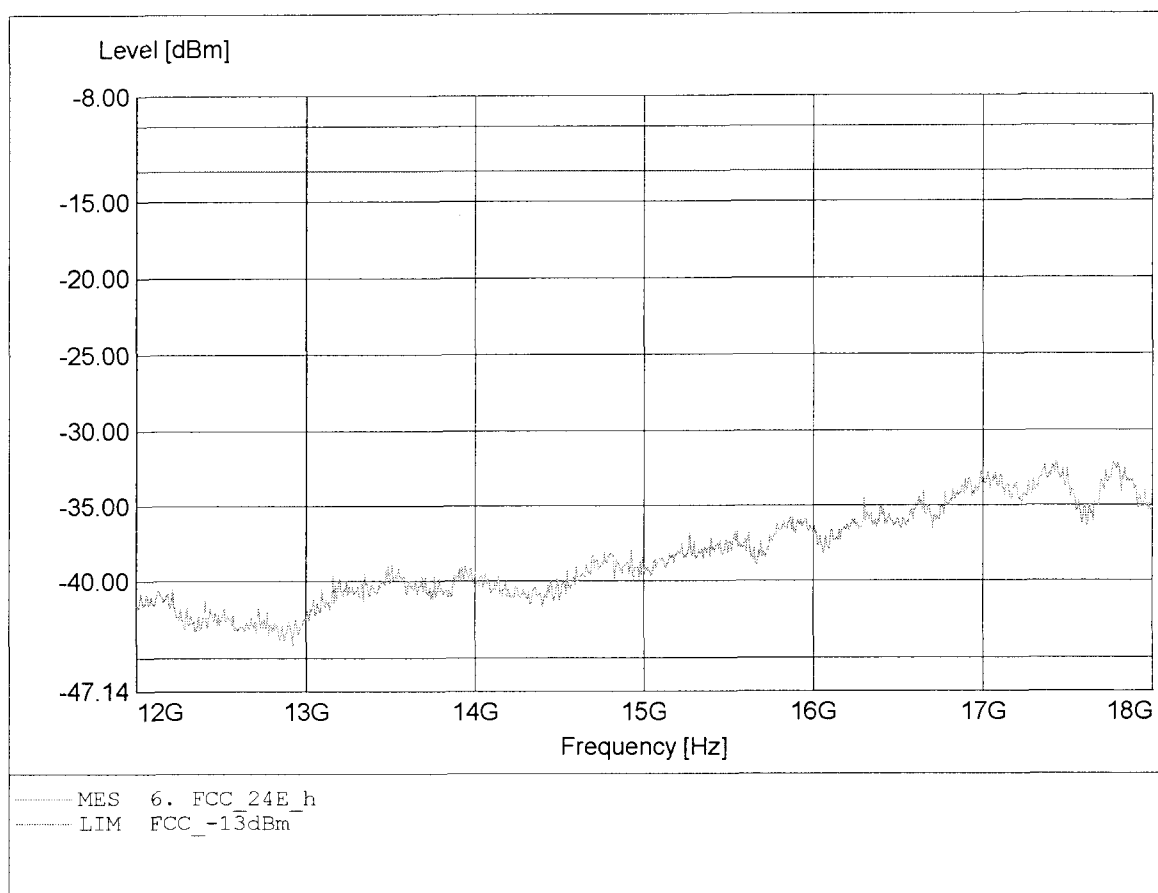


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 661
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 16.927GHz, Pmax: -29.42dBm, RBW: 1MHz

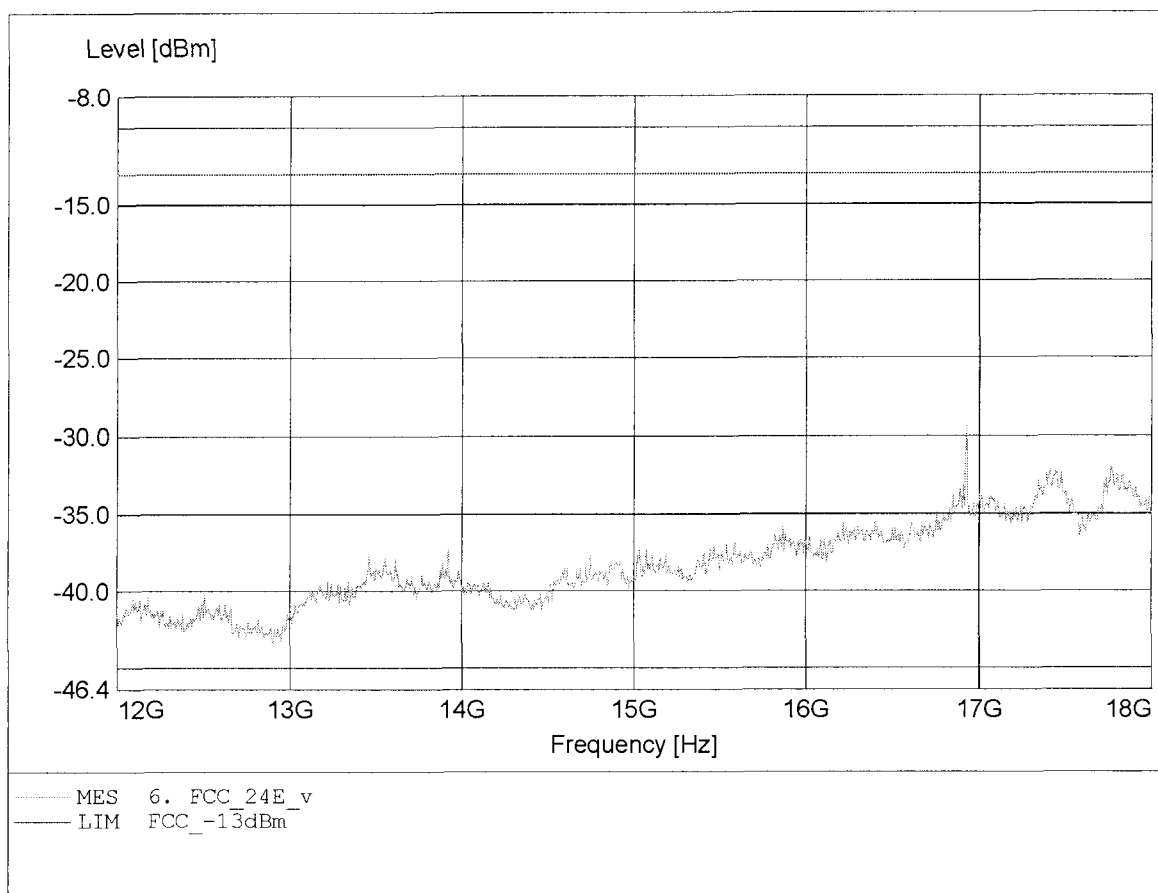


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 661
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 18.491GHz, Pmax: -23.08dBm, RBW: 1MHz

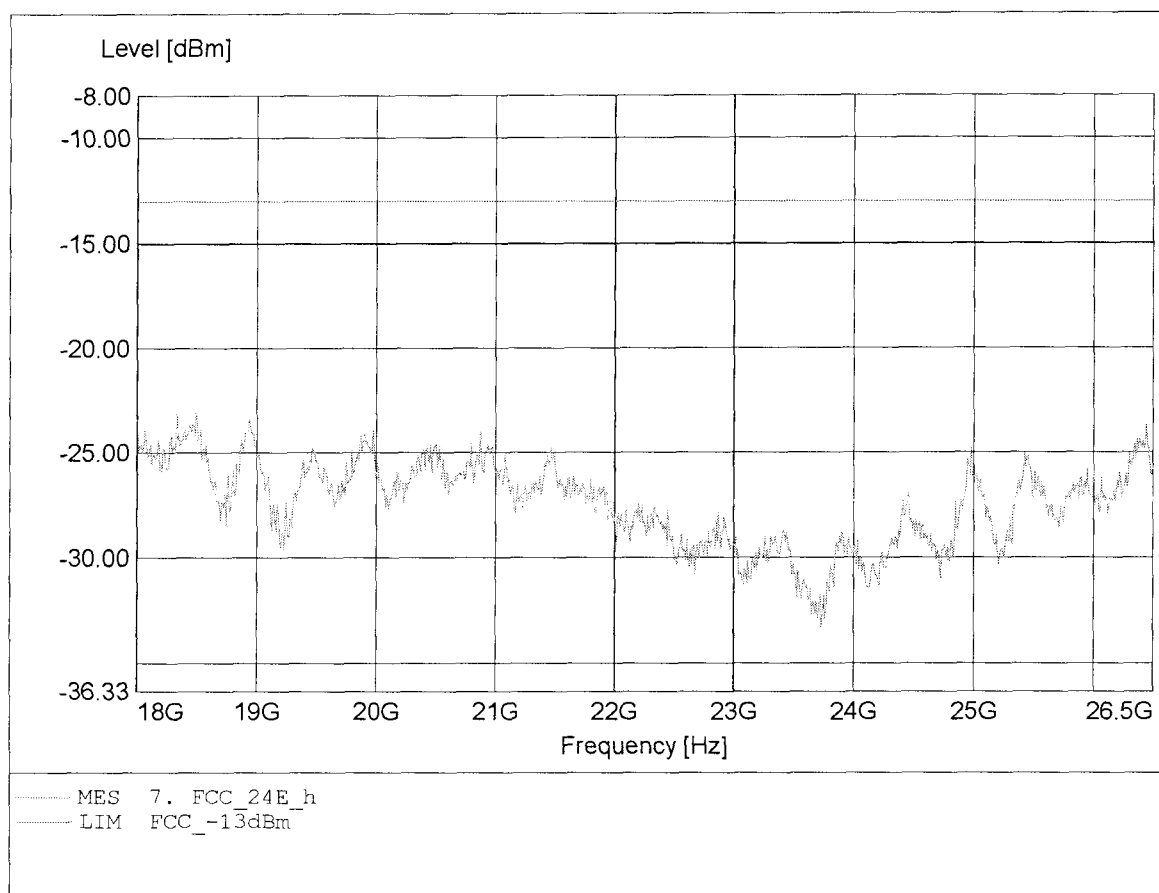


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 661
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 18.453GHz, Pmax: -22.61dBm, RBW: 1MHz

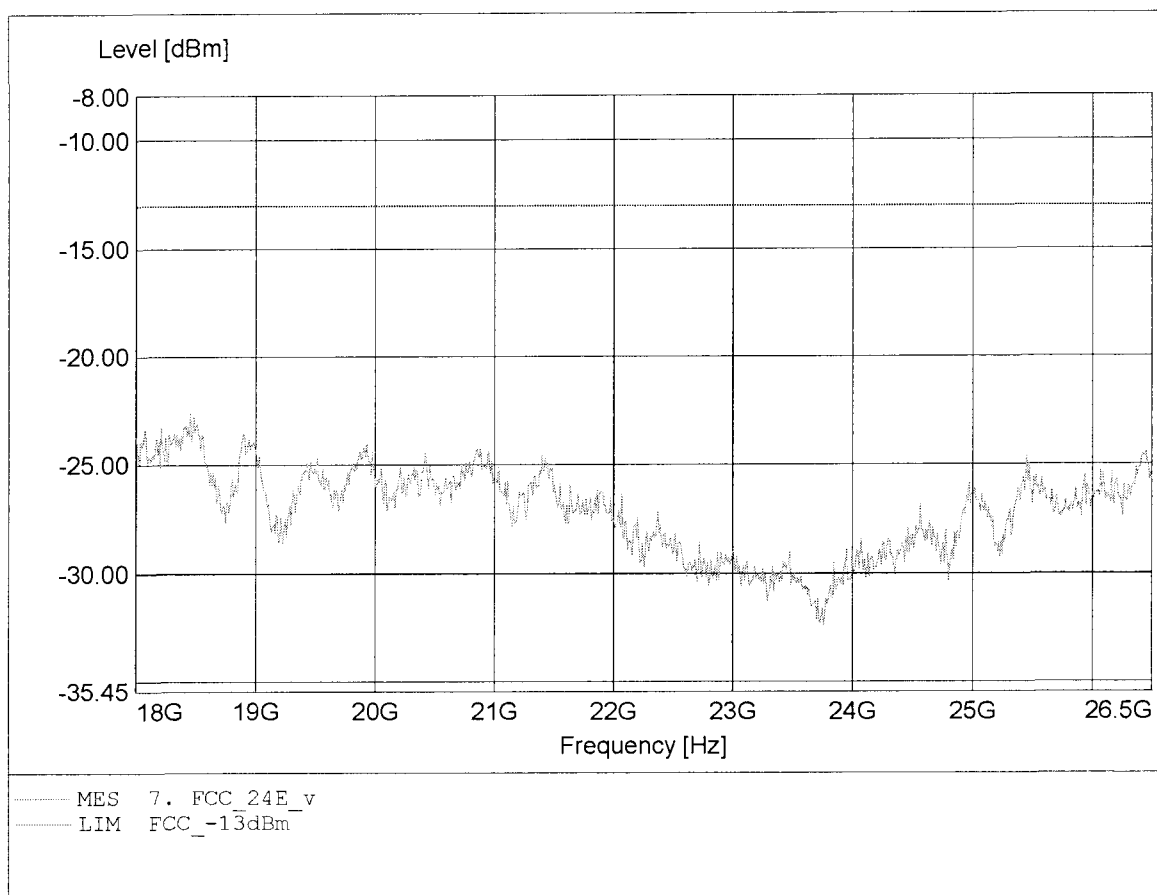


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 810
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 63.811MHz, Pmax: -52.49dBm, RBW: 1MHz

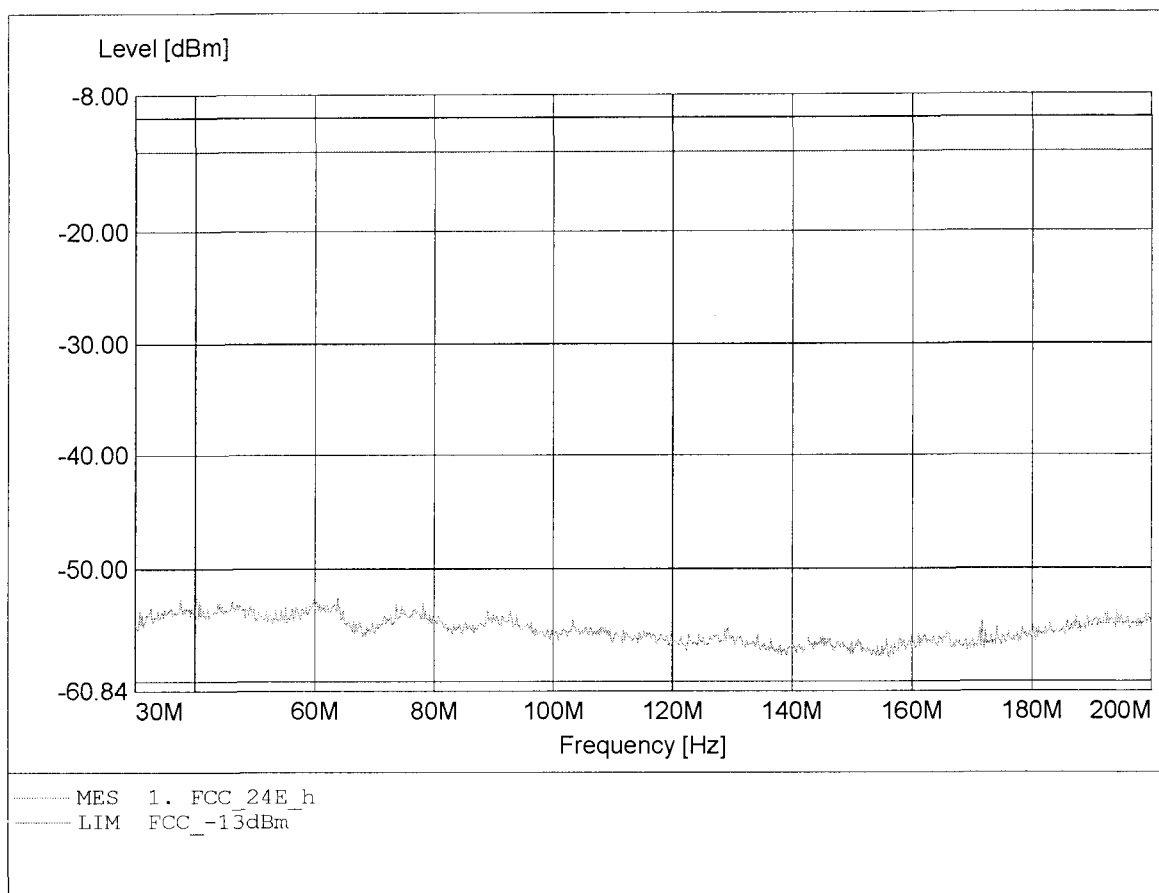


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 810
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 188.667MHz, Pmax: -52.93dBm, RBW: 1MHz

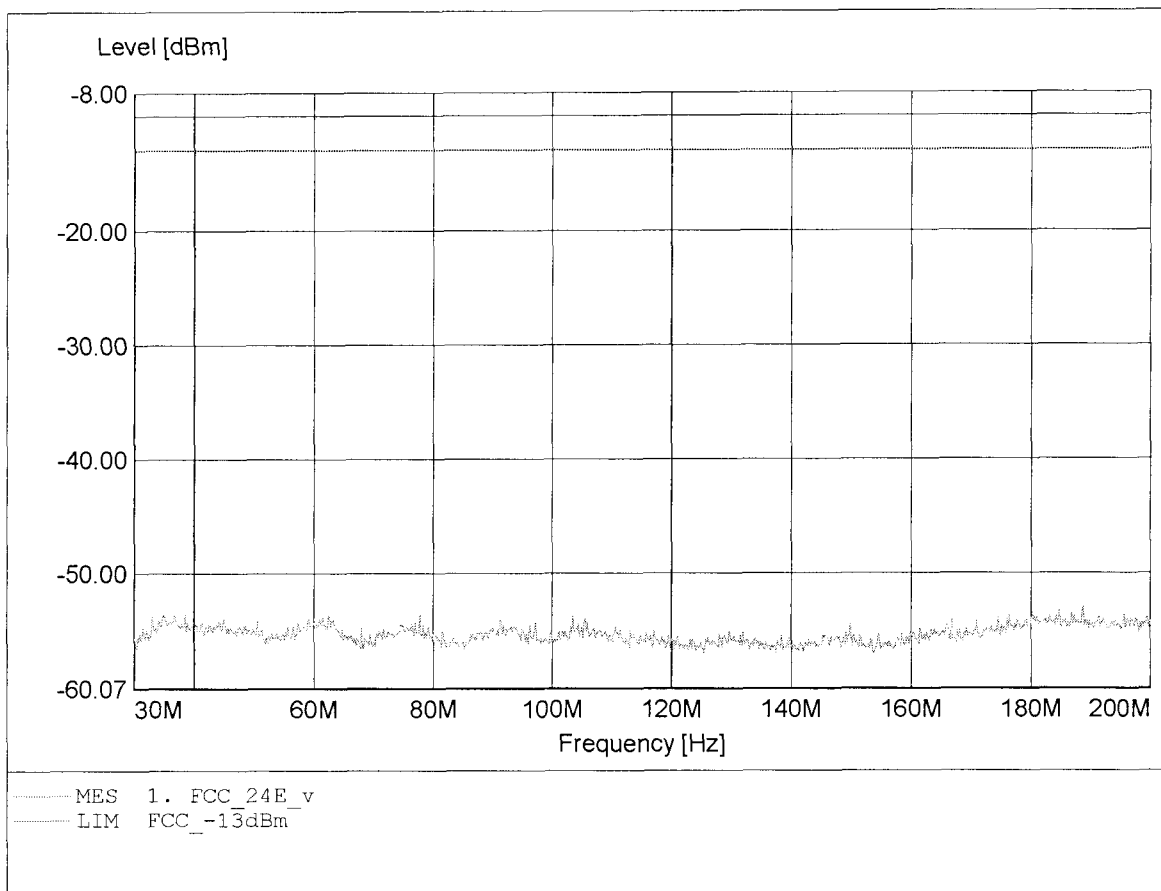


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 810
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 854.222MHz, Pmax: -39.20dBm, RBW: 1MHz

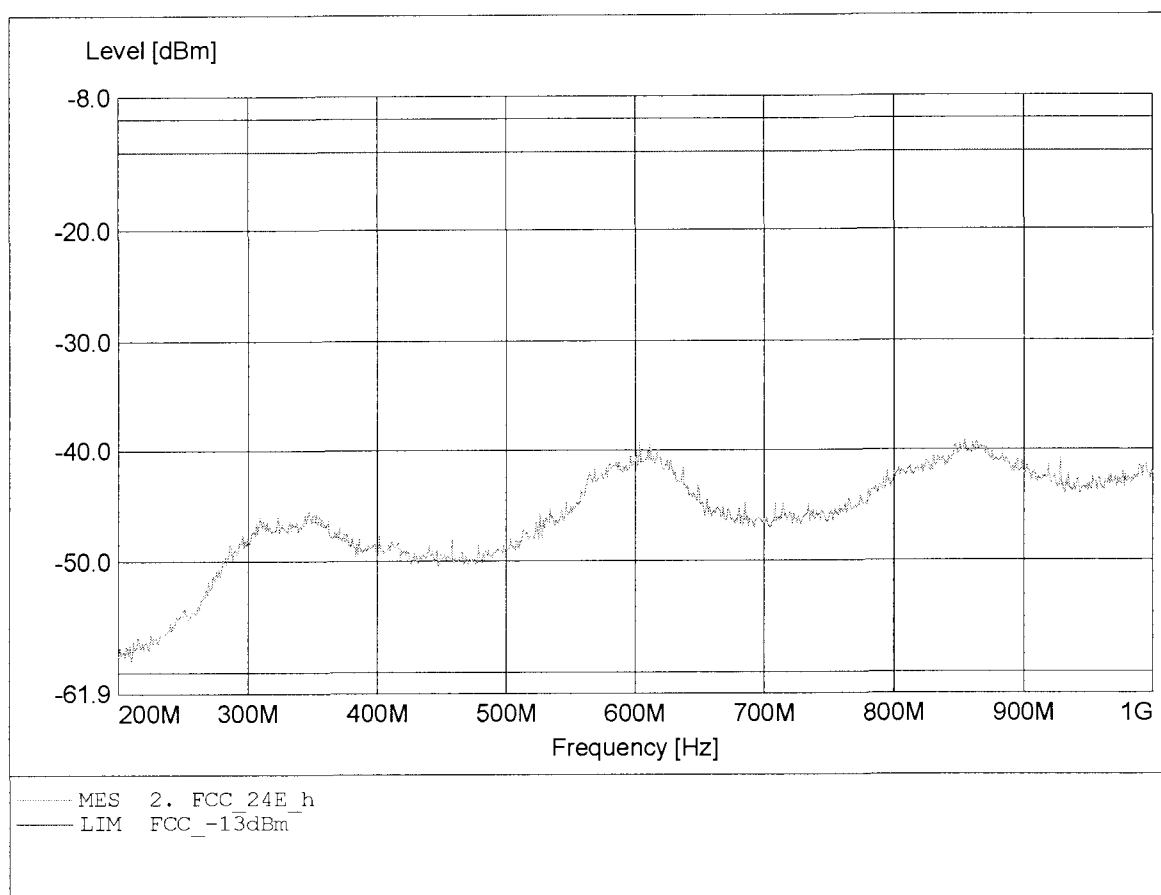


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 810
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 939.556MHz, Pmax: -40.41dBm, RBW: 1MHz

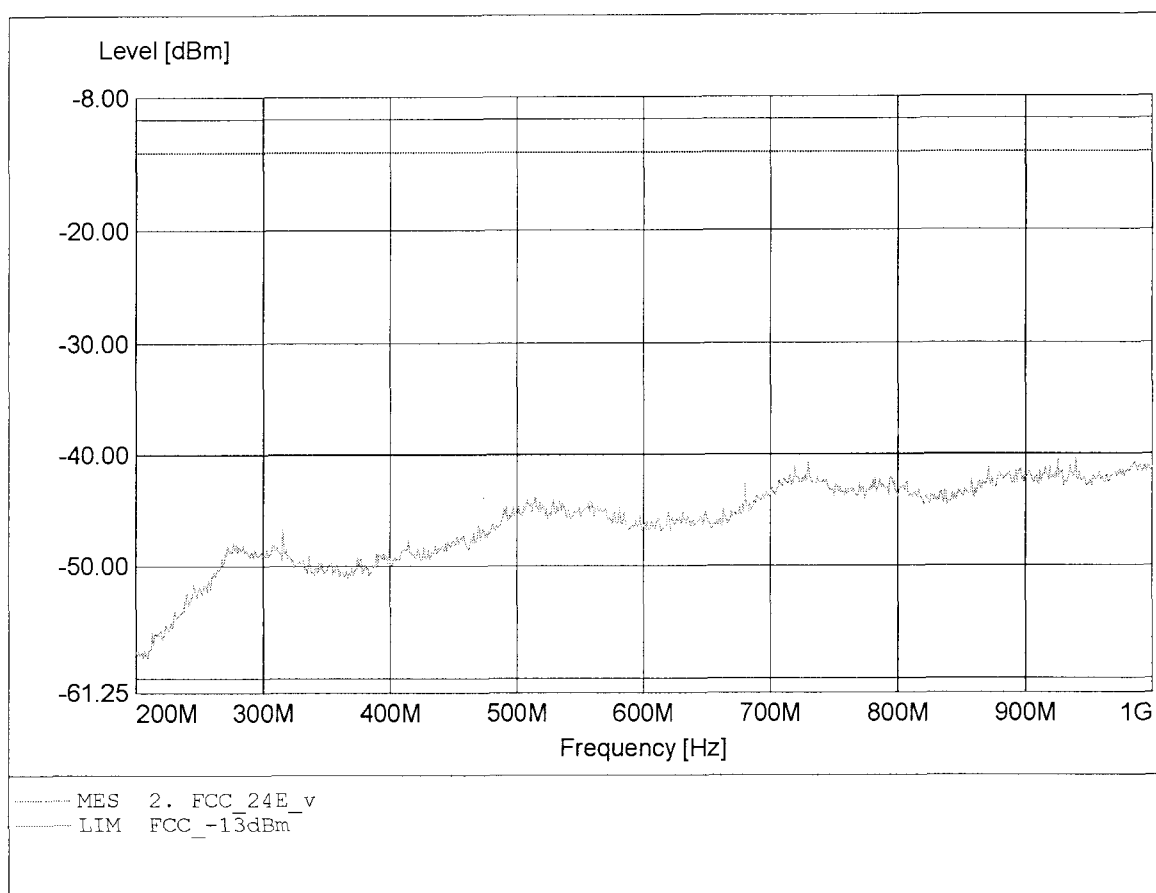


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 810
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.981GHz, Pmax: -23.05dBm, RBW: 1MHz/3kHz

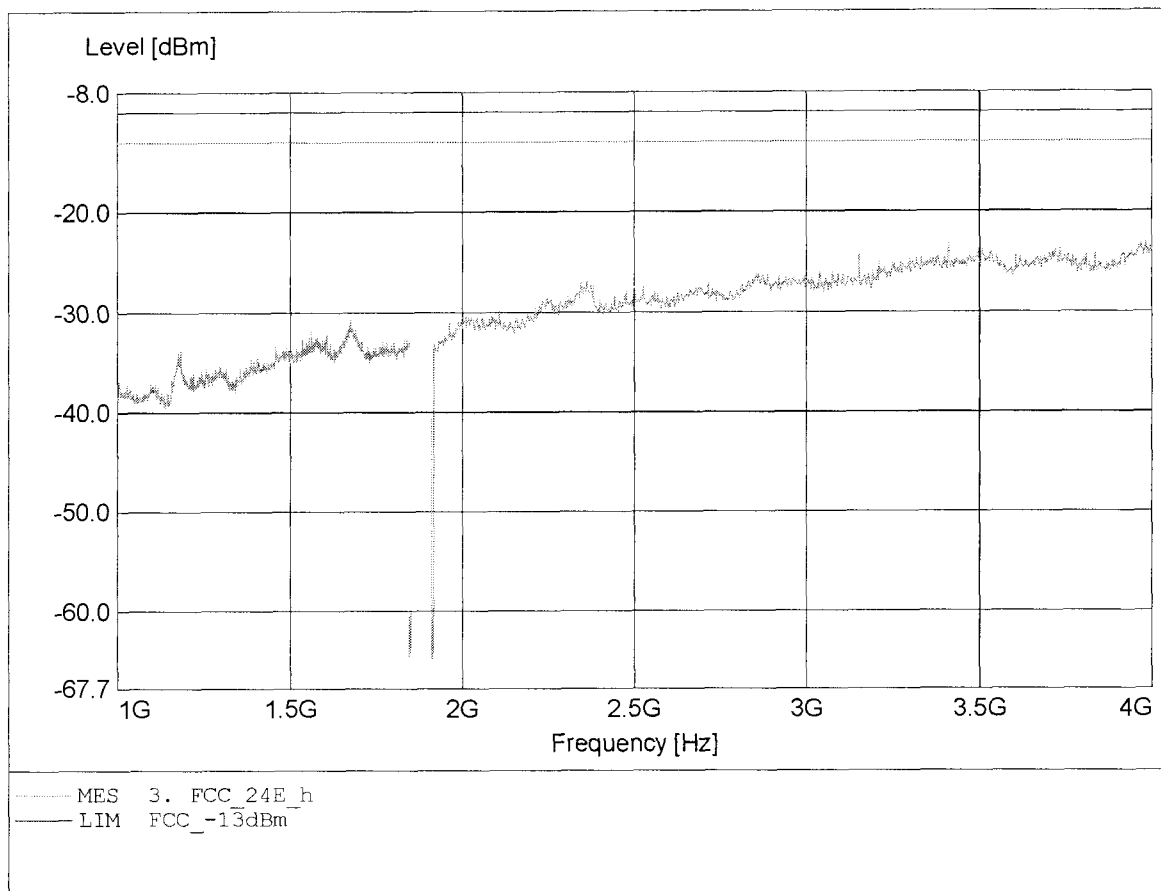


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 810
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.558GHz, Pmax: -22.48dBm, RBW: 1MHz/3kHz

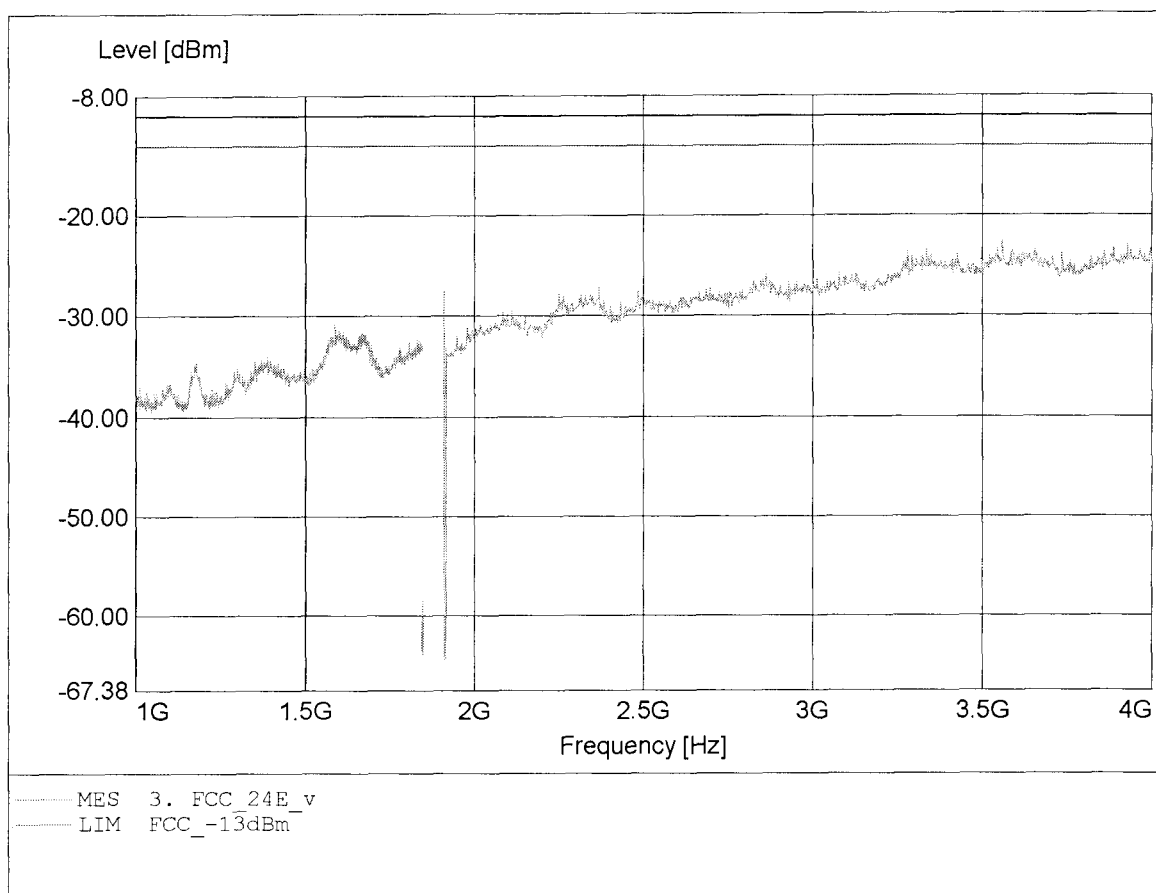


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 810
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.960GHz, Pmax: -44.84dBm, RBW: 1MHz

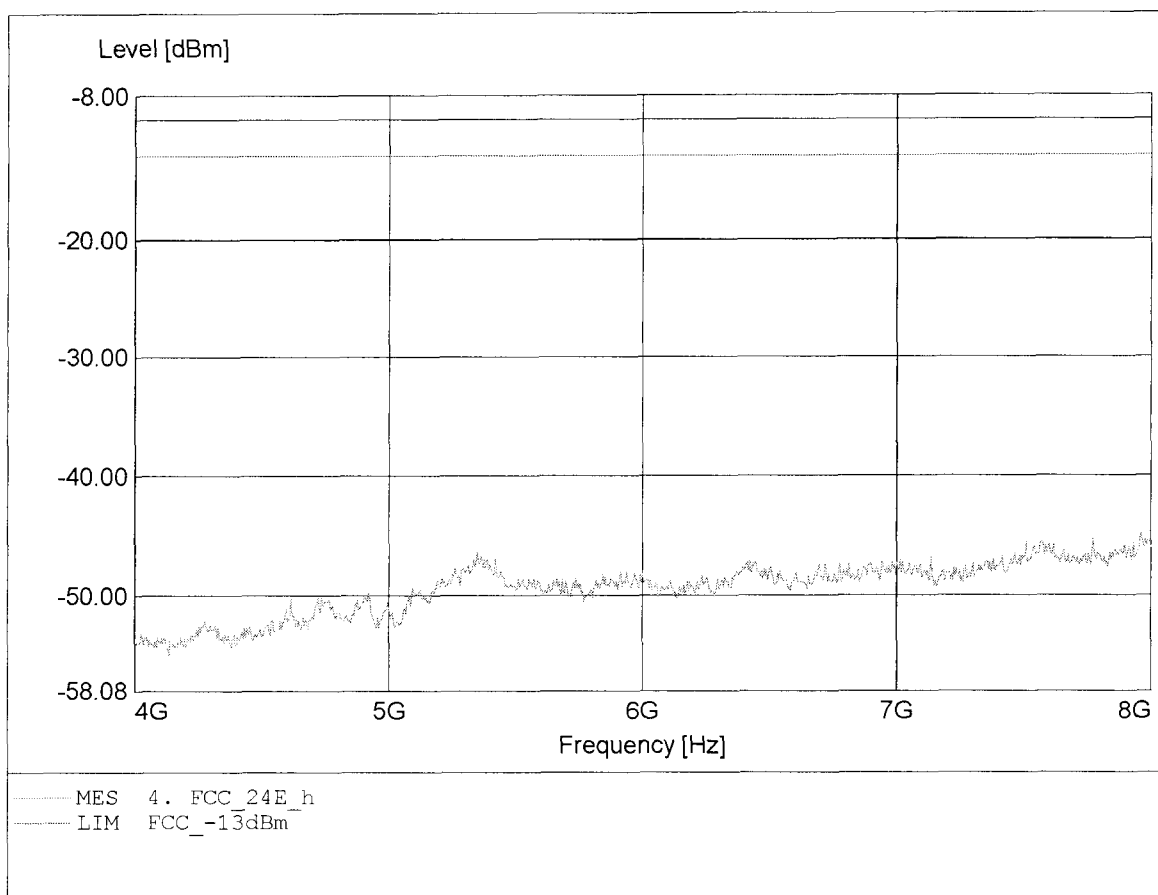


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 810
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.978GHz, Pmax: -45.13dBm, RBW: 1MHz

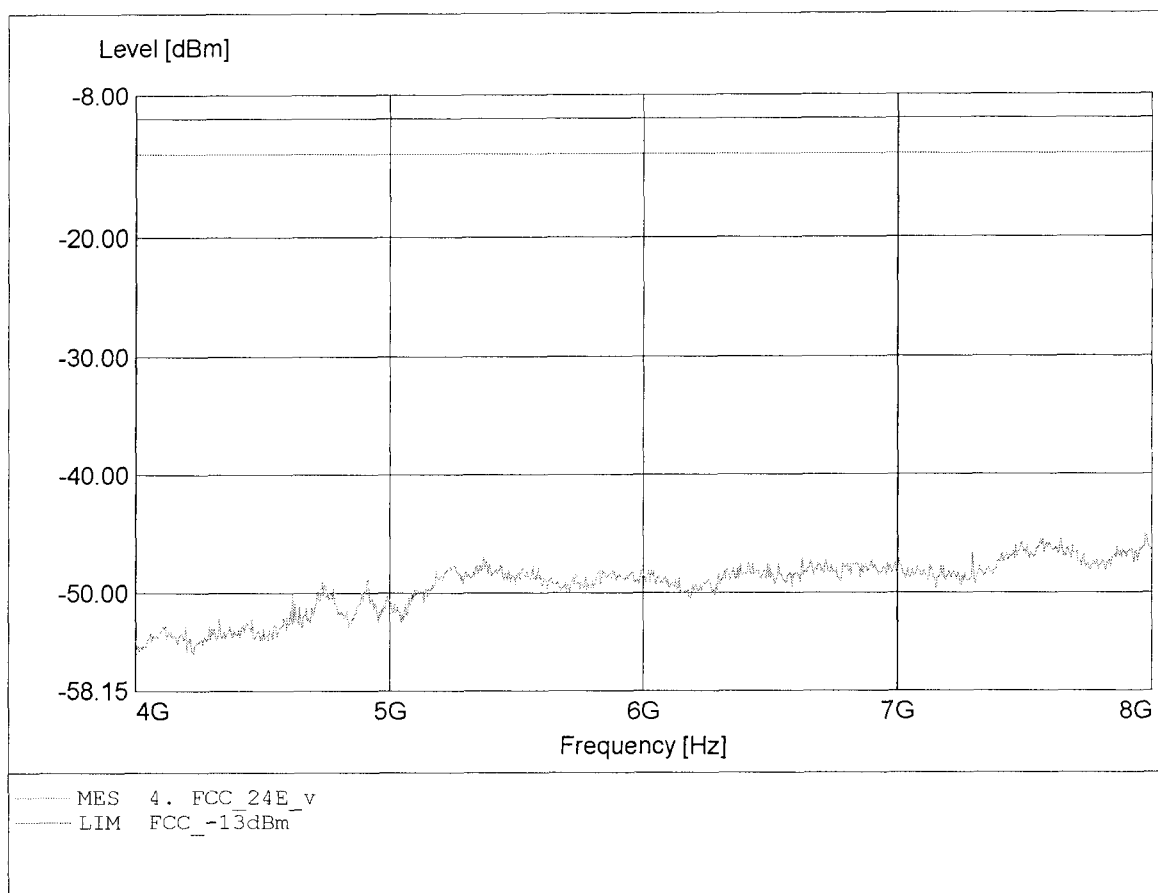


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 810
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.733GHz, Pmax: -40.15dBm, RBW: 1MHz

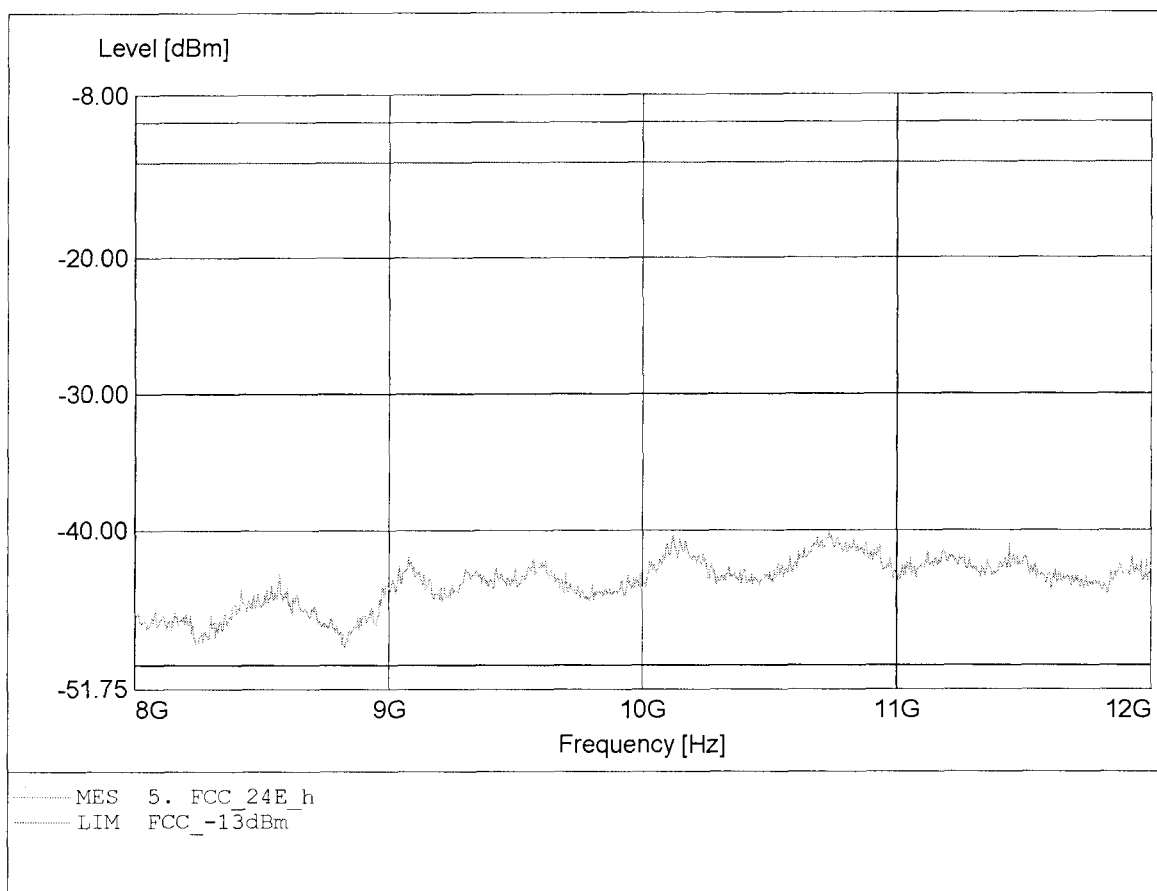


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 810
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.711GHz, Pmax: -40.87dBm, RBW: 1MHz

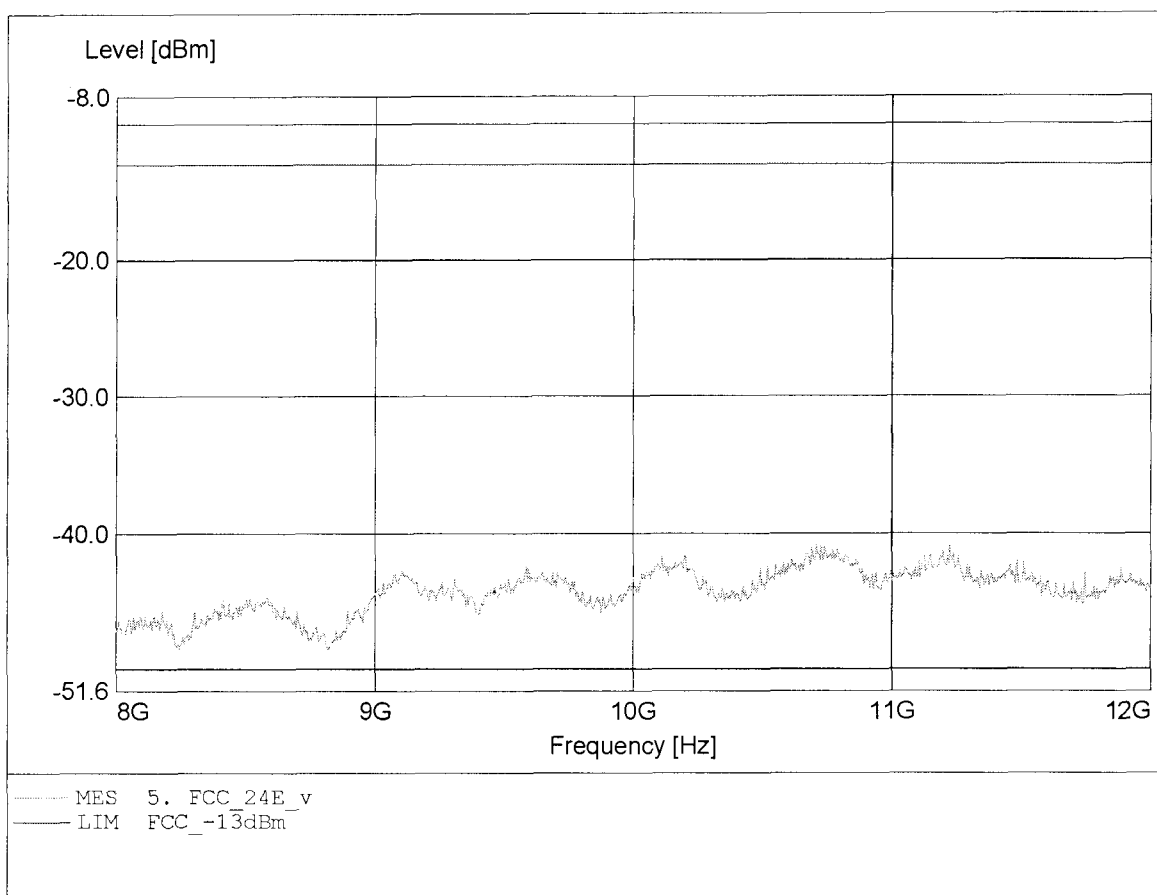


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 810
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.733GHz, Pmax: -31.76dBm, RBW: 1MHz

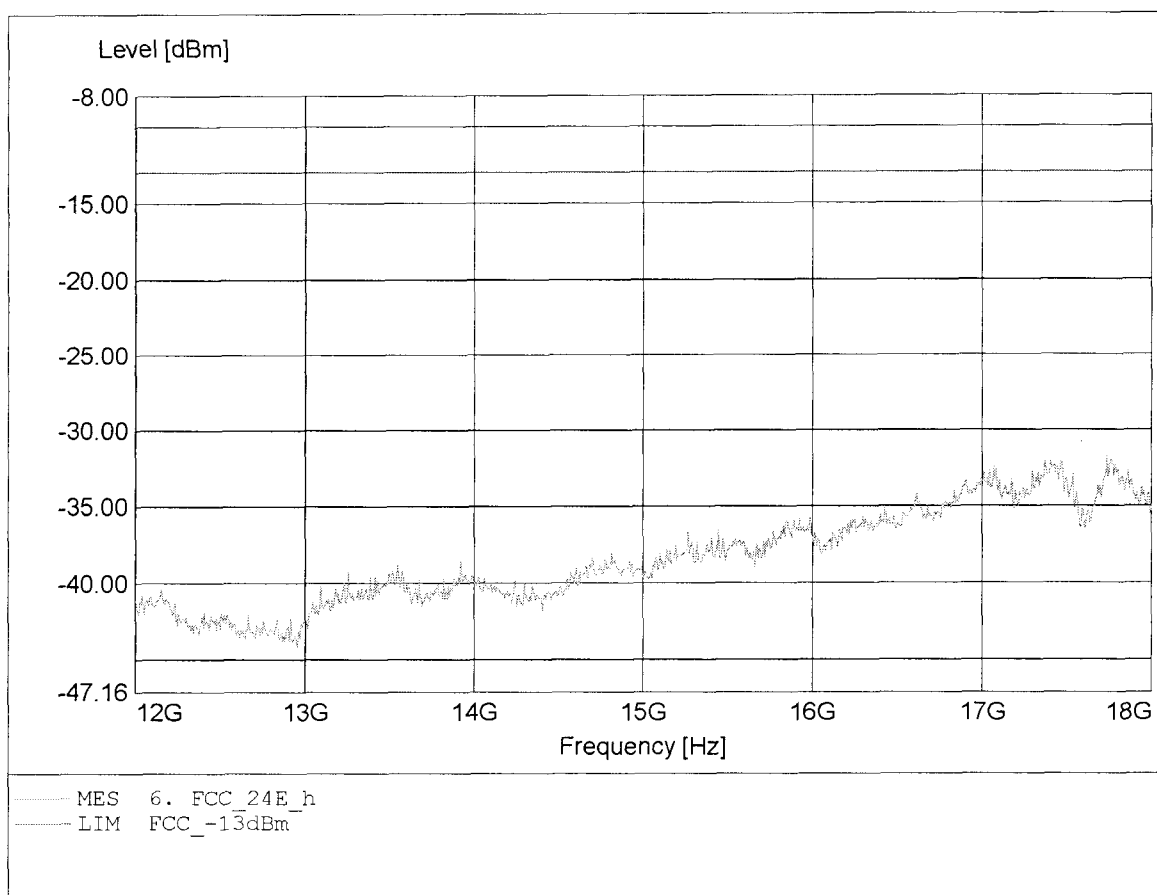


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 810
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.193GHz, Pmax: -28.22dBm, RBW: 1MHz

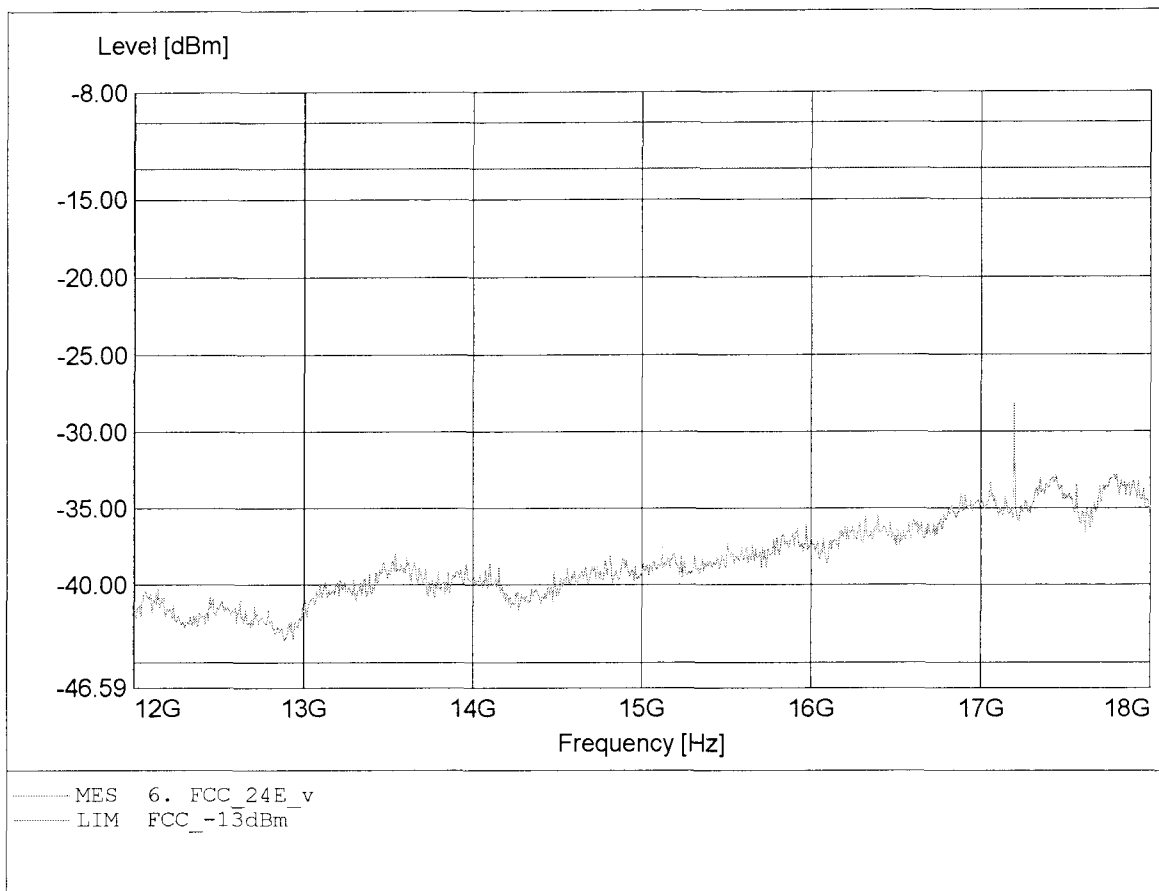


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 810
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 18.463GHz, Pmax: -22.51dBm, RBW: 1MHz

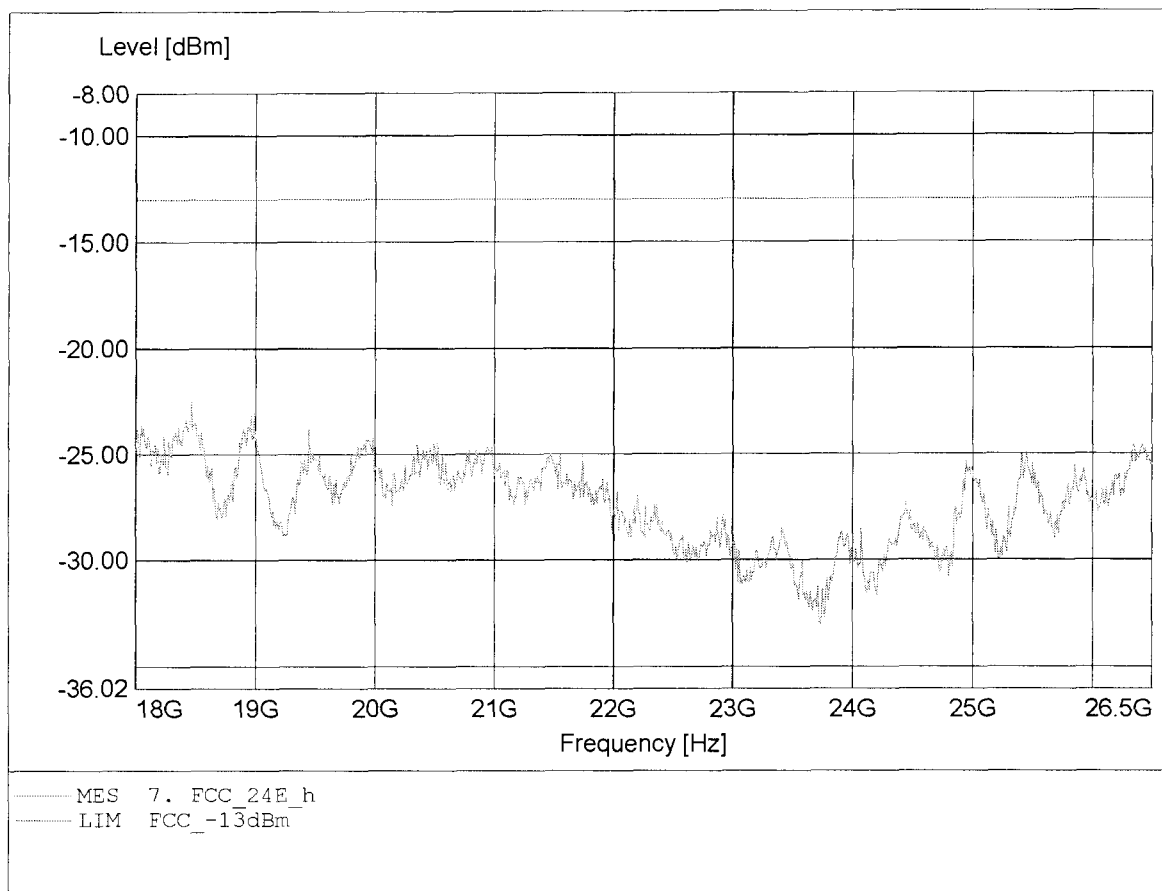


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 810
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 18.425GHz, Pmax: -22.95dBm, RBW: 1MHz

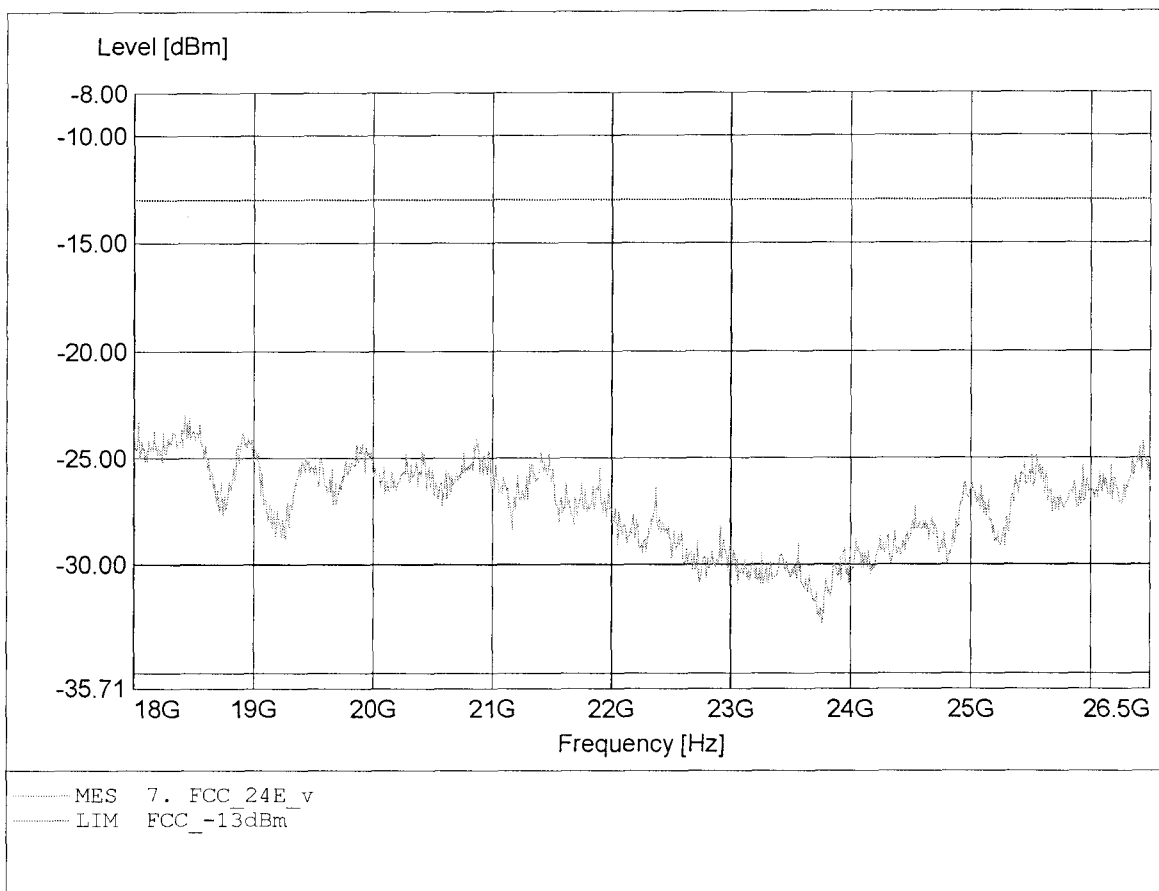


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 128
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 41.333MHz, Pmax: -51.52dBm, RBW: 1MHz

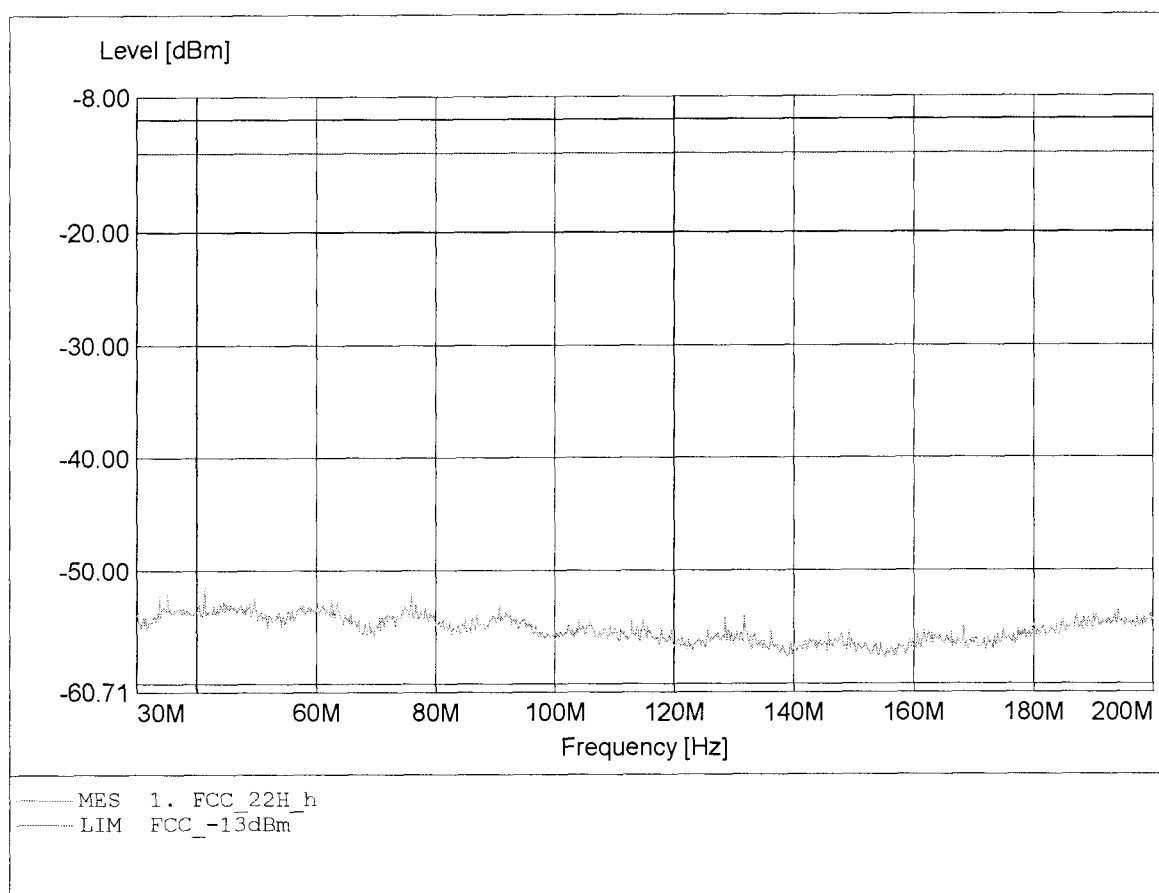


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 128
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 35.478MHz, Pmax: -52.49dBm, RBW: 1MHz

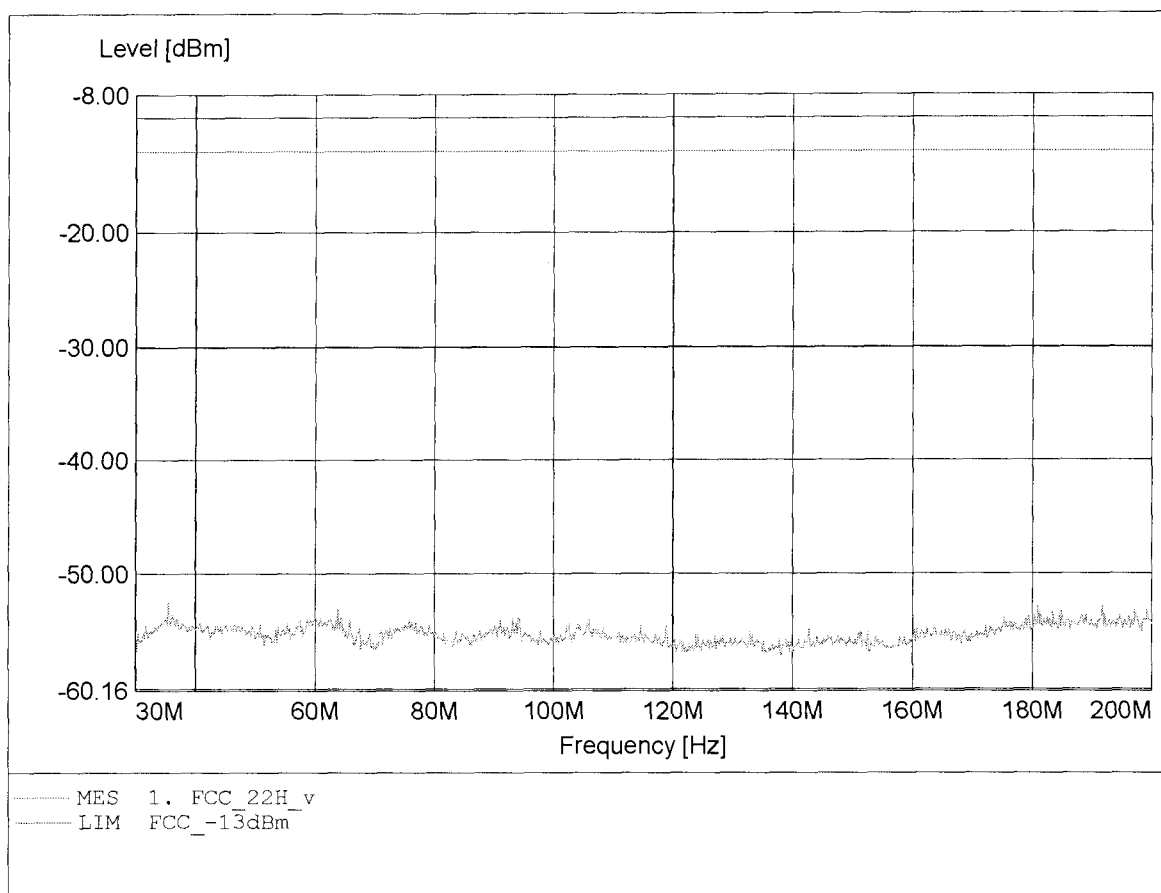


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 128
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL 223+notch
Comment 2: Freq: 823.994MHz, Pmax: -34.72dBm, RBW: 1MHz

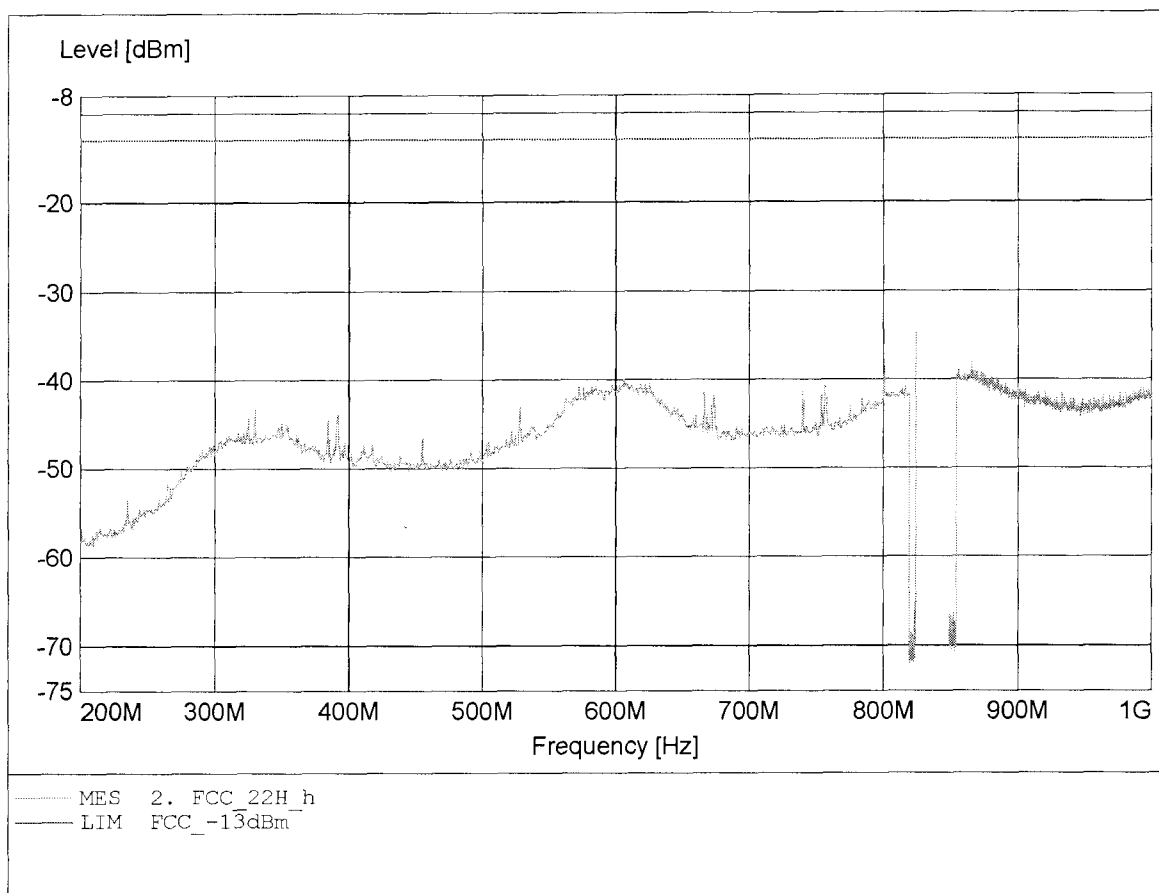


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 128
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL 223+notch
Comment 2: Freq: 823.994MHz, Pmax: -27.81dBm, RBW: 1MHz

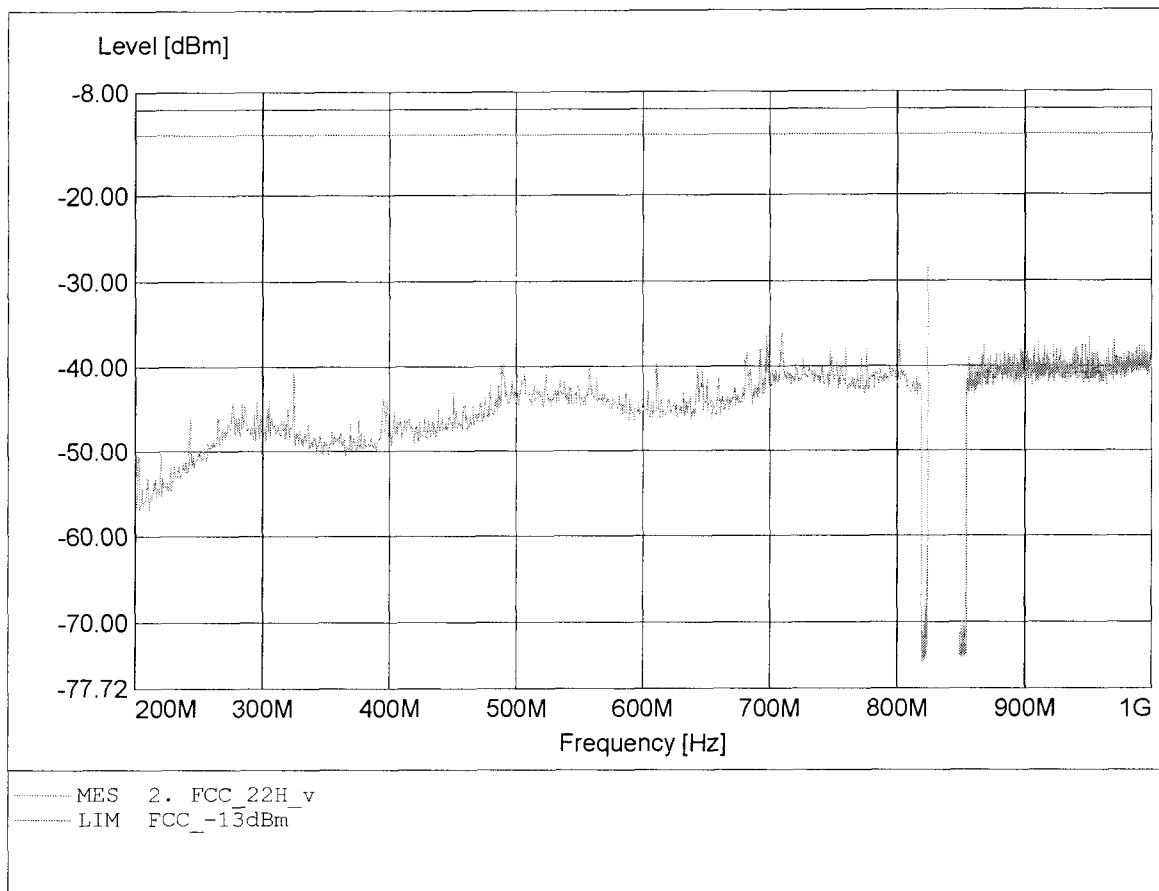


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 128
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.957GHz, Pmax: -19.27dBm, RBW: 1MHz

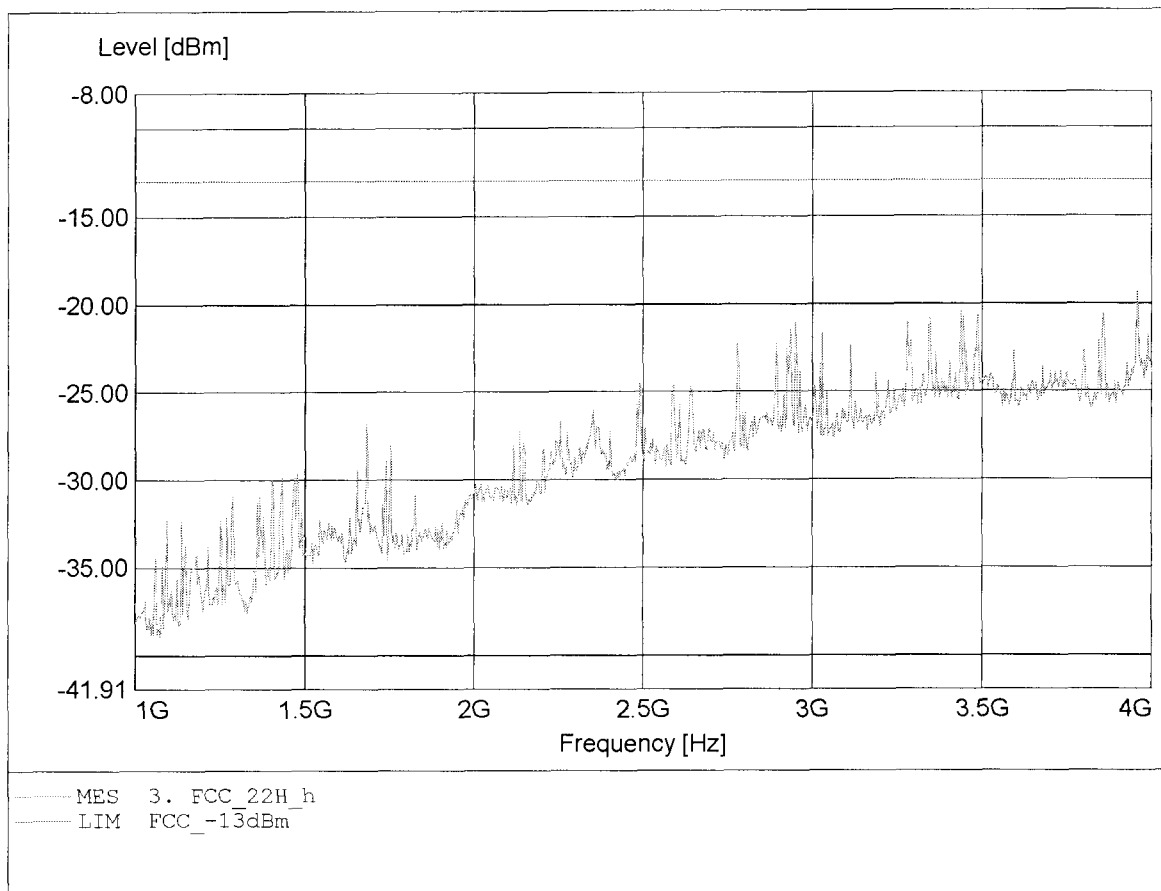


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 128
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.717GHz, Pmax: -18.16dBm, RBW: 1MHz

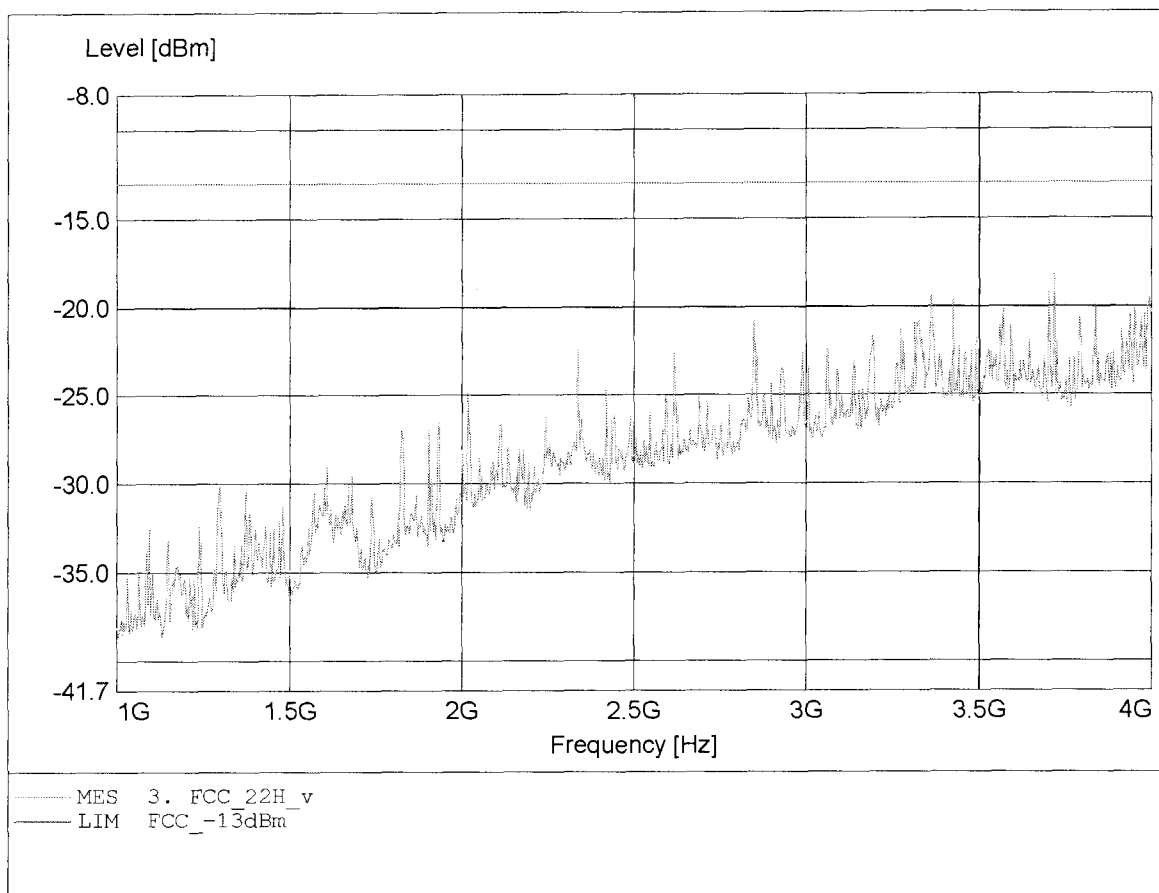


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 128
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 8.000GHz, Pmax: -44.63dBm, RBW: 1MHz

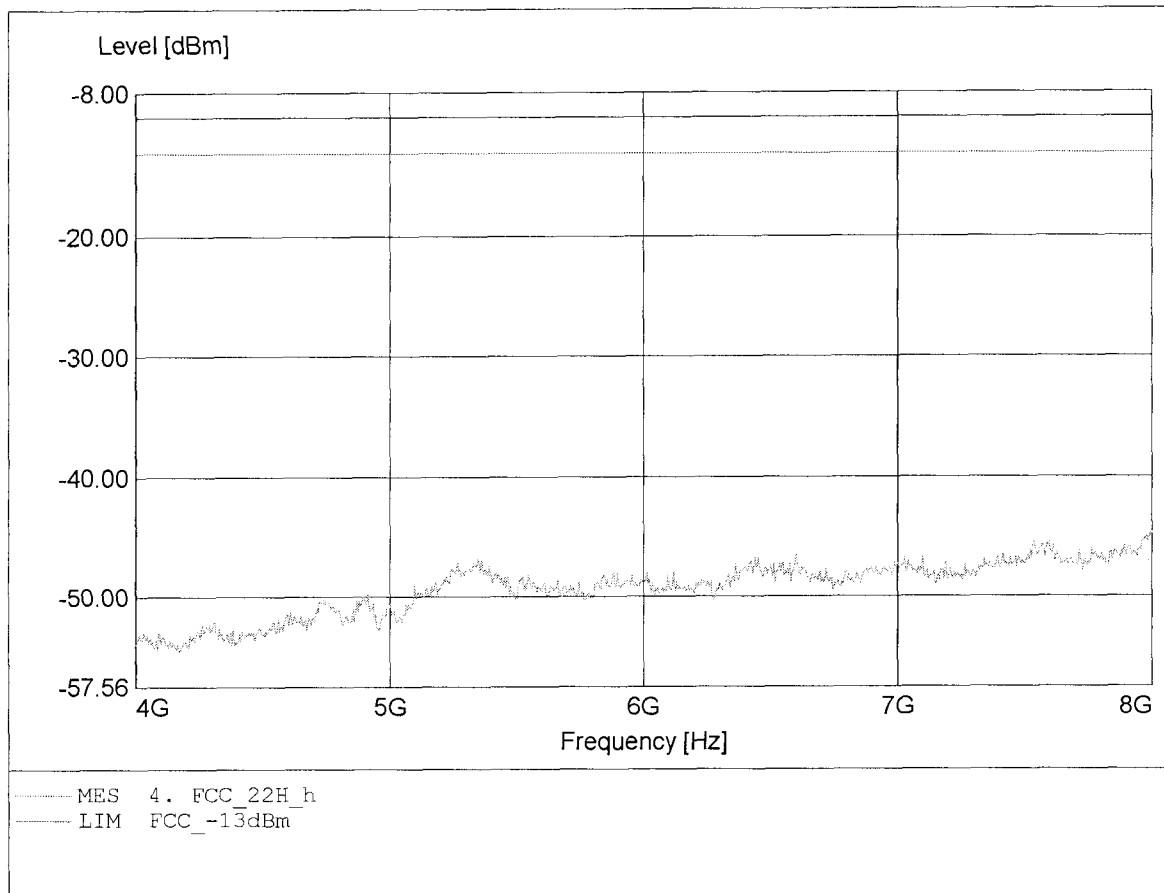


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 128
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.471GHz, Pmax: -45.33dBm, RBW: 1MHz

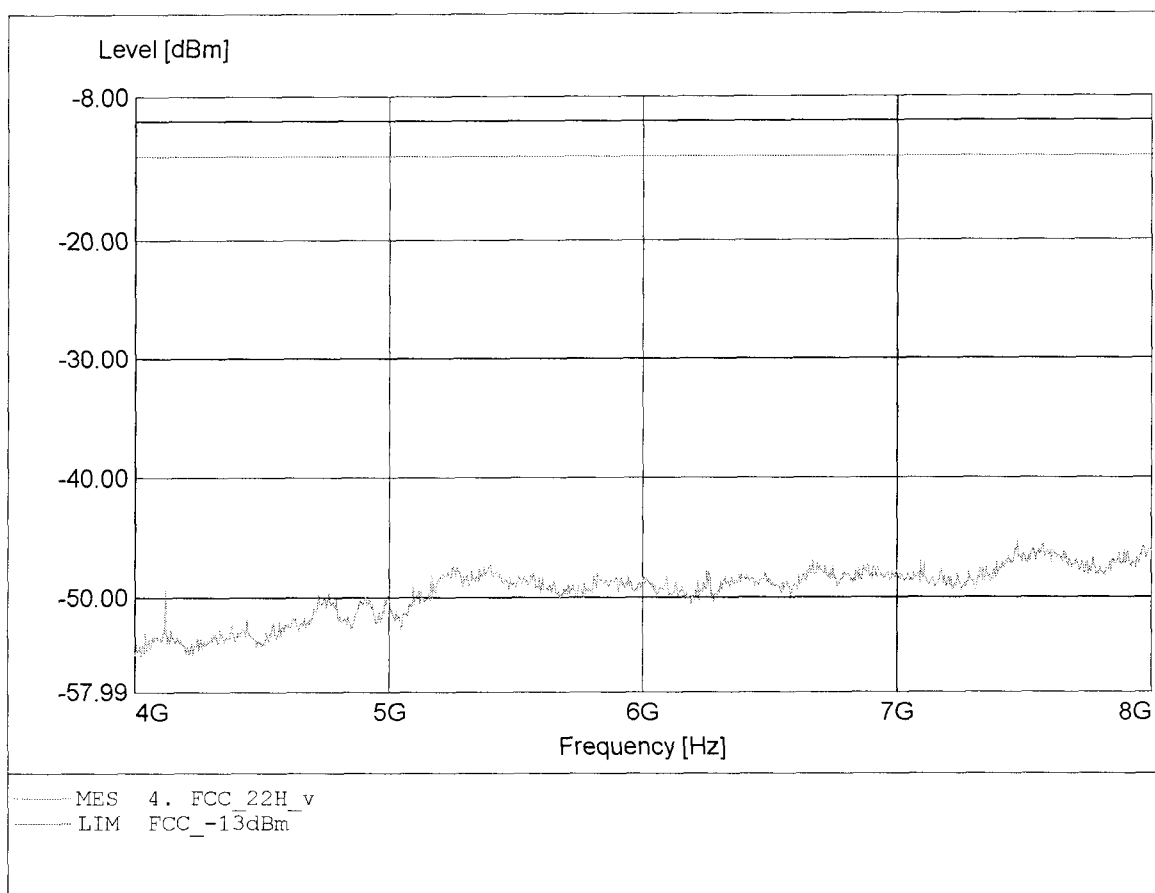


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 128
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.702GHz, Pmax: -39.77dBm, RBW: 1MHz

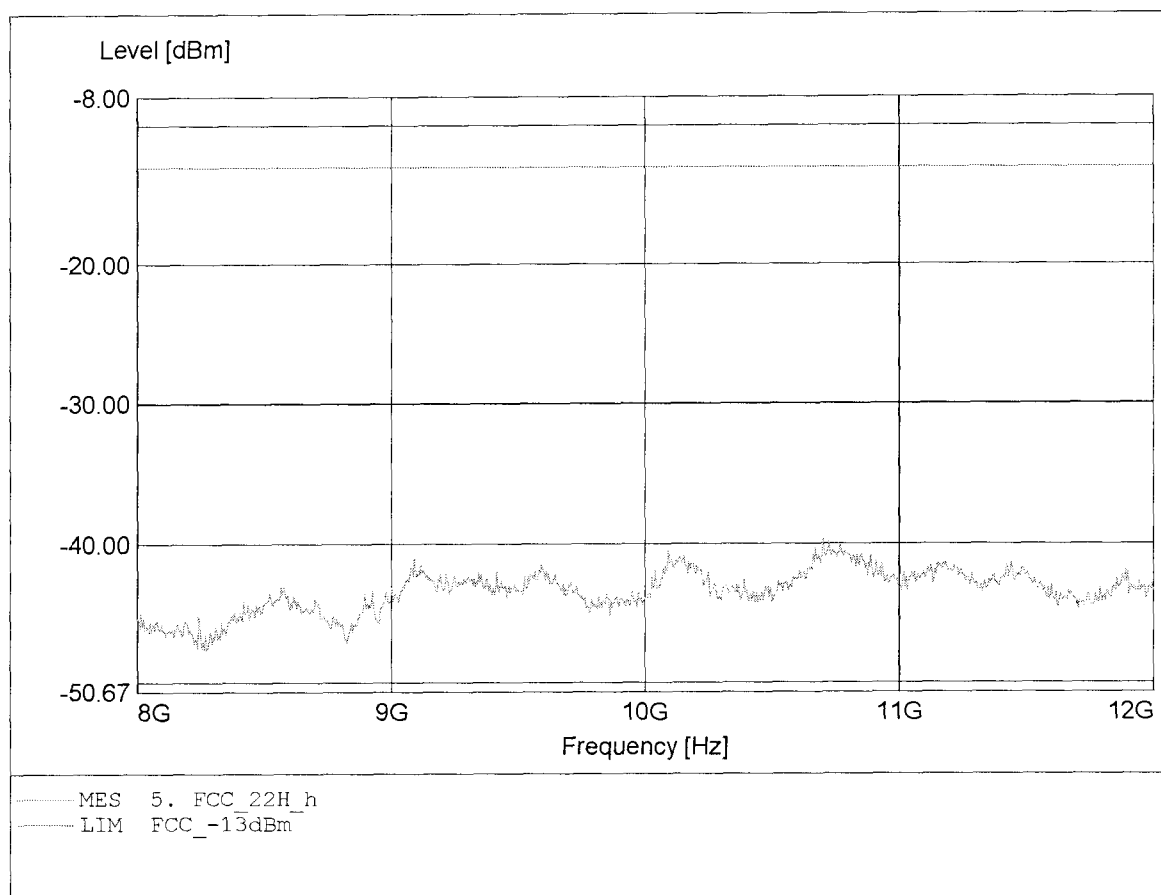


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 128
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.791GHz, Pmax: -41.10dBm, RBW: 1MHz

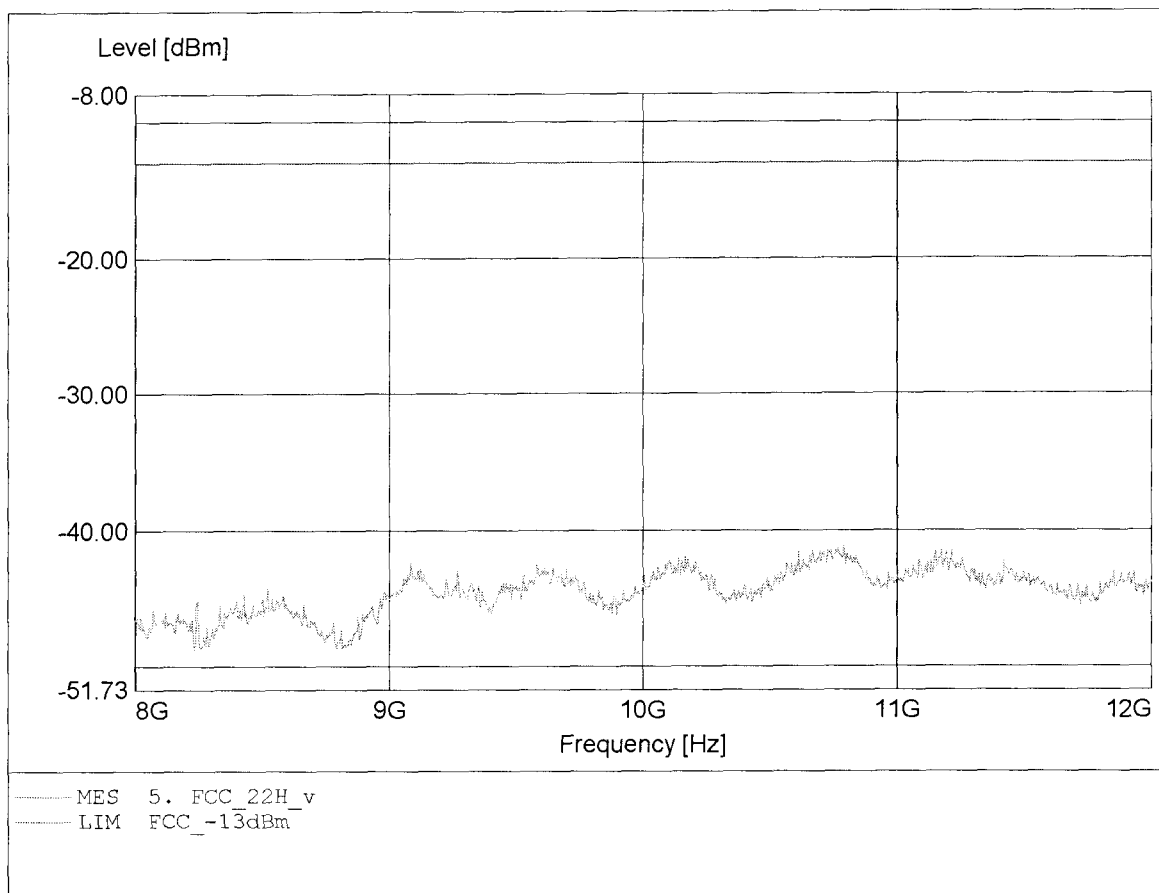


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 188
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 64.000MHz, Pmax: -49.91dBm, RBW: 1MHz

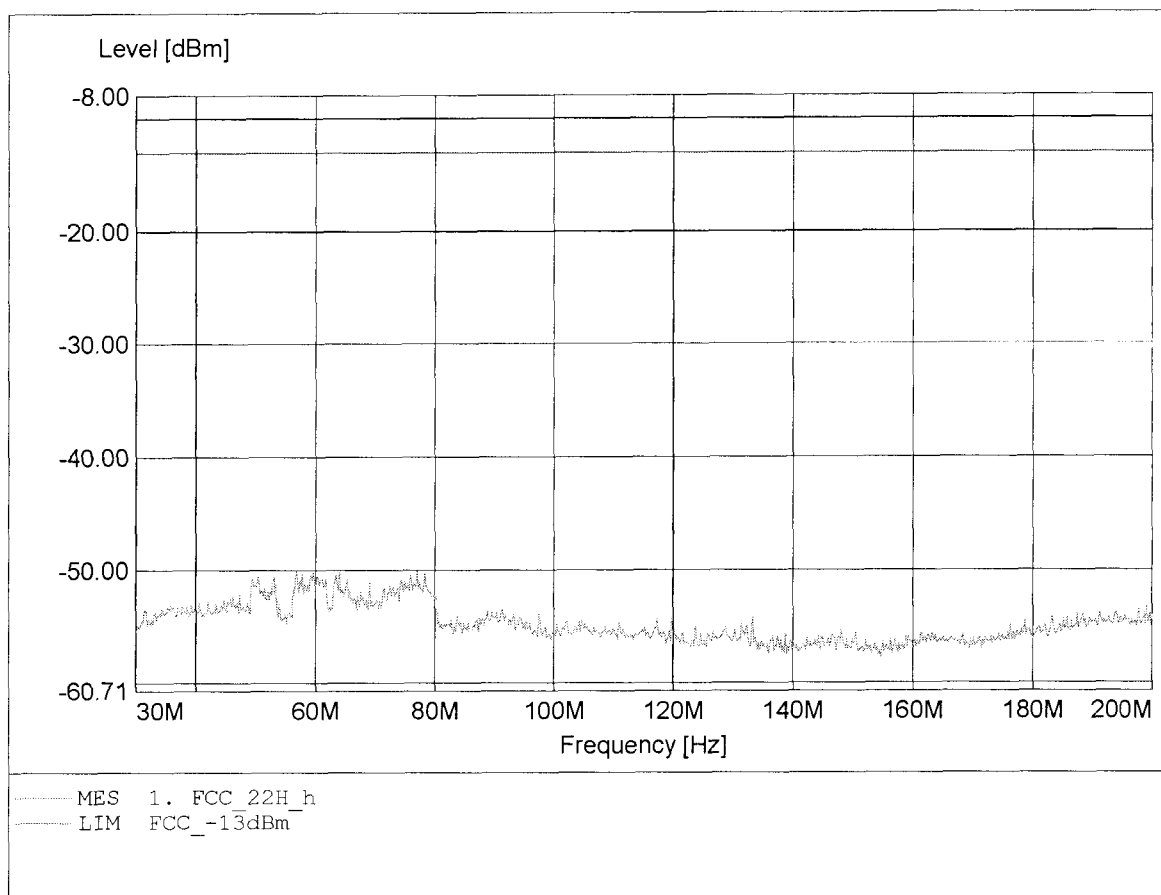


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 188
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 37.744MHz, Pmax: -49.02dBm, RBW: 1MHz

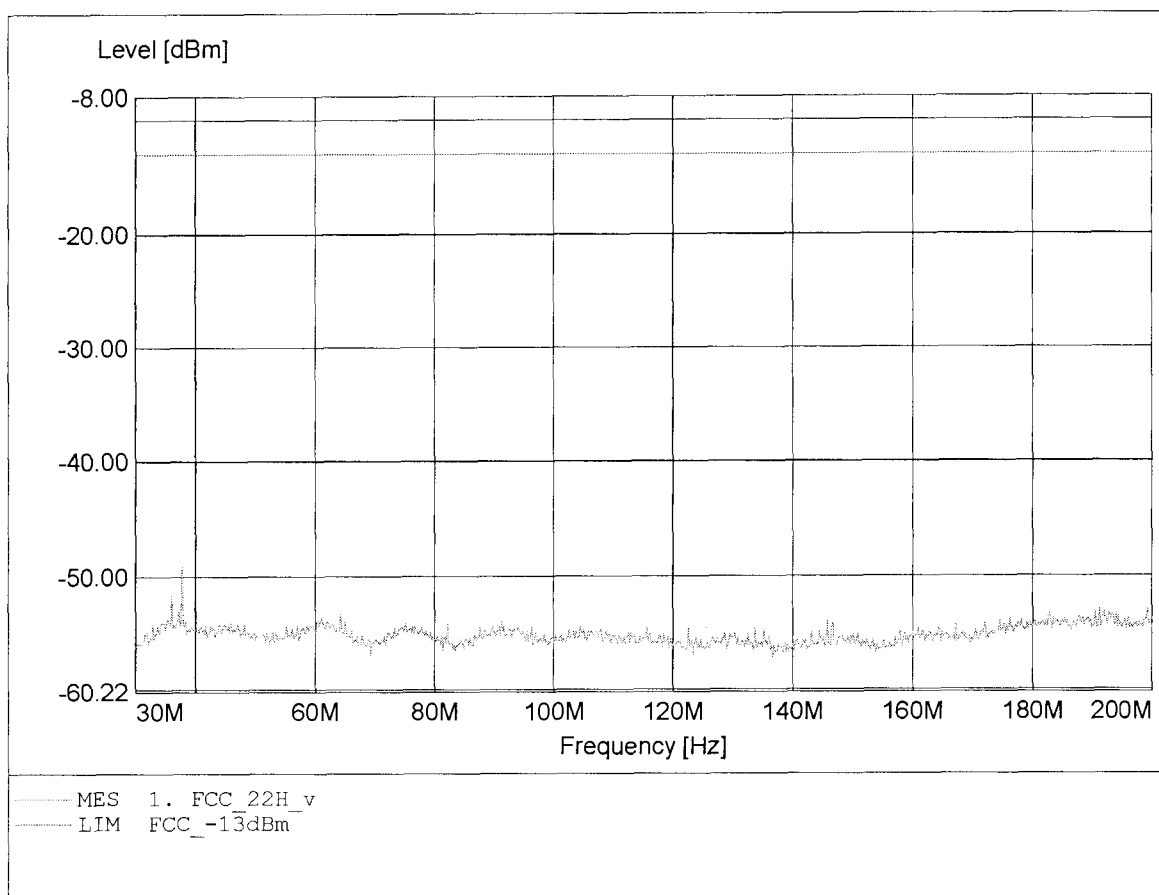


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 188
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL 223+notch
Comment 2: Freq: 867.789MHz, Pmax: -34.35dBm, RBW: 1MHz

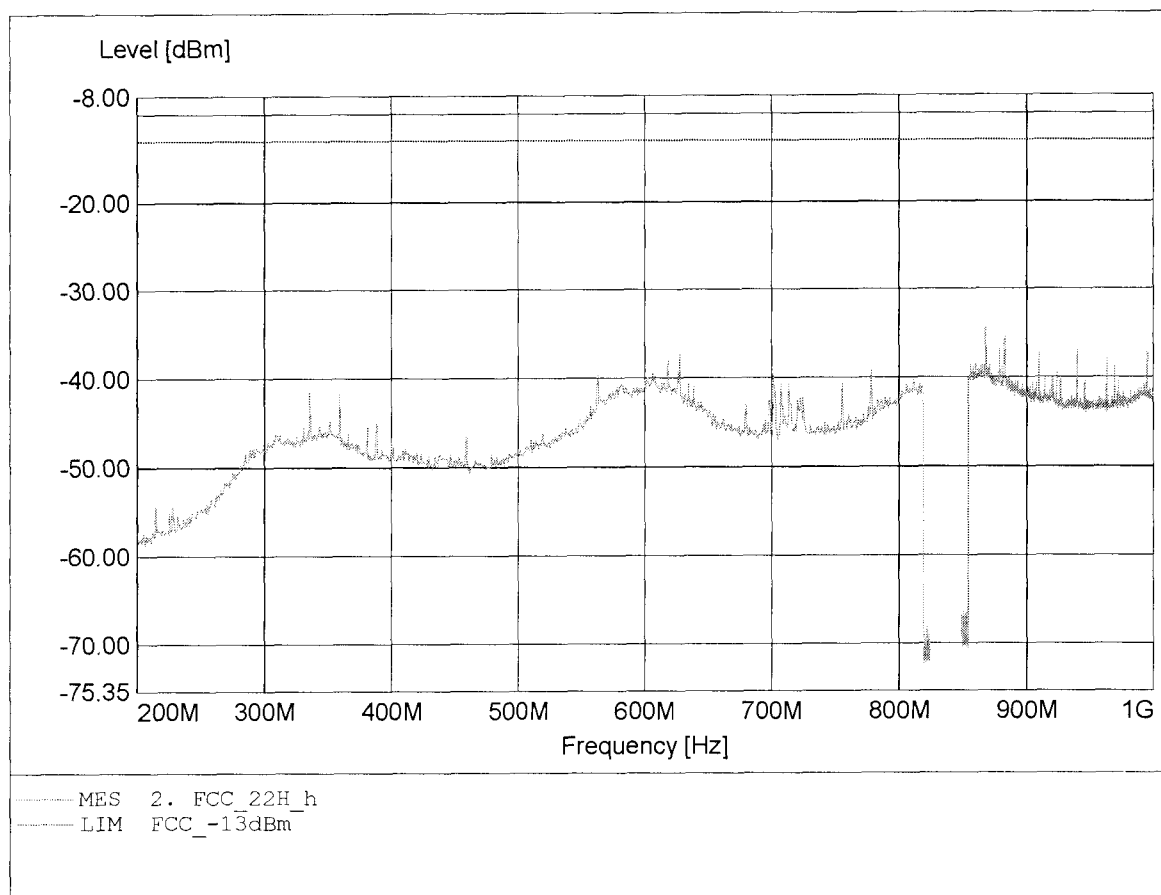


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 188
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL 223+notch
Comment 2: Freq: 960.256MHz, Pmax: -34.19dBm, RBW: 1MHz

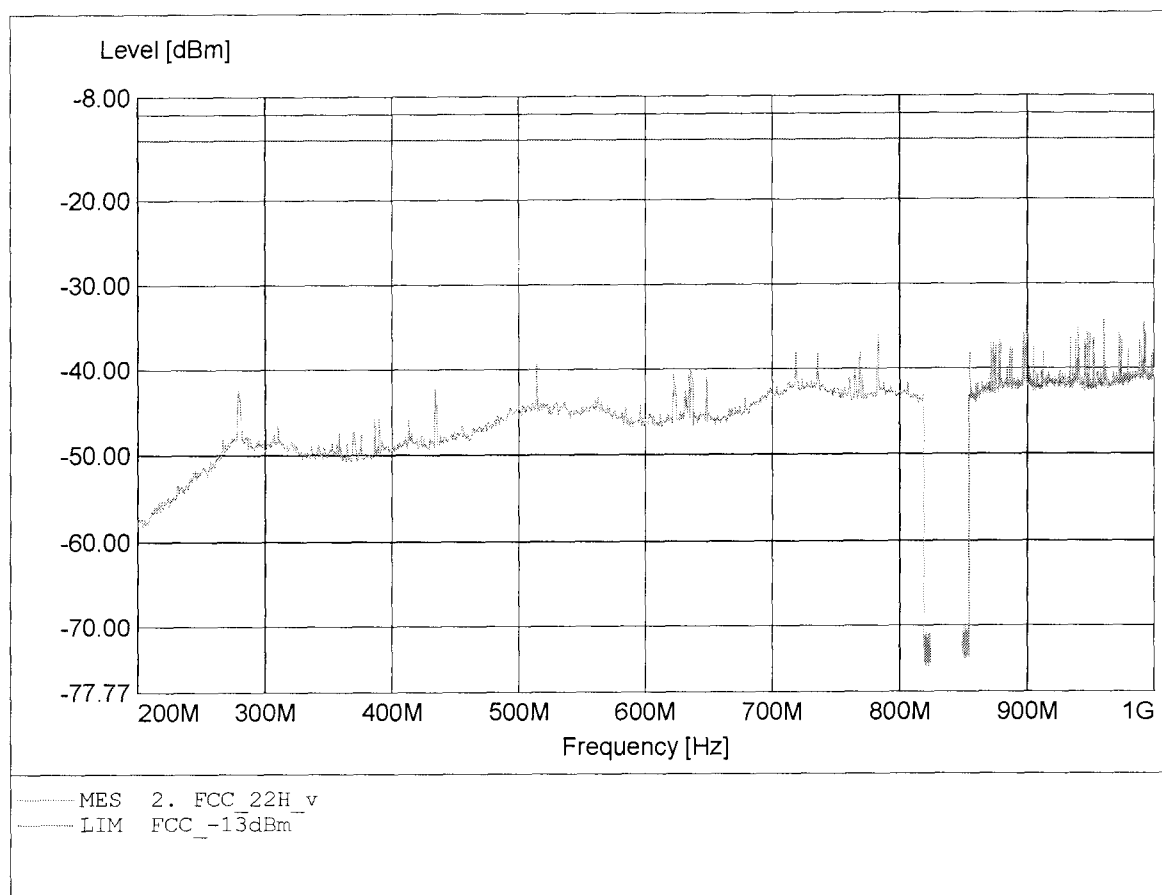


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 188
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.993GHz, Pmax: -19.96dBm, RBW: 1MHz

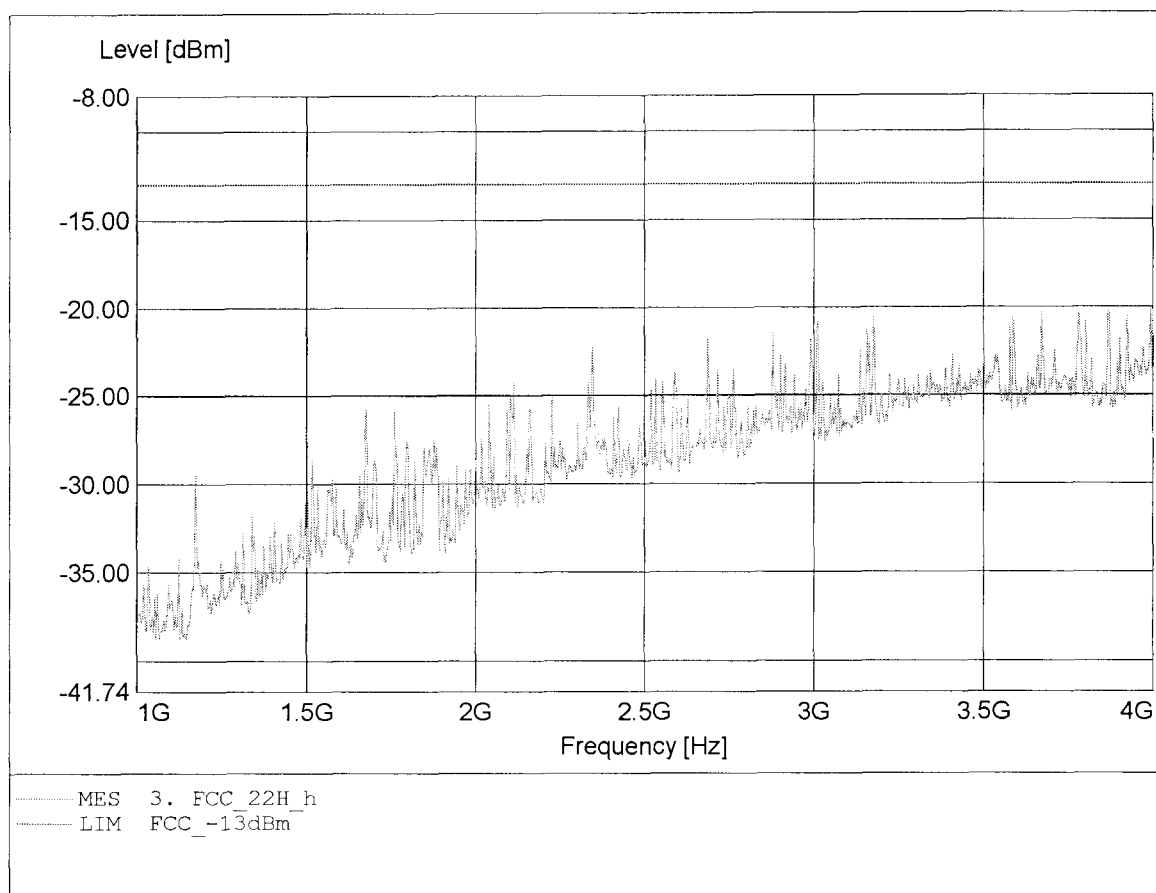


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 188
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.993GHz, Pmax: -21.94dBm, RBW: 1MHz

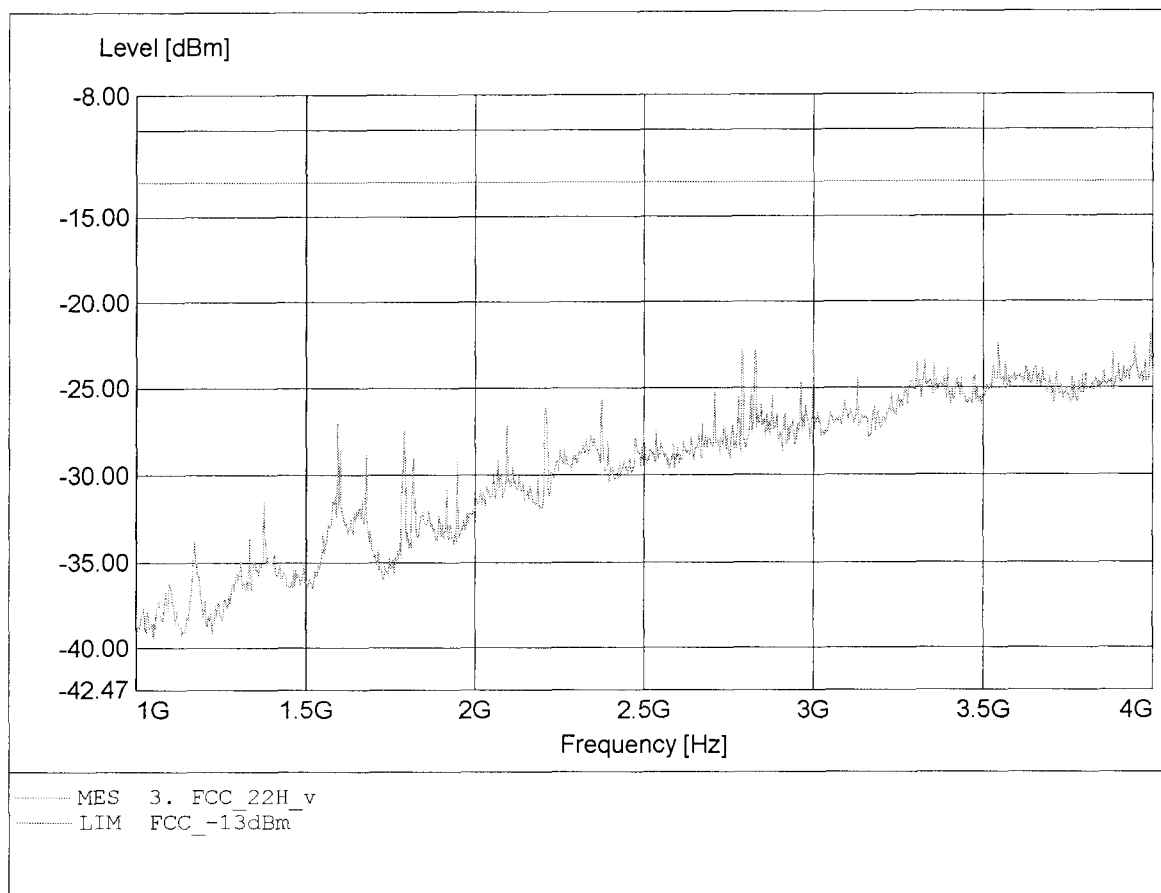


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 188
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.969GHz, Pmax: -44.35dBm, RBW: 1MHz

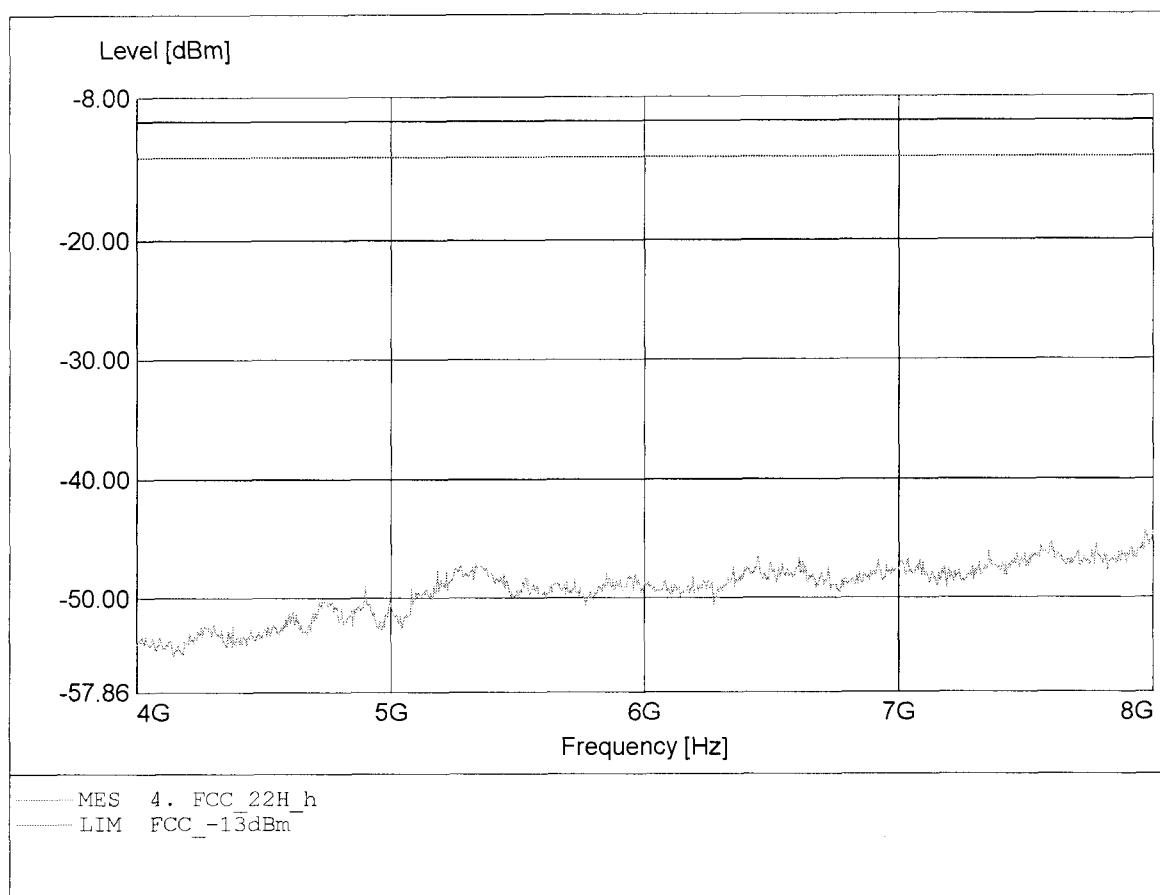


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 188
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.560GHz, Pmax: -45.28dBm, RBW: 1MHz

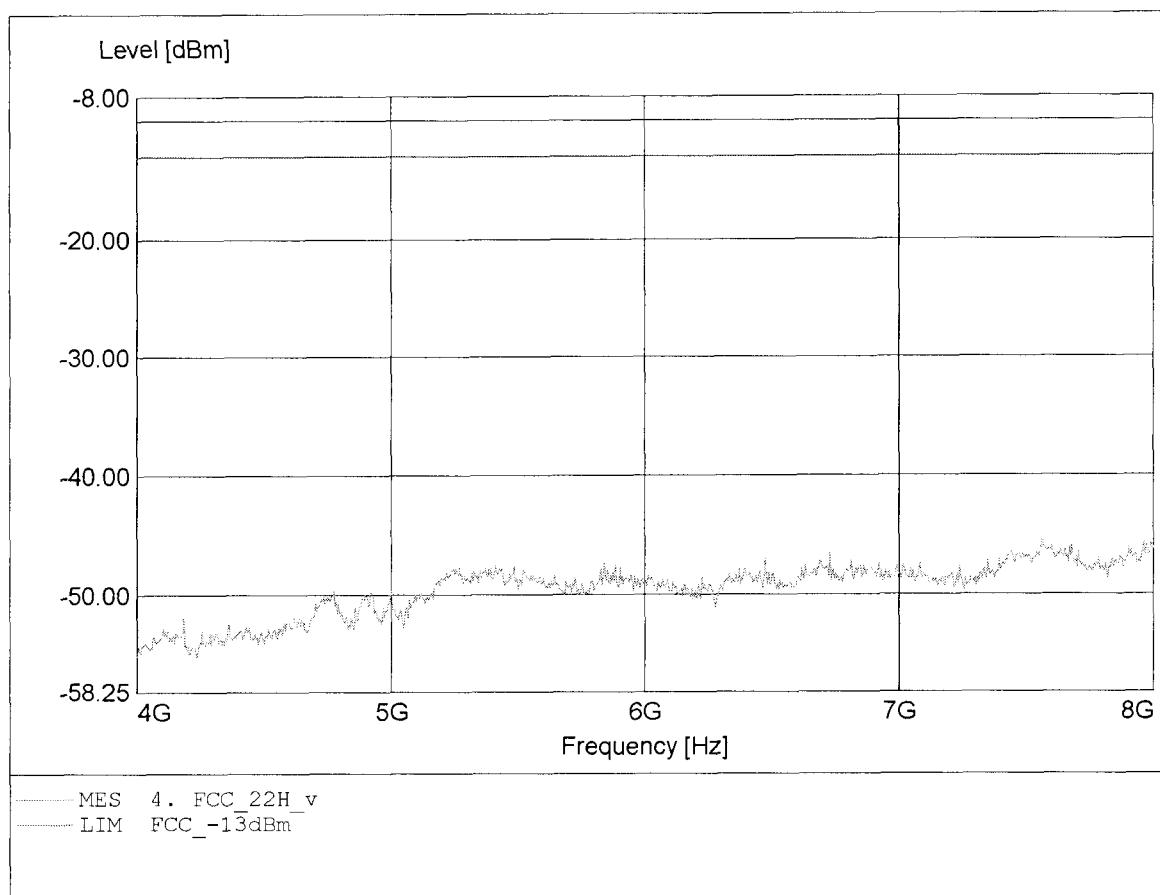


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 188
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.760GHz, Pmax: -40.44dBm, RBW: 1MHz

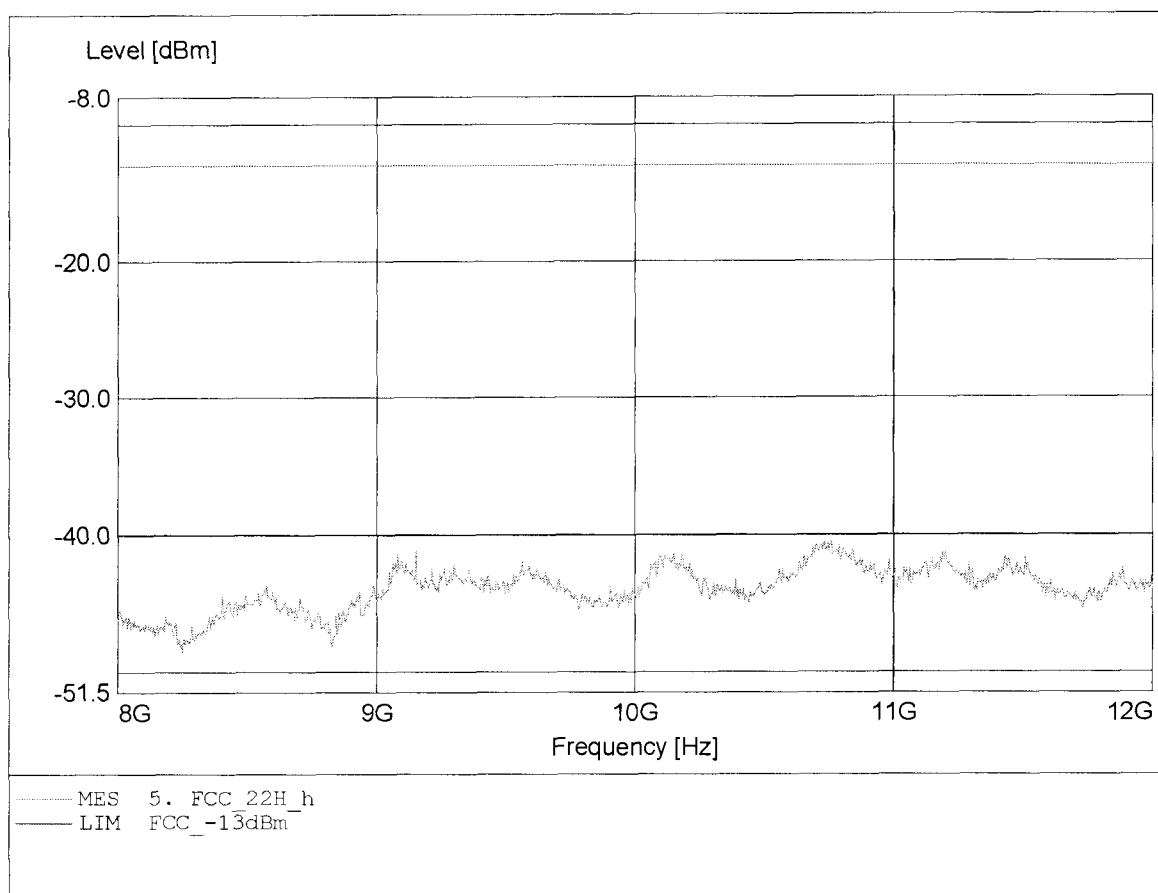


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 188
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.782GHz, Pmax: -40.92dBm, RBW: 1MHz

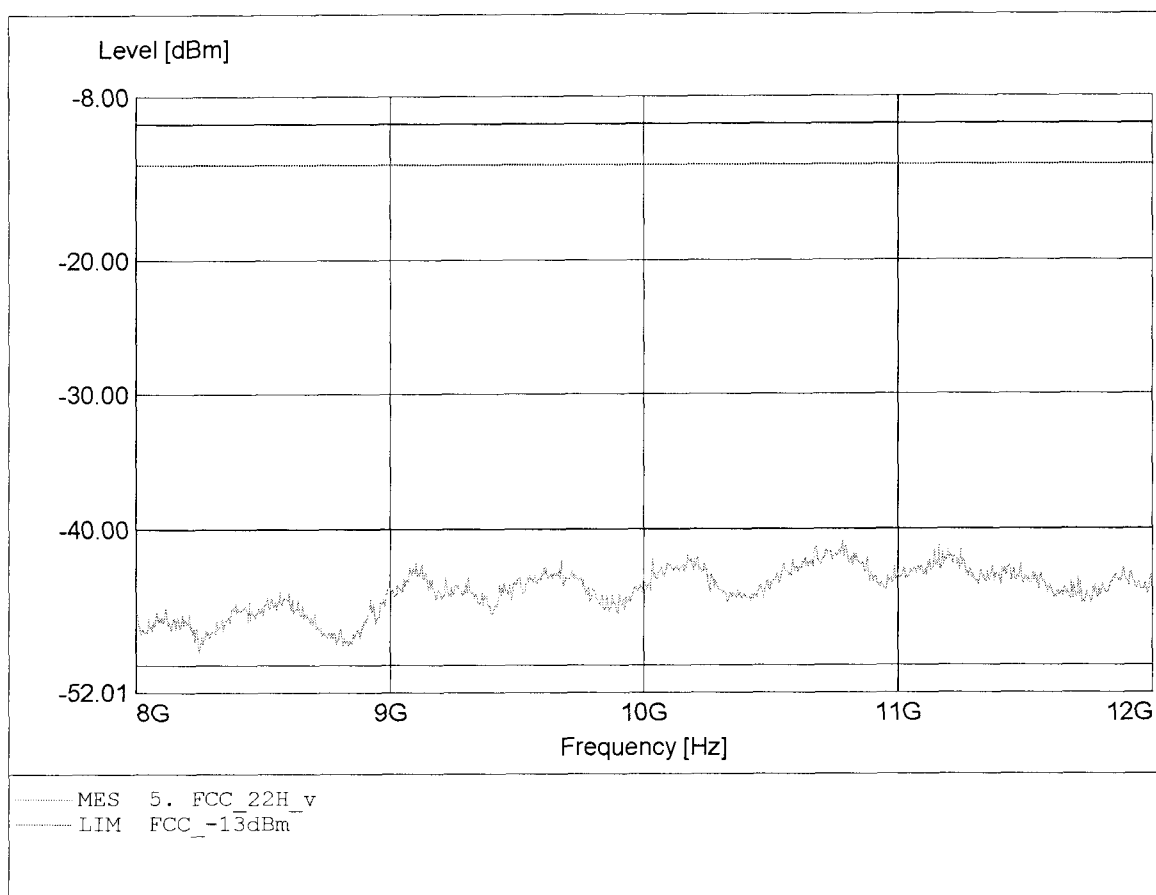


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 251
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 99.511MHz, Pmax: -51.13dBm, RBW: 1MHz

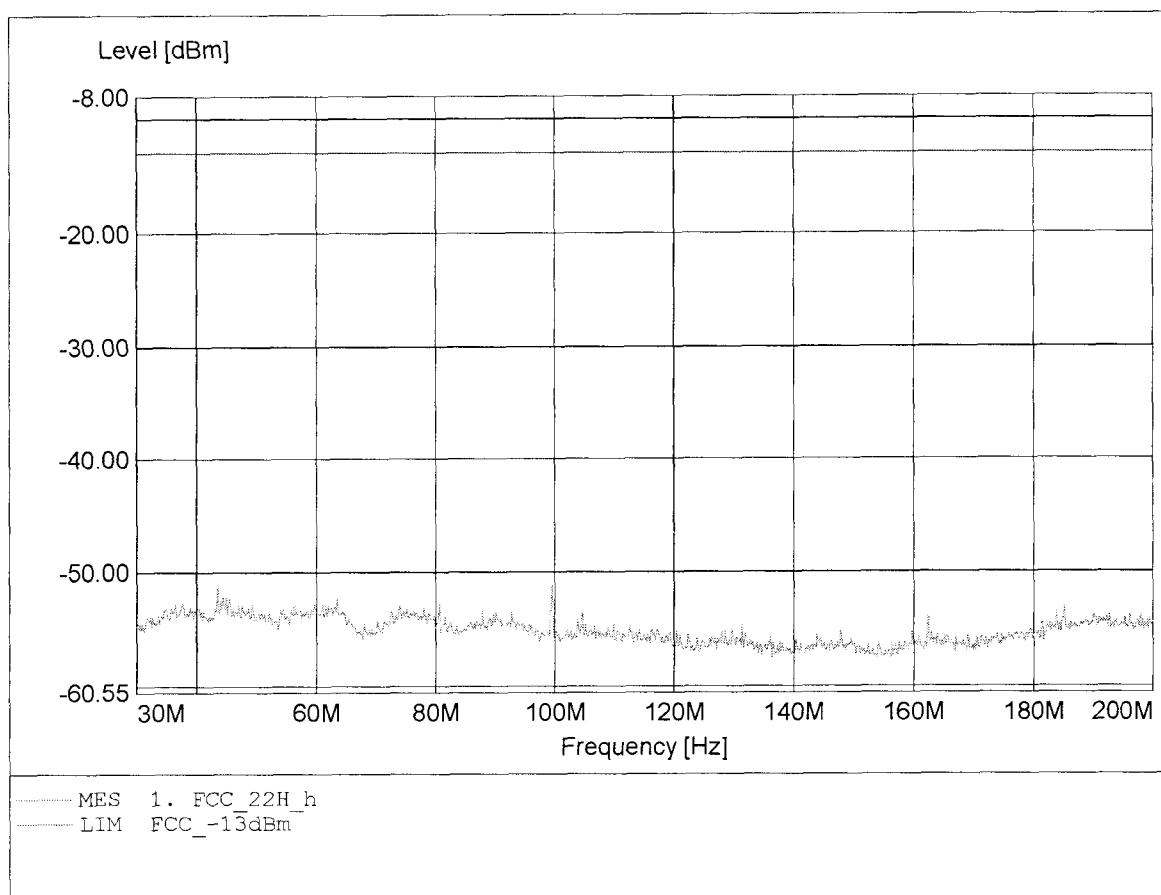


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 251
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 83.833MHz, Pmax: -42.84dBm, RBW: 1MHz

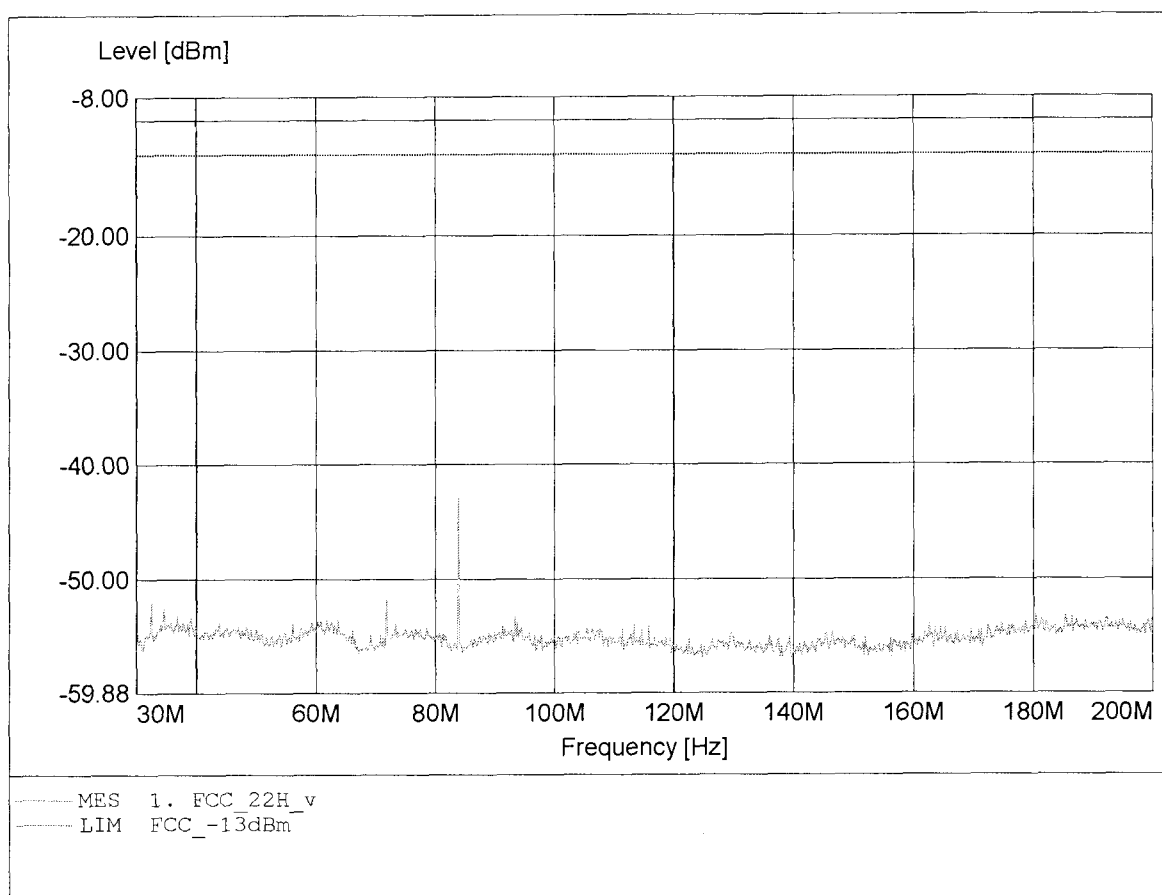


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 251
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL 223+notch
Comment 2: Freq: 849.017MHz, Pmax: -33.03dBm, RBW: 1MHz

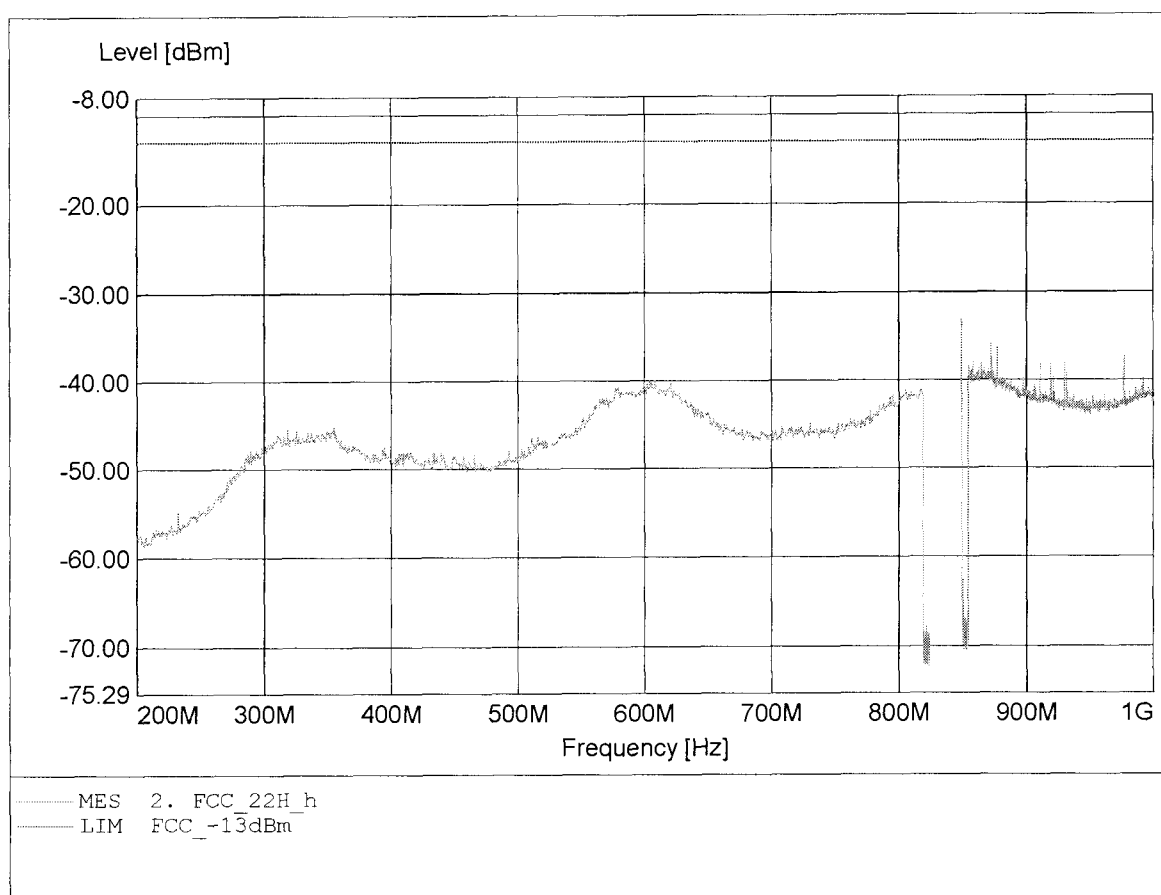


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 251
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL 223+notch
Comment 2: Freq: 849.022MHz, Pmax: -28.24dBm, RBW: 1MHz

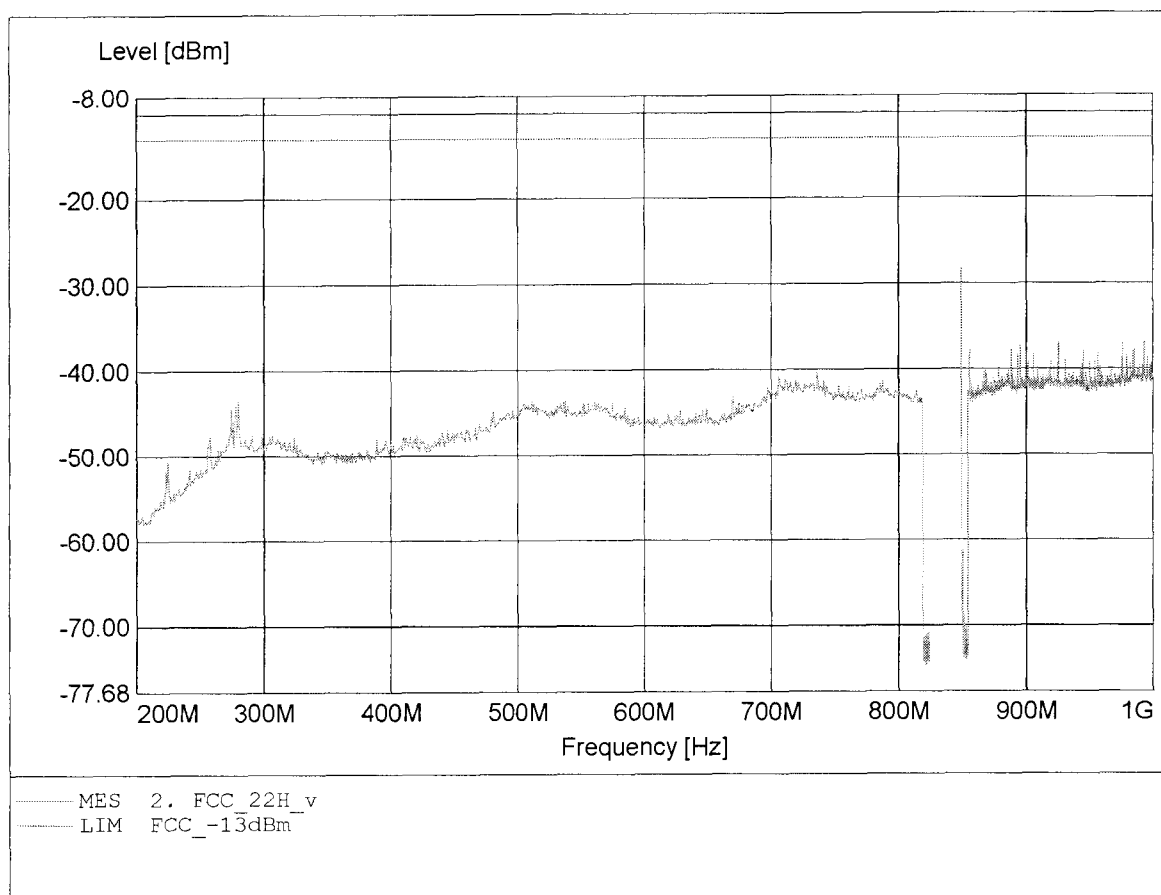


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 251
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.647GHz, Pmax: -17.77dBm, RBW: 1MHz

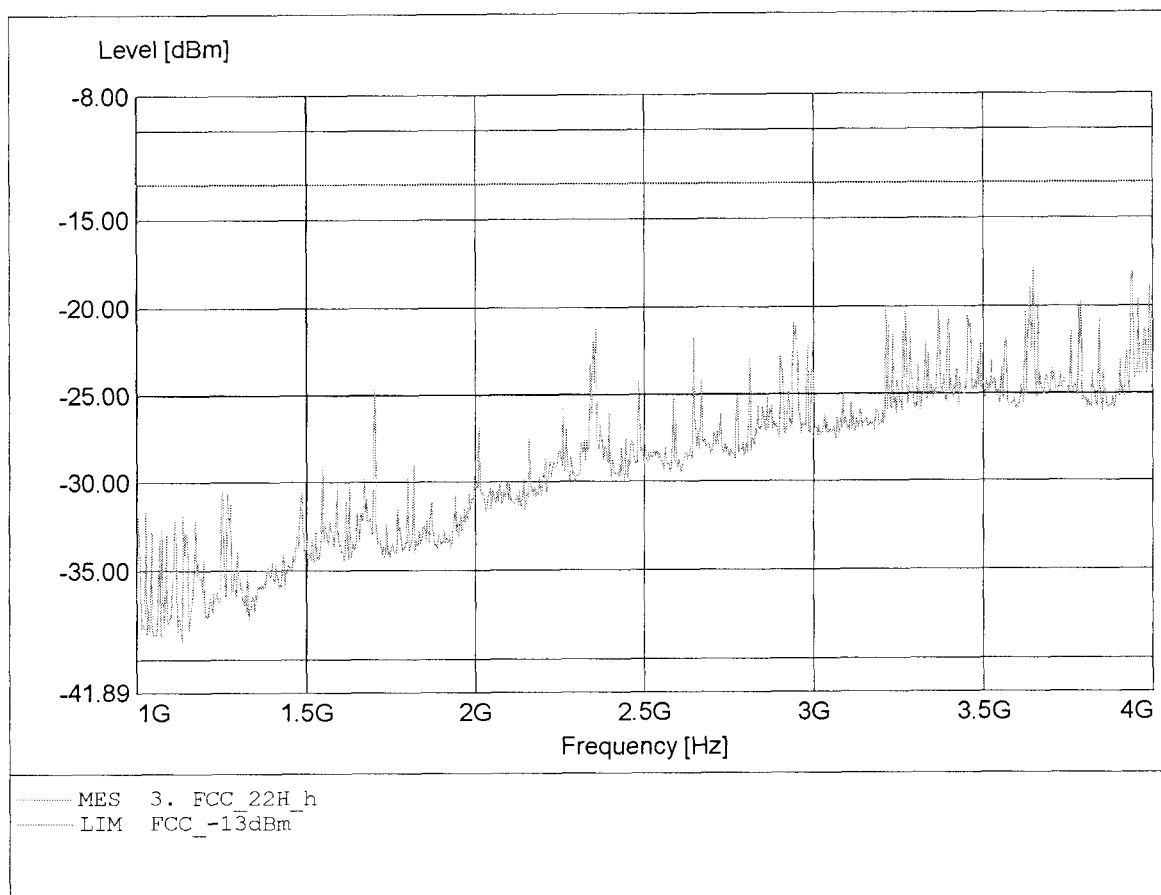


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 251
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.640GHz, Pmax: -18.63dBm, RBW: 1MHz

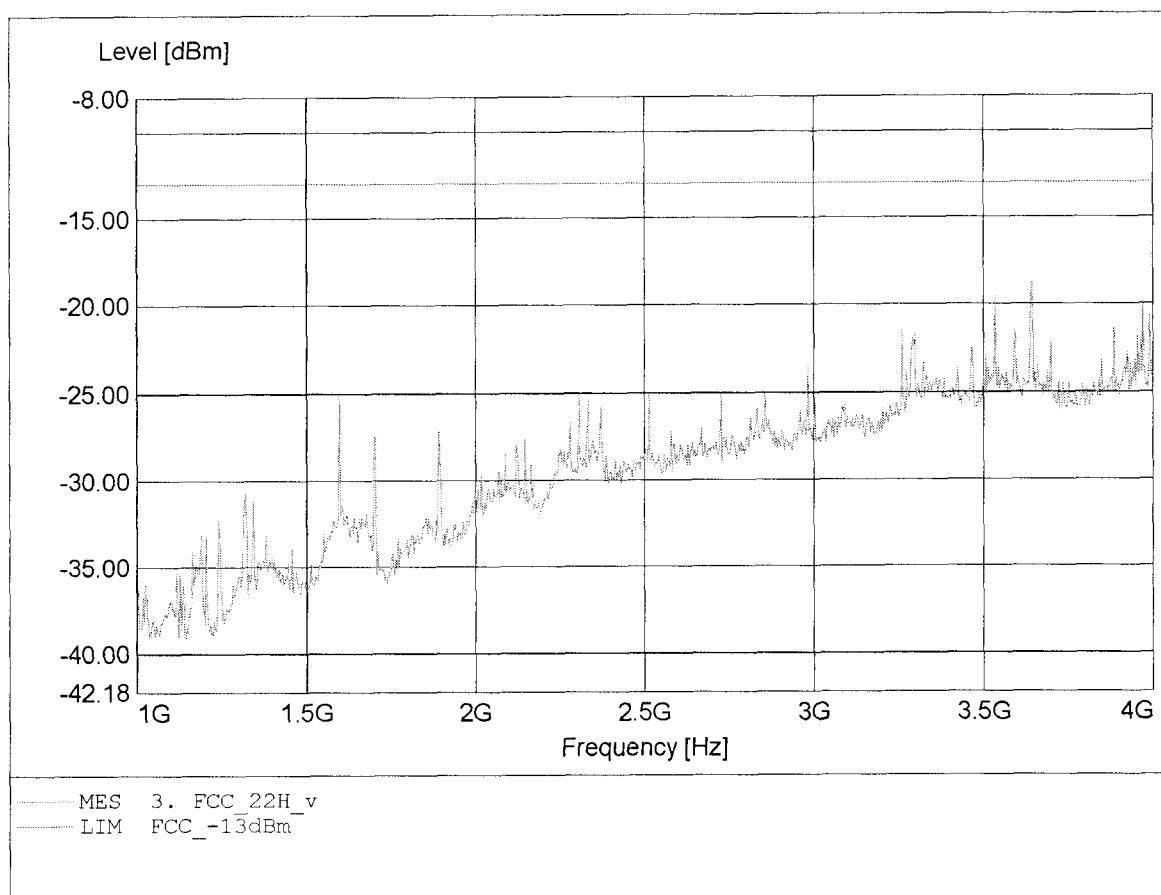


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 251
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.987GHz, Pmax: -43.73dBm, RBW: 1MHz

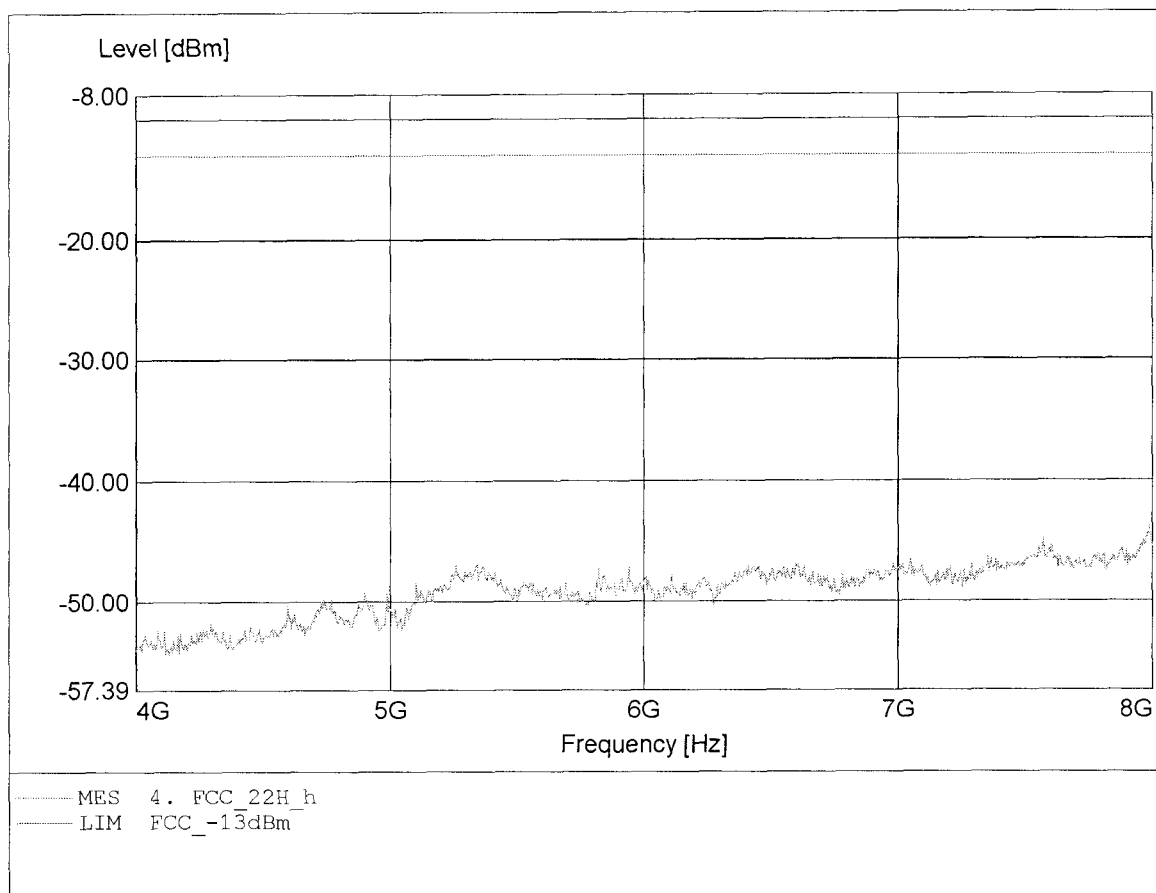


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 251
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.627GHz, Pmax: -45.01dBm, RBW: 1MHz

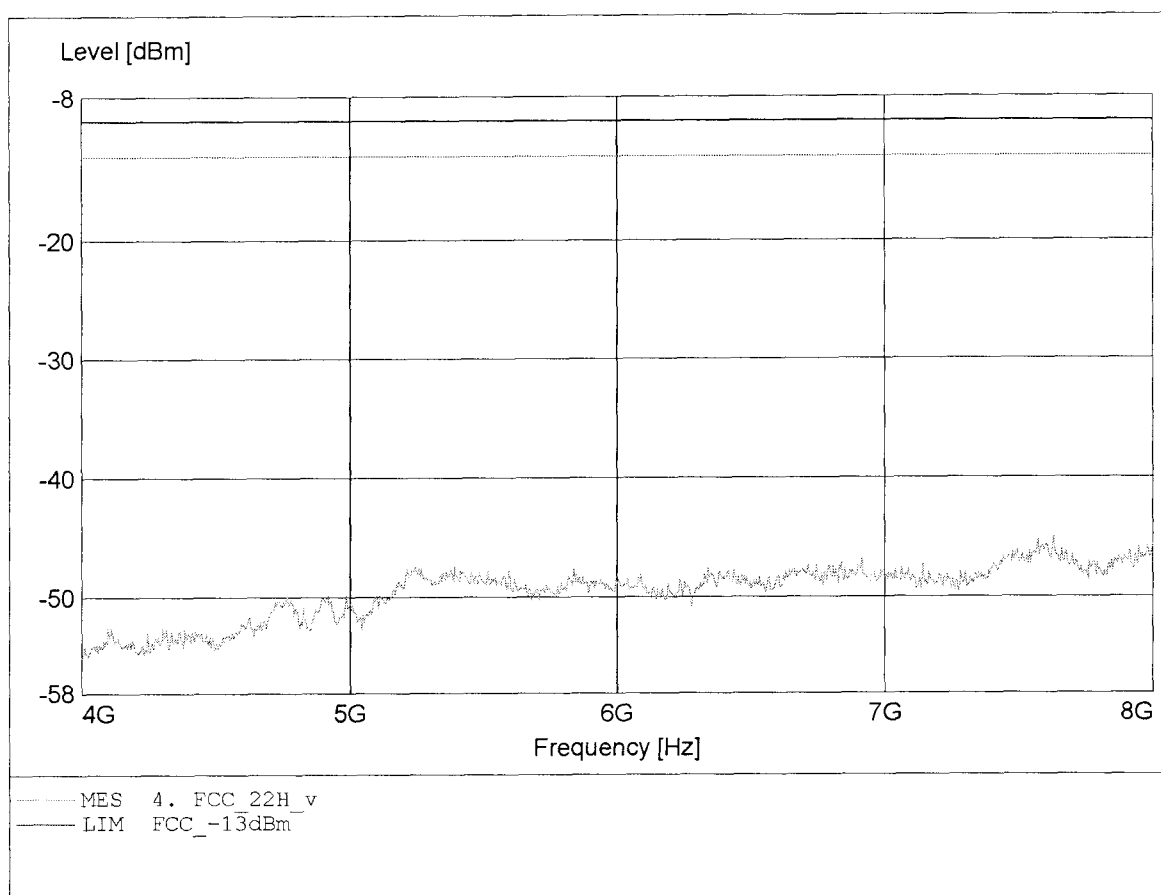


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 251
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.720GHz, Pmax: -39.95dBm, RBW: 1MHz

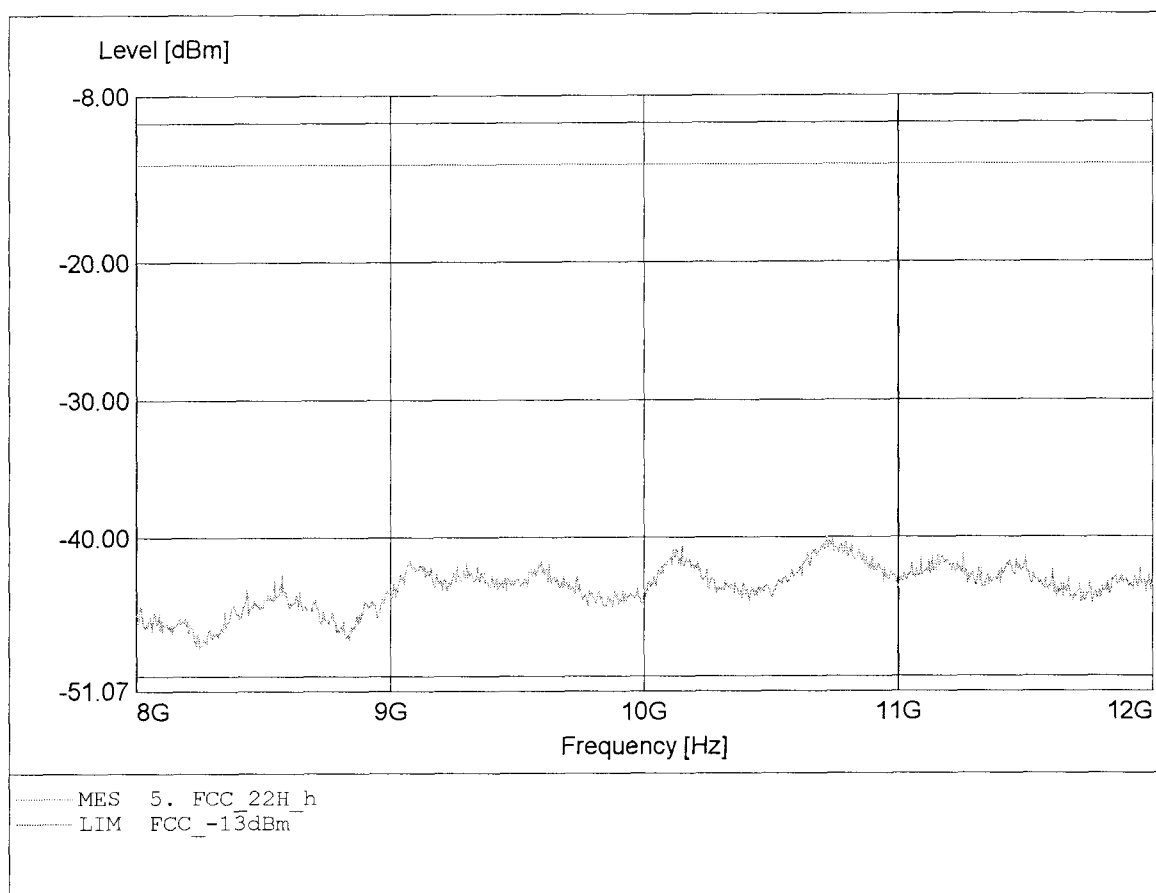

Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: WAVECOM S.A.
EUT: GSM/GPRS MODULE
Model / Channel: WISMO QUIK Q2686H / 251
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom.: 3.80 V DC
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.778GHz, Pmax: -40.12dBm, RBW: 1MHz

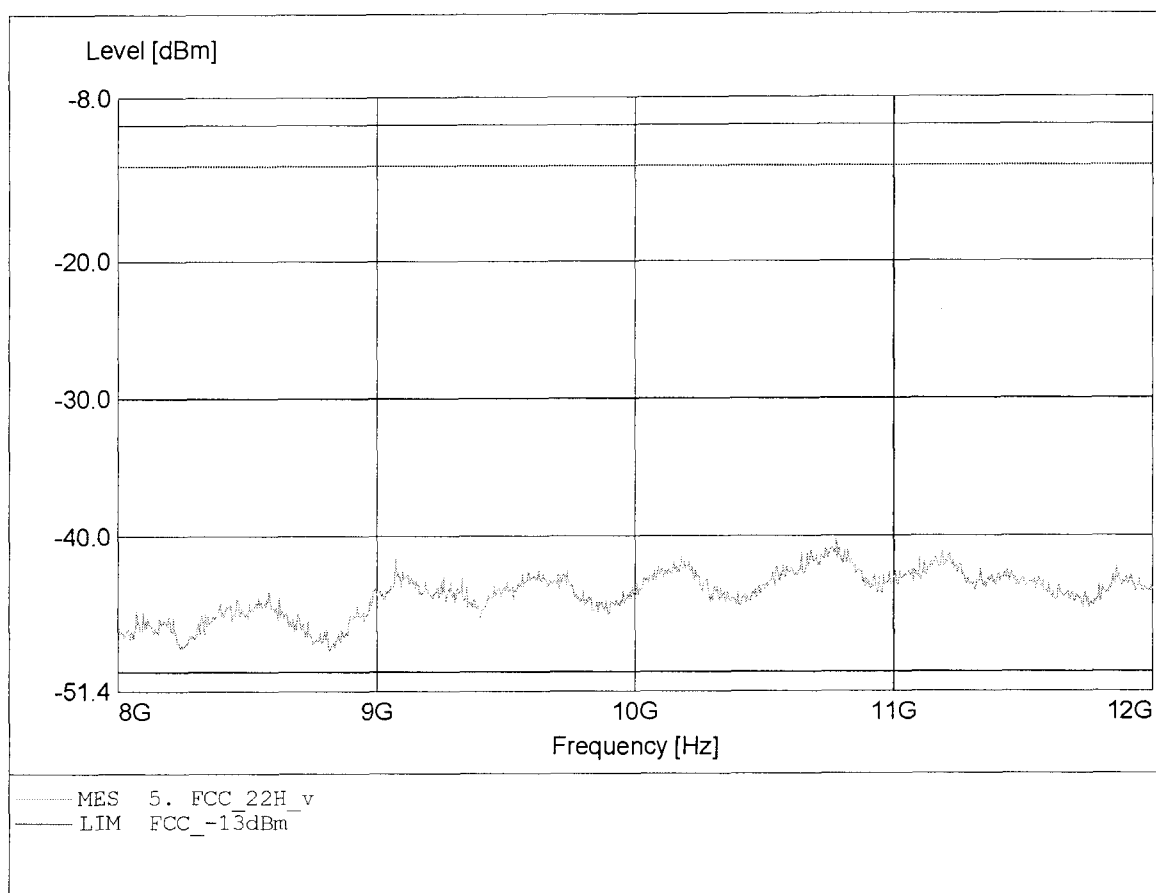

Appendix J

Line Conducted Emissions

Appendix K

Frequency Stability vs. Temperature

No diagrams
Refer to point 13.2

Appendix L

Frequency Stability vs. Voltage

No diagrams

Refer to point 14.2