



Network Partner

 **Nemko**
Qualified Independent LaboratoryAgent of

Accredited Laboratory

F C C -

TEST REPORT

REPORT NO.: 22315B/0/400F



Network Partner

**Nemko**

Qualified Independent Laboratory



Accredited Laboratory

FCC – Test ReportDate: 2000-07-17

No. 22315B/0/400F

Page 2 of 10

FCC listed testlab
acc. to Section 2.948 of the FCC - Rules
in compliance with the requirements of
ANSI C63.4 - 1992

Product : Radio Control Flip Over 2 Sided
Vehicle – 49 MHz Receiver


Model : 9700

Importer : SUPER LEADER IND. LIMITED

Manufacturer : SUPER LEADER IND. LIMITED



Network Partner

**Nemko**
Qualified Independent Laboratory

Accredited Laboratory

FCC – Test Report**No. 22315B/0/400F**Date: 2000-07-17

Page 3 of 10

TABLE OF CONTENTS


1. Cover sheet
2. Introduction
3. Table of Contents
4. Laboratory Report
5. Summary of Testresults
6. Test Equipment List
7. Radiated Emission Testprocedure
8. Interference Radiation (Datasheet)
9. Interference Radiation (Datasheet)
10. Notes for Radiation Measurement (acc. to ANSI C63.4 - 1992)



Network Partner

**Nemko**

Qualified Independent Laboratory



Accredited Laboratory

FCC – Test ReportDate: 2000-07-17

No. 22315B/0/400F

Page 4 of 10

LABORATORY - REPORT

APPLICANT: SUPER LEADER IND. LIMITED
ADDRESS: Room 9, 5/F, Wah Sang Ind. Building
14-18 Wong Chuk Yeung Street
Fo Tan, Shatin, NT
HONG KONG

DATE OF SAMPLE RECEIVED: 2000-04-06**DATE OF TESTING:** 2000-07-17**DESCRIPTION OF SAMPLE:**

Product: Radio Control Flip Over 2 Sided Vehicle – 49 MHz Receiver
Manufacturer: SUPER LEADER IND. LIMITED
Model number: 9700
Rating: DC 6V ('AA' Size Battery x 4)
Country of Origin: P.R. CHINA

INVESTIGATIONS REQUESTED: Measurements to the relevant clauses of F.C.C. Rules and Regulations
Part 15 Subpart B – 'Unintentional Radiators'

RESULTS: See the attached test sheets

CONCLUSIONS From the measurement data obtained, the tested sample was considered to have COMPLIED with the requirements for the relevant clauses of Federal Communications Commission Rules as specified above.



Authorized Signature

Remark: Purpose of those tests in this report is to provide the applicant with the necessary test data of their device for the submission to FCC with application for Equipment Authorization under the FCC Equipment Authorization Program. The tests themselves are not Approval Tests




Network Partner



Nemko

Qualified Independent Laboratory



Accredited Laboratory

FCC – Test Report

Date: 2000-07-17

No. 22315B/0/400F


Page 5 of 10

Summary of Test Results**Interference Radiation:**

Test result: O.K.
Test data: See attached data sheet

Interference Voltage:

Test result: N.A.
Test data: N.A.

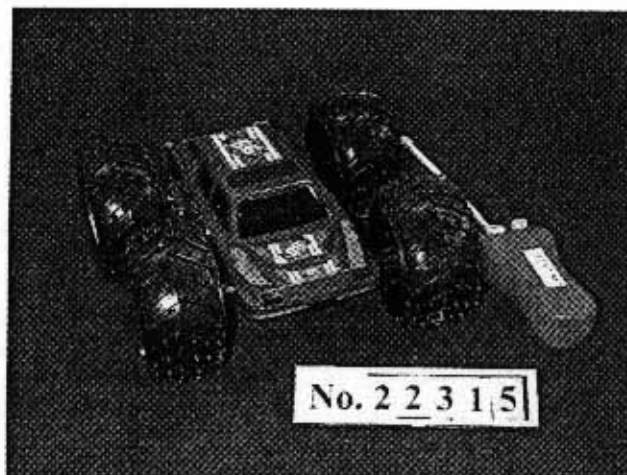PHOTOGRAPH OF THE SAMPLE

FCC – Test Report

Date: 2000-07-17

No. 22315B/0/400F

Page 6 of 10

TEST EQUIPMENT LIST

Equipment	Manufacturer	Model	Serial No.	Remark
Test Receiver	Rohde & Schwarz	ESH 3	863497/015	10KHz – 30MHz
Test Receiver	Rohde & Schwarz	ESVP	860688/022	25MHz – 1,300 MHz
Artificial Mains Network (LISN)	Schwarzbeck	NSLK 8127	--	2 x 10A, 50Ω, 50μH 10KHz-30MHz
Antenna System	Schwarzbeck	BBA 9106 / UHALP 9107	--	30MHz – 1000MHz
Antenna Mast System	Schwarzbeck	AM9104	--	Max. 4 meters height
Spectrum Analyzer with Q. Peak	Tektronix	2712	B023006	9KHz – 1.8GHz
Interface for Spectrum 2712	Tektronix	TD3F14A	--	
Test Receiver	Rohde & Schwarz	ESH 3	892580/006	10KHz – 30MHz
Test Receiver	Rohde & Schwarz	ESVP	863512/012	25MHz – 1,300 MHz
Impulse Limiter	Rohde & Schwarz	ESH-3-Z2	--	
Artificial Mains Network (LISN)	Schwarzbeck	NSLK 8127	--	2 x 10A, 50Ω, 50μH 10KHz-30MHz
Antenna System	Schwarzbeck	BBA 9106 / UHALP 9107	--	30MHz – 1000MHz
Signal Generator	Rohde & Schwarz	SWS 2	879113/42	100KHz – 1040 MHz
Digital Multimeter	Tektronix	DM2510G	DM- 2510GTW105 55	10KHz – 30MHz
Turntable with Controller	Drehtisch	DT312	--	φ120 cm



Network Partner

**Nemko**

Qualified Independent Laboratory


Agent of



Accredited Laboratory

FCC – Test Report**No. 22315B/0/400F**Date: 2000-07-17

Page 7 of 10

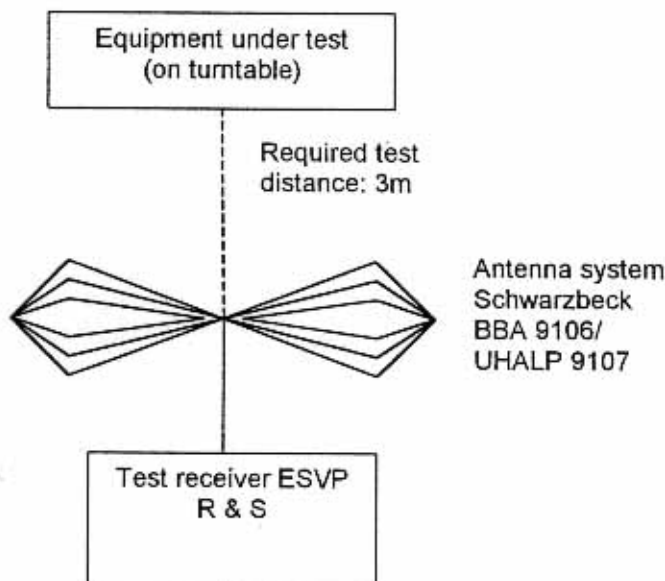
Radiated Emission Test procedure**Head Office:**Unit 602-605, 6/F., 31 Lok Yip Rd., On Lok Tsuen, Fanling, N.T., Hong Kong. Tel: (852) 2305 2570 Fax: (852) 2756 4480 Home page: <http://www.iecc.com.hk> E-mail: info@iecc.com.hk
香港新界粉嶺安樂村樂業路31號6樓602-605室 電話: (852) 2305 2570 傳真: (852) 2756 4480 網頁: <http://www.iecc.com.hk> 電子郵件: info@iecc.com.hk**Guangzhou Office:**Unit 1916, 19/F., South Tower, Guangzhou World Trade Centre Complex, 371-375 Huan Shi Dong Rd., Guangzhou, P.R. China. Tel: +86-20-8776 4838 Fax: +86-20-8776 3918
廣州市環市東路371-375號世界貿易中心南塔19樓1916室 電話: (020) 8776 4838 傳真: (020) 8776 3918



Network Partner

Nemko
Qualified Independent Laboratory

Unintentional Radiators



Accredited Laboratory

Measurement of Radiated Emissions (30MHz-1000MHz)


Acc: FCC Part 15 Subpart B

IECC Ref: 22315B/0/400F
 Model: 9700
 Applicant: SUPER LEADER IND. LIMITED
 Ser.Nr.: 1
 Set under test: Radio Control Flip Over 2 Sided Vehicle
 Connected sets: -
 Operating mode: Power "On"(Standby mode)

Test Equipment

Receiver: ESVP Rohde & Schwarz
 Antenna: Schwarzbeck BBA 9106
 and UHALP 9107

Frequency (MHz)	Horz. Reading dB(μV)	Vert. Reading dB(μV)	Antenna Factor (dB)	Horiz. Test Result (μV/m)	Vert. Test Result (μV/m)	Limit (μV/m)
30	< 16	< 16	18.4	< 52.5	< 52.5	100.0
47	< 16	< 17	12.5	< 26.7	< 30.0	100.0
49.3	< 16	< 18	11.9	< 24.8	< 31.2	100.0
51	< 16	< 18	11.3	< 23.3	< 29.3	100.0
53.1	< 16	< 19	10.6	< 21.4	< 30.2	100.0
55.8	< 16	< 19	9.7	< 19.3	< 27.3	100.0
74.8	< 23	< 20	6.5	< 29.8	< 21.1	100.0
85.1	< 20	< 19	7.8	< 24.7	< 22.0	100.0
105.8	< 18	< 16	11.2	< 28.8	< 22.9	150.0
113.7	< 18	< 16	12.2	< 32.3	< 25.6	150.0
122.8	< 17	< 16	13.1	< 31.9	< 28.5	150.0
261	< 16	< 16	18.0	< 50.4	< 50.4	200.0
297.2	< 16	< 16	19.8	< 61.9	< 61.9	200.0
348	< 16	< 16	17.4	< 46.5	< 46.5	200.0
383	< 16	< 16	18.0	< 50.2	< 50.2	200.0
500	< 16	< 16	19.7	< 61.0	< 61.0	200.0
700	< 16	< 16	22.4	< 83.2	< 83.2	200.0
1000	< 16	< 16	26.5	< 133.4	< 133.4	500.0

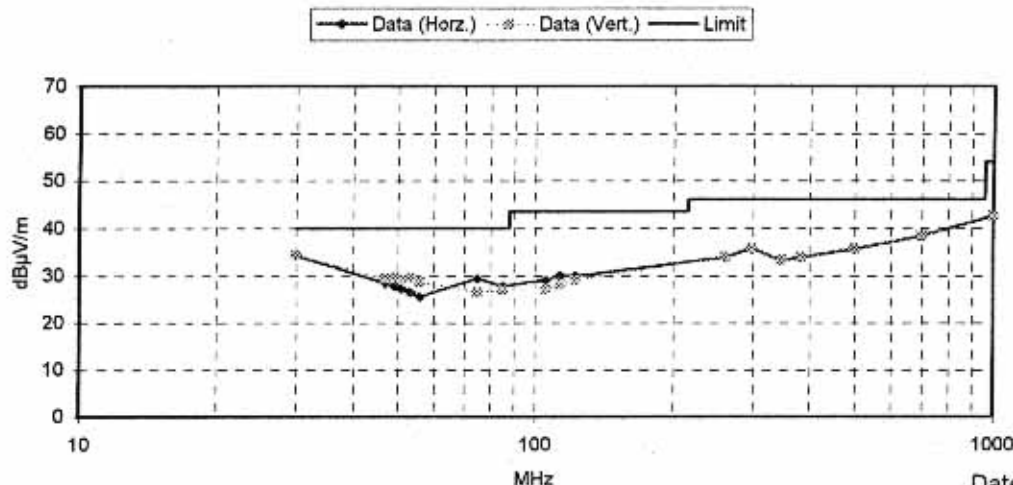

Date: 17 JUL 2000

Operator:

Test result:

☒ O.K.
☐ Not O.K.


Measurement of Radiated Emissions (30MHz-1000MHz)

Acc: FCC Part 15 Subpart B

IECC Ref: 22315B/0/400F
Model: 9700
Applicant: SUPER LEADER IND. LIMITED
Ser.Nr.: 1
Set under test: Radio Control Flip Over 2 Sided Vehicle
Connected sets: -
Operating mode: Power "On"(Motor forward operation)

Test Equipment
Receiver: ESVP Rohde & Schwarz
Antenna: Schwarzbeck BBA 9106
and UHALP 9107

Frequency (MHz)	Horz. Reading dB(μV)	Vert. Reading dB(μV)	Antenna Factor (dB)	Horiz. Test Result (μV/m)	Vert. Test Result (μV/m)	Limit (μV/m)
30	< 16	< 16	18.4	< 52.5	< 52.5	100.0
50	< 16	< 16	11.7	< 24.3	< 24.3	100.0
100	< 16	< 16	10.3	< 20.7	< 20.7	150.0
300	< 16	< 16	20.0	< 63.1	< 63.1	200.0
435.7	< 16	< 16	18.8	< 55.0	< 55.0	200.0
500	< 16	< 16	19.7	< 61.0	< 61.0	200.0
700	< 16	< 16	22.4	< 83.2	< 83.2	200.0
1000	< 16	< 16	26.5	< 133.4	< 133.4	500.0

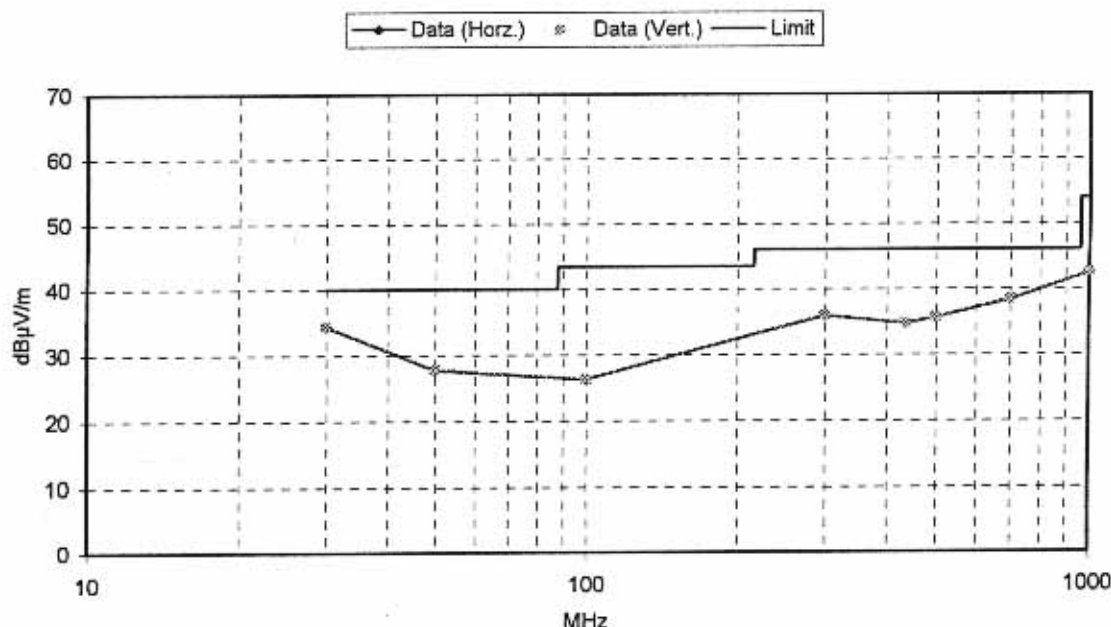

Date: 17 JUL 2000

Test result:

☒ O.K.
☐ Not O.K.


Operator:



Network Partner

**Nemko**

Qualified Independent Laboratory



Accredited Laboratory

FCC – Test ReportDate: 2000-07-17

No. 22315B/0/400F

Page 10 of 10

Notes for Radiation Measurement**1. Measurement facility:**

Measurement facility located at Fanling (Hong Kong), placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules.

2. Distance between the EUT and measuring antenna:

3 meters.

3. Measuring instrumentations:

Rohde & Schwarz ESVP Test Receiver (20 - 1300 MHz) with a CISPR weighting QP detector, 6 dB bandwidth set at 120 KHz.

4. Measuring antenna:

Broad-band antenna for the frequency range 30 - 300 MHz and frequency range 300 - 1000 MHz, connected with 10 meters coaxial cable. Cable loss of the coaxial cable included in the Antenna Factor for measurement data. The antennas are capable of measuring both horizontal and vertical polarizations.

5. Frequency range scanned:

The frequency range 30 - 1000 MHz has been scanned. Readings of the highest emissions relating to the limit were reported as above.

6. Arrangement of EUT:

During the test, the sample was operated at rated supply voltage and arranged for maximum emissions.

7. Measuring Procedure:

In accordance with the relevant sections of the American National Standards Institute (ANSI) C63.4-1992 'Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9KHz to 40GHz'.

Head Office:

Unit 602-605, 6/F., 31 Lok Yip Rd., On Lok Tsuen, Fanling, N.T., Hong Kong. Tel: (852) 2305 2570 Fax: (852) 2756-4480 Home page: <http://www.iecc.com.hk> E-mail: info@iecc.com.hk
香港新界粉嶺安樂村樂業路31號6樓602-605室 電話: (852) 2305 2570 傳真: (852) 2756 4480 網頁: <http://www.iecc.com.hk> 電子郵件: info@iecc.com.hk

Guangzhou Office:

Unit 1916, 19/F., South Tower, Guangzhou World Trade Centre Complex, 371-375 Huan Shi Dong Rd., Guangzhou, P.R. China. Tel: +86-20-8776 4838 Fax: +86-20-8776 3918
廣州市環市東路371-375號世界貿易中心南塔19樓1916室 電話: (020) 8776 4838 傳真: (020) 8776 3918