

Application for FCC Certificate
On Behalf of
Twin Growth Electronics (Suzhou) Co., Ltd

Energy Saving Lamp

Model No.: TDE (S) 11W TDE (S) 13W

FCC ID: 09OTGESC20012

Prepared For : Twin Growth Electronics (Suzhou) Co., Ltd
Mudu Town, Suzhou, Jiangsu, China

Prepared By : Audix Technology (Shanghai) Co., Ltd.
3 F 34 Bldg 680 Guiping Rd,
Caohejing Hi-Tech Park,
Shanghai, China 200233

Tel: +86-21-64955500

Fax: +86-21-64955491

Report No. : ACI-F01077
Date of Test : Sept 26, 2001
Date of Report : Sept 28, 2001

TABLE OF CONTENTS

	Page
1 GENERAL INFORMATION.....	4
1.1 Description of Equipment Under Test.....	4
1.2 Description of Test Facility.....	5
1.3 Measurement Uncertainty	5
2 AC POWERLINE CONDUCTED EMISSION TEST.....	6
2.1 Test Equipment.....	6
2.2 Block Diagram of Test Setup	6
2.3 Conducted Emission Limits	6
2.4 Test Configuration.....	7
2.5 Operating Condition of EUT.....	7
2.6 Test Procedures	7
2.7 Test Results	8
3 FIELD STRENGTH TEST.....	10
3.1 Test Equipment.....	10
3.2 Block Diagram of Test Setup	10
3.3 Test Configuration.....	10
3.4 Operating Condition of EUT.....	10
3.5 Test Procedure	11
3.6 Test Result	11

TEST REPORT FOR FCC CERTIFICATE

Applicant : Twin Growth Electronics (Suzhou) Co., Ltd
Manufacturer : Twin Growth Electronics (Suzhou) Co., Ltd
EUT Description : Energy Saving Lamp
(A) Model No.:
TDE (S) 11W TDE (S) 13W
(B) Serial No.:
E0911079(1) E091107(4)
(C) Power Supply: 120V/60Hz

Test Procedure Used:

*FCC RULES AND REGULATIONS PART 18 CONSUMER DEVICES (2000)
AND MP-5/1986*

The device described above is tested by Audix Technology (Shanghai) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 18 RF Lighting Device limits both conducted emissions and field strength.

The test results are contained in this test report and Audix Technology (Shanghai) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliant with the FCC official limits.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shanghai) Co., Ltd.

This report must not be used by the applicant to claim product endorsement by NVLAP or any agency of the U.S. Government.

Date of Test : Sept 26, 2001

Prepared by : KK YI Test Engineer : RAIN LIANG
(Assistant)
For and on behalf of (Engineer)
AUDIX TECHNOLOGY (SHANGHAI) CO., LTD.
Reviewer : BYRON KWO Approved Signatory : ALEX CHIU
(Supervisor)
(Assistant Signatory)

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test

Description : Energy Saving Lamp

Type of EUT : ☒ Production ☐ Pre-product ☐ Pro-type

Model Number : TDE (S) 11W, TDE (S) 13W

Applicant : Twin Growth Electronics (Suzhou) Co., Ltd
Mudu Town, Suzhou, Jiangsu, China

Manufacturer : Twin Growth Electronics (Suzhou) Co., Ltd
Mudu Town, Suzhou, Jiangsu, China

M/N	INPUT POWER (VA)	OUTPUT POWER (W)
TDE(S) 11W	16.0	8.3
TDE(S) 13W	17.3	9.1

1.2 Description of Test Facility

Site Description (Semi-Anechoic Chamber)	:	Sept. 17, 1998 file on Federal Communications Commission FCC Engineering Laboratory 7435 Oakland Mills Road Columbia, MD 21046, USA
Name of Firm	:	Audix Technology (Shanghai) Co., Ltd.
Site Location	:	3 F 34 Bldg 680 Guiping Rd, Caohejing Hi-Tech Park, Shanghai, China 200233
NVLAP Lab Code	:	200371-0

1.3 Measurement Uncertainty

Conducted Emission Uncertainty : $U = 2.66\text{dB}$


2 AC POWERLINE CONDUCTED EMISSION TEST

2.1 Test Equipment

The following test equipment are used during the powerline conducted emission test in a shielded room:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS10	844077/020	Apr 24, 2001	1 Year
2.	Line Impedance Stabilization Network (LISN)	Kyoritsu	KNW-407	8-1280-5	May 08, 2001	1 Year

2.2 Block Diagram of Test Setup

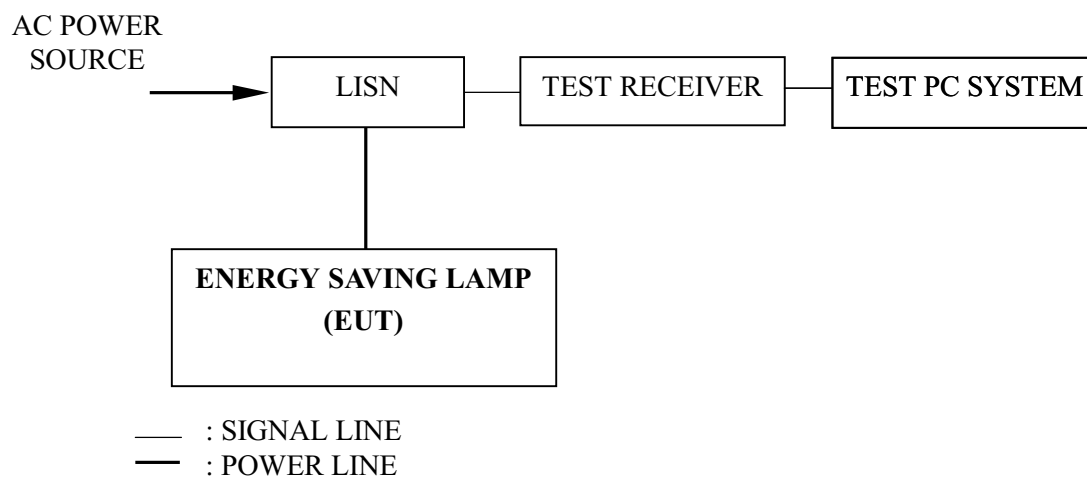

2.3 Conducted Emission Limits

Frequency (MHz)	Maximum RF Line Voltage	
	(μ V)	dB(μ V)
0.45 ~ 2.51	250	48
2.51 ~ 3	3000	70
3 ~ 30	250	48
NOTE 1 – RF Line Voltage dB(μ V) = 20 log RF Line Voltage (μ V)		

2.4 Test Configuration

The EUT (listed in Sec. 1.1) was installed as shown on Sec. 2.2 to meet FCC requirement and operating in a manner, which tends to maximize its emission level in a normal application.

2.5 Operating Condition of EUT

The EUT was connected to the power mains through a Line Impedance Stabilization Network (LISN). This provided a 50 ohm coupling impedance for the measuring equipment.

Both sides of AC line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed or manipulated according to MP-5/1986 during conducted emission test.

The bandwidth of Test Receiver ESHS10 was set at 10 kHz.

The frequency range from 450 kHz to 30 MHz was checked. The test mode (ON) was done on conducted test and the test results of the highest emissions are listed in Sec. 2.7.

2.6 Test Procedures

2.6.1 Setup the EUT as shown in Sec. 2.2.

2.6.2 Turn on the power of all equipment.

2.6.3 The EUT will be operated normally.

2.7 Test Results

< PASS >

The frequency and amplitude of the highest AC powerline conducted emissions relative to the limit is reported. All emissions not reported below are too low against the prescribed limits.

EUT : Energy Saving Lamp Temperature : 20.8°C

Model No. : TDE (S) 11W Humidity : 53%

Test Mode : ON Date of Test : Sept 26, 2001

Test Line	Frequency (MHz)	Factor (dB)	Meter Reading dB(μV)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)
VA	0.482	0.32	44.99	45.31	48.00	2.69
	0.568	0.30	45.02	45.32	48.00	2.68
	0.612	0.30	42.72	43.02	48.00	4.98
	0.657	0.29	41.97	42.26	48.00	5.74
	0.701	0.29	39.90	40.19	48.00	7.81
	1.224	0.27	39.16	39.43	48.00	8.57
VB	0.480	0.32	43.46	43.78	48.00	4.22
	0.568	0.30	42.37	42.67	48.00	5.33
	0.654	0.29	39.40	39.69	48.00	8.31
	0.742	0.29	36.02	36.31	48.00	11.69
	1.087	0.27	36.04	36.31	48.00	11.69
	1.175	0.26	35.88	36.14	48.00	11.86

NOTE 1 – Emission Level = Meter Reading + Factor

NOTE 2 – Factor = Insertion Loss + Cable Loss

NOTE 3 – All reading are Quasi-Peak Values.

NOTE 4 – The worst emission is detected at 0.568 MHz with corrected signal level of 45.32 dB(μV) (limit is 48.00 dB(μV)), when the VA of the EUT is connected to LISN.

TEST ENGINEER: Rain Liang
(RAIN LIANG)

EUT : Energy Saving Lamp Temperature : 20.8°C

Model No. : TDE (S) 13W Humidity : 53%

Test Mode : ON Date of Test : Sept 26, 2001

Test Line	Frequency (MHz)	Factor (dB)	Meter Reading dB(μV)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)
VA	0.487	0.32	44.98	45.30	48.00	2.70
	0.576	0.30	42.41	42.71	48.00	5.29
	0.619	0.30	40.44	40.74	48.00	7.26
	0.666	0.29	43.29	43.58	48.00	4.42
	0.754	0.29	40.14	40.43	48.00	7.57
	1.284	0.27	40.97	41.24	48.00	6.76
VB	0.489	0.31	42.87	43.18	48.00	4.82
	0.577	0.30	41.30	41.60	48.00	6.40
	0.666	0.29	39.78	40.07	48.00	7.93
	0.709	0.29	32.57	32.86	48.00	15.14
	0.756	0.29	37.02	37.31	48.00	10.69
	1.464	0.25	33.11	33.36	48.00	14.64
NOTE 1 – Emission Level = Meter Reading + Factor NOTE 2 – Factor = Insertion Loss + Cable Loss NOTE 3 – All reading are Quasi-Peak Values. NOTE 4 – The worst emission is detected at 0.487 MHz with corrected signal level of 45.30 dB(μV) (limit is 48.00 dB(μV)), when the VA of the EUT is connected to LISN.						

TEST ENGINEER: Rain Liang
(RAIN LIANG)


3 FIELD STRENGTH TEST

3.1 Test Equipment

The following test equipment are used during the field strength test in a shielded room:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Loop Antenna	Laplace	RF300	5001	May 05, 2001	1/2 Year
2.	Test Receiver	Rohde & Schwarz	ESHS10	844077/020	Apr 24, 2001	1 Year

3.2 Block Diagram of Test Setup

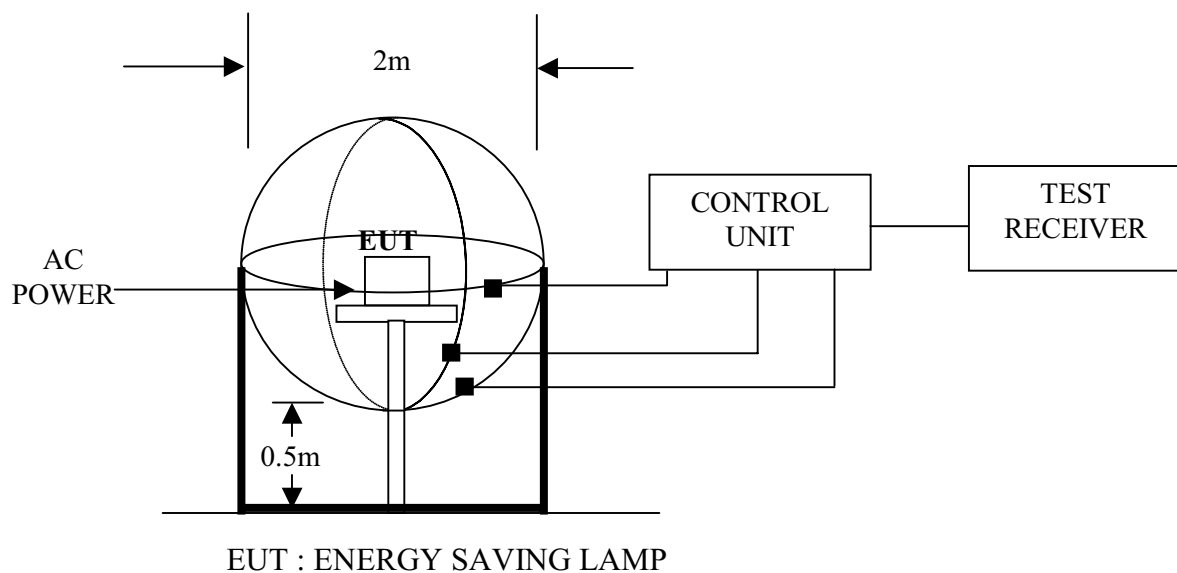

3.3 Test Configuration

The configuration of the EUT is same as those used in conducted emission test.

Refer to Sec. 2.4.

3.4 Operating Condition of EUT

Same as conducted emission test which is listed in Sec. 2.5, except the test setup replaced by Sec. 3.2.

3.5 Test Procedure

The EUT was placed on a wooden table, which is in the center of the loop antenna. The loop antenna is 0.5 meters above the ground. Each side had one sensor. The three sensors were through the control unit to connect the Test receiver, which receiving the emission and find out the maximum emission of each side of the loop antenna.

The bandwidth of R&S Test Receiver ESHS10 was set at 200 Hz from 9kHz to 150kHz and 10kHz from 150 kHz to 30 MHz.

The frequency range from 9 kHz to 30 MHz was checked.

The “ON” mode was done on field strength test and all the test results are listed in Sec. 3.6.

3.6 Test Result

<PASS>

Refer to the following pages.

Twin Growth Electronics (Suzhou) Co., Ltd

FCC ID: 090TGESC20012


Page 12 of 17

Audix Technology (Shanghai) Co., Ltd.
敦吉电子(上海)有限公司

3F #34Bldg. No.688 Guiliping Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
audixaci@8848.net

Data#: 199 File#: D:\EMIVM\TEST\T\TWIN.emi

Date: 2001-09-26 Time: 14:44:29

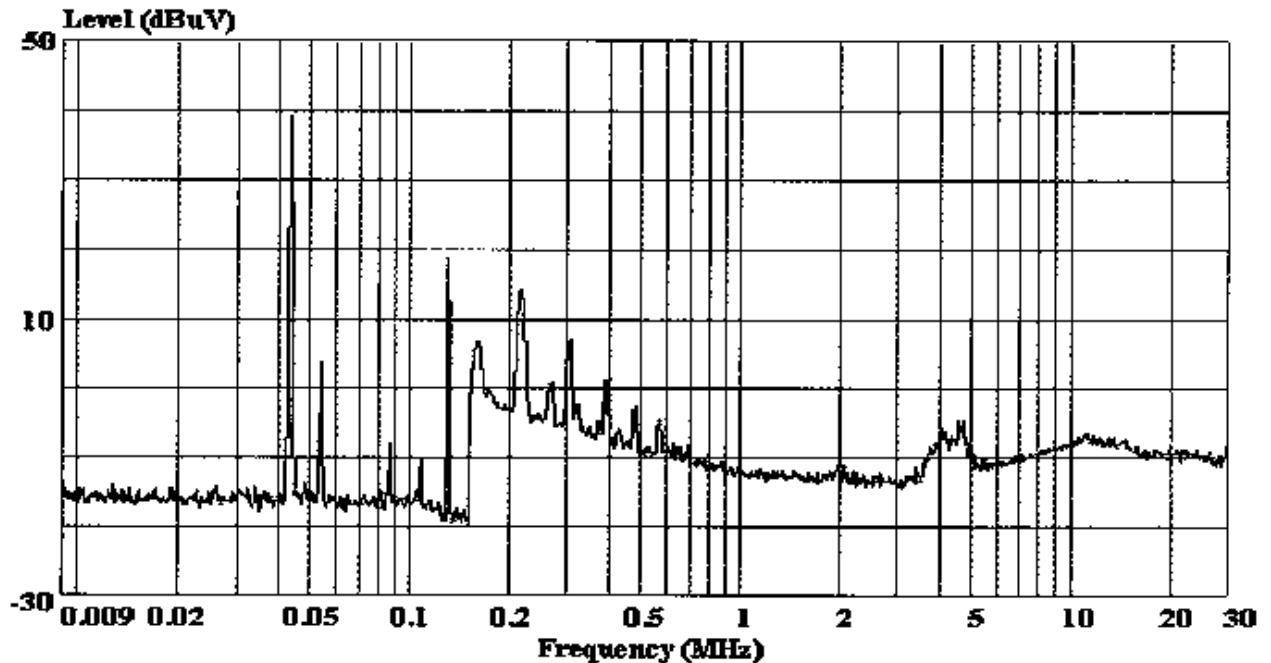

Site : audix-aci Conducted Emission
Condition :
Project No. : AQE-000110
Applicant : TWIN GROWTH ELECTRONICS (SUZHOU) CO., LTD
EUT : Energy Saving Lamp
M/N : TDE(S) 11W
Power Supply : 120V/60Hz
Ambient : 20.8'C 53%
Test Line : A
Test Mode : ON
Test Engineer: *Rain*

Twin Growth Electronics (Suzhou) Co., Ltd


FCC ID: 090TGESC20012

Page 13 of 17

Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司3F #34Bldg. NO.680 Guiliping Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel: +86-21-64955500
Fax: +86-21-64955491
audixaci@8848.net

Data#: 196 File#: D:\EMIVM\TEST\T\TWIN.emi

Date: 2001-09-26 Time: 14:41:35

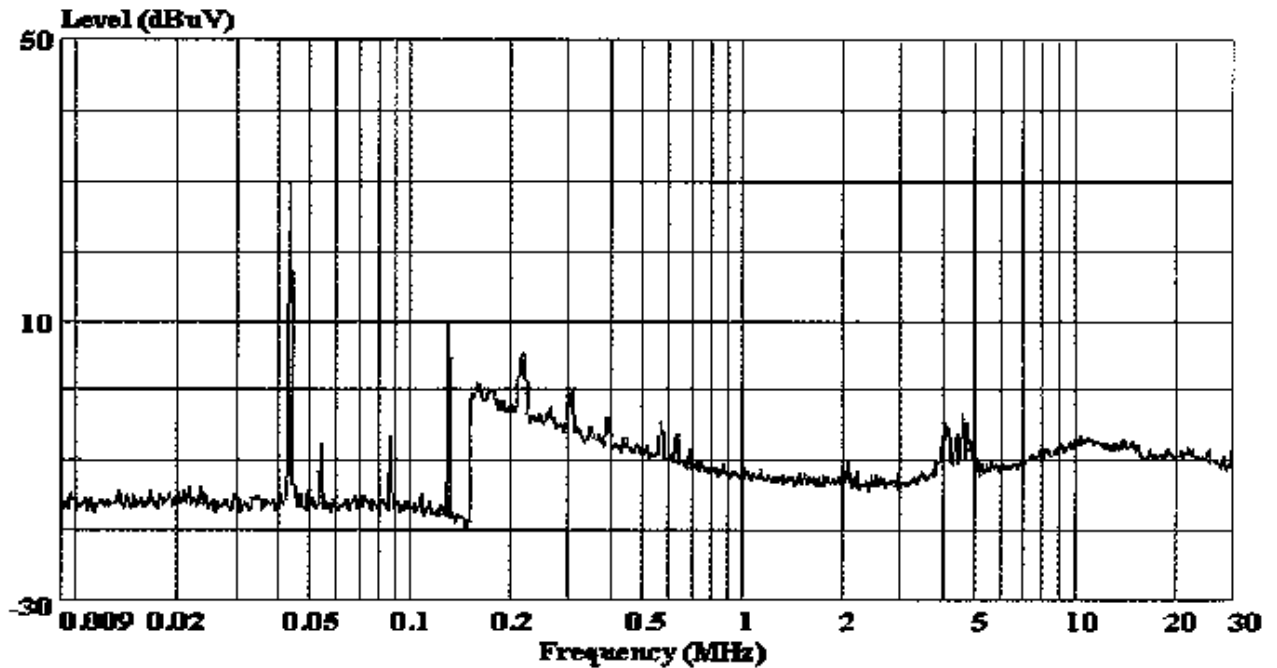

Site : audix-aci Conducted Emission
Condition :
Project No. : AQE-000110
Applicant : TWIN GROWTH ELECTRONICS (SUZHOU) CO., LTD
EUT : Energy Saving Lamp
M/N : TDE(S) 11W
Power Supply : 120V/60Hz
Ambient : 20.8°C 53%
Test Line : B
Test Mode : ON
Test Engineer: *Rain*

Twin Growth Electronics (Suzhou) Co., Ltd


FCC ID: 090TGESC20012

Page 14 of 17

Audix Technology (Shanghai) Co., Ltd.
毅吉電子(上海)有限公司SF #34Bldg. No.680 Guilping Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
audixaci@9848.net

Data#: 193 File#: D:\EMIVM\TEST\T\TWIN.emi

Date: 2001-09-26 Time: 14:36:56

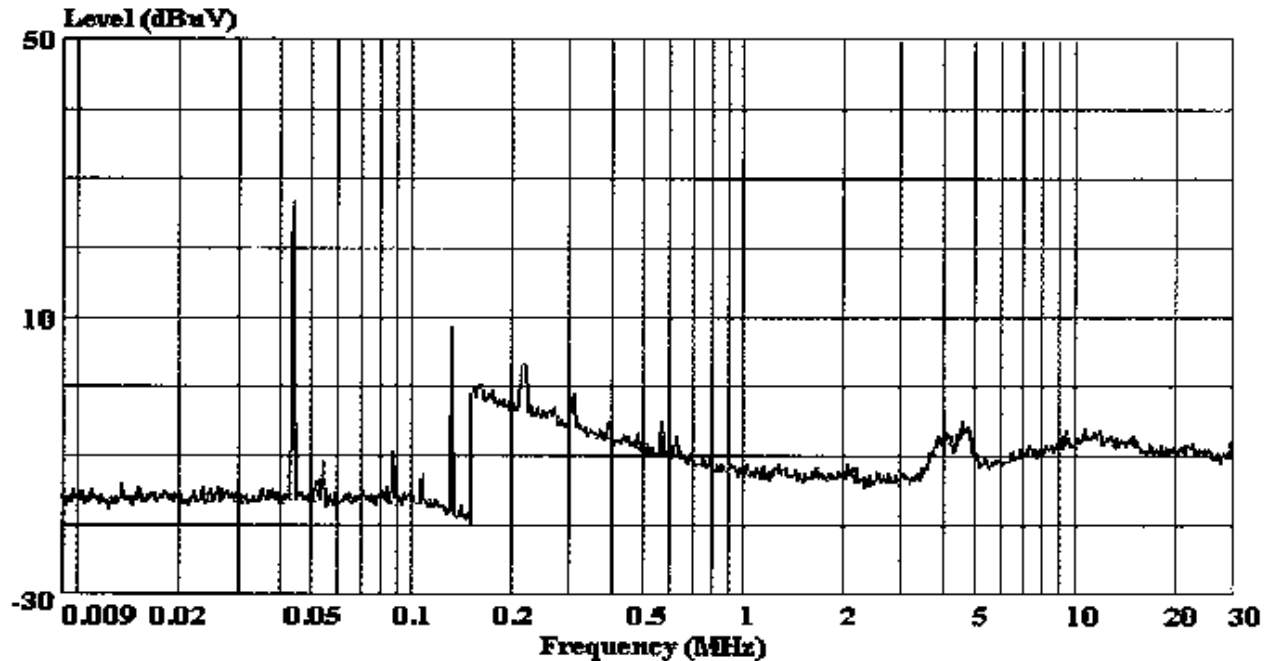

Site : audix-aci Conducted Emission
Condition :
Project No. : AQE-000110
Applicant : TWIN GROWTH ELECTRONICS (SUZHOU) CO., LTD
EUT : Energy Saving Lamp
M/N : TDE(S) 11W
Power Supply : 120V/60Hz
Ambient : 20.8°C 53%
Test Line : C
Test Mode : ON
Test Engineer: *Ran*

Twin Growth Electronics (Suzhou) Co., Ltd


FCC ID: 090TGESC20012

Page 15 of 17

Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司3F #34Bldg. NO.680 Guilin Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
audixaci@8848.net

Data#: 184 File#: D:\EMIVM\TEST\T\TWIN.emi

Date: 2001-09-26 Time: 14:21:29

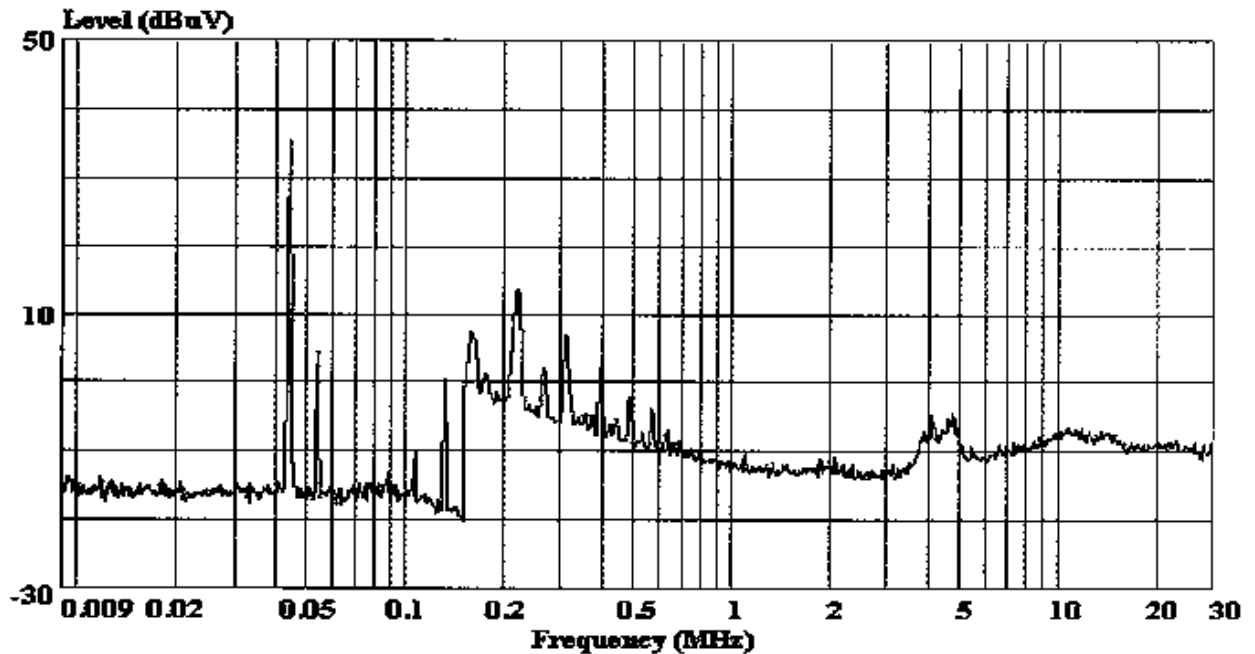

Site : audix-aci Conducted Emission
Condition :
Project No. : AQE-000110
Applicant : TWIN GROWTH ELECTRONICS (SUZHOU) CO.,LTD
EUT : Energy Saving Lamp
M/N : TDE(S) 13W
Power Supply : 120V/60Hz
Ambient : 20.8°C 53%
Test Line : A
Test Mode : ON
Test Engineer: *Rmin*

Twin Growth Electronics (Suzhou) Co., Ltd


FCC ID: 09OTGESC20012

Page 16 of 17

Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司SF #54E1dg. NO.880 Guilin Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
audixaci@8848.net

Data#: 187 File#: D:\EMIVM\TEST\T\TWIN.emi

Date: 2001-09-26 Time: 14:25:53

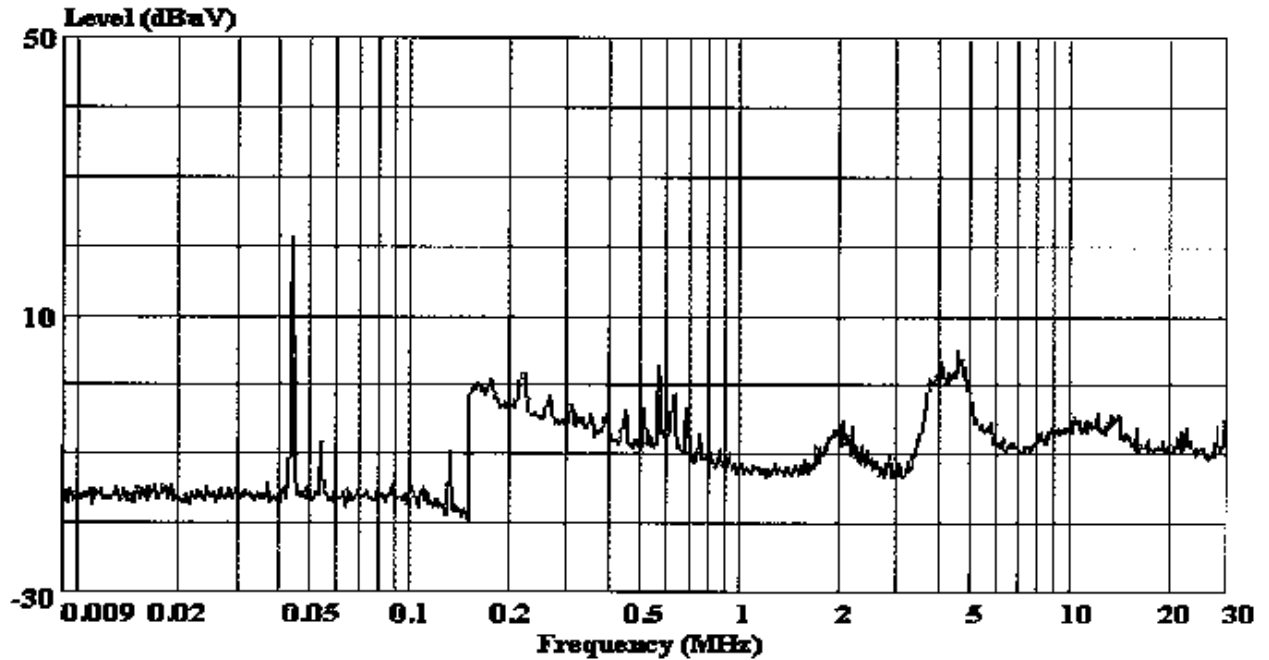

Site : audix-aci Conducted Emission
Condition :
Project No. : AQE-000110
Applicant : TWIN GROWTH ELECTRONICS (SUZHOU) CO.,LTD
EUT : Energy Saving Lamp
M/N : TDE(S) 13W
Power Supply : 120V/60Hz
Ambient : 20.8'C 53%
Test Line : B
Test Mode : ON
Test Engineer: *Rain*

Twin Growth Electronics (Suzhou) Co., Ltd


FCC ID: 09OTGESC20012

Page 17 of 17

Audix Technology (Shanghai) Co., Ltd.
数吉电子(上海)有限公司3F #34Bldg. NO.680 GUIPING RD.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel: +86-21-64955500
Fax: +86-21-64955491
audixaci@8848.net

Data#: 190 File#: D:\EMIVM\TEST\T\TWIN.emi

Date: 2001-09-26 Time: 14:30:11

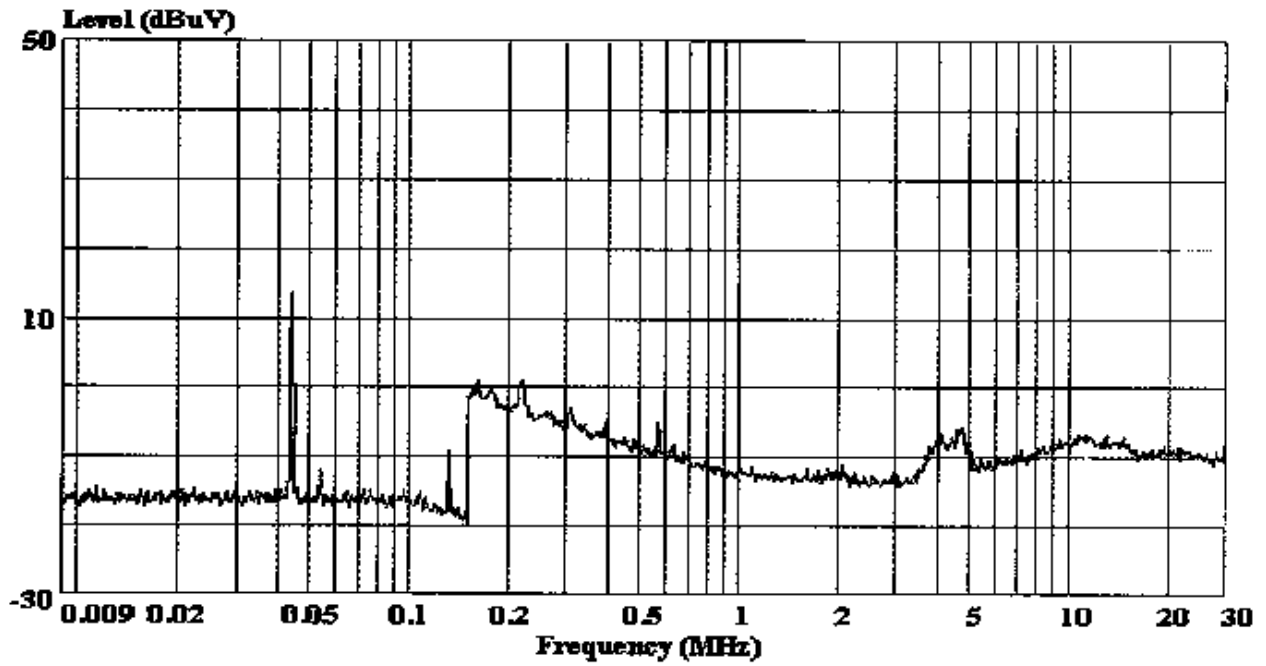

Site : audix-aci Conducted Emission
Condition :
Project No. : AQE-000110
Applicant : TWIN GROWTH ELECTRONICS (SUZHOU) CO., LTD
EUT : Energy Saving Lamp
M/N : TDE(S) 13W
Power Supply : 120V/60Hz
Ambient : 20.8'C 53%
Test Line : C
Test Mode : ON
Test Engineer: *Rain*