

APPENDIX A – SAR TEST PLOTS

12/26/01

GMRS-1500XTM

SAM TP1019 Phantom; Flat Section; Position: (90°,90°); Frequency: 450 MHz

Probe: ET3DV6 - SN1608; ConvF(7.13,7.13,7.13); Crest factor: 1.0; Brain 450 MHz: $\sigma = 0.84$ mho/m $\epsilon_r = 45.2$ $\rho = 1.00$ g/cm³


Cube 5x5x7: SAR (1g): 1.62 mW/g, SAR (10g): 1.16 mW/g, (Worst-case extrapolation)

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -0.20 dB

Comment : Face- Held

Channel: 1 (462.5625MHz)

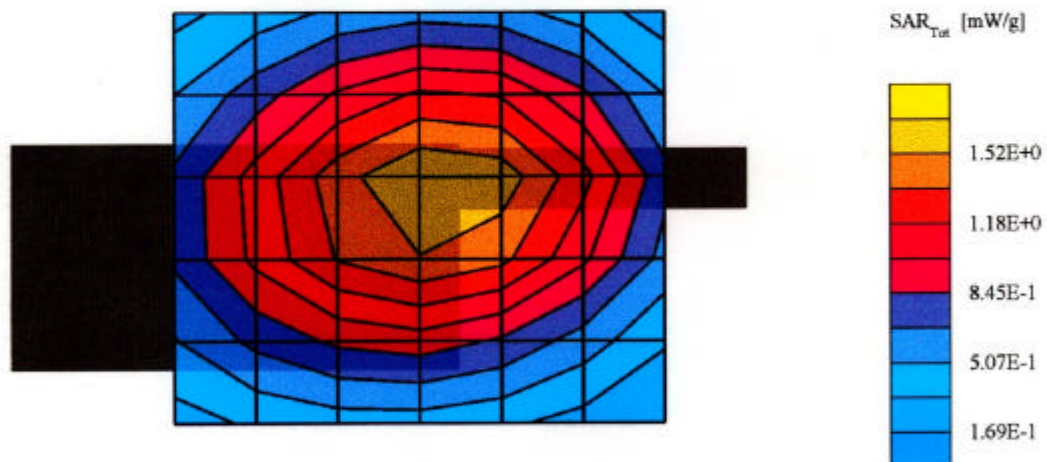

HYUNDAI C-Tech Co., Ltd.

12/26/01

GMRS-1500XTM

SAM TP1019 Phantom; Flat Section; Position: (90°,90°); Frequency: 450 MHz

Probe: ET3DV6 - SN1608; ConvF(7.13,7.13,7.13); Crest factor: 1.0; Brain 450 MHz: $\sigma = 0.84$ mho/m $\epsilon_r = 45.2$ $\rho = 1.00$ g/cm³


Cube 5x5x7: SAR (1g): 1.43 mW/g, SAR (10g): 1.02 mW/g, (Worst-case extrapolation)

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -0.29 dB

Comment : Face- Held

Channel: 10 (462.6750MHz)

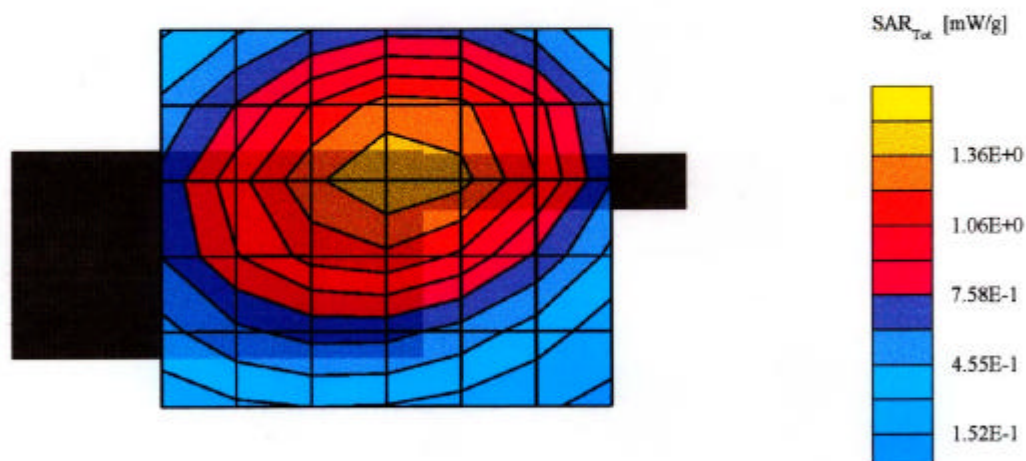

HYUNDAI C-Tech Co., Ltd.

12/26/01

GMRS-1500XTM

SAM TP1019 Phantom; Flat Section; Position: (90°, 90°); Frequency: 450 MHz

Probe: ET3DV6 - SN1608; ConvF(7.13, 7.13, 7.13); Crest factor: 1.0; Brain 450 MHz: $\sigma = 0.84$ mho/m $\epsilon_r = 45.2$ $\rho = 1.00$ g/cm³


Cube 5x5x7; SAR (1g): 1.61 mW/g, SAR (10g): 1.16 mW/g, (Worst-case extrapolation)

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -0.17 dB

Comment : Face- Held

Channel: 15 (462.7250MHz)

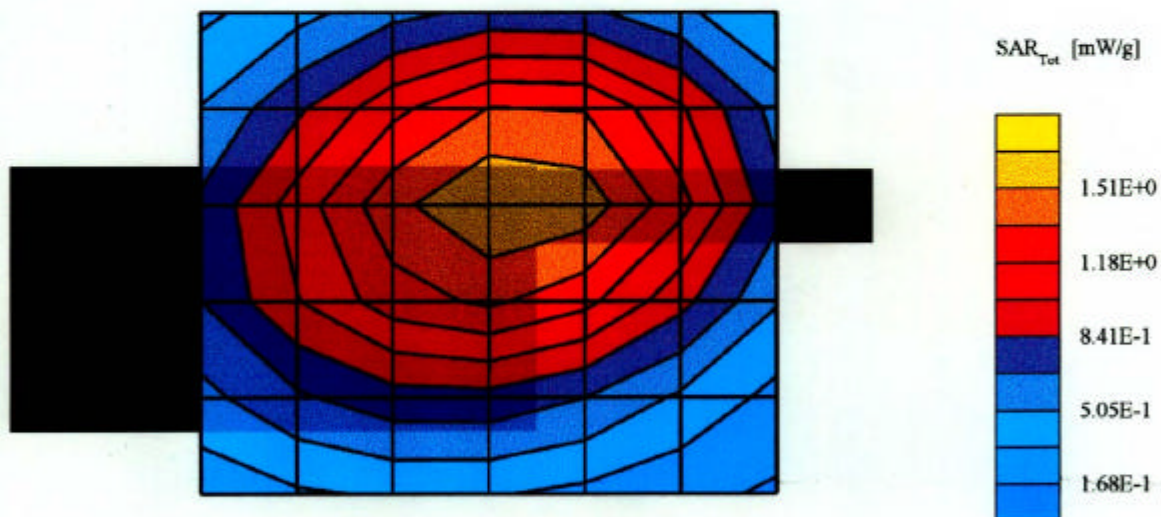

HYUNDAI C-Tech Co., Ltd.

01/02/02

GMRS-1500XTM

SAM TP1019 Phantom; Flat Section; Position: (90°,90°); Frequency: 450 MHz

Probe: ET3DV6 - SN1608; ConvF(7.13,7.13,7.13); Crest factor: 1.0; Muscle 450 MHz: $\sigma = 0.90$ mho/m $\epsilon_r = 58.5$ $\rho = 1.00$ g/cm³


Cube 5x5x7: SAR (1g): 1.71 mW/g, SAR (10g): 1.23 mW/g, (Worst-case extrapolation)

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -0.18 dB

Comment : Body- Worn

Channel: 1 (462.5625MHz)

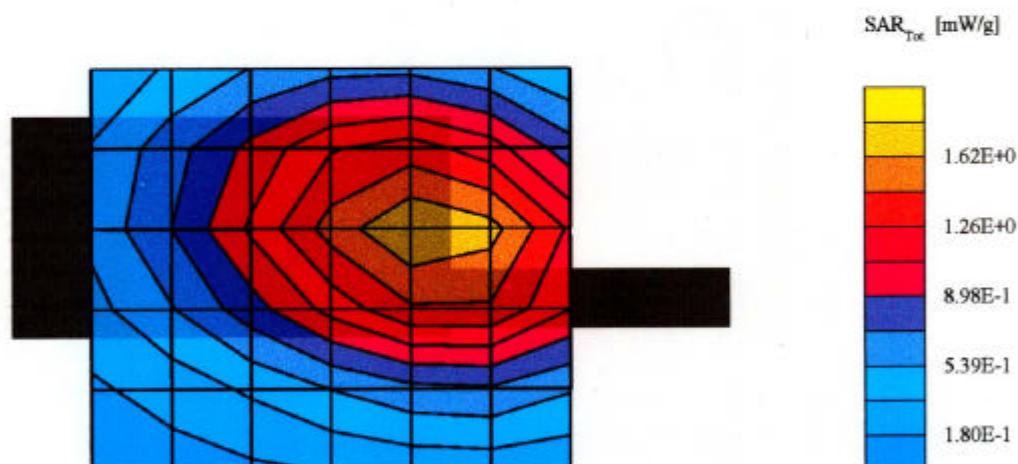

HYUNDAI C-Tech Co., Ltd.

01/02/02

GMRS-1500XTM

SAM TP1019 Phantom; Flat Section; Position: (90°, 90°); Frequency: 450 MHz

Probe: ET3DV6 - SN1608; ConvF(7.13, 7.13, 7.13); Crest factor: 1.0; Muscle 450 MHz: $\sigma = 0.90 \text{ mho/m}$, $\epsilon_r = 58.5$, $\rho = 1.00 \text{ g/cm}^3$


Cube 5x5x7: SAR (1g): 1.81 mW/g, SAR (10g): 1.29 mW/g, (Worst-case extrapolation)

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -0.16 dB

Comment : Body- Worn

Channel: 10 (462.6750MHz)

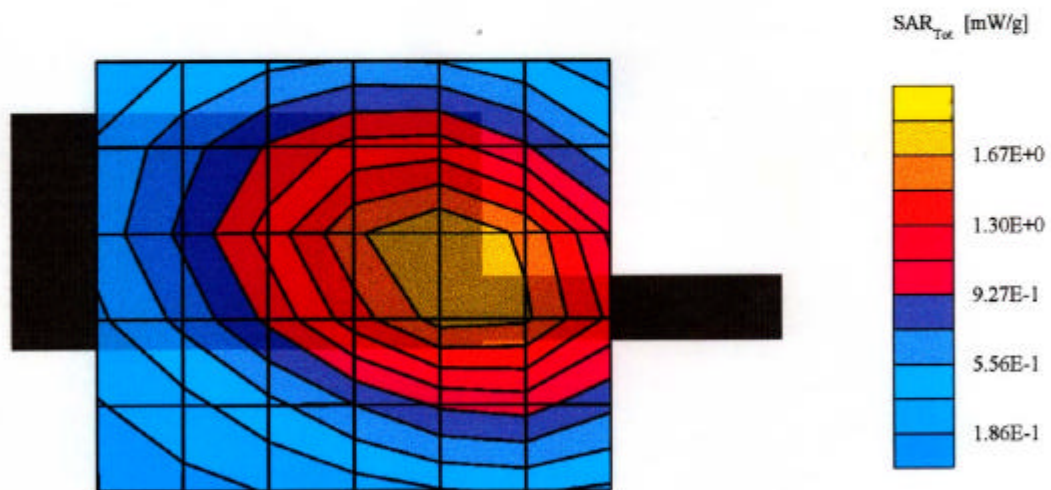

HYUNDAI C-Tech Co., Ltd.

01/02/02

GMRS-1500XTM

SAM TP1019 Phantom; Flat Section; Position: (90°, 90°); Frequency: 450 MHz

Probe: ET3DV6 - SN1608; ConvF(7.13, 7.13, 7.13); Crest factor: 1.0; Muscle 450 MHz: $\sigma = 0.90$ mho/m $\epsilon_r = 58.5$ $\rho = 1.00$ g/cm³


Cube 5x5x7: SAR (1g): 2.18 mW/g, SAR (10g): 1.57 mW/g, (Worst-case extrapolation)

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -0.26 dB


Comment : Body- Worn

Channel: 15 (462.7250MHz)


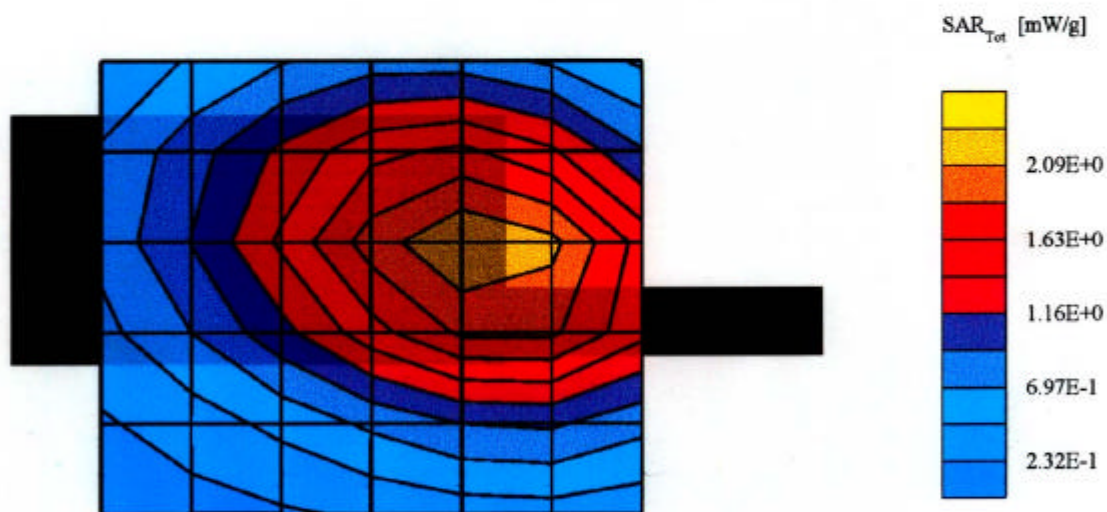


HYUNDAI C-Tech Co., Ltd.

APPENDIX B – EUT TEST SETUP PHOTOGRAPHS

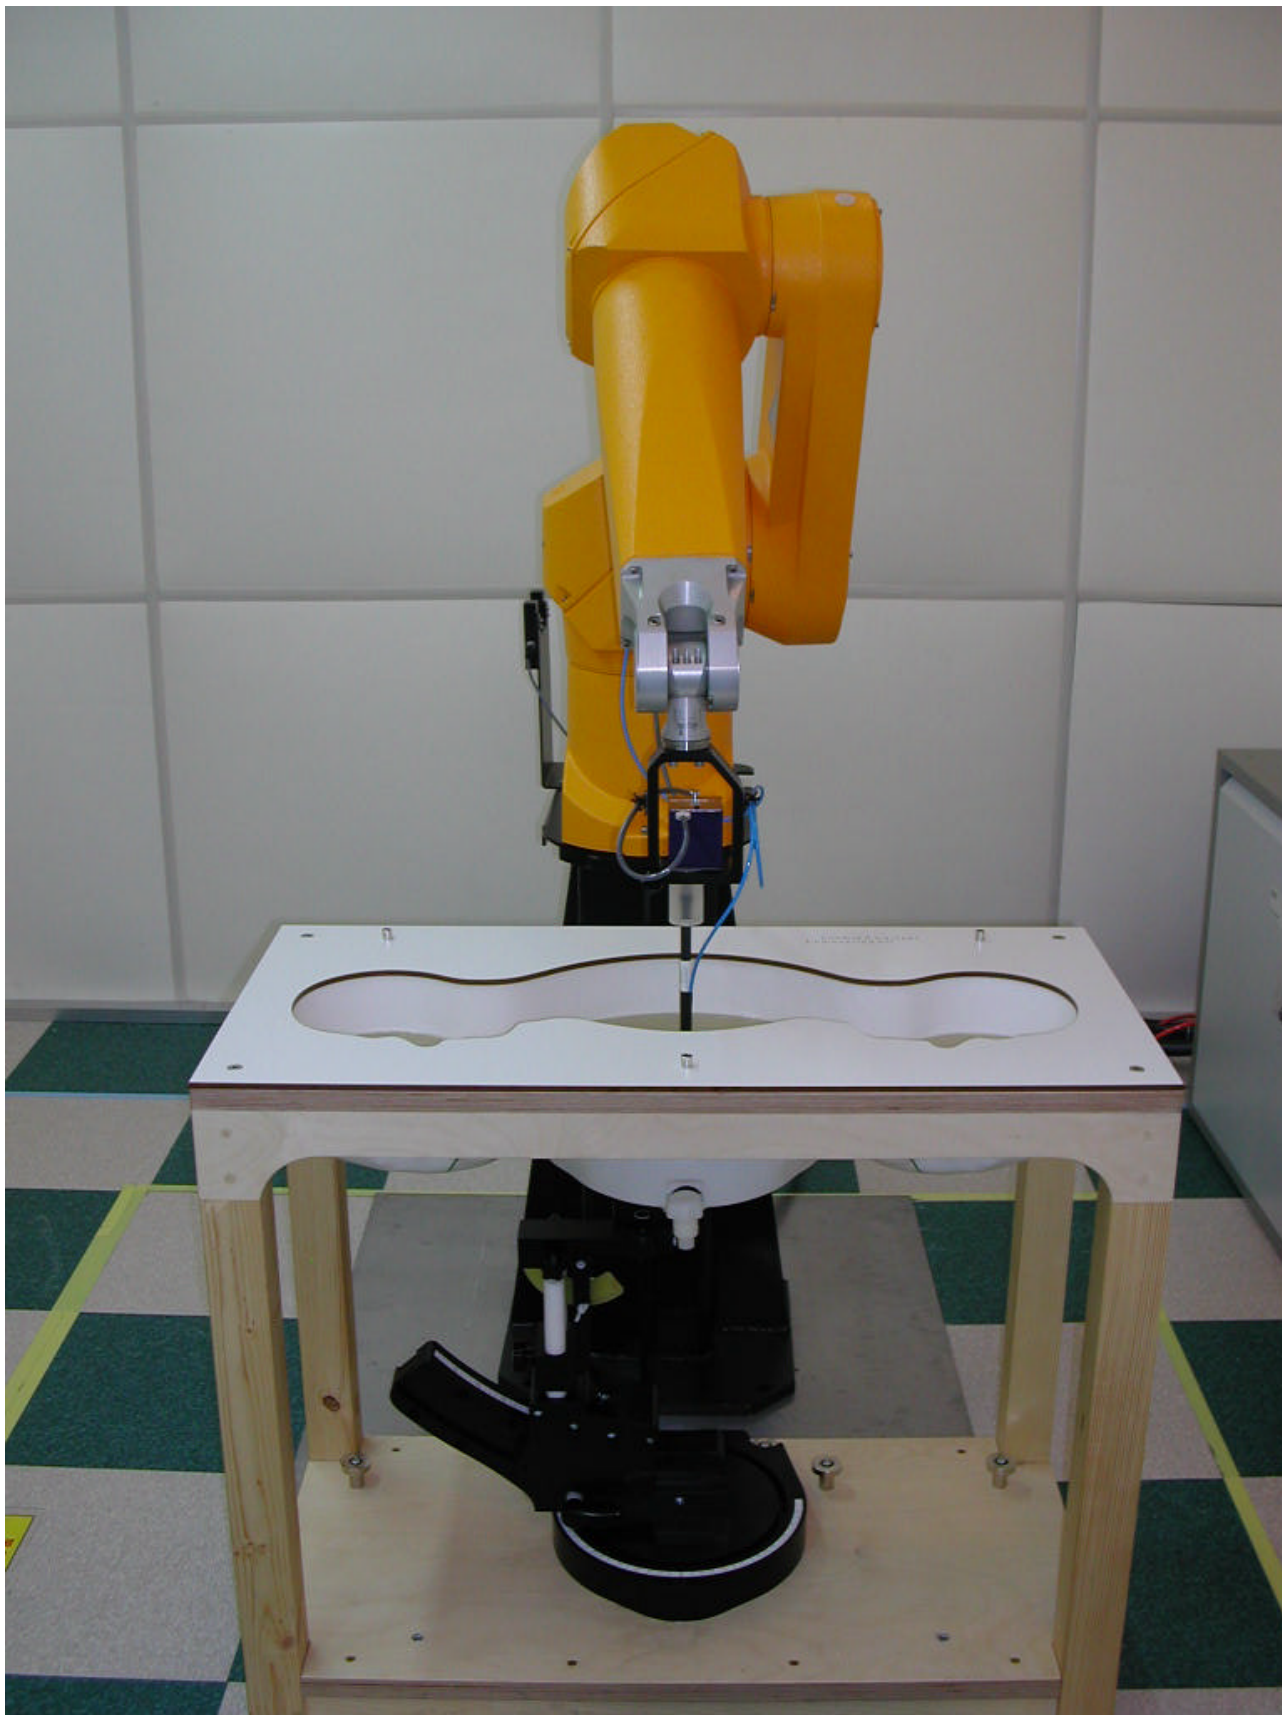



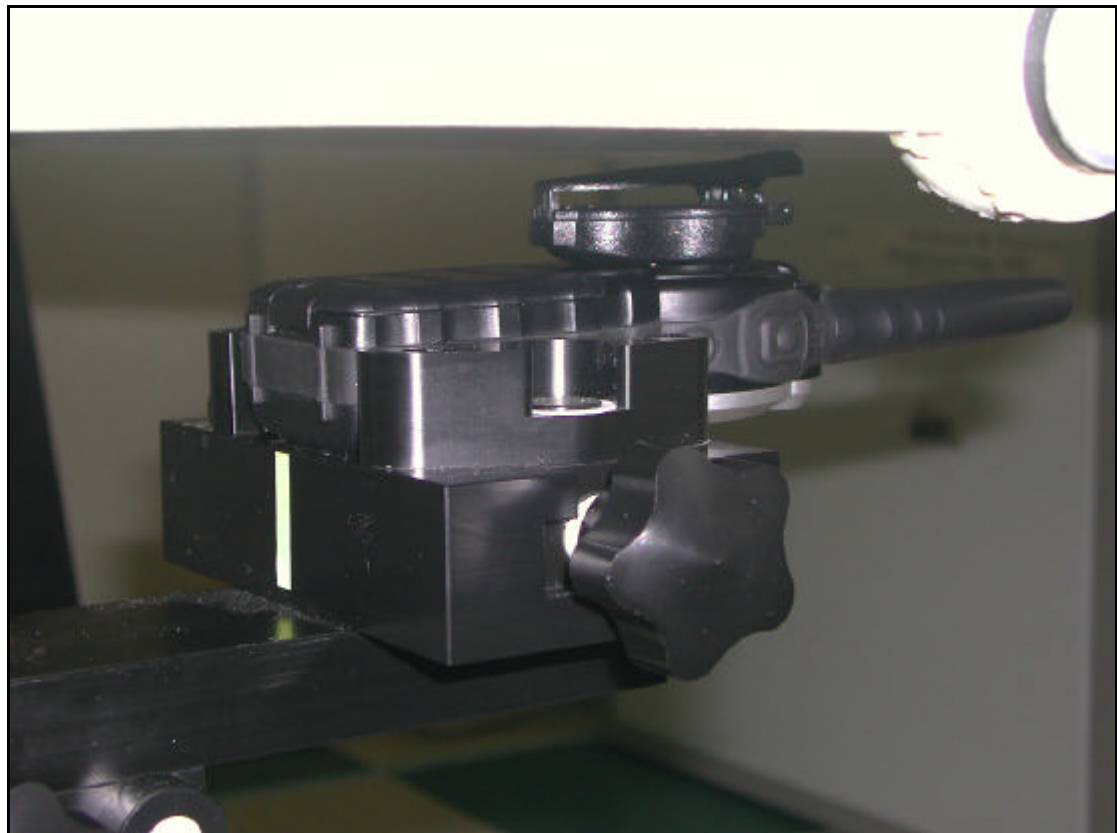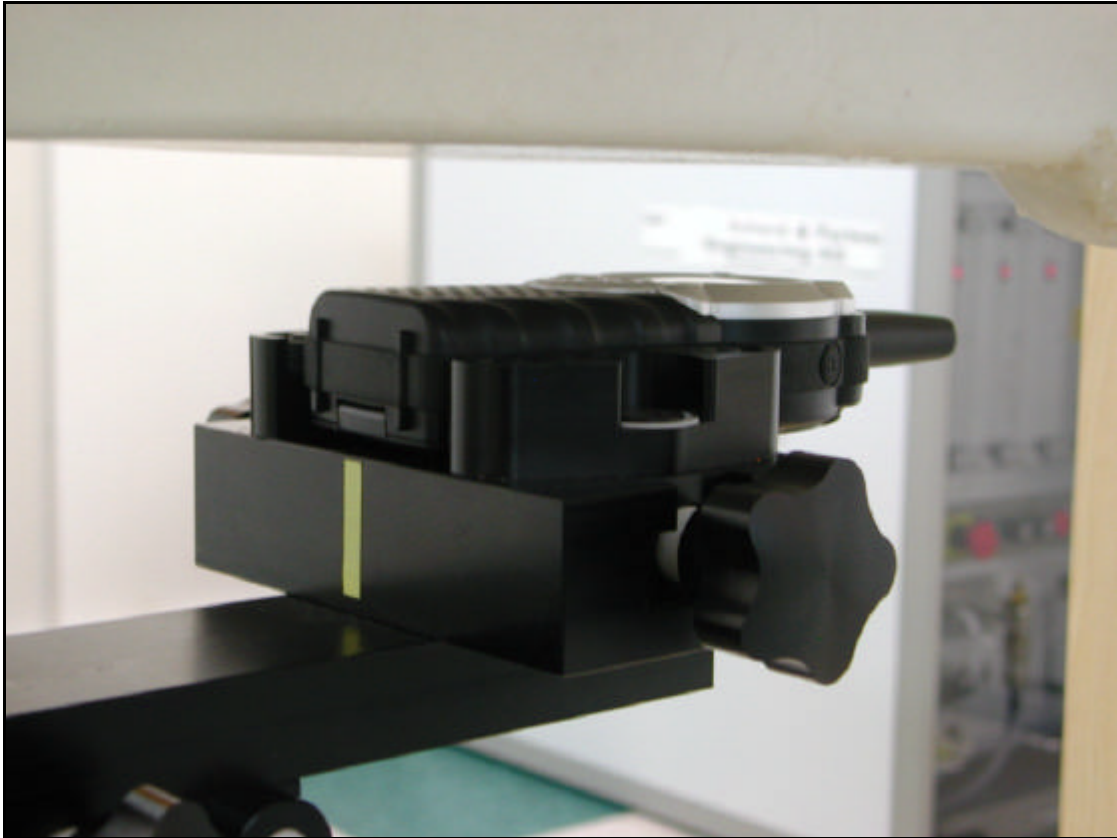

APPENDIX C – EUT PROFILE PHOTOGRAPHS

