

TEST REPORT

Report Number: 3048625-002

Project Number: 3048625

October 20, 2003

**Evaluation of the
2100NC personal tracking system**

Model Number: 2250

FCC ID:

OAM2250

FCC Part 2

FCC Part 15

FCC Part 24 Subpart E

For

ISECUREtrac Corp.

Test Performed by:

Intertek
731 Enterprise Drive
Lexington, KY 40510

Test Authorized by:

ISECUREtrac Corp.
5022 South 114th Street
Omaha, NE 68137

Prepared By:  Date: 9/12/2003

Bryan C. Taylor, Team Leader

Approved By: _____ Date: ____ Date _____

Reviewing Engineer, Title

This report may be reproduced only with the written permission of Intertek and if reproduced must be reproduced in its entirety.

This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.

The results contained in this report were derived from measurements performed on the identified test samples. Any implied performance of other samples based on this report is dependent on the representative adequacy of the samples tested.



Intertek

731 Enterprise Drive, Lexington, KY 40510

TABLE OF CONTENTS

1	EXECUTIVE SUMMARY.....	4
2	JOB DESCRIPTION.....	5
2.1	CLIENT INFORMATION	5
2.2	TEST PLAN REFERENCE:.....	5
2.3	EQUIPMENT UNDER TEST (EUT).....	6
2.3.1	System Support Equipment.....	7
2.3.2	Cables associated with EUT	7
2.3.3	System Block Diagram	7
2.3.4	Justification	8
2.3.5	Mode(s) of operation.....	8
2.4	MODIFICATIONS REQUIRED FOR COMPLIANCE	8
2.5	RELATED SUBMITTAL(S) GRANTS.....	8
3	TEST FACILITY.....	9
4	CONDUCTED RF POWER	10
4.1	TEST PROCEDURE	10
4.2	TEST EQUIPMENT.....	10
4.3	TEST RESULTS	10
5	RADIATED RF POWER.....	11
5.1	TEST PROCEDURE	11
5.2	TEST EQUIPMENT.....	11
5.3	TEST RESULTS	12
6	EMISSION LIMITATIONS, OCCUPIED BANDWIDTH	13
6.1	TEST PROCEDURE	13
6.2	TEST EQUIPMENT.....	13
6.3	TEST RESULTS	14
7	OUT OF BAND EMISSION AT ANTENNA TERMINALS.....	18
7.1	TEST PROCEDURE	18
7.2	TEST EQUIPMENT.....	18
7.3	TEST RESULTS	19
8	FIELD STRENGTH OF SPURIOUS RADIATION	25
8.1	TEST PROCEDURE	25

8.2	TEST EQUIPMENT	25
8.3	TEST RESULTS	26
9	POWER LINE CONDUCTED EMISSIONS.....	39
9.1	TEST PROCEDURE	39
9.2	TEST EQUIPMENT.....	39
9.3	TEST RESULTS	40
10	RECEIVER SPURIOUS EMISSIONS	42
10.1	TEST LIMITS.....	42
10.2	TEST EQUIPMENT.....	42
10.3	TEST PROCEDURE	42
10.4	TEST RESULTS	43
11	FREQUENCY STABILITY VS TEMPERATURE	46
11.1	TEST PROCEDURE	46
11.2	TEST EQUIPMENT.....	46
11.3	TEST RESULTS	46
12	FREQUENCY STABILITY VS VOLTAGE	47
12.1	TEST PROCEDURE	47
12.2	TEST EQUIPMENT.....	47
12.3	TEST RESULTS	47

Evaluation For: ISECUREtrac Corp.
Model No: 2250

FCC ID: OAM2250

1 EXECUTIVE SUMMARY

Testing performed for: ISECUREtrac Corp.

Equipment Under Test: 2250, 2100NC personal tracking system

FCC RULE	IC RULE	DESCRIPTION OF TEST	RESULT	PAGE
§2.1046	RSS-129 §7.1, §9.1 RSS-133 §6.2	RF Power Output	Passed	10
§22.913, §24.232	RSS-129 §7.1, §9.1 RSS-133 §6.2	ERP, EIRP	Passed	12
§2.1049 §22.917(b)(d)	RSS-129 §6.3, RSS-129 §8.1	Emission Limitation, Occupied Bandwidth	Passed	13
§2.1051 §22.917(e) §22.917(f) §24.238(a)	RSS-129 §6.3, §7.2.2, §8.1.1, §10 RSS-133 §6.3	Out of Band Emissions at Antenna Terminals Mobile Emissions In Base Frequency Range	Passed	18
§2.1053	RSS-129 §8.1	Field Strength of Spurious Radiation	Passed	25
§2.1091, §2.1093	RSS-129 §11, RSS-133 §8	Specific Absorption Rate	N/S	See Note ¹
§15.107, §15.207	IC ES-003	Power Line Conducted Emissions	Passed	39
§15.109	IC ES-003 RSS-129 §10, RSS-133 §9	Receiver Spurious Emission	Passed	42
§2.1055, §22.355, §24.235	RSS-133 §7	Frequency Stability vs. Temperature	Passed	46
§2.1055, §22.355, §24.235	--	Frequency Stability vs. Voltage	Passed	47

N/S: Not under scope of this evaluation

¹ Specific Absorption Rate testing results are in report number 3048625-001.

2 JOB DESCRIPTION

2.1 Client information

The 2100NC personal tracking system

has been tested at the request of

Company: ISECUREtrac Corp.
5022 South 114th Street
Omaha, NE 68137

Name of contact: Jef Higgason
Telephone: (402)-537-5663
Fax: (402)-537-9847

2.2 Test plan reference:

Tests were performed to the following standards:

- FCC Part 2
- FCC Part 15
- FCC Part 24 Subpart E rules for an intentional radiator
- FCC Part 22 Subpart H rules for an intentional radiator

The test procedures described in this test report and ANSI C63.4: 1992 were employed.

Evaluation For: ISECUREtrac Corp.
Model No: 2250

FCC ID: OAM2250

2.3 Equipment Under Test (EUT)

The Equipment Under Test (EUT) was a personal tracking system that operated in the CDMA800 and CDMA1900 modes. This body worn device allows for tracking of individuals while they are wearing it.

Product	2100NC personal tracking system	
EUT Model Number	2250	
EUT Serial Number	Not Marked	
Whether quantity (>1) production is planned	Quantity production is planned.	
Cellular Phone standards	CDMA 800 and 1900	
Type(s) of Emission	1M29F9W	
RF Output Power	23.86 dBm – CDMA 800 25.76 dBm – CDMA1900	
Frequency Range	824.7 – 848.31 MHz	CDMA800
	1850 – 1910 MHz	CDMA1900
Antenna & Gain	Internal antenna	
Detachable Antenna ?	No	
External input	☐ Audio ☒ Digital Data	

EUT receive date: 9/24/2003

EUT receive condition: The EUT was received in good condition with no apparent damage.

Test start date: 9/24/2003

Test completion date: 9/29/2003

The test results in this report pertain only to the item tested.

2.3.1 System Support Equipment

Table 2-1 contains the details of the support equipment associated with the Equipment Under Test during the FCC Part 15 testing.

Table 2-1: System Support Equipment


Description	Manufacturer	Model Number	Serial Number	FCC ID number
Charging Base	ISECUREtrac Corp	2250	007095-0514	Not Labeled
Charging Base	ISECUREtrac Corp	2250	007095-0811	Not Labeled

2.3.2 Cables associated with EUT

There were no cables used with the EUT. It was operated in a stand alone mode and powered by batteries.

2.3.3 System Block Diagram

The diagram shown below details the interconnection of the EUT and its accessories during FCC Part 15 testing. For specific layout, refer to the test configuration photograph in the relevant section of this report.



Evaluation For: ISECUREtrac Corp.

FCC ID: OAM2250

Model No: 2250

2.3.4 Justification

The EUT was operated in the stand-alone configuration.

2.3.5 Mode(s) of operation

The EUT was powered from a fully charged 7.2 Vdc 2200 mAh Li-Ion Battery during all testing.

2.4 Modifications required for compliance

No modifications were implemented by Intertek.

2.5 Related Submittal(s) Grants

None

3 TEST FACILITY

The INTERTEK-Lexington is located at 731 Enterprise Drive, Lexington Kentucky, 40510. The radiated emission test site is a 10-meter semi-anechoic chamber. The chamber meets the characteristics of CISPR 16-1: 1993 and ANSI C63.4: 1992. For measurements, a remotely controlled flush-mount metal-top turntable is used to rotate the EUT a full 360 degrees. A remote controlled non-conductive antenna mast is used to scan the antenna height from one to four meters.

Figure 3-1: 10-Meter EMC Site



4 CONDUCTED RF POWER

FCC §2.1046

4.1 Test Procedure

The transmitter output was connected to a calibrated coaxial cable, the other end of which was connected to a CMU-200 Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The EUT was placed into a call and the transmitter output was read off the CMU-200 in dBm. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the CMU-200 power reading.

Tests were performed at three frequencies (low, middle, and high channels) and on the highest power levels, which can be setup on the transmitters.

4.2 Test Equipment

Description	Manufacturer	Model Number	Serial Number	Calibration due date
Base Station Simulator	Rohde & Schwarz	CMU-200	1100.0008.02	8/2004

4.3 Test Results

The 2100NC personal tracking system

met the RF power output requirements of FCC Part 22 Subpart H and FCC Part FCC Part 24 Subpart E. The test results are located in Table 4-1.

Table 4-1 RF Power Variation with temperature

EUT Mode	Frequency MHz	Channel	Measured Power dBm		
			+60°C	+20°C	-30°C
CDMA1900	1850.20	25	22.5	24.41	25.19
	1880.00	600	22.5	24.74	25.76
	1909.80	1175	21.91	24.07	24.91
CDMA800	836.52	384	23.38	23.3	23.86
	848.31	777	21.96	22.6	23.79
	824.70	1013	23.04	23.19	23.02

5 RADIATED RF POWER

FCC §22.913: The Effective Radiated Power (ERP) of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

FCC §24.232: The equivalent Isotropic Radiated Power (EIRP) must not exceed 2 Watts.

5.1 Test Procedure

The EUT was placed on a non-conductive turntable. The radiated emission at the fundamental frequency was measured at 3m with a test antenna and EMI receiver. This was performed with the antenna in both vertical and horizontal polarities.

During the measurement of the EUT, the receiver resolution bandwidth was set to 3 MHz and the video bandwidth was set to 10 kHz. These settings matched the power readings of a power meter with a thermocouple power sensor. The highest emission was recorded with the rotation of the turntable and the raising and lowering of the test antenna. The receiver reading was recorded and the field strength (E in dB μ V/m) was calculated.

EIRP in frequency band 1851.25-1910 MHz were measured using a substitution method. The EUT was replaced by a horn antenna (1851.25-1910 MHz) connected to a signal generator, which was set to -10 dBm. The receiver reading was recorded and EIRP was calculated as follows:

$$\text{EIRP} = E_1 - E_2 + V_g + G$$

where,

E_1 is the receiver reading in dB μ V/m when measuring the field strength of the EUT

E_2 is the receiver reading in dB μ V/m when measured field strength from the generator

V_g is the generator output in dBm

G is the gain of the transmitting antenna in dBi.

5.2 Test Equipment

Description	Manufacturer	Model Number	Serial Number	Calibration due date
Signal Generator	HP	83620B	3614A00199	8/2004
Horn Antenna	Antenna Research	DRG-118/A	1086	3/7/2007
Horn Antenna	EMCO	3115	6556	7/11/2004
EMI Receiver	Rohde & Schwarz	ESI 26	1088.7490	11/27/2003

5.3 Test Results

The 2100NC personal tracking system

met the radiated power requirements of FCC §24.232. The test results are located in Table 5-1.

Table 5-1 Radiated RF Power

EUT Resting Flat on an 80cm High Wooden Table (Internal Antenna)									
EUT Mode	Channel	Frequency (MHz)	Rx Antenna Polarity	Measurement Method (ERP/EIRP)	EUT Reading (dBuV)	Substitution Reading (dBuV)	Cable Reading (dBm)	Tx Antenna Gain (dBi)	ERP / EIRP (dBm)
CDMA PCS	25	1851.25	V	EIRP	85.07	73.29	-0.5	7.2	18.48
CDMA PCS	600	1880	V	EIRP	79.5	73.07	-0.29	7.2	13.34
CDMA PCS	1175	1908.75	V	EIRP	75.53	72.63	-0.27	7.2	9.83
CDMA PCS	25	1851.25	H	EIRP	81.05	73.59	-0.5	7.1	14.06
CDMA PCS	600	1880	H	EIRP	79.16	74.03	-0.29	7.1	11.94
CDMA PCS	1175	1908.75	H	EIRP	73.94	73.19	-0.27	7.1	7.58
CDMA Cell	384	836.52	V	ERP	93.5	76.87	3.8	0	20.43
CDMA Cell	777	848.31	V	ERP	93.86	76.13	3.8	0	21.53
CDMA Cell	1013	824.7	V	ERP	93.04	75.76	3.8	0	21.08
CDMA Cell	384	836.52	H	ERP	92.21	77.4	3.8	0	18.61
CDMA Cell	777	848.31	H	ERP	90.45	76.86	3.8	0	17.39
CDMA Cell	1013	824.7	H	ERP	93.13	77.05	3.8	0	19.88

6 EMISSION LIMITATIONS, OCCUPIED BANDWIDTH

CFR 47 §2.1049

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

6.1 Test Procedure

In both CDMA 800 and 1900 modes the antenna port of the EUT was connected to a spectrum analyzer using a calibrated coaxial cable and directional coupler. The EUT was placed into a call using a CMU – 200 base station simulator. The occupied bandwidth function of the analyzer was used to automatically generate the occupied bandwidth plots below.

6.2 Test Equipment

Description	Manufacturer	Model Number	Serial Number	Calibration due date
Base Station Simulator	Rohde & Schwarz	CMU-200	1100.0008.02	8/2004
EMI Receiver	Rohde & Schwarz	ESI 26	1088.7490	11/27/2003
Directional Coupler	Amplifier Research	DC7144	22729	8/2004

6.3 Test Results

The following is the occupied bandwidth data for the 2100NC personal tracking system

Table 6-1: Occupied bandwidth measurements for CDMA modes

Mode	Channel	Resolution Bandwidth	Video Bandwidth	Sweep time	Measured Bandwidth MHz
CDMA800	384	30 kHz	300 kHz	2s	1.27
CDMA800	1013	30 kHz	300 kHz	2s	1.28
CDMA800	777	30 kHz	300 kHz	2s	1.28
CDMA1900	25	30 kHz	300 kHz	2s	1.28
CDMA1900	600	30 kHz	300 kHz	2s	1.28
CDMA1900	1175	30 kHz	300 kHz	2s	1.28

Figure 6-1: Occupied Bandwidth – Cell Channel 384

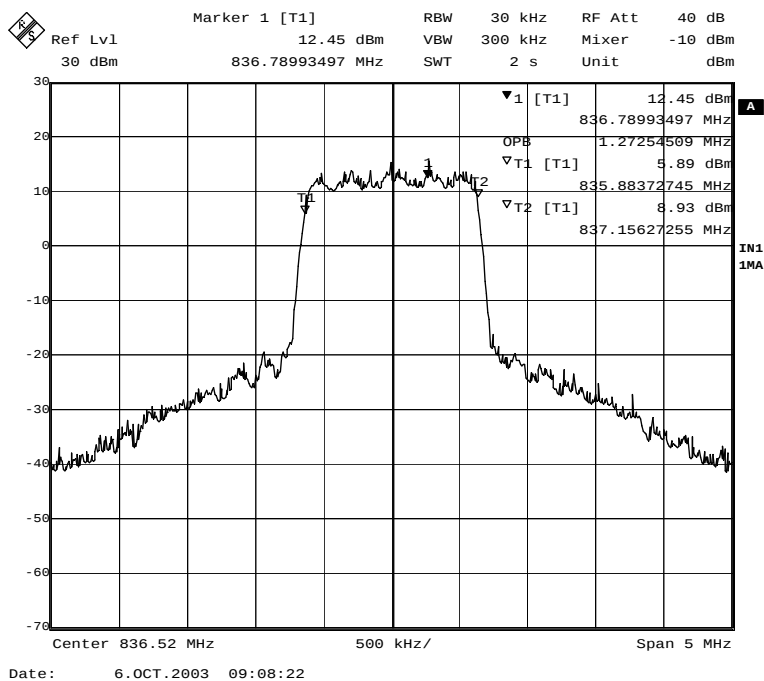


Figure 6-3: Occupied Bandwidth – Cell Channel 777

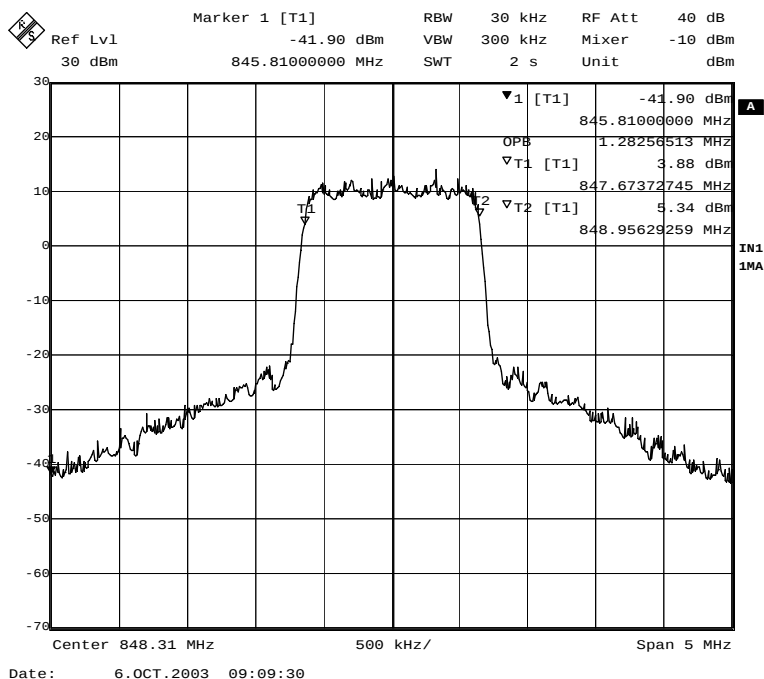


Figure 6-5: Occupied Bandwidth – Cell Channel 1013

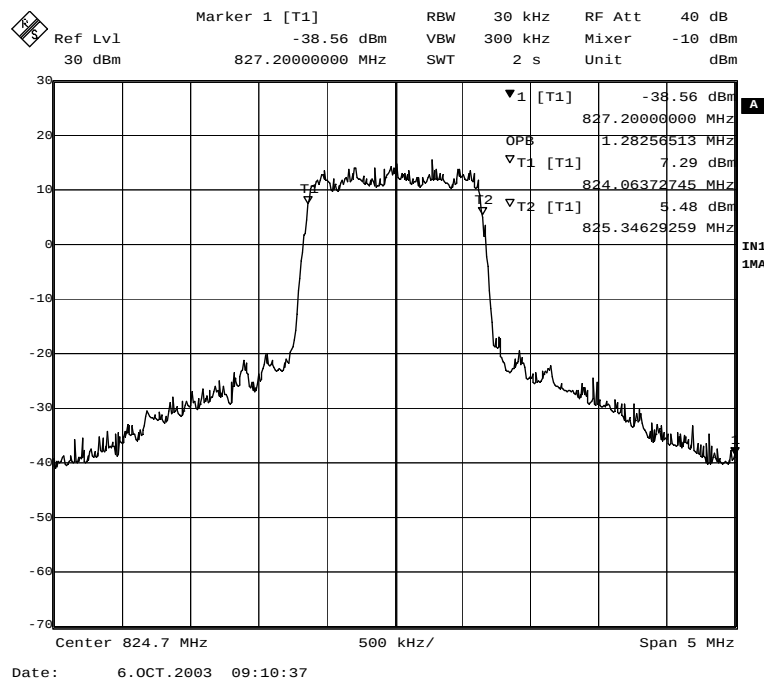


Figure 6-7: Occupied Bandwidth – PCS Channel 25

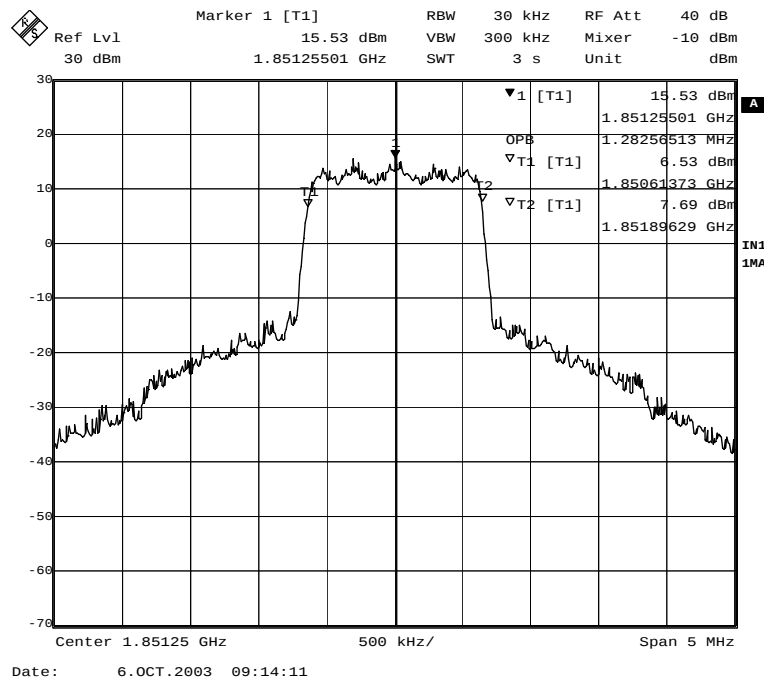


Figure 6-9: Occupied Bandwidth – PCS Channel 600


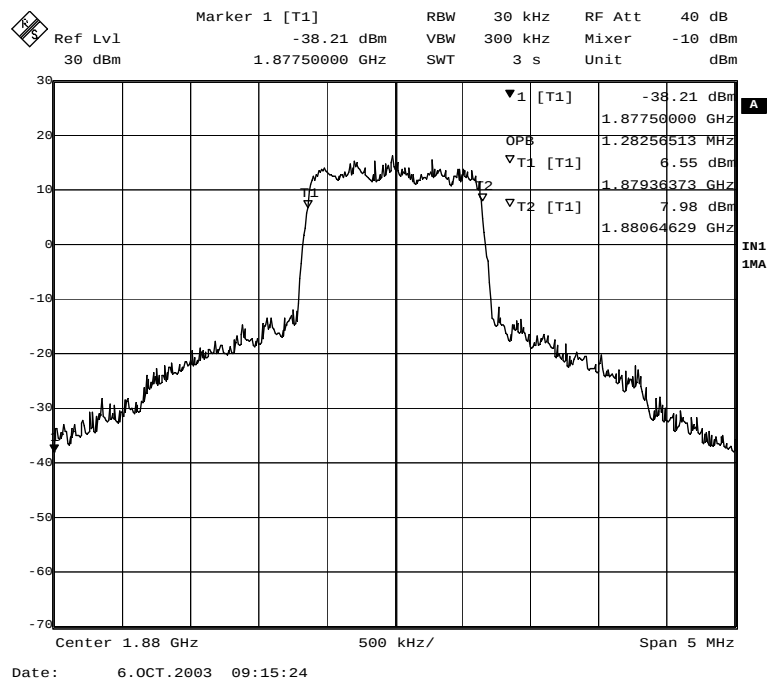


Figure 6-11: Occupied Bandwidth – PCS Channel 1175

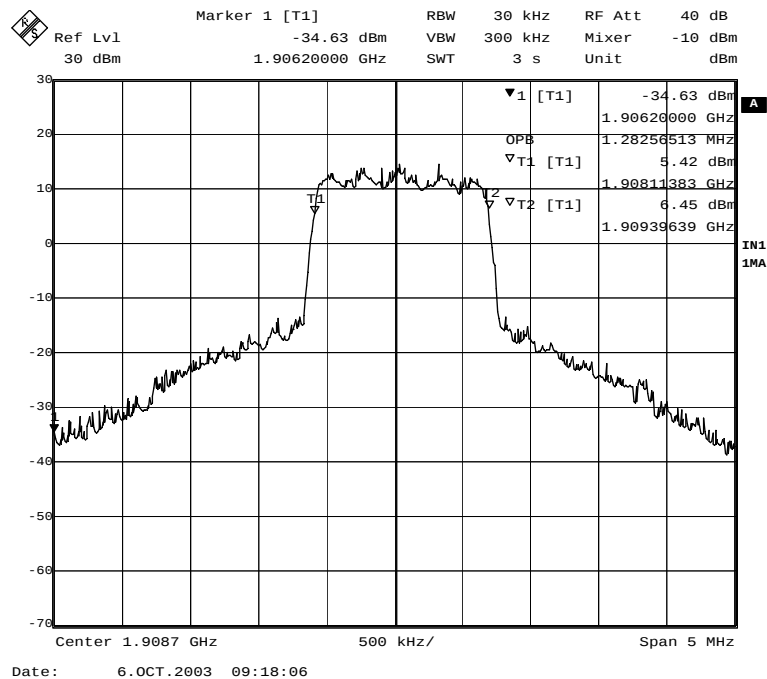

7 OUT OF BAND EMISSION AT ANTENNA TERMINALS

FCC §2.1049, FCC §2.1051, §22.917(a), FCC §24.238(a)

Out of Band Emissions: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

7.1 Test Procedure

Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for the Cellular band and 1 MHz or greater in the PCS band. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1 MHz. The audio modulating signal was adjusted like it is described in Section 6.1 of this report. Sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.

7.2 Test Equipment

Description	Manufacturer	Model Number	Serial Number	Calibration due date
Base Station Simulator	Rohde & Schwarz	CMU-200	1100.0008.02	8/2004
EMI Receiver	Rohde & Schwarz	ESI 26	1088.7490	11/27/2003
Directional Coupler	Amplifier Research	DC7144	22729	8/2004

7.3 Test Results

The 2100NC personal tracking system

met the out of band emission at antenna terminal requirements.

Table 7-1: Summary of test result locations

Location	Mode (Band)	Channel	Description
Figure 7-1	CDMA Cell	384	Conducted spurious emissions, 30MHz to 20 GHz
Figure 7-2	CDMA Cell	777	Conducted spurious emissions, 30MHz to 20 GHz
Figure 7-3	CDMA Cell	1013	Conducted spurious emissions, 30MHz to 20 GHz
Figure 7-4	CDMA PCS	25	Conducted spurious emissions, 30MHz to 20 GHz
Figure 7-5	CDMA PCS	600	Conducted spurious emissions, 30MHz to 20 GHz
Figure 7-6	CDMA PCS	1175	Conducted spurious emissions, 30MHz to 20 GHz
Figure 7-7	CDMA Cell	1013	Emissions within 1 MHz of band edge
Figure 7-8	CDMA Cell	777	Emissions within 1 MHz of band edge
Figure 7-9	CDMA PCS	25	Emissions within 1 MHz of band edge
Figure 7-10	CDMA PCS	1175	Emissions within 1 MHz of band edge

Figure 7-1: Out of band emissions at antenna terminals – CDMA 800 Channel 384

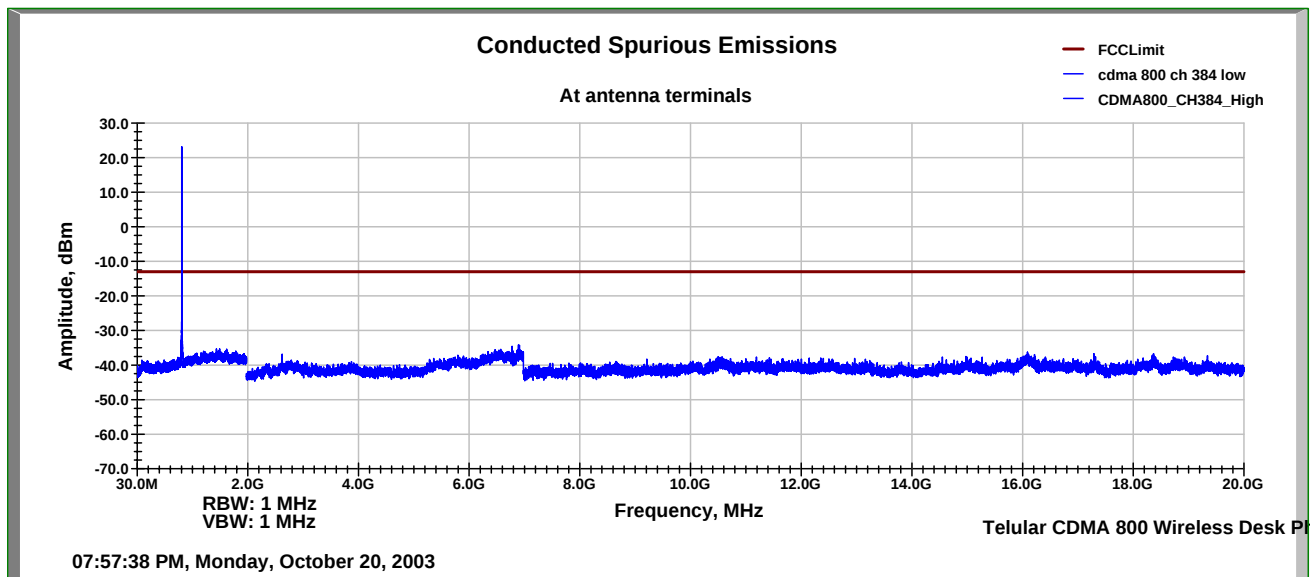


Figure 7-2: Out of band emissions at antenna terminals – CDMA 800 Channel 777

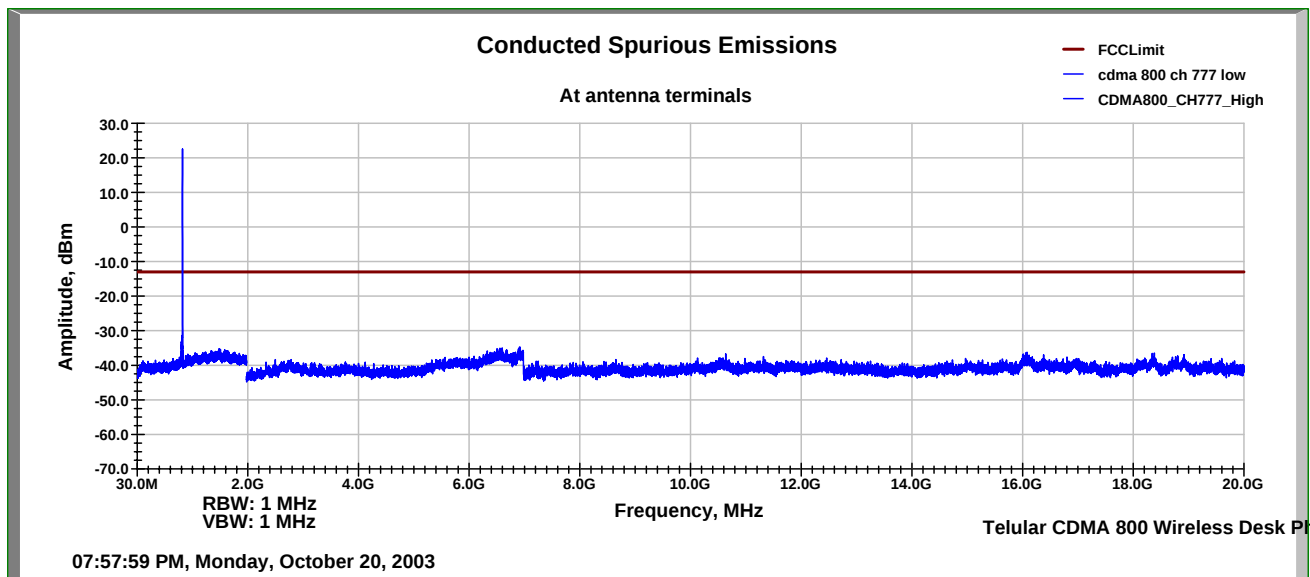


Figure 7-3: Out of band emissions at antenna terminals – CDMA 800 Channel 1013

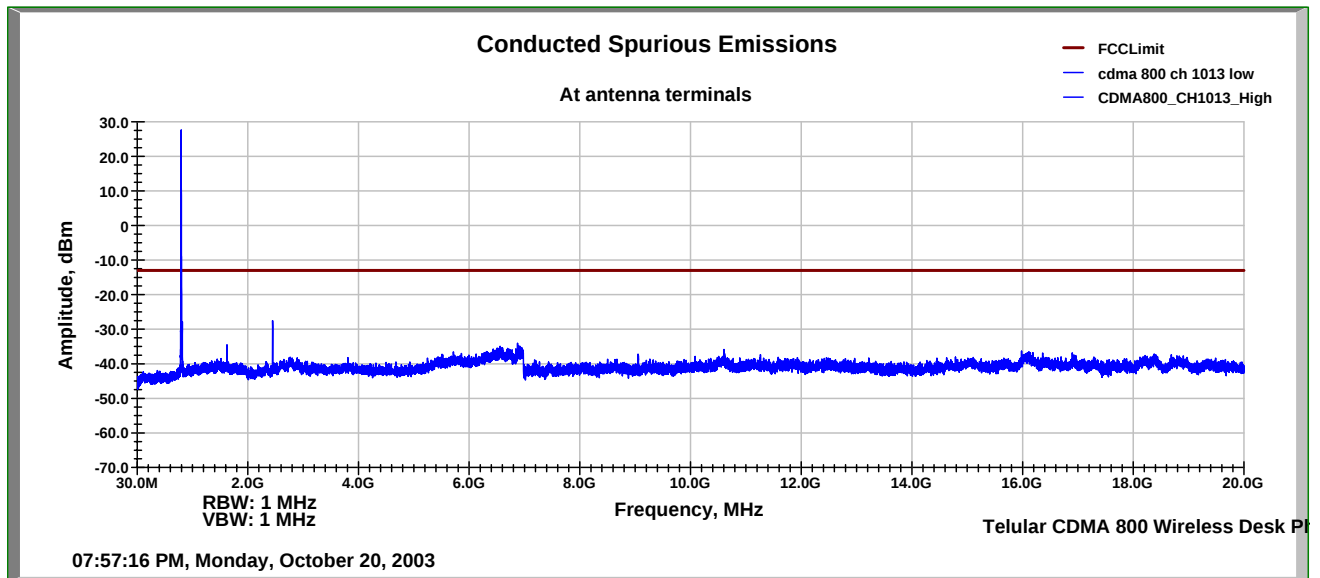


Figure 7-4: Out of band emissions at antenna terminals – CDMA1900 Channel 25

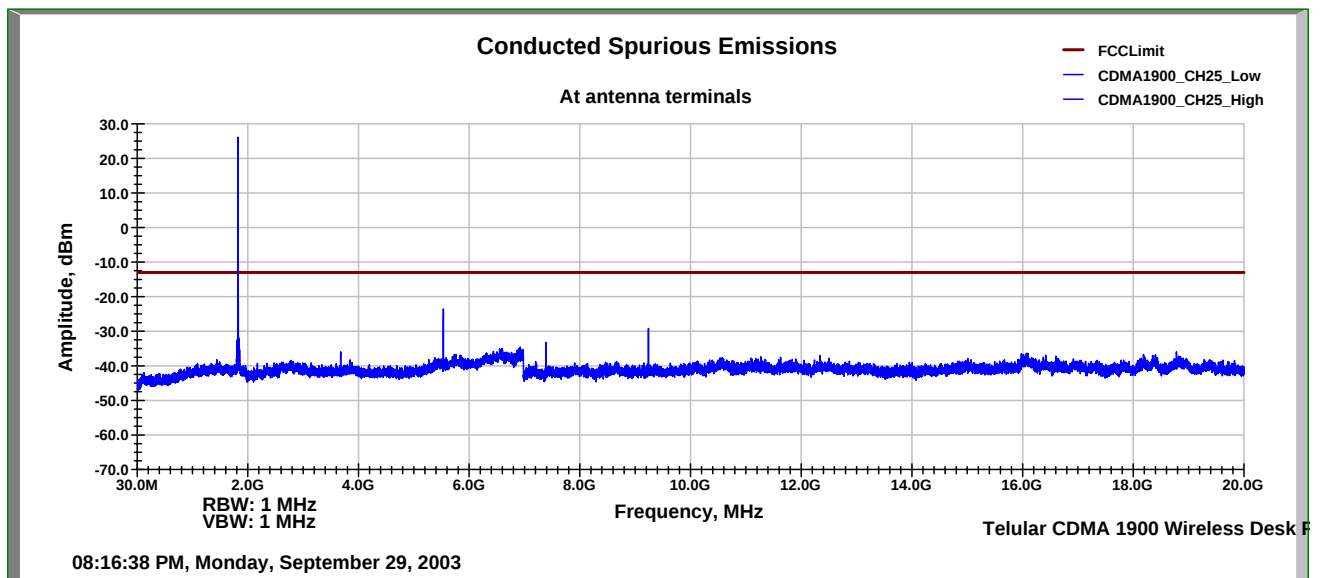


Figure 7-5: Out of band emissions at antenna terminals – CDMA1900 Channel 600

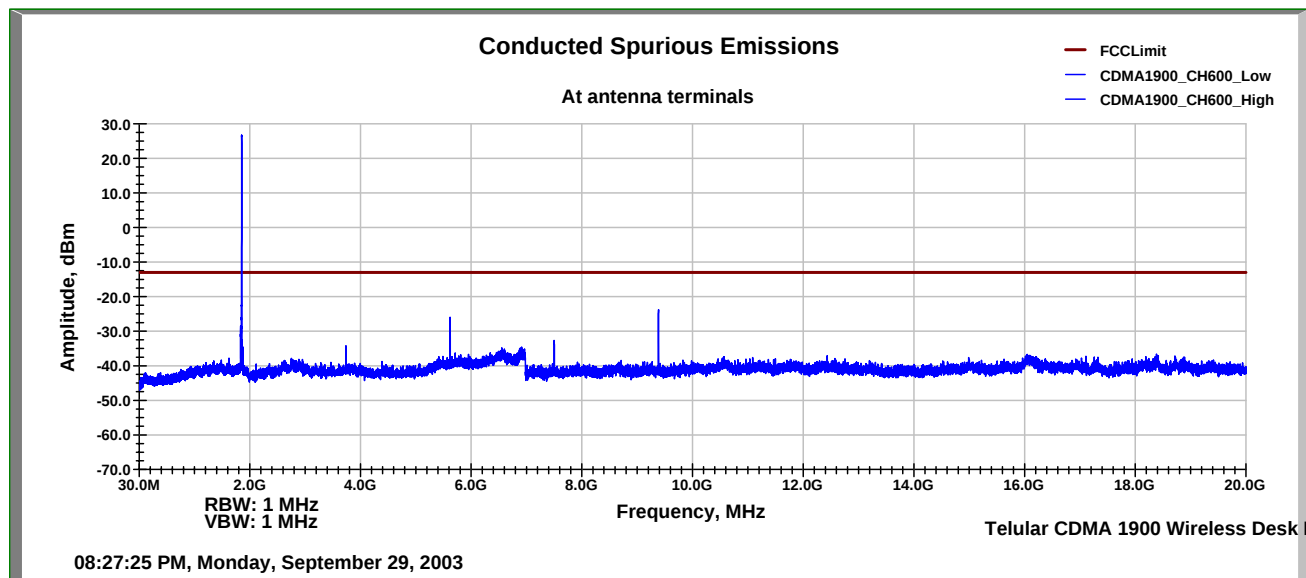


Figure 7-6: Out of band emissions at antenna terminals – CDMA1900 Channel 1175

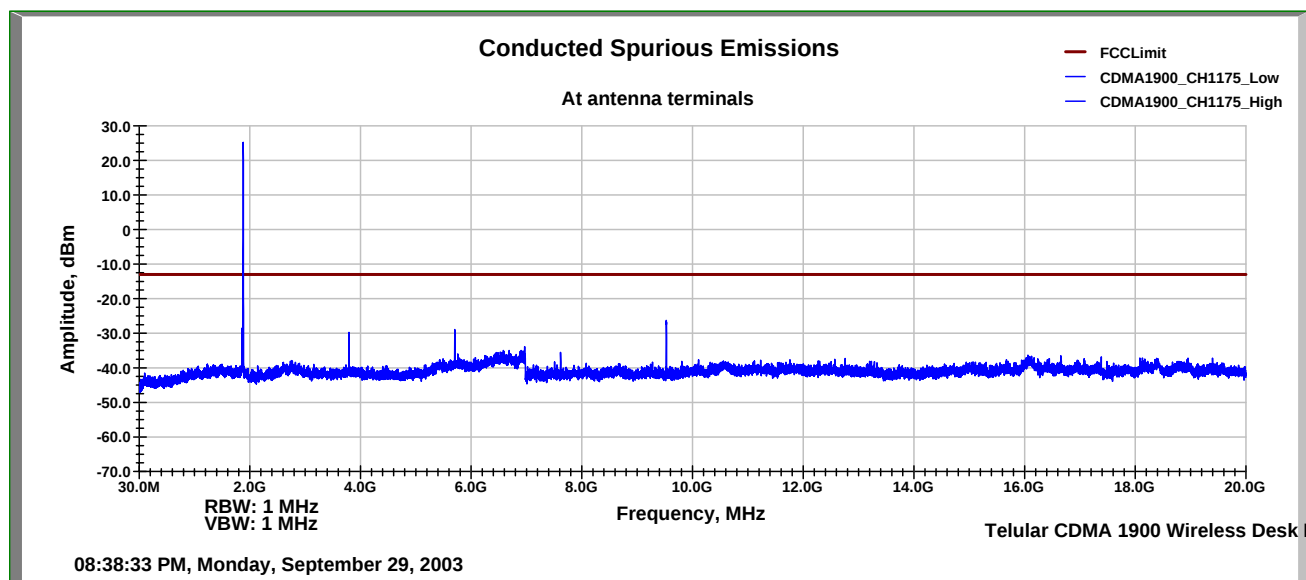


Figure 7-7: Emissions within 1 MHz of band edge, CDMA 800 Channel 1013

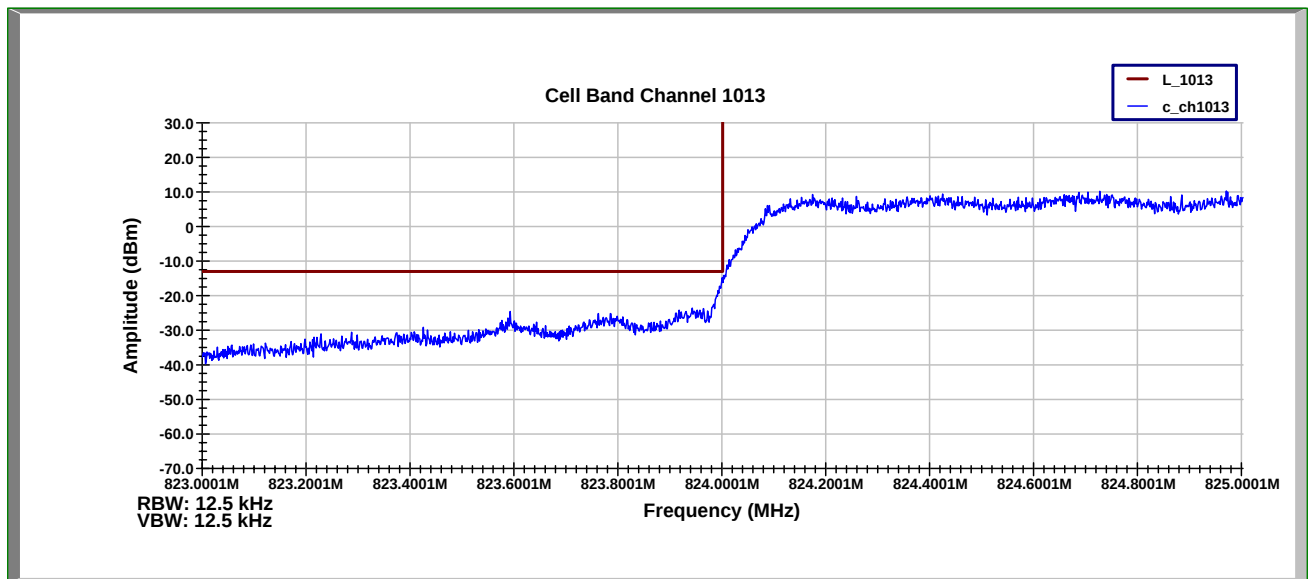


Figure 7-8: Emissions within 1 MHz of band edge, CDMA 800 Channel 777

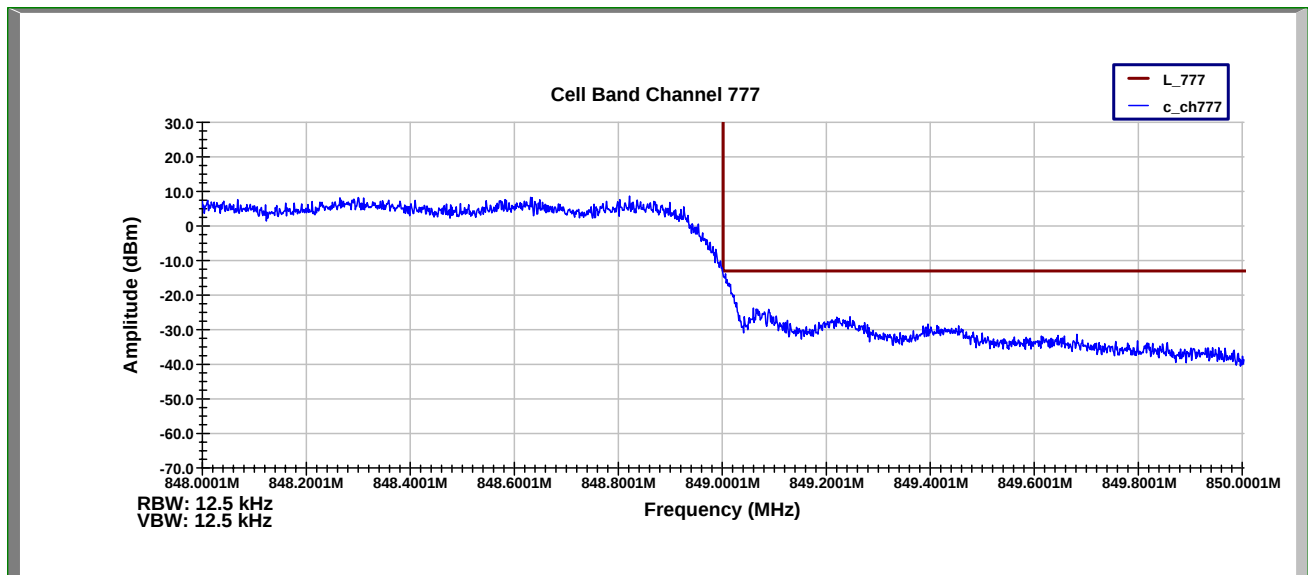


Figure 7-9: Emissions within 1 MHz of band edge, CDMA 1900 Channel 25


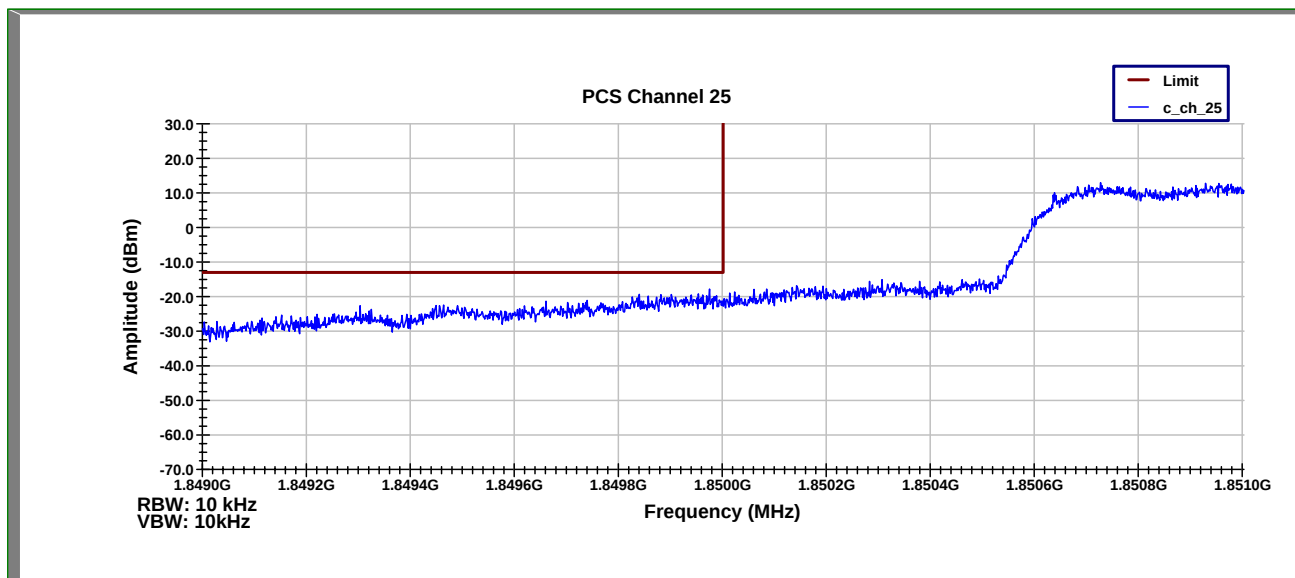


Figure 7-10: Emissions within 1 MHz of band edge, CDMA 1900 Channel 1175

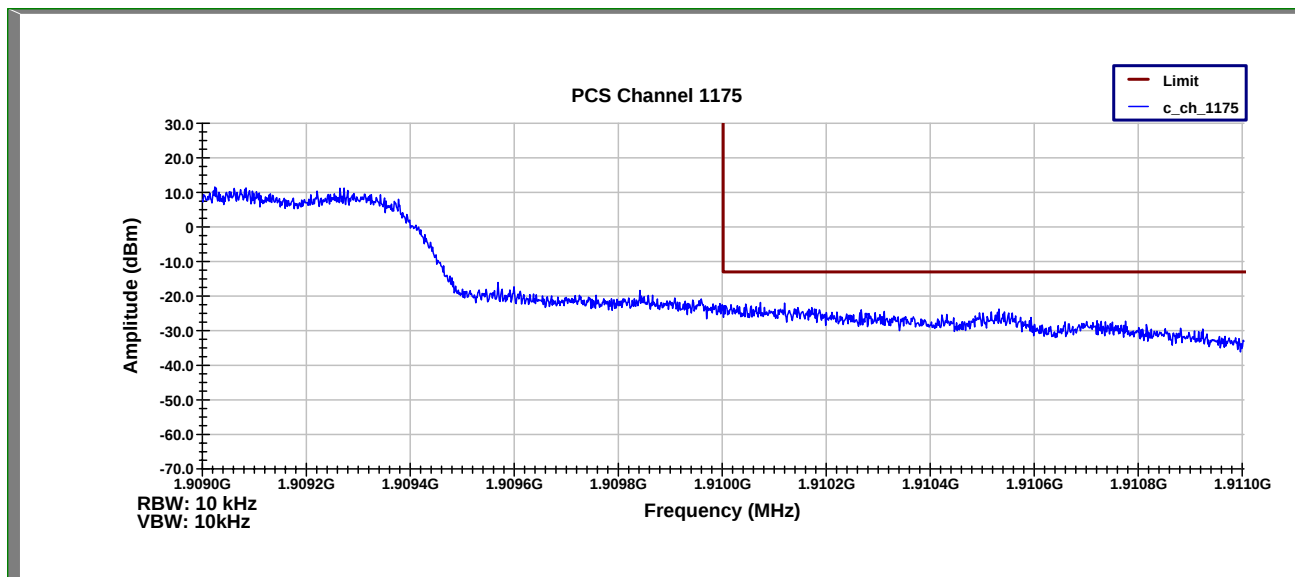

8 FIELD STRENGTH OF SPURIOUS RADIATION

FCC §2.1053

8.1 Test Procedure

The EUT was placed on a non-conductive turntable. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

The frequency range up to tenth harmonic was investigated for each of three fundamental frequencies (low, middle, and high channels). Once spurious emissions were identified, the power of the emission was determined using the substitution method.

The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and at the spurious emissions frequency.

8.2 Test Equipment

Description	Manufacturer	Model Number	Serial Number	Calibration due date
Base Station Simulator	Rohde & Schwarz	CMU-200	1100.0008.02	8/2004
Signal Generator	HP	83620B	3614A00199	8/2004
Horn Antenna	Antenna Research	DRG-118/A	1086	3/7/2007
Horn Antenna	EMCO	3115	6556	7/11/2004
EMI Receiver	Rohde & Schwarz	ESI 26	1088.7490	11/27/2003
LISN	FCC	FCC-LISN-50-50-2M	1026	12/2003
Bilog Antenna	EMCO	3142B	1674	8/2004
Preamplifier	HP	8449B	3008A00775	12/2003
High Pass Filter	Filtek	HP12/2000-5AB	15B61	8/2004

8.3 Test Results



The 2100NC personal tracking system

met the field strength of spurious radiation requirements of FCC §2.1053. Emissions within 20 dB of the limit were measured using a substitution method and are reported in Table 8-1.

Table 8-1: Substitution Measurements on Emissions Within 20 dB of the Limit (Internal and External Antennas)

EUT Resting Flat on an 80cm High Wooden Table (Internal Antenna)									
EUT Mode	Channel	Frequency (MHz)	Rx Antenna Polarity	Measurement Method (ERP/EIRP)	EUT Reading (dBuV)	Substitution Reading (dBuV)	Cable Reading (dBm)	Tx Antenna Gain (dBi)	ERP / EIRP (dBm)
CDMA Cell	384	1673.3	H	EIRP	48.43	64.24	-11.08	7.1	-19.79
CDMA Cell	384	2511	H	EIRP	41.13	61.5	-11.2	8.9	-22.67
CDMA Cell	384	3345.8	H	EIRP	63.5	89.53	-11.48	9.7	-27.81
CDMA Cell	777	1697	H	EIRP	41.67	63.82	-11.05	7.1	-26.1
CDMA Cell	777	2547.1	H	EIRP	36.55	60.71	-11.13	8.9	-26.39
CDMA Cell	1013	1649.3	H	EIRP	49.44	64.59	-10.99	7.1	-19.04
CDMA Cell	1013	2474.9	H	EIRP	40.7	61.42	-11.12	8.9	-22.94
CDMA Cell	384	1673.3	V	EIRP	50.6	63.99	-11.08	7.2	-17.27
CDMA Cell	384	2511	V	EIRP	39.72	59.2	-11.2	8.5	-22.18
CDMA Cell	384	3345.8	V	EIRP	63.67	88.43	-11.48	9.6	-26.64
CDMA Cell	777	1697	V	EIRP	44.1	63.62	-11.05	7.2	-23.37
CDMA Cell	777	2547.1	V	EIRP	35.46	58.89	-11.13	8.5	-26.06
CDMA Cell	1013	1649.3	V	EIRP	47.5	64.58	-10.99	7.2	-20.87
CDMA Cell	1013	2474.9	V	EIRP	36.32	59.72	-11.12	8.5	-26.02
CDMA PCS	25	3702	H	EIRP	67.1	88.42	-11.72	8.7	-24.34
CDMA PCS	25	5539	H	EIRP	57.03	82.19	-12.32	10.7	-26.78
CDMA PCS	25	9255	H	EIRP	52.63	75.32	-14.38	10	-27.07
CDMA PCS	600	3759.9	H	EIRP	58.69	88.39	-11.66	9.7	-31.66
CDMA PCS	1175	5726	H	EIRP	59.77	82.95	-12.18	10.7	-24.66
CDMA PCS	1175	9543.7	H	EIRP	53.12	75	-13.41	10.4	-24.89
CDMA PCS	25	3702	V	EIRP	70.66	88.07	-11.72	10.1	-19.03
CDMA PCS	25	5539	V	EIRP	58.4	83.05	-12.32	11	-25.97
CDMA PCS	25	9255	V	EIRP	54.11	76.3	-14.38	10.2	-26.37
CDMA PCS	600	3759.9	V	EIRP	63.25	88.56	-11.66	10	-26.97
CDMA PCS	1175	5726	V	EIRP	60.51	83.19	-12.18	11	-23.86
CDMA PCS	1175	9543.7	V	EIRP	58.83	75.82	-13.41	10.4	-20

Figure 8-1: Field Strength of Spurious Radiation (30 MHz – 1 GHz),
CDMA 800 Channel 384, 777, and 1013 (Internal Antenna)

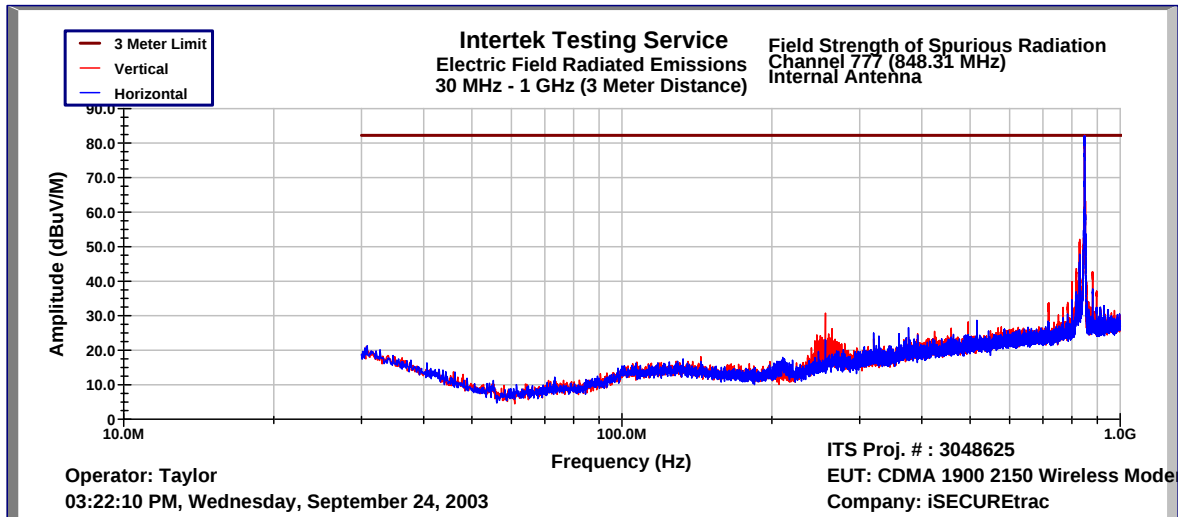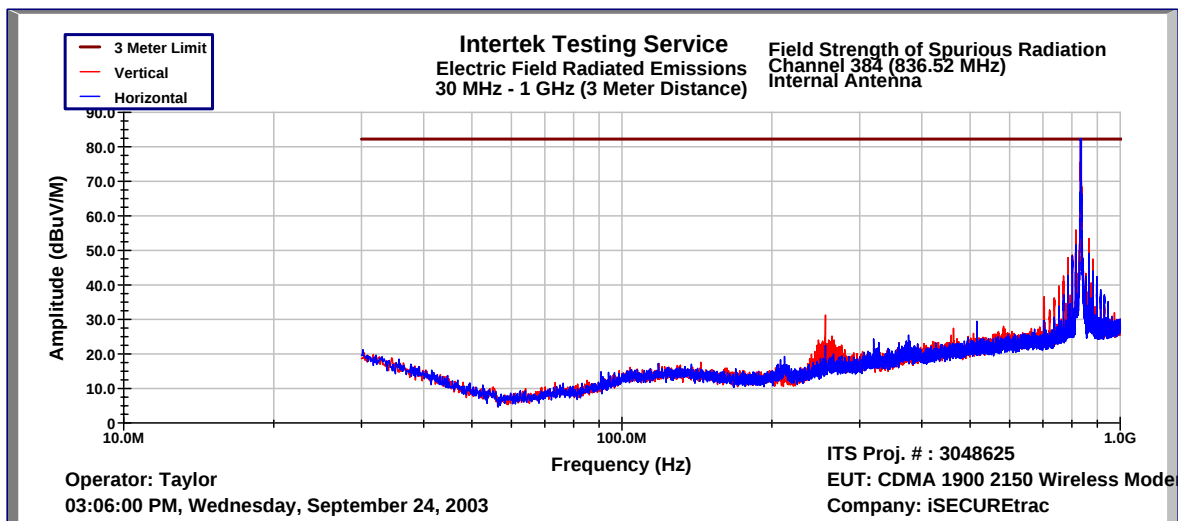

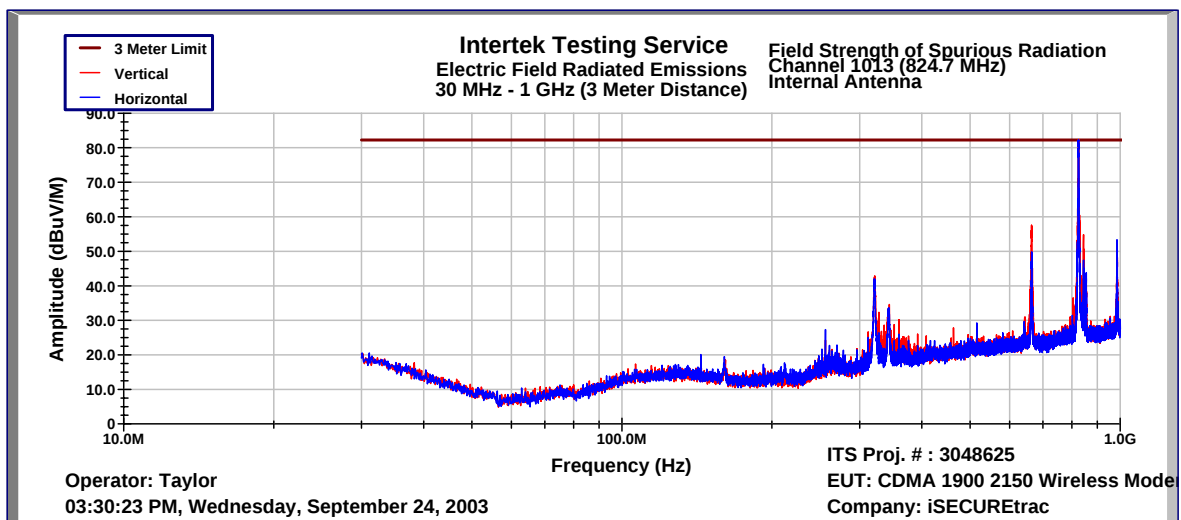
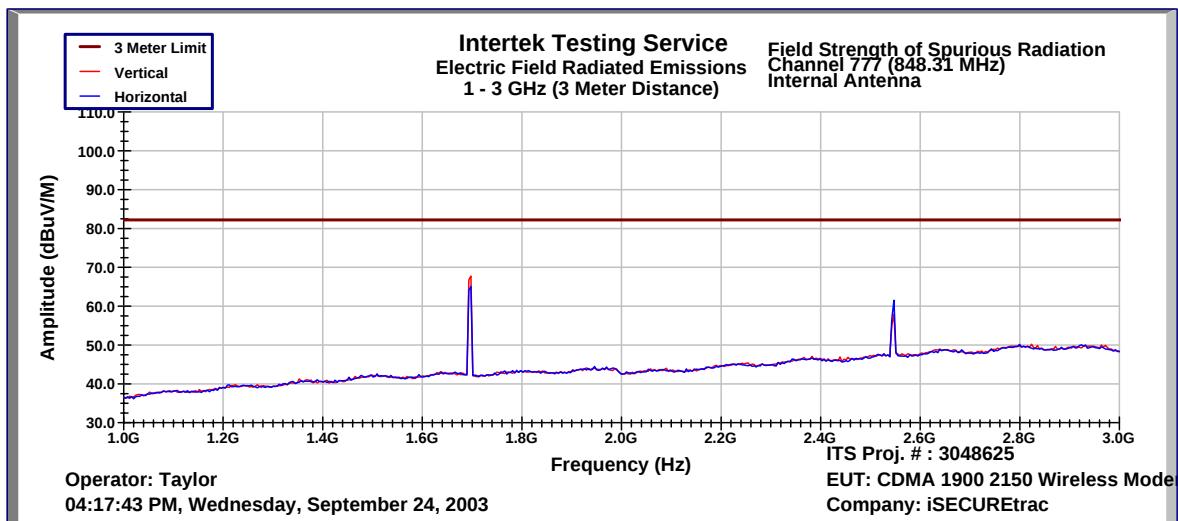
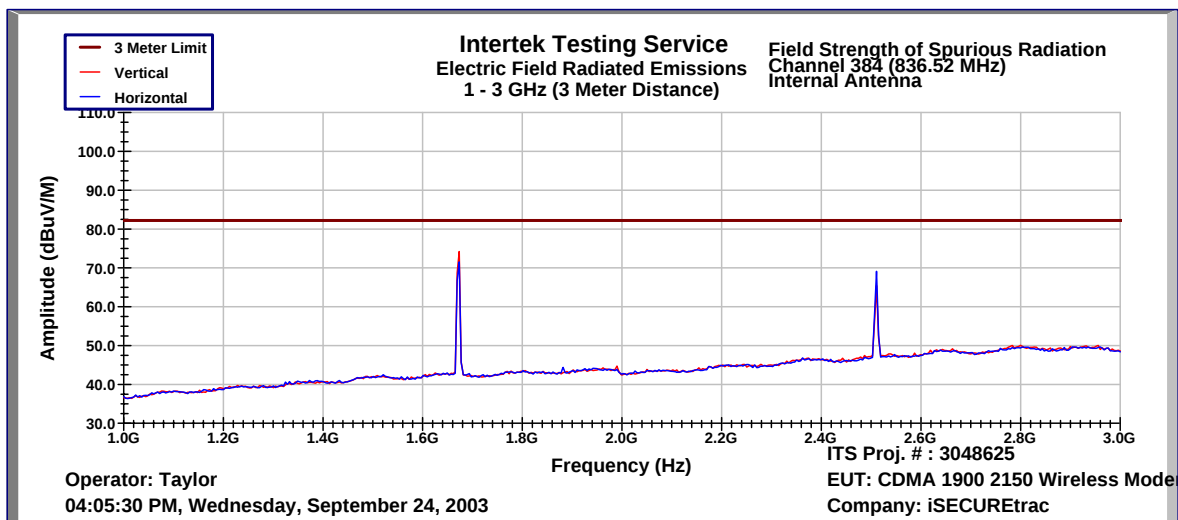


Figure 8-2: Field Strength of Spurious Radiation (1 GHz – 3 GHz), CDMA 800 Channel 384,777, 1013 (Internal Antenna)



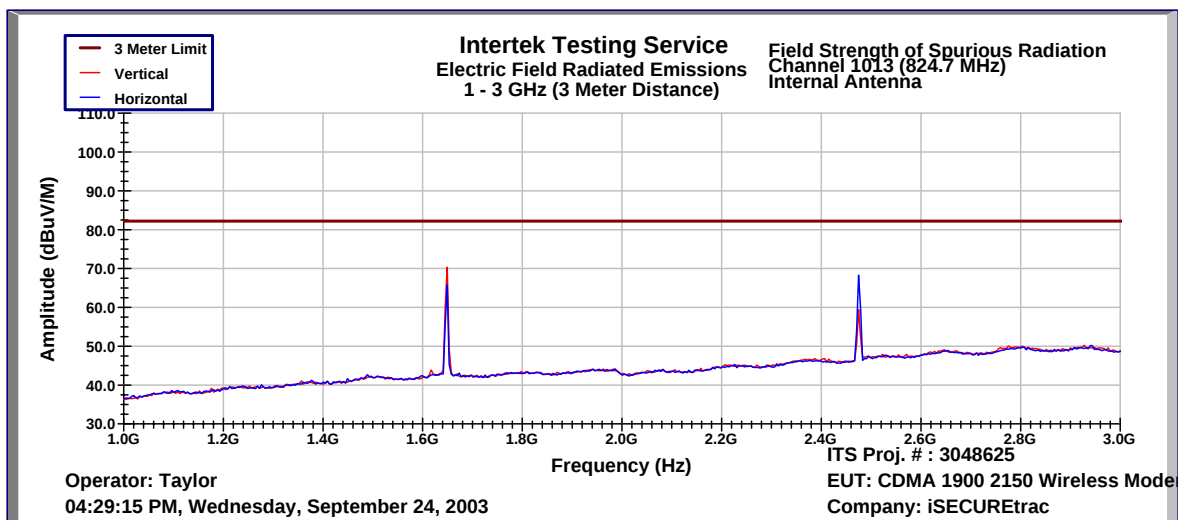
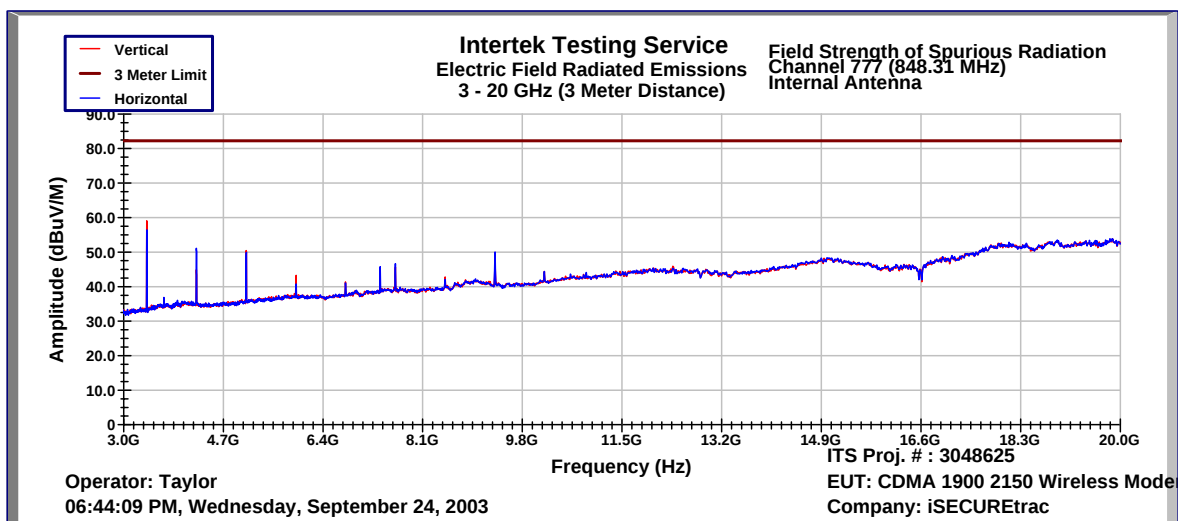
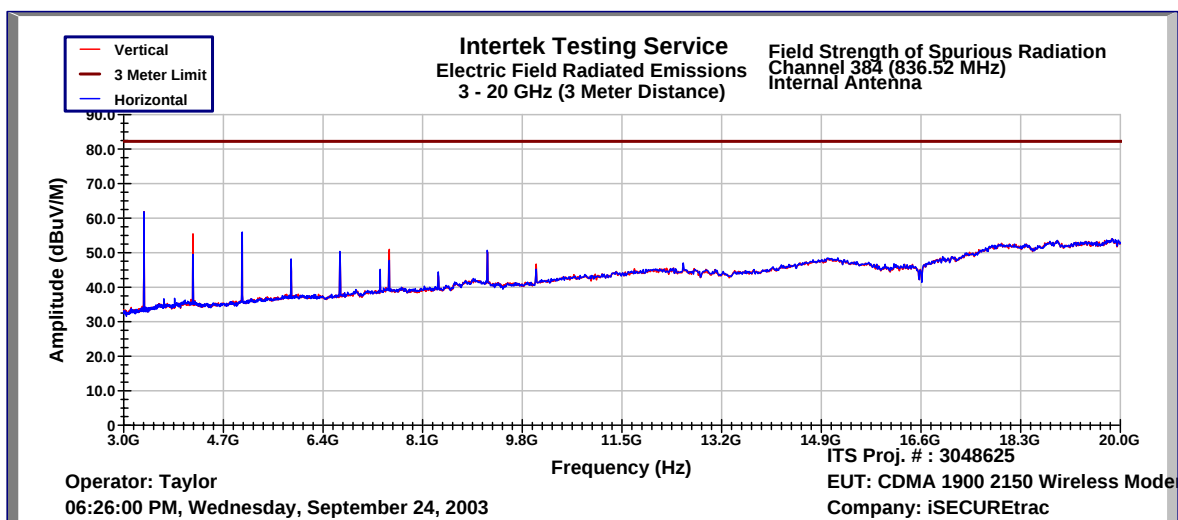


Figure 8-3: Field Strength of Spurious Radiation (3GHz – 20GHz), CDMA 800 Channel 384, 777, and 1013 (Internal Antenna)



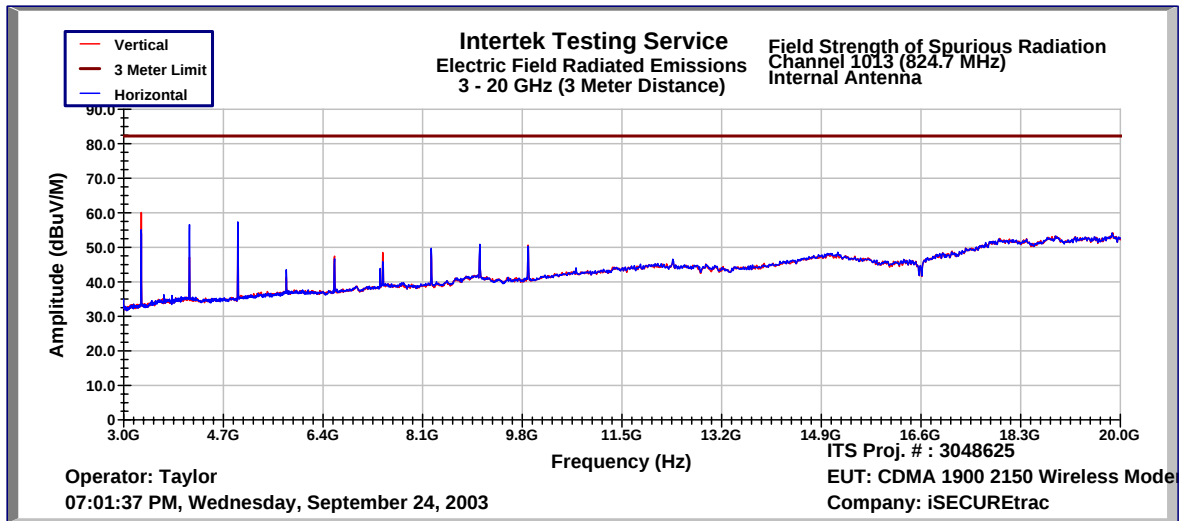
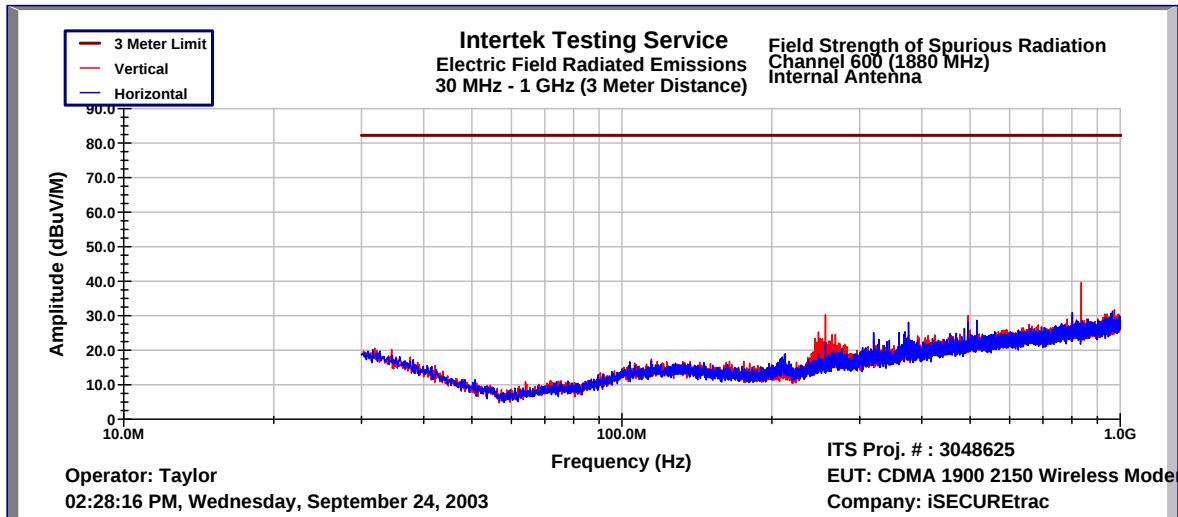
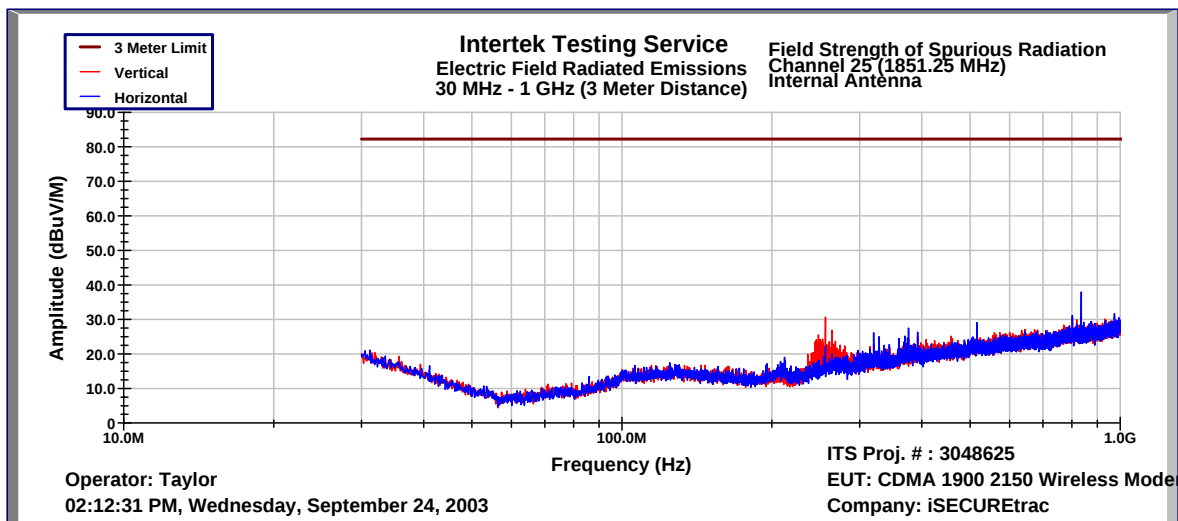


Figure 8-4: Field Strength of Spurious Radiation (30 MHz – 1 GHz), CDMA 1900 Channel 25, 600, and 1175 (Internal Antenna)



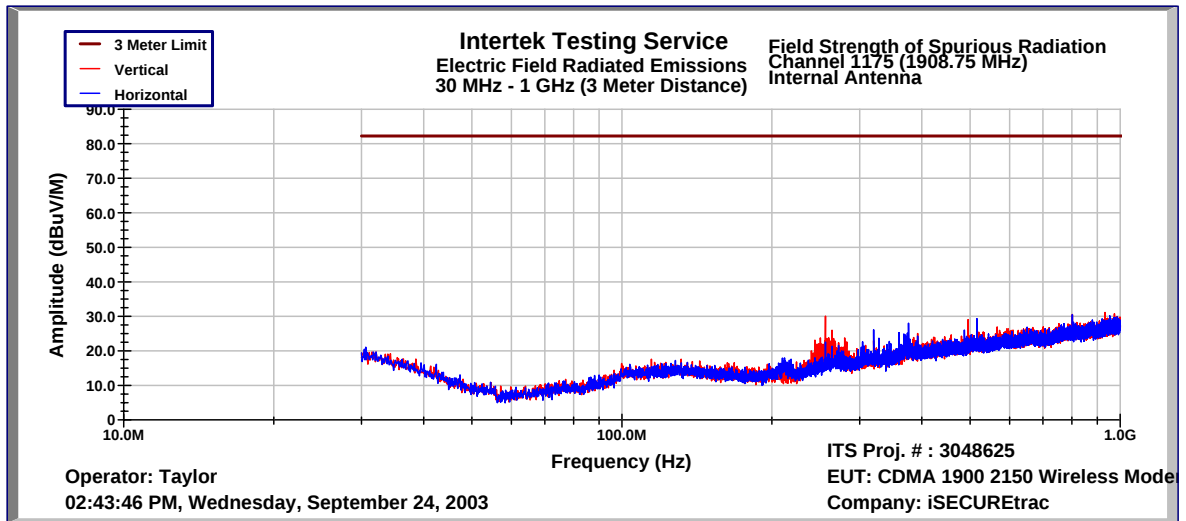
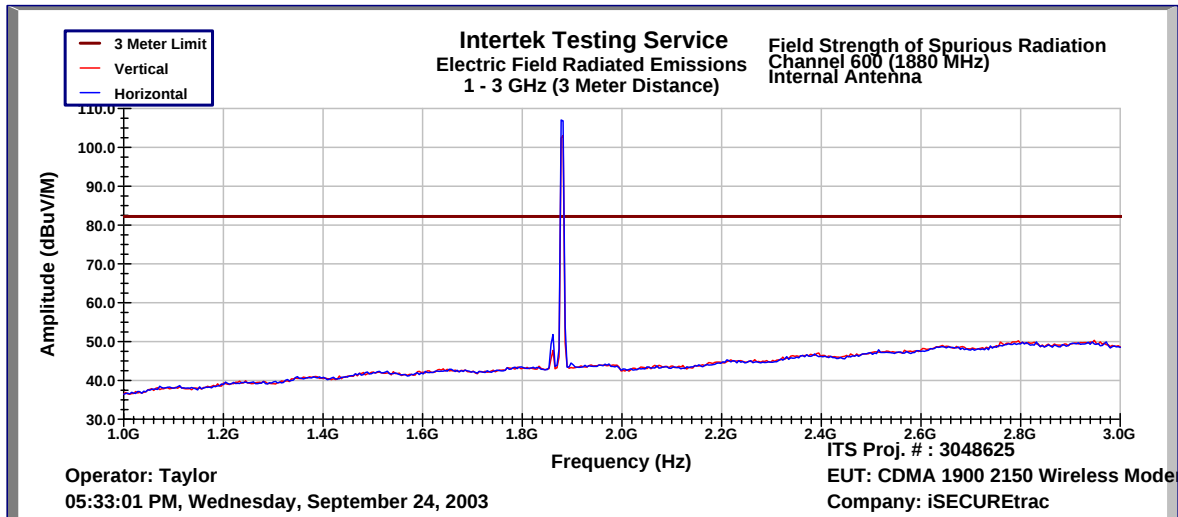
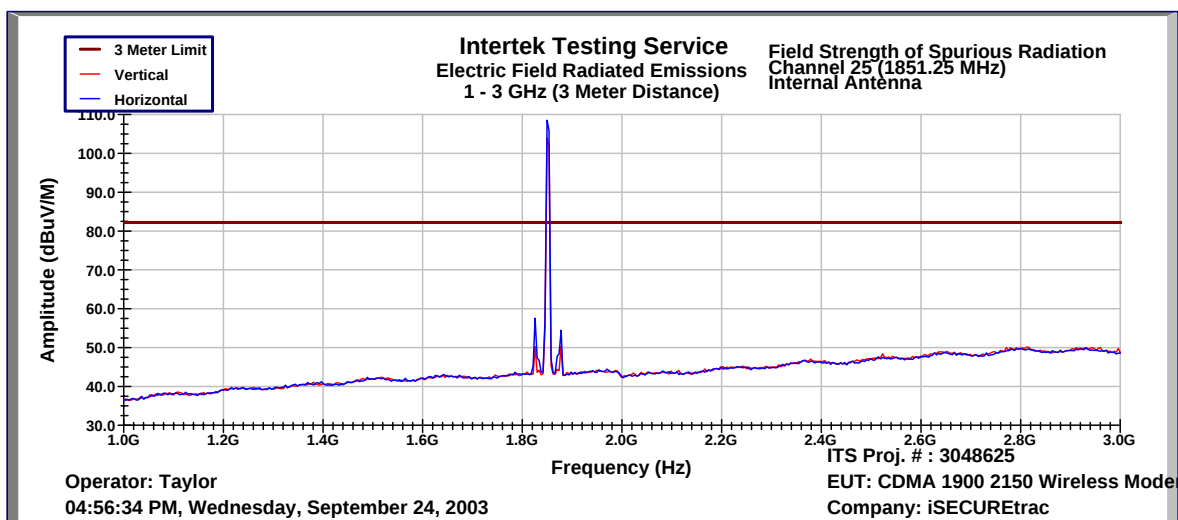


Figure 8-5: Field Strength of Spurious Radiation (1 GHz – 3 GHz), CDMA 1900 Channel 25, 600, and 1175 (Internal Antenna)






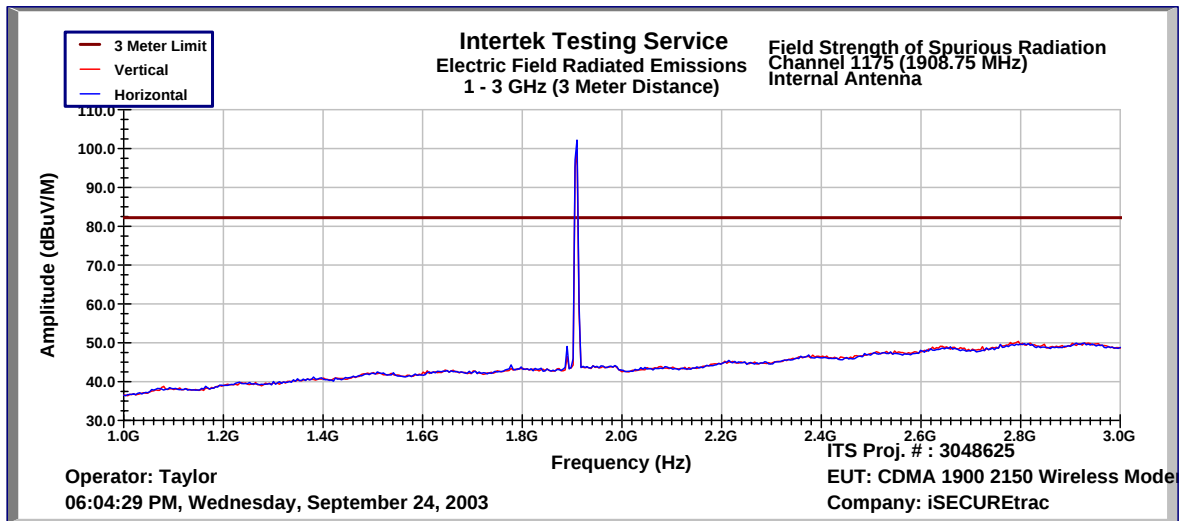


Figure 8-6: Field Strength of Spurious Radiation (3GHz – 20GHz), CDMA 1900 Channel 25, 600, and 1175 (Internal Antenna)

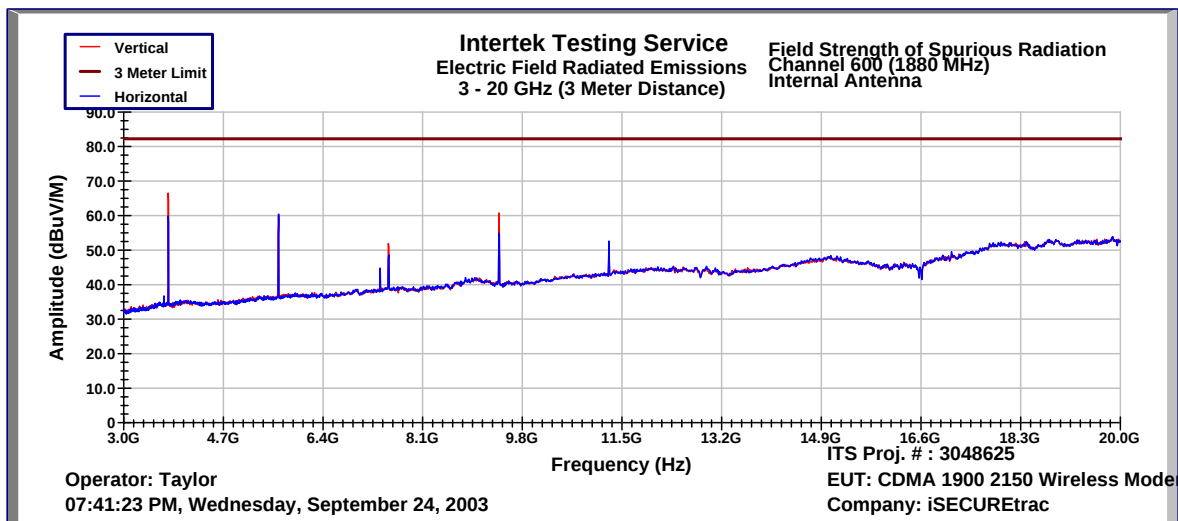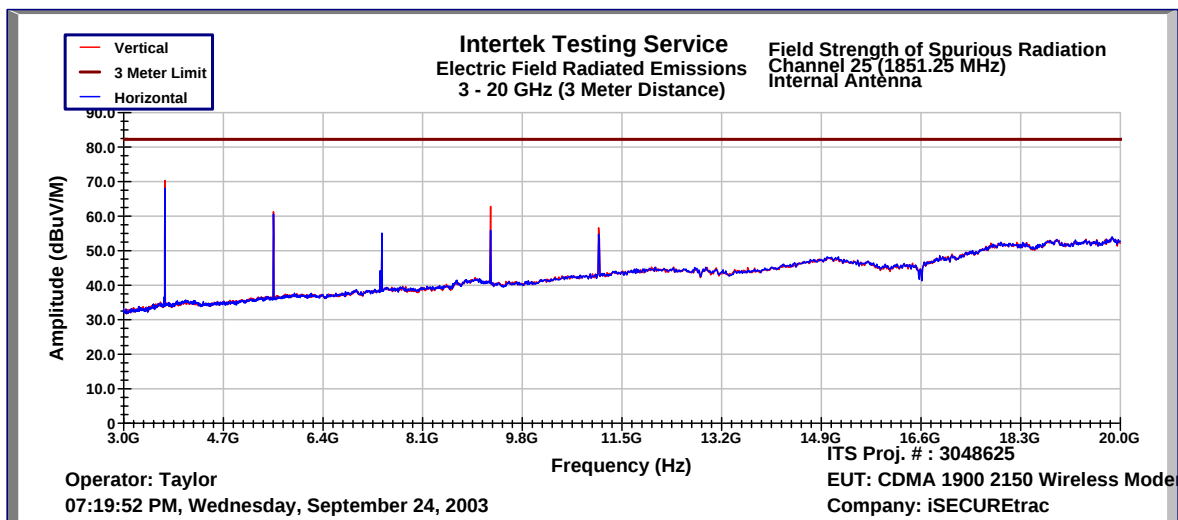

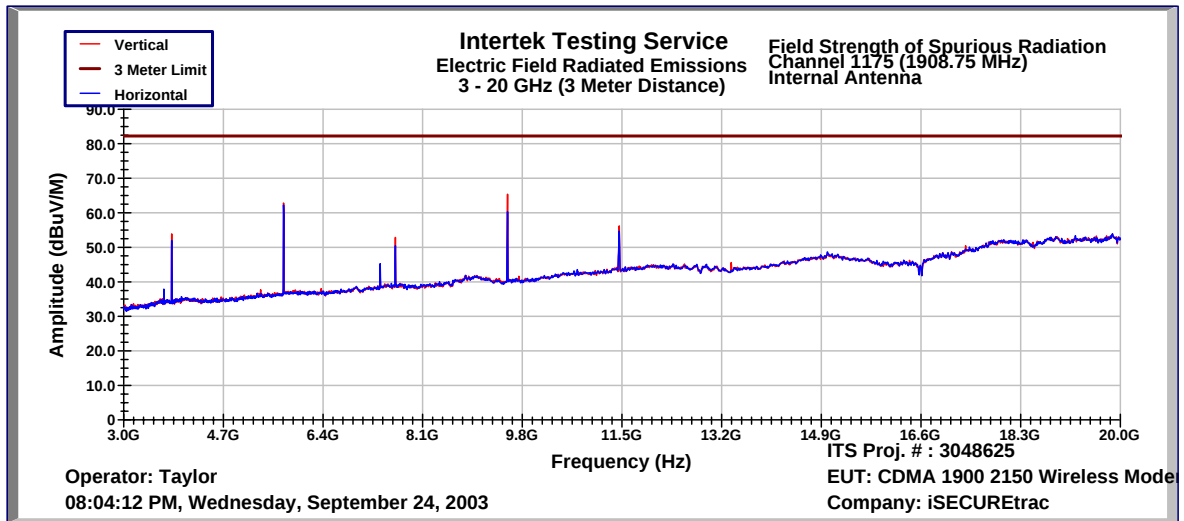

9 POWER LINE CONDUCTED EMISSIONS

FCC §15.107, FCC §15.207

9.1 Test Procedure

Measurements are carried out using quasi-peak and average detector receivers in accordance with CISPR 16. An AMN is required to provide a defined impedance at high frequencies across the power feed at the point of measurement of terminal voltage and also to provide isolation of the circuit under test from the ambient noise on the power lines. An AMN as defined in CISPR 16 shall be used.

The EUT is located so that the distance between the boundary of the EUT and the closest surface of the AMN is 0.8m.

Where a flexible mains cord is provided by the manufacturer, this shall be 1m long or if in excess of 1m, the excess cable is folded back and forth as far as possible so as to form a bundle not exceeding 0.4m in length.

The EUT is arranged and connected with cables terminated in accordance with the product specification.

Conducted disturbance is measured between the phase lead and the reference ground, and between the neutral lead and the reference ground. Both measured values are reported.

The EUT, where intended for tabletop use, is placed on a table whose top is 0.8m above the ground plane. A vertical, metal reference plane is placed 0.4m from the EUT. The vertical metal reference-plane is at least 2m by 2m. The EUT shall be kept at least 0.8m from any other metal surface or other ground plane not being part of the EUT. The table is constructed of non-conductive materials. Its dimensions are 1m by 1.5m, but may be extended for larger EUT.

Floor standing EUTs are placed on a horizontal metal ground plane and isolated from the ground plane by 3 to 12 mm of insulating material. The metal ground plane extends at least 0.5m beyond the boundaries of the EUT and has minimum dimensions of 2m by 2m.

Equipment setup for conducted disturbance tests followed the guidelines of ANSI C63.4: 1992.

9.2 Test Equipment

Description	Manufacturer	Model Number	Serial Number	Calibration due date
Base Station Simulator	Rohde & Schwarz	CMU-200	1100.0008.02	8/2004
EMI Receiver	Rohde & Schwarz	ESI 26	1088.7490	11/27/2003
LISN	FCC	FCC-LISN-50-50-2M	1026	12/2003

9.3 Test Results

The 2100NC personal tracking system

met the power line conducted emission requirements of FCC §15.107 and §15.207. The test results are located in Figure 9-1 through Figure 9-2. The graphical data, measured with peak detection, was all below the class B quasi-peak and average limits.

Figure 9-1: FCC §15.107 and §15.207 power line conducted emissions (Line 1 on the Charging Unit with 2100NC personal tracking system Charging)


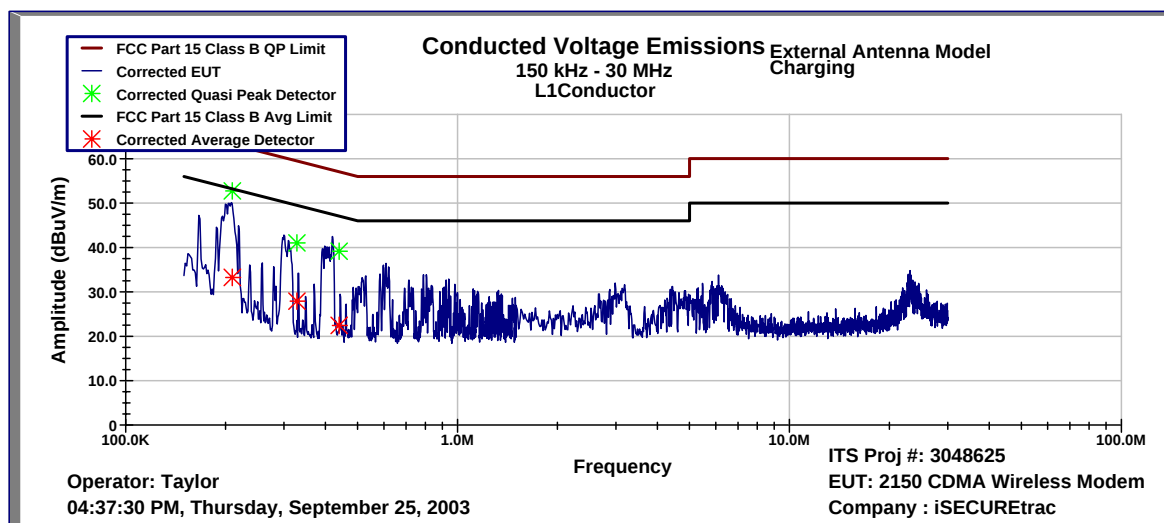


Figure 9-2: FCC §15.107 and §15.207 power line conducted emissions (Line 2 on the Charging Unit with 2100NC personal tracking system

Charging)

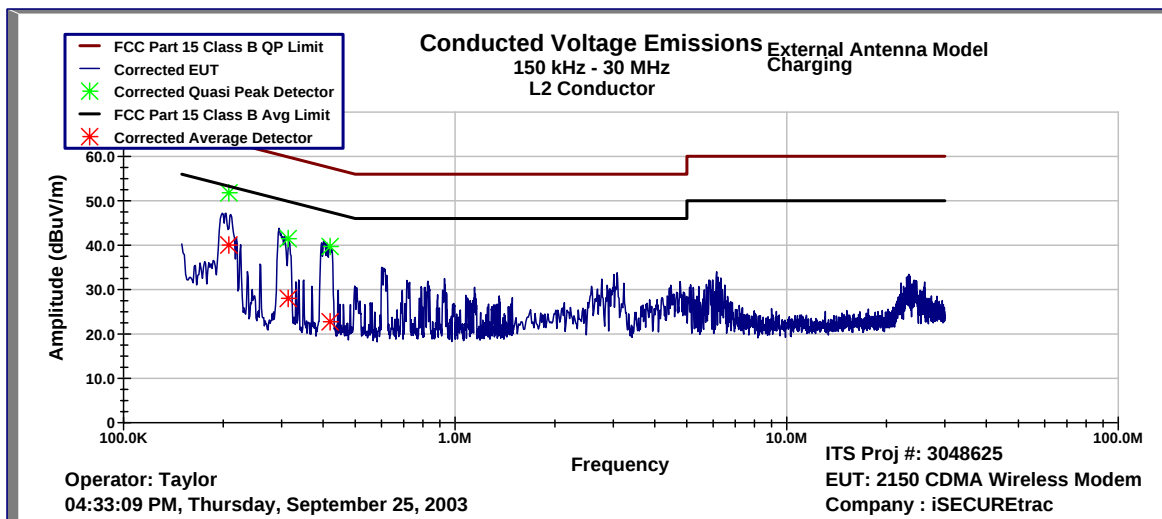

10 RECEIVER SPURIOUS EMISSIONS

10.1 Test Limits

Table 10-1 Radiated Emission Limit for FCC §15.109

Radiated Emission Limits at 3 meters	
Frequency (MHz)	Quasi-Peak limits, dB (μV/m)
30 to 88	40.0
88 to 216	43.5
216 to 960	46.0
960 and up	54.0

10.2 Test Equipment

Description	Manufacturer	Model Number	Serial Number	Calibration due date
Horn Antenna	Antenna Research	DRG-118/A	1086	3/7/2007
Horn Antenna	EMCO	3115	6556	7/11/2004
EMI Receiver	Rohde & Schwarz	ESI 26	1088.7490	11/27/2003
Bilog Antenna	EMCO	3142B	1674	8/2004
Preamplifier	HP	8449B	3008A00775	12/2003

10.3 Test Procedure

Measurements are made over the frequency range of 30 MHz to five times the highest frequency operating within the device. The measuring receiver meets the requirements of Section One of CISPR 16 and the measuring antenna correlates to a balanced dipole. From 30 to 1000 MHz, a quasi-peak detector was used for measurement. Above 1000 MHz, average measurements were performed.

Measurements of the radiated field are made with the antenna located at a distance of 3 meters from the EUT. If the field-strength measurements at 3m cannot be made because of high ambient noise level or for other reasons, measurements may be made at a closer distance, for example 1m. An inverse proportionality factor of 20 dB per decade should be used to normalize the measured data to the specified distance for determining compliance.

The antenna is adjusted between 1m and 4m in height above the ground plane for maximum meter reading at each test frequency.

The antenna-to-EUT azimuth is varied during the measurement to find the maximum field-strength readings.

The antenna-to-EUT polarization (horizontal and vertical) is varied during the measurements to find the maximum field-strength readings.

The EUT, where intended for tabletop use, is placed on a table whose top is 0.8m above the ground plane. The table is constructed of non-conductive materials. Its dimensions are 1m by 1.5m, but may be extended for larger EUT.

Equipment setup for radiated disturbance tests followed the guidelines of ANSI C63.4: 1992.

10.4 Test Results

The 2100NC personal tracking system

met the radiated disturbance requirements of FCC §15.109. The maximized quasi peak data can be found in Figure 10-5. There were no other emissions detected within 10 dB of the limit.

Figure 10-1 FCC §15.109Worse Case Receiver Spurious Emission (Horizontal – Internal Antenna, Battery Powered)


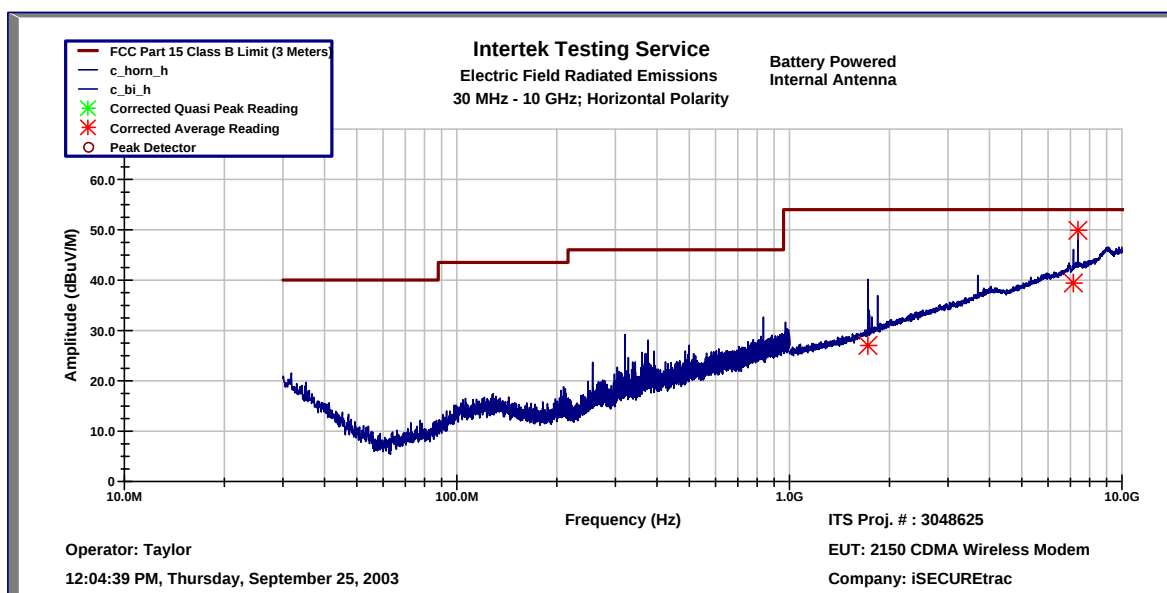


Figure 10-2 FCC §15.109Worse Case Receiver Spurious Emission (Vertical – Internal Antenna, Battery Powered)

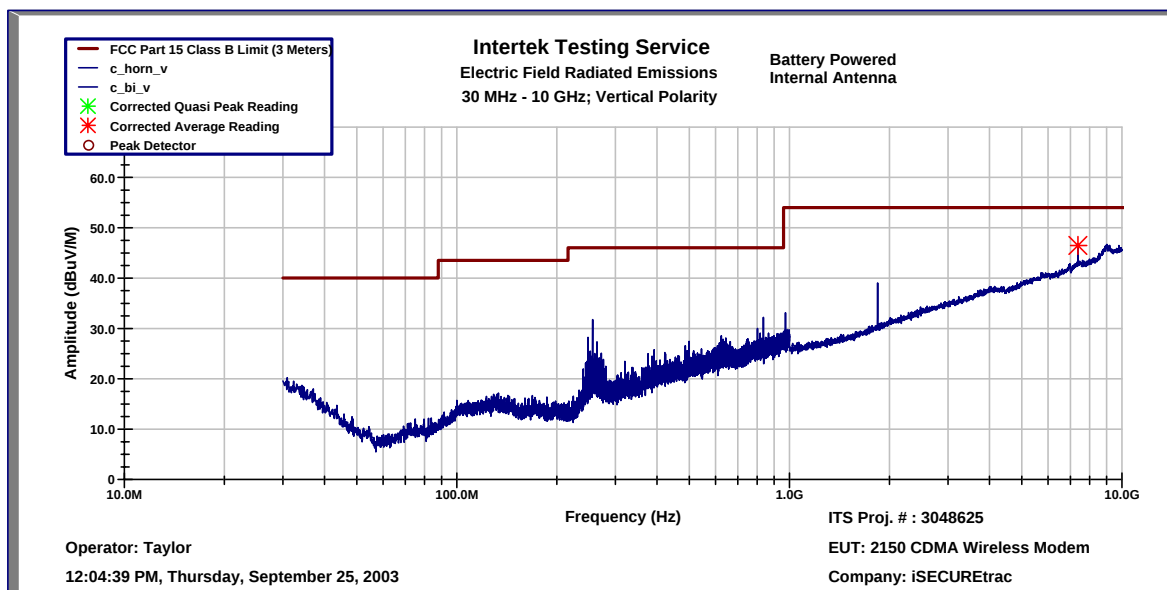

Evaluation For: ISECUREtrac Corp.
Model No: 2250

FCC ID: OAM2250

Figure 10-3 FCC §15.109Worse Case Receiver Spurious Emission (Horizontal – Internal Antenna, Charging)

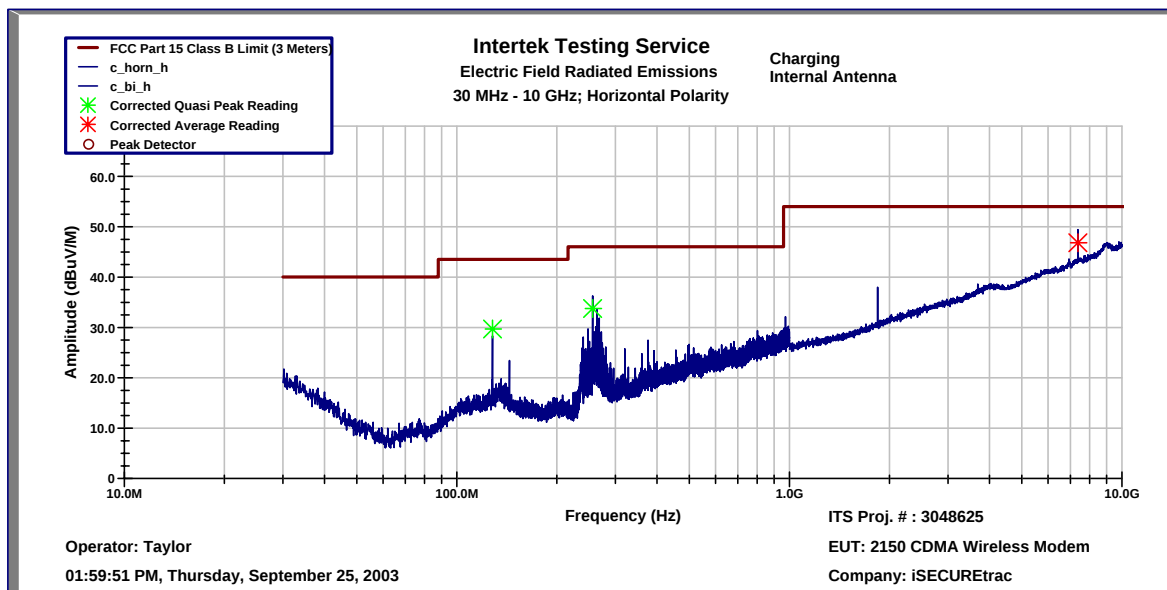


Figure 10-4 FCC §15.109Worse Case Receiver Spurious Emission (Vertical – Internal Antenna, Charging)

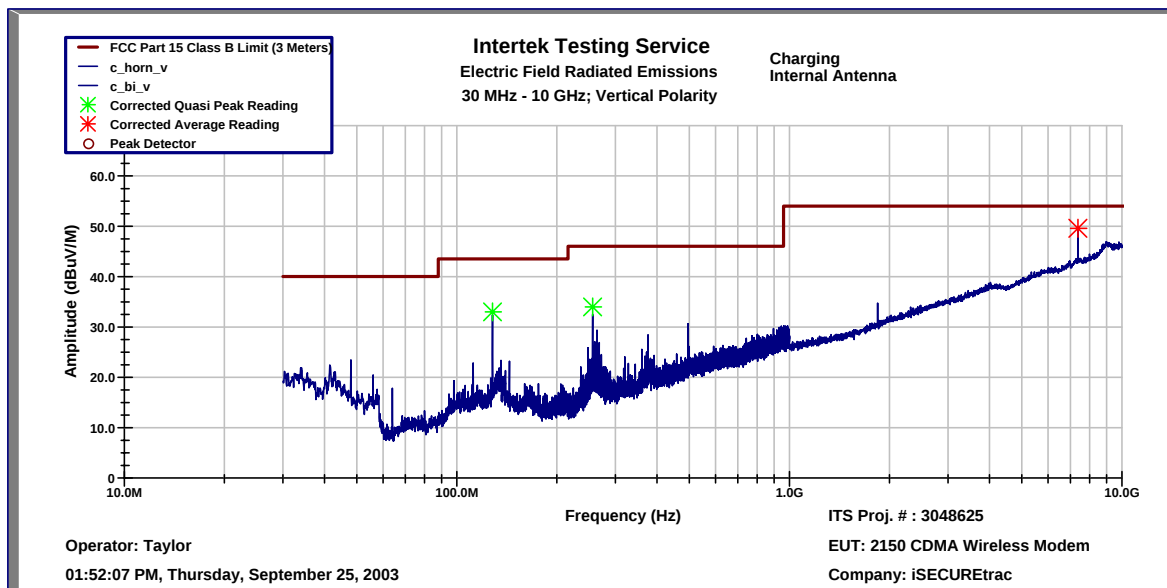


Figure 10-5 FCC §15.109 Maximized Quasi Peak and Average Emissions (Sorted by Delta)

Frequency	Polarity (H/V)	Cab. (dB)	Ant. (dB)	Corr. Reading. (dBuV/m)	Limit (dBuV/m)	Delta (dB)	Azimuth (deg)	Tower (cm)	Results	Test Configuration
7.3734 GHz	H	-21.79	37.9	49.88	53.98	-4.1	211	114	Compliant	Internal Antenna Battery Power
7.3736 GHz	V	-21.79	37.9	49.59	53.98	-4.39	29	99	Compliant	Internal Antenna Charging
7.3735 GHz	H	-21.79	37.9	46.82	53.98	-7.16	155	111	Compliant	Internal Antenna Charging
7.3734 GHz	V	-21.79	37.9	46.46	53.98	-7.52	288	161	Compliant	Internal Antenna Battery Power
127.99 MHz	V	0.9	12.8	32.99	43.52	-10.5	162	100	Compliant	Internal Antenna Charging
256.0 MHz	V	1.27	13.5	33.97	46.02	-12.1	128	172	Compliant	Internal Antenna Charging
256.0 MHz	H	1.27	13.5	33.75	46.02	-12.3	207	123	Compliant	Internal Antenna Charging
128.01 MHz	H	0.9	12.8	29.68	43.52	-13.8	64	245	Compliant	Internal Antenna Charging
7.1476 GHz	H	-22.29	37.5	39.42	53.98	-14.6	286	111	Compliant	Internal Antenna Battery Power
1.723 GHz	H	-29.89	27.8	27.02	53.98	-27	347	256	Compliant	Internal Antenna Battery Power

11 FREQUENCY STABILITY VS TEMPERATURE

FCC §2.1055, FCC §22.355, FCC §24.235

Frequency tolerance: 2.5ppm

11.1 Test Procedure

The equipment under test was connected to an external DC power supply and the RF output was connected to a CMU-200 Base Station Simulator. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for that purpose. After the temperature stabilized for approximately 30 minutes, the frequency error was read from the CMU-200.

11.2 Test Equipment

Description	Manufacturer	Model Number	Serial Number	Calibration due date
Base Station Simulator	Rohde & Schwarz	CMU-200	1100.0008.02	8/2004
Environmental Chamber	Thermotron	SM-8C	32692	12/2003

11.3 Test Results

The 2100NC personal tracking system

met the frequency stability requirements of FCC §2.1055, FCC §22.355 and FCC §24.235. The test results are located in Table 11-1.

Table 11-1: Frequency stability vs. Temperature

Frequency Stability (Hz) vs. Temp.						
	PCS Band			Cell Band		
Temp (C)	25	600	1175	384	777	1013
60	1	3	12	8	5	2
50	1	-3	-2	3	-2	2
40	-8	-8	-11	-1	-5	-2
30	-13	-14	-12	-2	-3	-3
20	5	4	3	1	1	7
10	-3	1	-4	0	0	3
0	-5	-7	-10	0	1	2
-10	-11	-6	-4	6	-2	-2
-20	-3	-4	-4	3	3	5
-30	3	1	2	6	6	5

12 FREQUENCY STABILITY VS VOLTAGE

FCC §2.1055, FCC §22.355

Frequency tolerance: 2.5ppm

12.1 Test Procedure

An external DC power supply was connected to the battery terminals of the equipment under test. The voltage was set to 115% of the nominal value and was then decreased to 85% of the nominal value. The output frequency was recorded for each battery voltage.

12.2 Test Equipment

Description	Manufacturer	Model Number	Serial Number	Calibration due date
DC Power Supply	HP	6226	6M1203	5/20/2004
Temperature Chamber	Thermotron	SM-8C	32692	12/2003
Base Station Simulator	Rohde & Schwarz	CMU-200	1100.0008.02	8/2004

12.3 Test Results

The 2100NC personal tracking system

met the frequency stability requirements of FCC §2.1055 and FCC §22.355. The test results are located in Table 12-1.

Table 12-1: CDMA 1900 Frequency stability vs. input voltage

Frequency Stability (Hz) vs. Voltage						
	PCS Band			Cell Band		
Vdc	25	600	1175	384	777	1013
135.25	3	8	7	-4	-5	4
120	5	6	-6	6	3	-2
97.75	-2	-4	-10	8	-6	7