

EMC TEST REPORT



Report No.: 16020930-FCC-E

Supersede Report No.: N/A

Applicant	Ringway Tech(Jiangsu) Co.,Ltd.	
Product Name	DIGITAL PIANO	
Main Model No.	AG-50	
Serial Model	AG-30	
Test Standard	FCC Part 15 Subpart B Class B:2014, ANSI C63.4: 2014	
Test Date	July 22 to July 25, 2016	
Issue Date	July 29 , 2016	
Test Result	☒ Pass ☐ Fail	
Equipment complied with the specification	☒	
Equipment did not comply with the specification	☐	
<i>Amos. Xia</i>	<i>Miro Bao</i>	
Amos Xia Test Engineer	Miro Bao Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (Nanjing-China) Laboratories

2-1 Longcang Avenue Yuhua Economic and
Technology Development Park, Nanjing, China

Tel:+86(25)86730128/86730129 Fax:+86(25)86730127 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report No.	16020930-FCC-E
Page	3 of 38

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY.....	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	7
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	8
6.1 AC POWER LINE CONDUCTED EMISSIONS.....	8
6.2 RADIATED EMISSIONS.....	14
ANNEX A. TEST INSTRUMENT.....	18
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS	19
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	34
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST.....	37
ANNEX E. DECLARATION OF SIMILARITY	38

Test Report No.	16020930-FCC-E
Page	5 of 38

1. Report Revision History

Report No.	Report Version	Description	Issue Date
16020930-FCC-E	NONE	Original	July 29 , 2016

2. Customer information

Applicant Name	Ringway Tech(Jiangsu) Co.,Ltd.
Applicant Add	No. 101 West Hanjiang Road, Changzhou,Jiangsu, China
Manufacturer	Ringway Tech(Jiangsu) Co.,Ltd.
Manufacturer Add	No. 101 West Hanjiang Road, Changzhou,Jiangsu, China

3. Test site information

Lab performing tests	SIEMIC (Nanjing-China) Laboratories
Lab Add	2-1 Longcang Avenue Yuhua Economic and Technology Development Park, Nanjing, China
FCC Test Site No.	986914
IC Test Site No.	4842B-1
Test Software	Labview of SIEMIC version 1.0

4. Equipment under Test (EUT) Information

Description of EUT: DIGITAL PIANO

Main Model: AG-50

Serial Model: AG-30

Date EUT received: July 18, 2016

Test Date(s): July 22 to July 25, 2016

Port: USB to Host Port, Headphones 1/2 Port, Bluetooth Port, Aux in Port, Line out Port, PEDAL Port, Power Port, MIDI Out Port

Power: AC 110/220V ~50/60Hz

Trade Name : Artesia

FCC ID: OCDAG-50

Note: the difference between the two models please refer to **Annex E. DECLARATION OF SIMILARITY** in this report.

5. Test Summary

The product was tested in accordance with the following specifications.
All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.107; ANSI C63.4: 2014	AC Power Line Conducted Emissions	Compliance
§15.109; ANSI C63.4: 2014	Radiated Emissions	Compliance

Measurement Uncertainty


Emissions		
Test Item	Description	Uncertainty
Radiated Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	3.952dB

6. Measurements, Examination And Derived Results

6.1 AC Power Line Conducted Emissions

Temperature	24°C
Relative Humidity	50%
Atmospheric Pressure	1013mbar
Test date :	July 25, 2016
Tested By :	Amos Xia

Requirement(s):

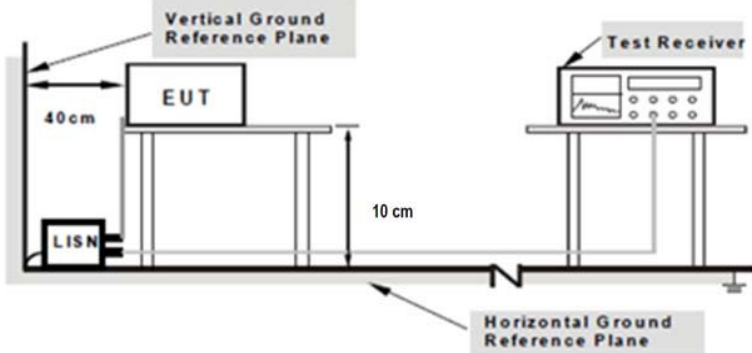Spec	Requirement	Applicable																									
47CFR §15.107	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [μ]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges. Class B digital devices <table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th><th colspan="2">Limit (dBμV)</th></tr> <tr> <th>QP</th><th>Average</th></tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td><td>66 to 56</td><td>56 to 46</td></tr> <tr> <td>0.5 ~ 5</td><td>56</td><td>46</td></tr> <tr> <td>5 ~ 30</td><td>60</td><td>50</td></tr> </tbody> </table> Class A digital devices <table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th><th colspan="2">Limit (dBμV)</th></tr> <tr> <th>QP</th><th>Average</th></tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td><td>79</td><td>66</td></tr> <tr> <td>0.5 ~ 30</td><td>73</td><td>60</td></tr> </tbody> </table>	Frequency ranges (MHz)	Limit (dBμV)		QP	Average	0.15 ~ 0.5	66 to 56	56 to 46	0.5 ~ 5	56	46	5 ~ 30	60	50	Frequency ranges (MHz)	Limit (dBμV)		QP	Average	0.15 ~ 0.5	79	66	0.5 ~ 30	73	60	☒
Frequency ranges (MHz)	Limit (dBμV)																										
	QP	Average																									
0.15 ~ 0.5	66 to 56	56 to 46																									
0.5 ~ 5	56	46																									
5 ~ 30	60	50																									
Frequency ranges (MHz)	Limit (dBμV)																										
	QP	Average																									
0.15 ~ 0.5	79	66																									
0.5 ~ 30	73	60																									
Test Setup	 Note: 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.																										
Procedure	- The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.1m high, non-metallic table. - The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. - The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. - All other supporting equipment were powered separately from another main supply. - The EUT was switched on and allowed to warm up to its normal operating condition. - A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. - High peaks, relative to the limit line, were then selected, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10kHz. - Steps 6-7 were repeated for the LIVE line (for AC mains) or DC line (for DC power).																										
Remark																											

Test Report No.	16020930-FCC-E
Page	9 of 38

Result	☒ Pass	☐ Fail
Test Data	☒ Yes	☐ N/A
Test Plot	☒ Yes	☐ N/A

Data sample

Frequency (MHz)	Quasi-Peak (dBμV)	Limit (dBμV)	Margin (dB)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Factors (dB)
xxx	56.21	66.00	-9.79	39.20	56.00	-16.80	12.22

Frequency (MHz) = Emission frequency in MHz

Quasi-Peak/Average (dBμV)=Receiver Reading(dBμV)+ Factor(dB)


Limit(dBμV)=Limit stated in standard

Factor (dB)= cable loss+ Insertion loss of LISN+ Insertion loss of transient limiter (The transient limiter included 10dB attenuation)

Calculation Formula:

Margin (dB)=Quasi Peak / Average (dBμV) – limit (dBμV)

Test Mode : Normal Working Mode

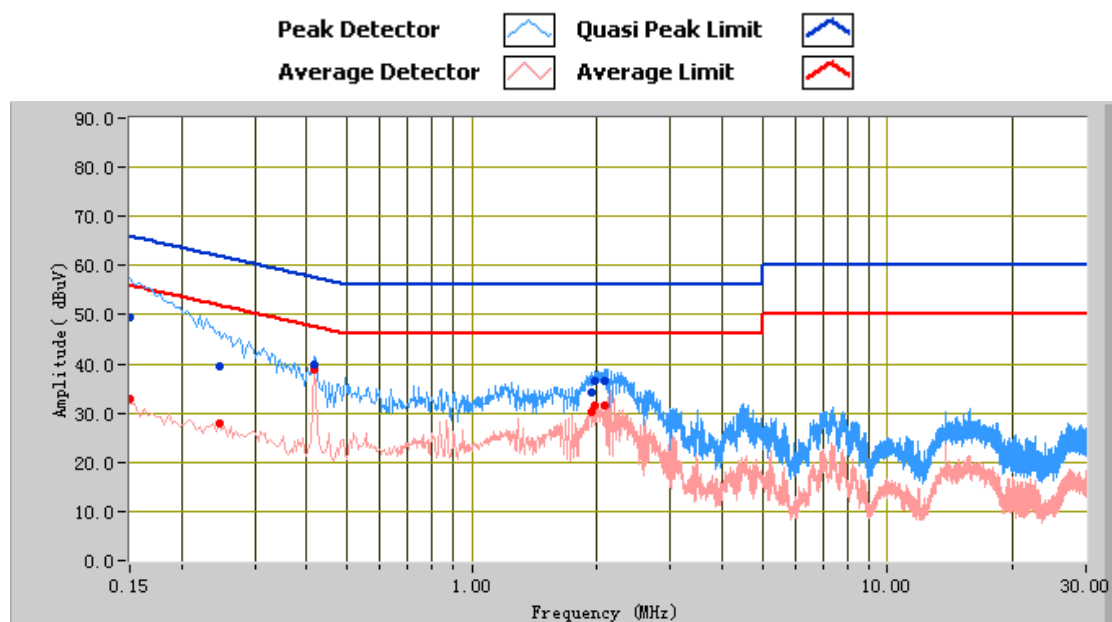


Test Data

Phase Line Plot at 120Vac, 60Hz

Frequency (MHz)	Quasi Peak (dBμV)	Limit (dBμV)	Margin (dB)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Factors (dB)
0.15	49.49	66.00	-16.51	32.90	56.00	-23.10	12.22
0.25	39.41	61.89	-22.48	27.76	51.89	-24.13	11.46
0.42	39.97	57.49	-17.52	38.89	47.49	-8.60	11.21
2.09	36.61	56.00	-19.39	31.43	46.00	-14.57	10.88
1.97	36.40	56.00	-19.60	31.41	46.00	-14.59	10.87
1.95	34.09	56.00	-21.91	30.16	46.00	-15.84	10.87

Test Mode : Normal Working Mode

Peak Detector Quasi Peak Limit
Average Detector Average Limit

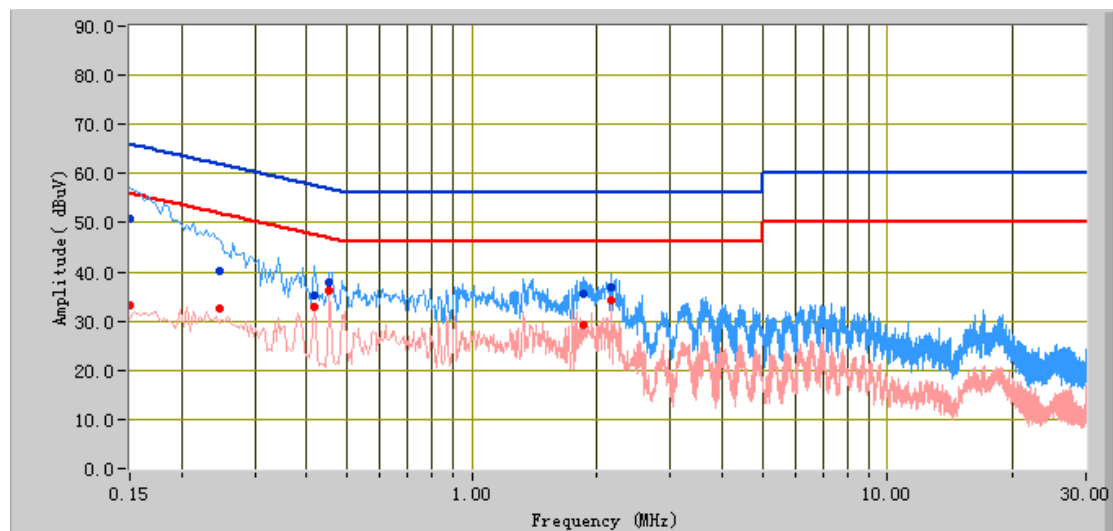


Test Data

Phase Neutral Plot at 120Vac, 60Hz

Frequency (MHz)	Quasi Peak (dBμV)	Limit (dBμV)	Margin (dB)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Factors (dB)
0.15	50.94	66.00	-15.06	33.11	56.00	-22.89	12.21
0.25	40.29	61.89	-21.60	32.54	51.89	-19.35	11.46
0.42	35.22	57.49	-22.26	33.02	47.49	-14.47	11.19
2.16	36.94	56.00	-19.06	34.22	46.00	-11.78	10.92
0.45	37.80	56.80	-19.00	36.22	46.80	-10.58	11.13
1.85	35.66	56.00	-20.34	29.23	46.00	-16.77	10.89

Test Mode : Normal Working Mode

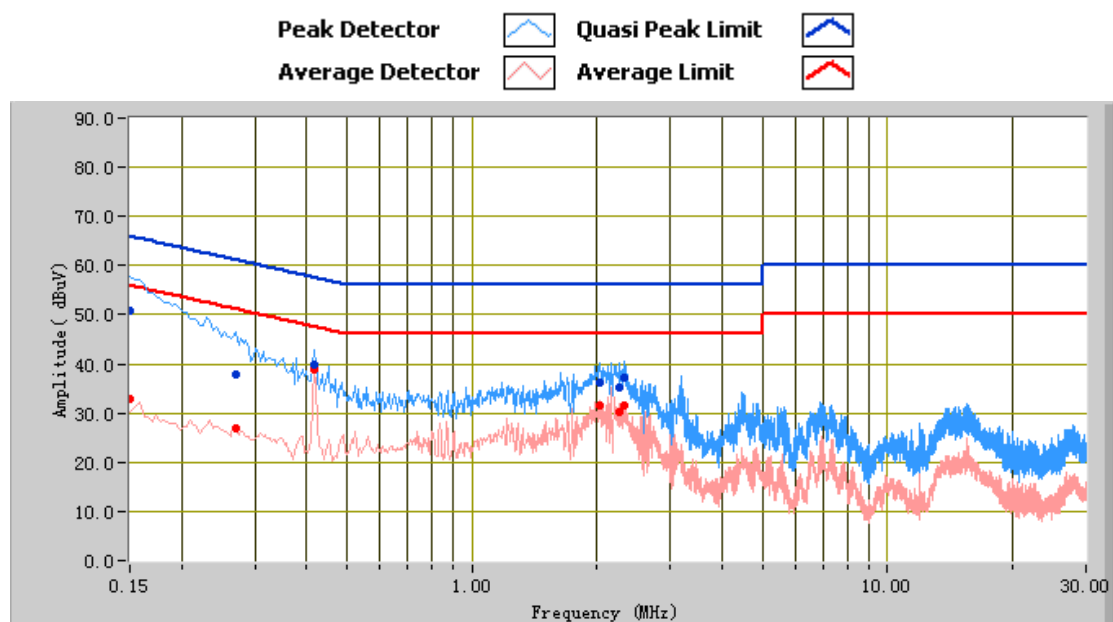


Test Data

Phase Line Plot at 240Vac, 60Hz

Frequency (MHz)	Quasi Peak (dBμV)	Limit (dBμV)	Margin (dB)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Factors (dB)
0.15	50.75	66.00	-15.25	32.83	56.00	-23.17	12.22
0.27	37.97	61.12	-23.15	26.96	51.12	-24.16	11.42
0.42	39.98	57.49	-17.51	38.87	47.49	-8.62	11.21
2.31	37.10	56.00	-18.90	31.47	46.00	-14.53	10.88
2.03	36.32	56.00	-19.68	31.71	46.00	-14.29	10.88
2.26	35.30	56.00	-20.70	30.37	46.00	-15.63	10.88

Test Mode : Normal Working Mode

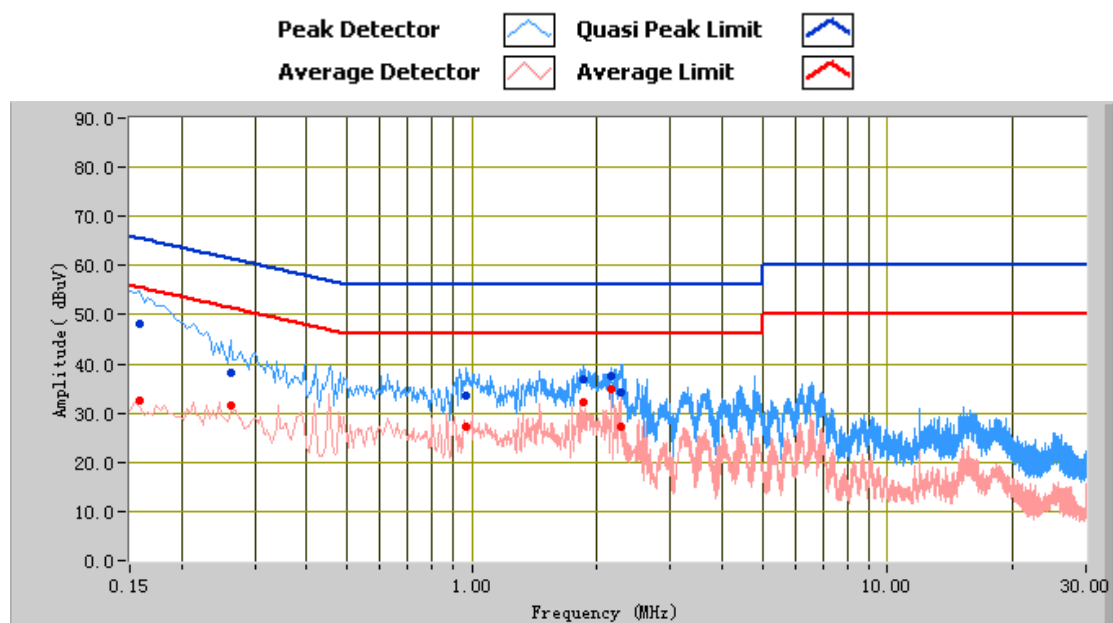

Test Data

Phase Neutral Plot at 240Vac, 60Hz

Frequency (MHz)	Quasi Peak (dBμV)	Limit (dBμV)	Margin (dB)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Factors (dB)
0.16	48.03	65.57	-17.54	32.48	55.57	-23.09	12.10
1.85	36.89	56.00	-19.11	32.15	46.00	-13.85	10.89
2.28	34.09	56.00	-21.91	27.34	46.00	-18.66	10.92
0.26	38.15	61.37	-23.22	31.58	51.37	-19.79	11.44
2.16	37.42	56.00	-18.58	34.71	46.00	-11.29	10.92
0.97	33.42	56.00	-22.58	27.31	46.00	-18.69	10.73

6.2 Radiated Emissions

Temperature	24°C
Relative Humidity	50%
Atmospheric Pressure	1013mbar
Test date :	July 22, 2016
Tested By :	Amos Xia

Requirement(s):

Spec	Requirement	Applicable										
47CFR §15.109	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges											
	Class A digital devices (3m)											
	<table><tr><th>Frequency range (MHz)</th><th>Field Strength (µV/m)</th></tr><tr><td>30 – 88</td><td>100</td></tr><tr><td>88 – 216</td><td>150</td></tr><tr><td>216 – 960</td><td>200</td></tr><tr><td>Above 960</td><td>500</td></tr></table>		Frequency range (MHz)	Field Strength (µV/m)	30 – 88	100	88 – 216	150	216 – 960	200	Above 960	500
	Frequency range (MHz)		Field Strength (µV/m)									
	30 – 88		100									
88 – 216	150											
216 – 960	200											
Above 960	500											
Class A digital devices(10m)												
<table><tr><th>Frequency range (MHz)</th><th>Field Strength (µV/m)</th></tr><tr><td>30 – 88</td><td>90</td></tr><tr><td>88 – 216</td><td>150</td></tr><tr><td>216 – 960</td><td>210</td></tr><tr><td>Above 960</td><td>300</td></tr></table>	Frequency range (MHz)	Field Strength (µV/m)	30 – 88	90	88 – 216	150	216 – 960	210	Above 960	300		
Frequency range (MHz)	Field Strength (µV/m)											
30 – 88	90											
88 – 216	150											
216 – 960	210											
Above 960	300											
Test Setup	EUT & Support Units 80cm Turn Table 3/10m Ant. Tower 1-4m Variable Ground Plane Test Receiver											
Procedure	1. The EUT was switched on and allowed to warm up to its normal operating condition. 2. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. b. The EUT was then rotated to the direction that gave the maximum emission. c. Finally, the antenna height was adjusted to the height that gave the maximum emission. 3. For emission frequencies measured below and above 1GHz, set the spectrum analyzer on a 100kHz and 1MHz resolution bandwidth respectively for each frequency measured. 4. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.											
Remark												

Test Report No.	16020930-FCC-E
Page	15 of 38

Result	☒ Pass ☐ Fail
Test Data	☒ Yes ☐ N/A
Test Plot	☒ Yes ☐ N/A

Data sample

Frequency (MHz)	Quasi Peak (dB μ V/m)	Azimuth	Polarity (H/V)	Height (cm)	Factors (dB)	Limit (dB μ V/m)	Margin (dB)
xxx	32.23	181.00	H	350.00	-38.23	40.00	-7.77

Frequency (MHz) = Emission frequency in MHz

Quais-Peak (dB μ V/m)= Receiver Reading(dB μ V/m)+ Factor(dB)

Azimuth=Position of turn table

Polarity=Polarity of Receiver antenna

Height(cm)= Height of Receiver antenna

Factor (dB)=Antenna factor + cable loss- antenna gain

Limit (dB μ V/m)=Limit stated in standard


Calculation Formula:

Margin (dB)=Quasi Peak (dB μ V/m) – limit (dB μ V/m)

Test Mode:	Normal Working Mode
-------------------	----------------------------

(Below 1GHz)

Peak Detector 
Quasi Peak Limit 

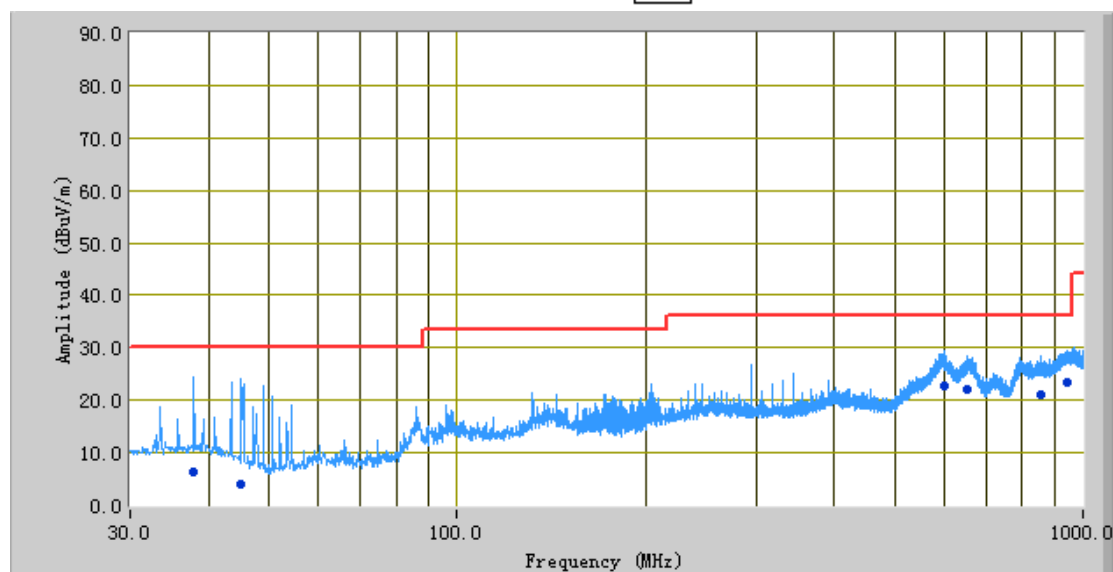

Test Data


Horizontal Polarity Plot @10m

Frequency (MHz)	Quasi Peak (dBμV/m)	Azimuth	Polarity (H/V)	Height (cm)	Factors (dB)	Limit (dBμV/m)	Margin (dB)
37.95	6.43	8.00	H	295.00	-34.01	30.00	-23.57
45.10	3.99	100.00	H	109.00	-36.31	30.00	-26.01
598.69	22.79	324.00	H	159.00	-20.83	36.00	-13.21
942.01	23.33	111.00	H	127.00	-16.85	36.00	-12.67
655.08	22.10	69.00	H	262.00	-21.18	36.00	-13.90
856.22	21.07	180.00	H	160.00	-19.27	36.00	-14.93

Test Mode:	Normal Working Mode
-------------------	----------------------------

(Below 1GHz)

Peak Detector 
Quasi Peak Limit 

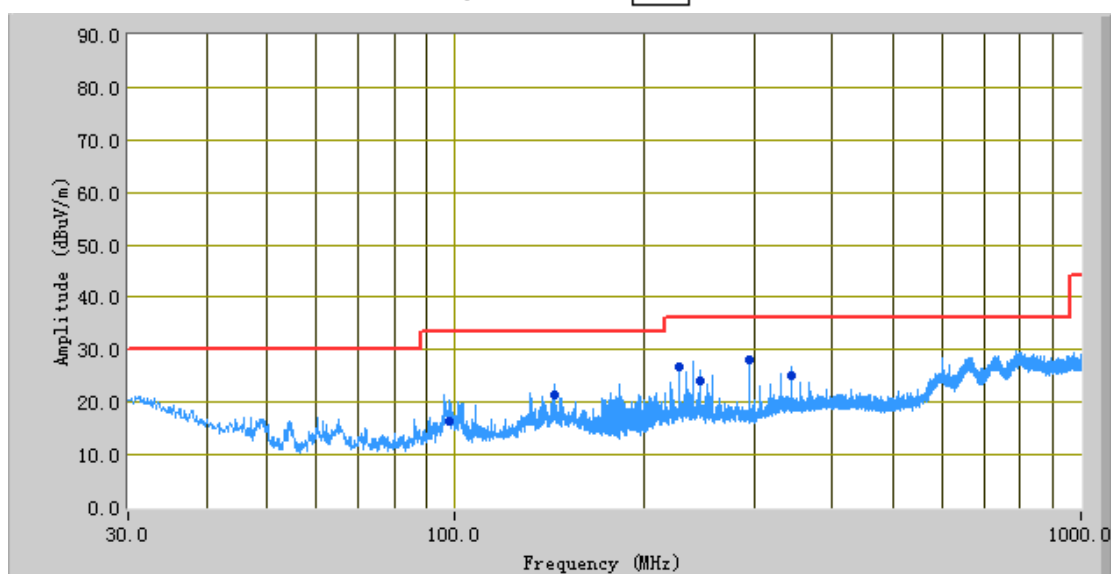

Test Data

Vertical Polarity Plot @10m

Frequency (MHz)	Quasi Peak (dBμV/m)	Azimuth	Polarity (H/V)	Height (cm)	Factors (dB)	Limit (dBμV/m)	Margin (dB)
294.95	28.06	144.00	V	112.00	-29.65	36.00	-7.94
228.00	26.85	178.00	V	101.00	-30.54	36.00	-9.15
344.06	24.98	132.00	V	113.00	-28.45	36.00	-11.02
245.78	24.00	257.00	V	106.00	-29.87	36.00	-12.00
144.01	21.36	291.00	V	101.00	-31.11	33.50	-12.14
97.74	16.27	1.00	V	128.00	-34.23	33.50	-17.23

Note: The highest frequency of the internal sources of the EUT is less than 108MHz, so the measurement shall only be made up to 1GHz.

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted Emissions					
R&S EMI Test Receiver	ESPI3	101216	03/31/2016	03/31/2017	☒
V-LISN	ESH3-Z5	838979/005	03/31/2016	03/31/2017	☒
Com-Power Transient Limiter	LIT-153	531021	10/30/2015	10/30/2016	☒
SIEMIC Labview Conducted Emissions software	V1.0	N/A	N/A	N/A	☒
Radiated Emissions					
R&S EMI Receiver	ESPI3	101216	03/31/2016	03/31/2017	☒
Antenna (30MHz~6GHz)	JB6	A121411	10/31/2015	10/31/2016	☒
SIEMIC Labview Radiated Emissions software	V1.0	N/A	N/A	N/A	☒

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph EUT Internal Photo



Front View of EUT



Rear View of EUT

Test Report No.	16020930-FCC-E
Page	20 of 38



Top View of EUT



Left View of EUT

Test Report No.	16020930-FCC-E
Page	21 of 38




Right View of EUT




EUT – Port Front View

Test Report No.	16020930-FCC-E
Page	22 of 38

Annex B.ii. Photograph EUT Internal Photo

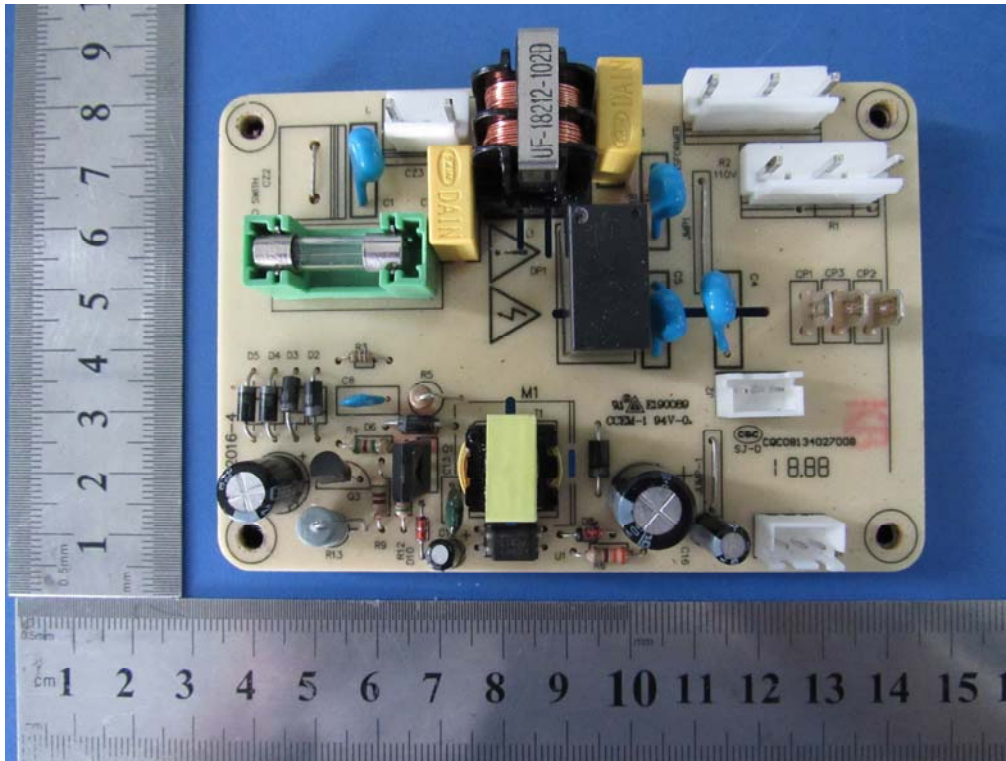


EUT PCBA 1 – Front View

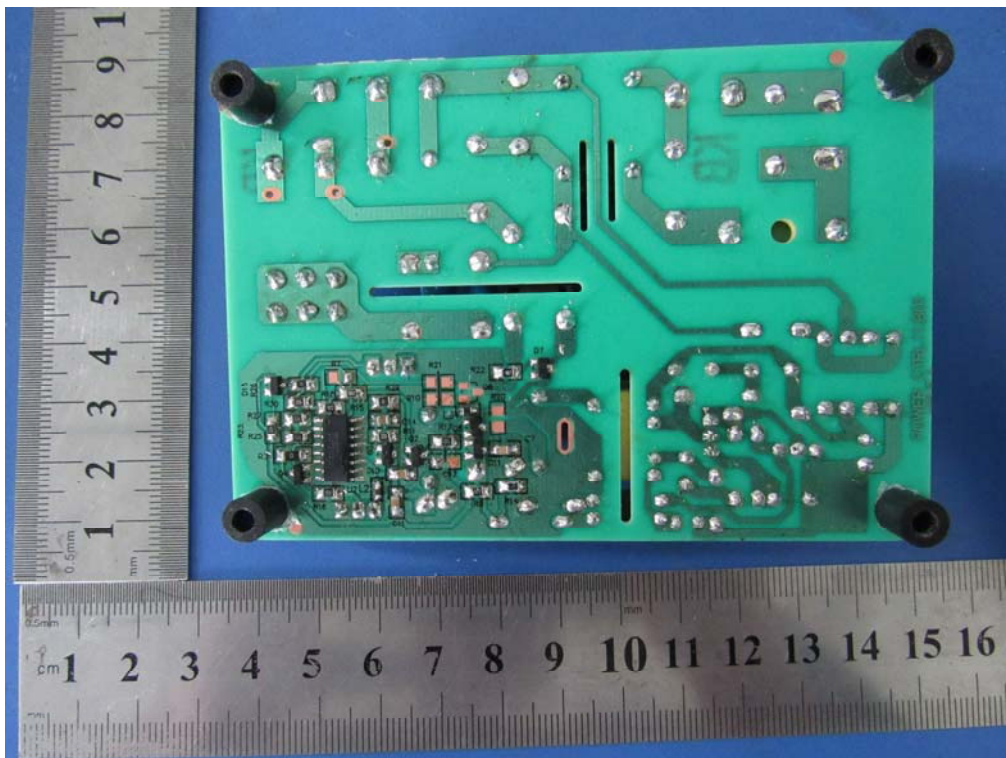


EUT PCBA 1 – Rear View

Test Report No.	16020930-FCC-E
Page	23 of 38

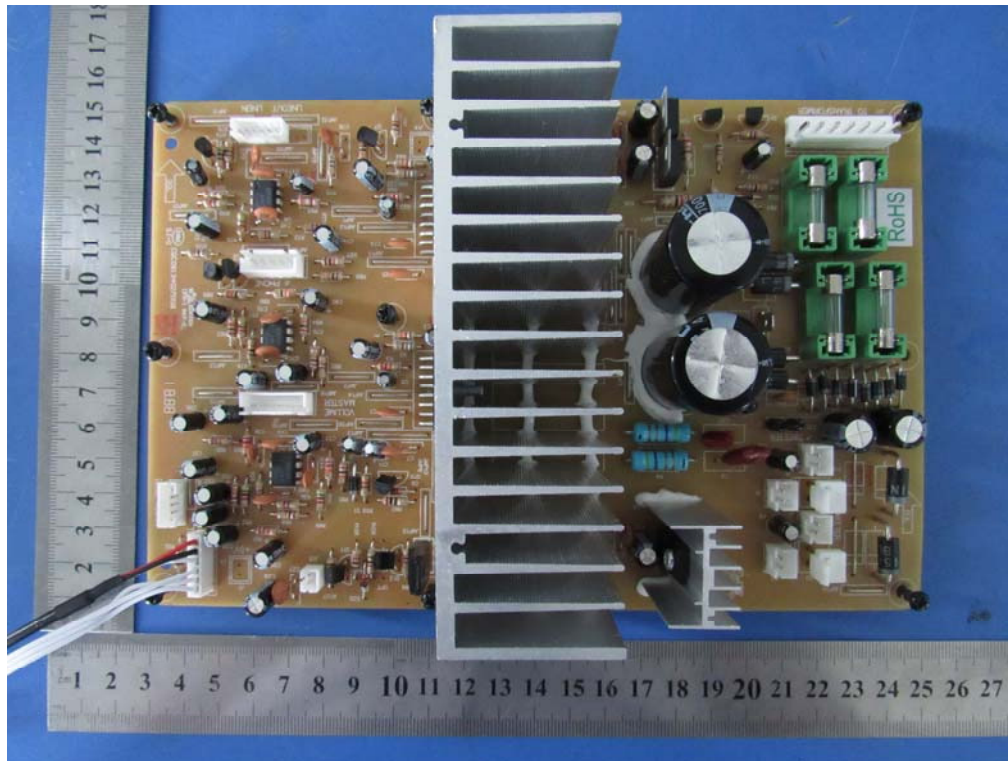


EUT PCBA 2 – Front View

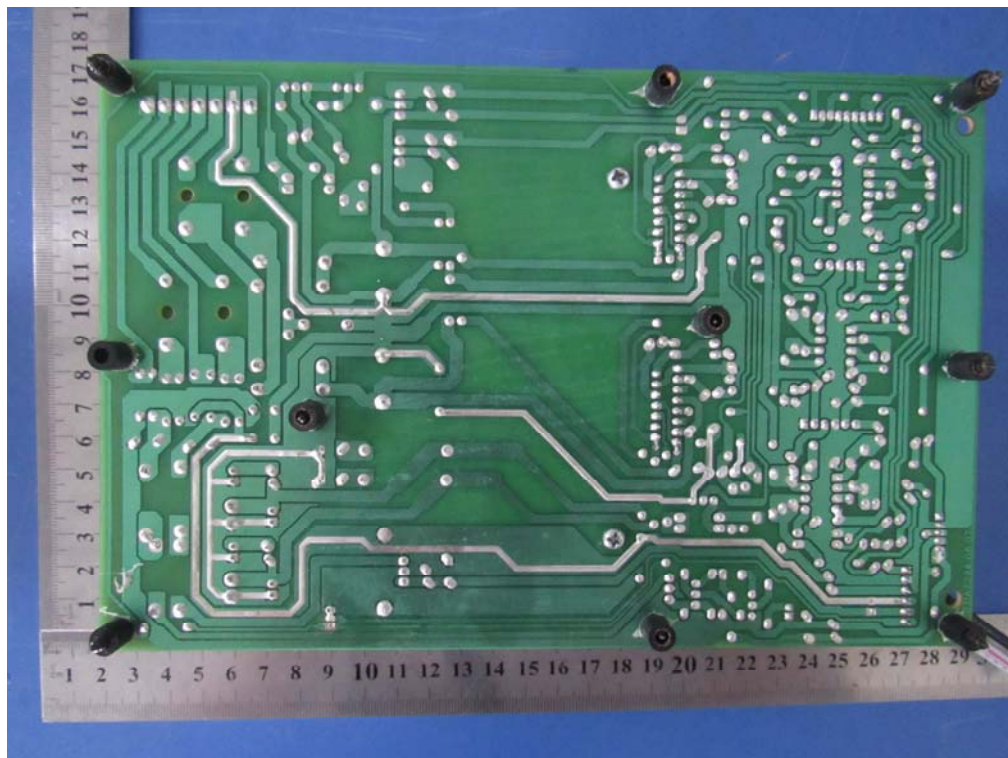


EUT PCBA 2 – Rear View

Test Report No.	16020930-FCC-E
Page	24 of 38

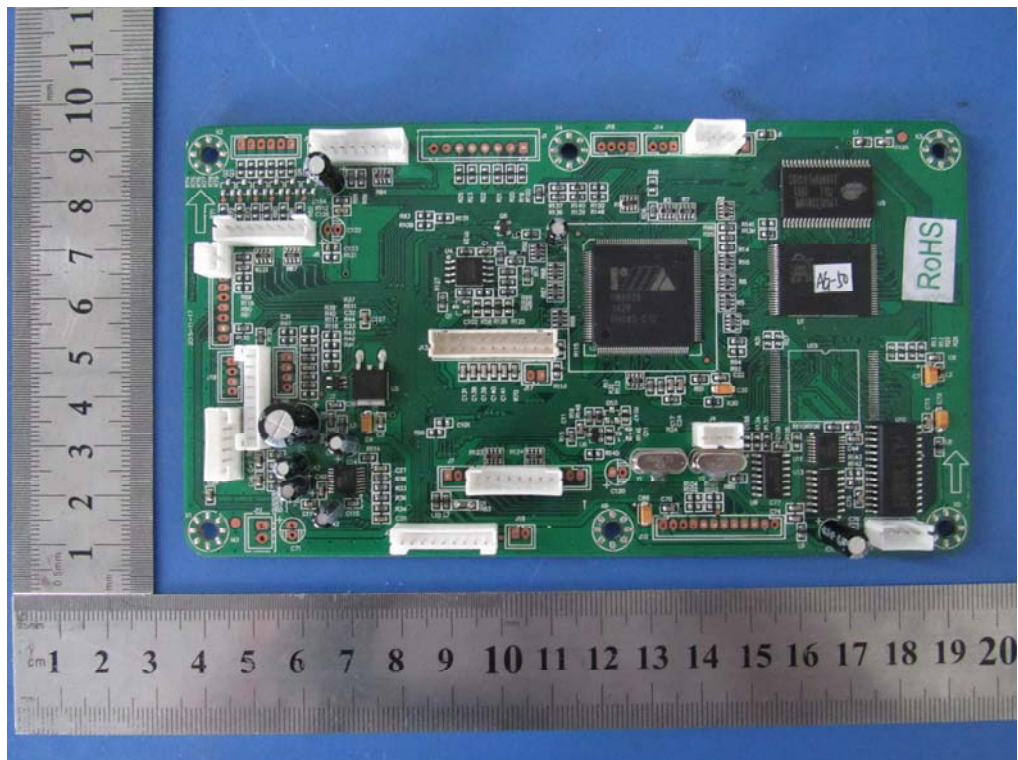


EUT PCBA 3 – Front View

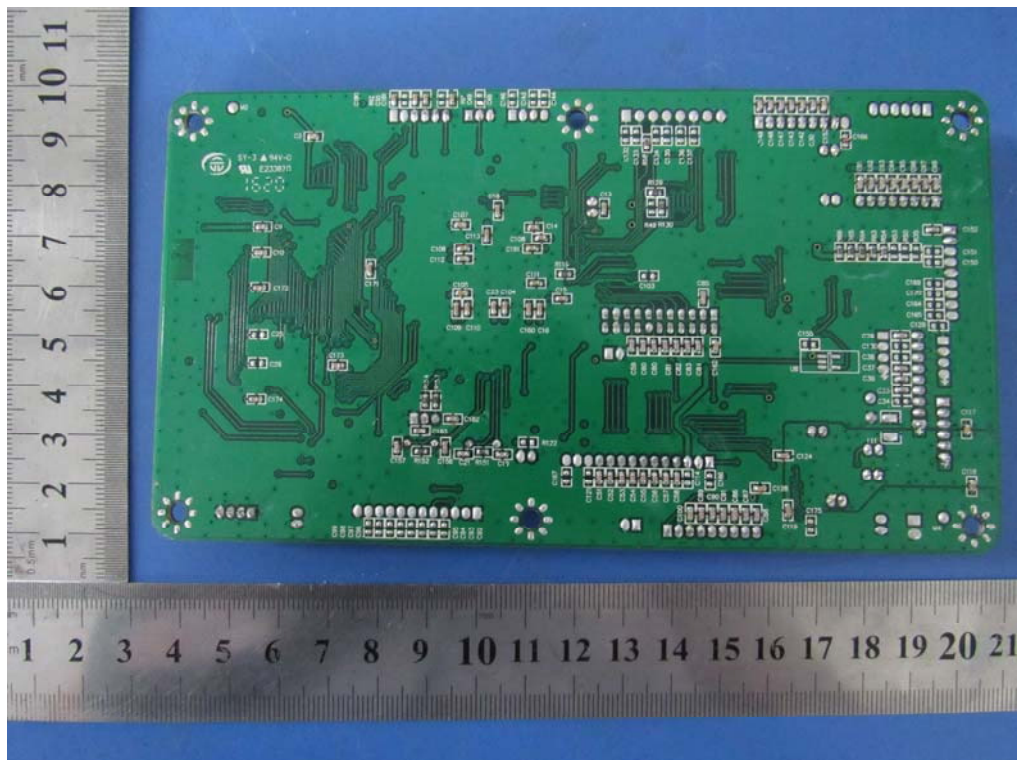


EUT PCBA 3 – Rear View

Test Report No.	16020930-FCC-E
Page	25 of 38

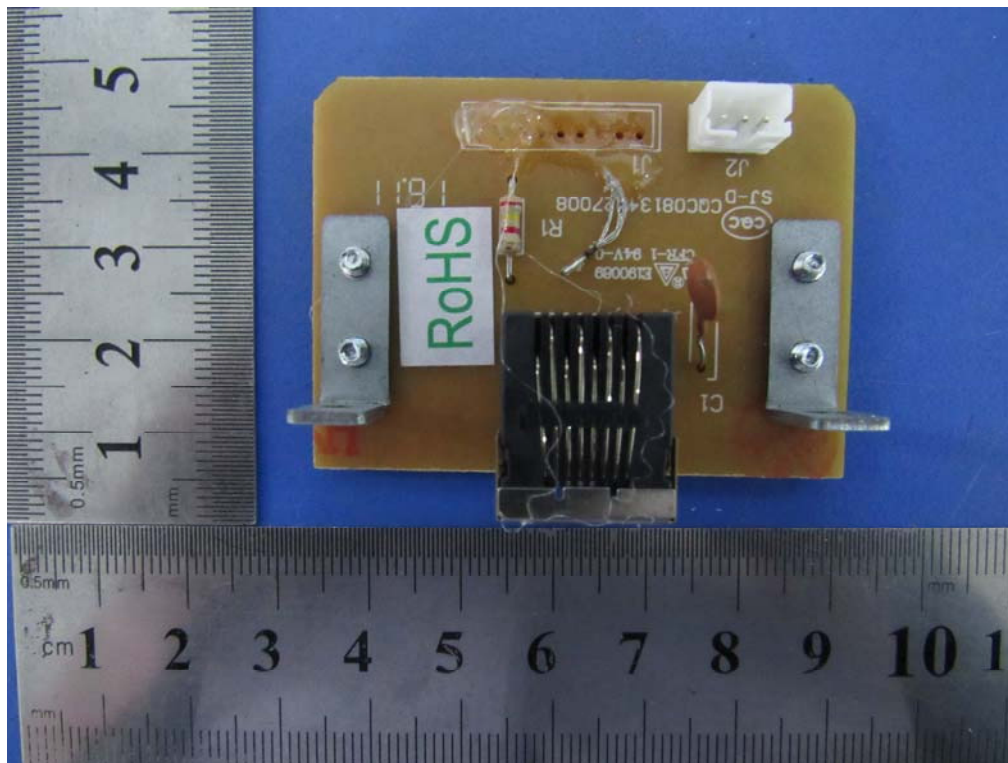

EUT PCBA 4 – Front View

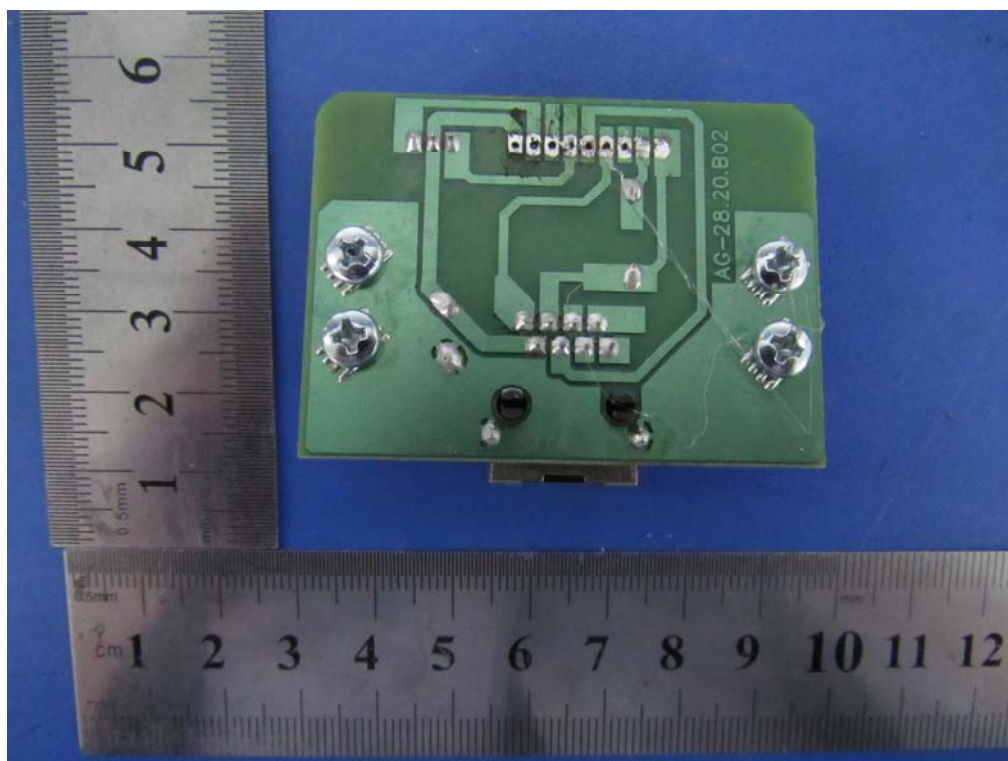


EUT PCBA 4 – Rear View

Test Report No.	16020930-FCC-E
Page	26 of 38




EUT PCBA 5 – Front View

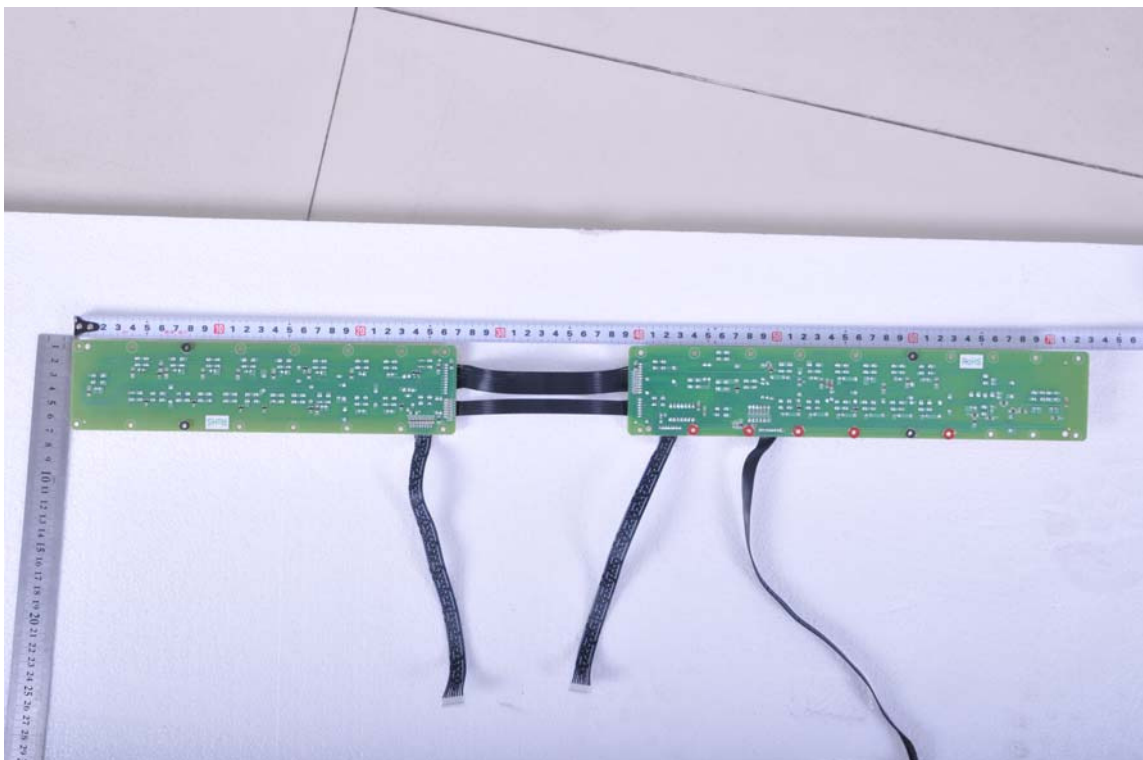


EUT PCBA 5 – Rear View

Test Report No.	16020930-FCC-E
Page	27 of 38

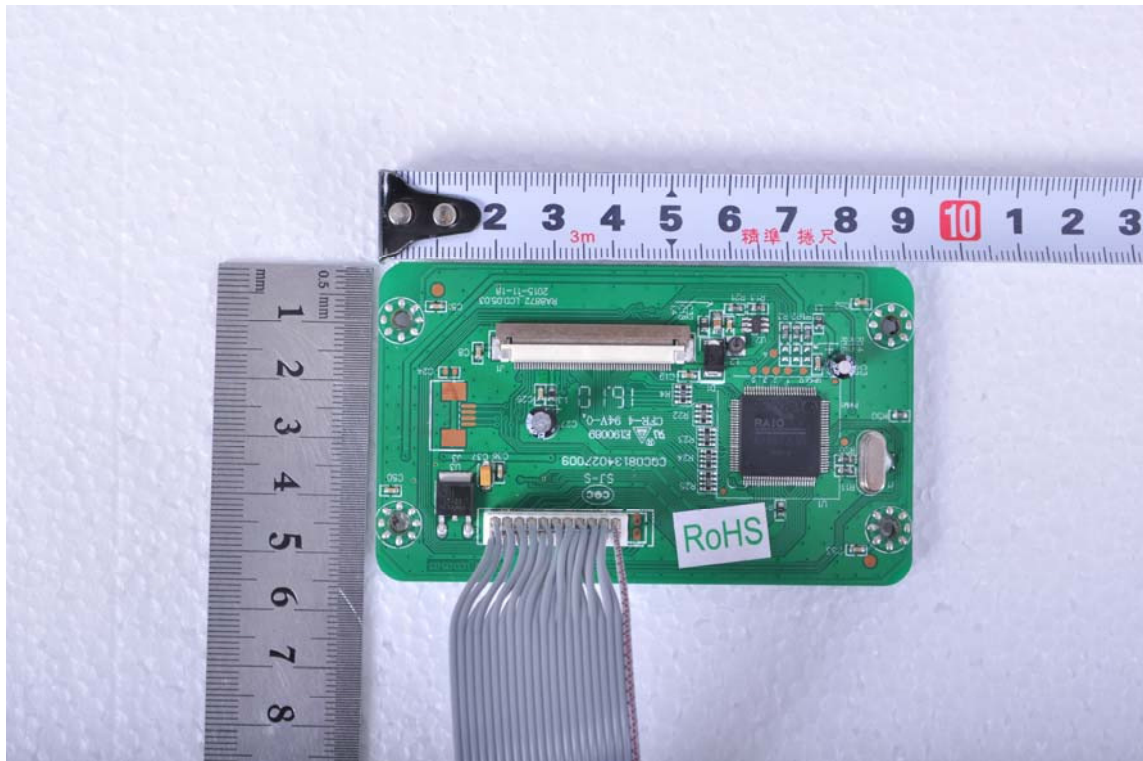


EUT PCBA 6 – Front View

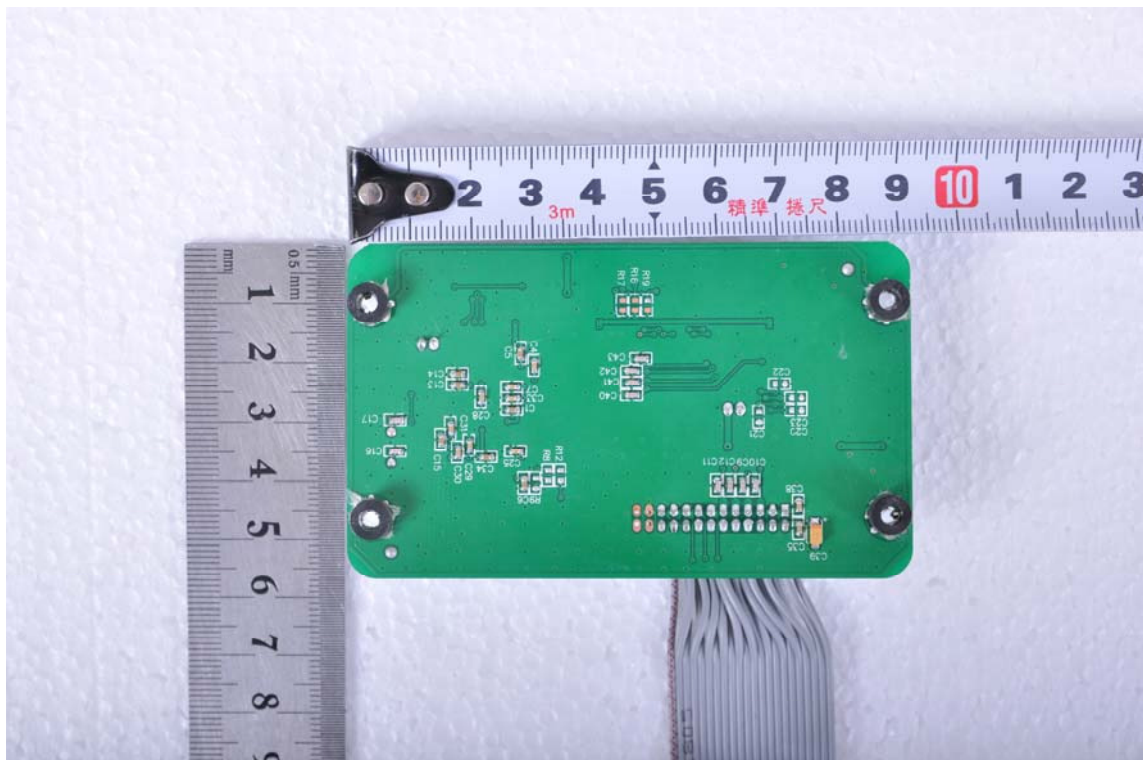


EUT PCBA 6 – Rear View

Test Report No.	16020930-FCC-E
Page	28 of 38

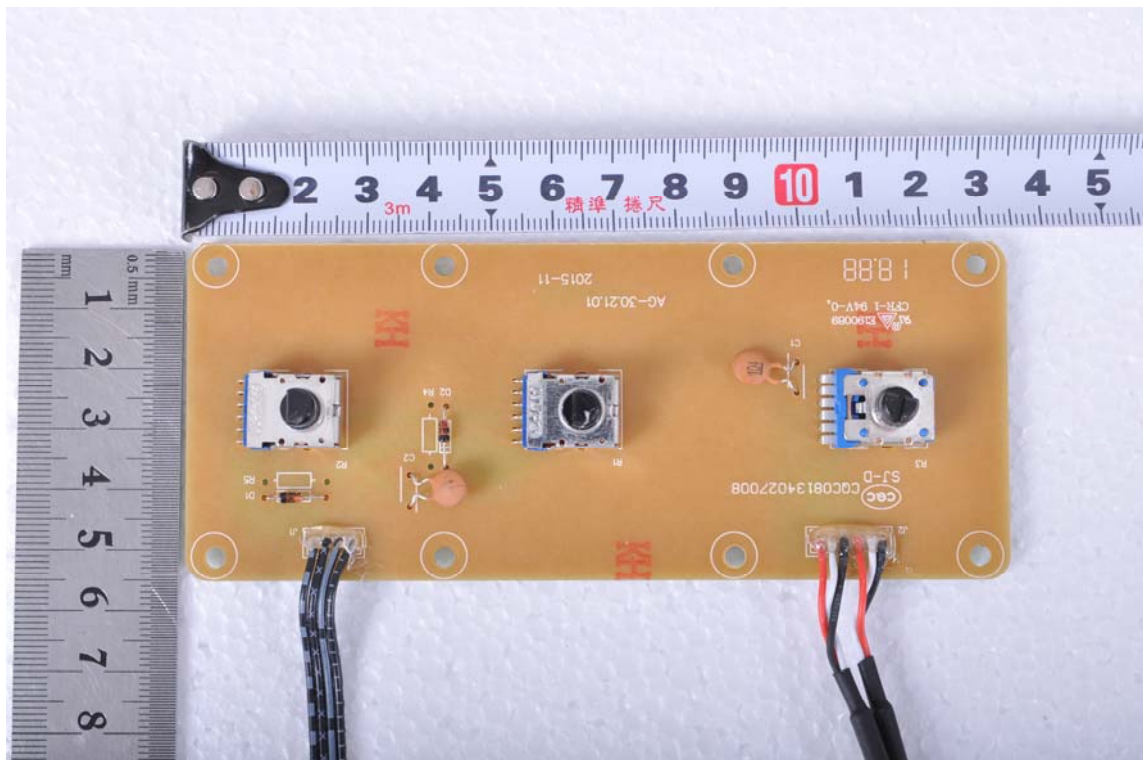


EUT PCBA 7 – Front View

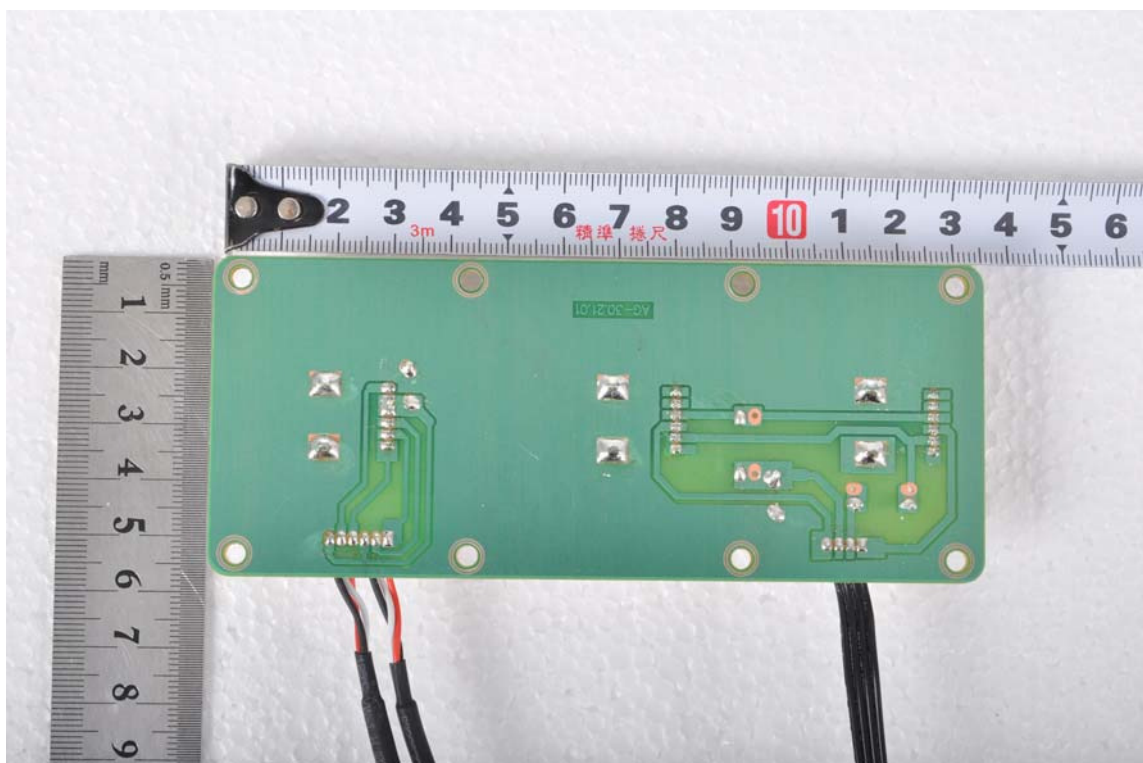


EUT PCBA 7 – Rear View


Test Report No.	16020930-FCC-E
Page	29 of 38

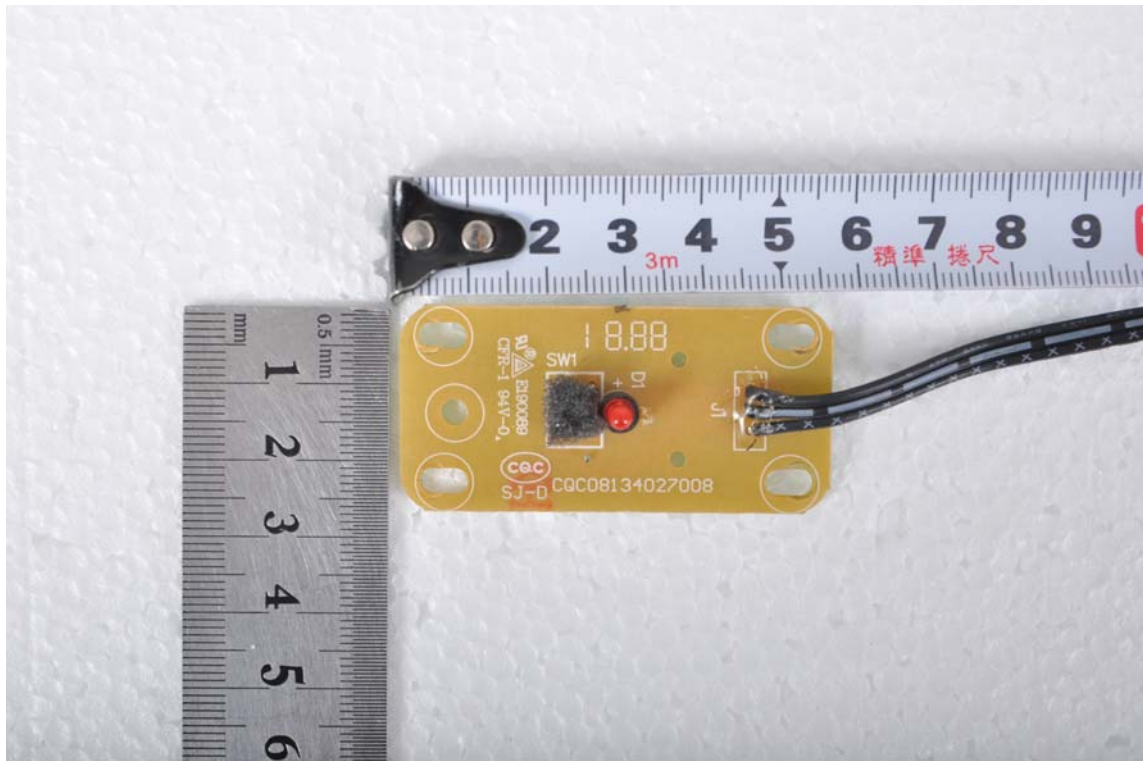


EUT PCBA 8 – Front View

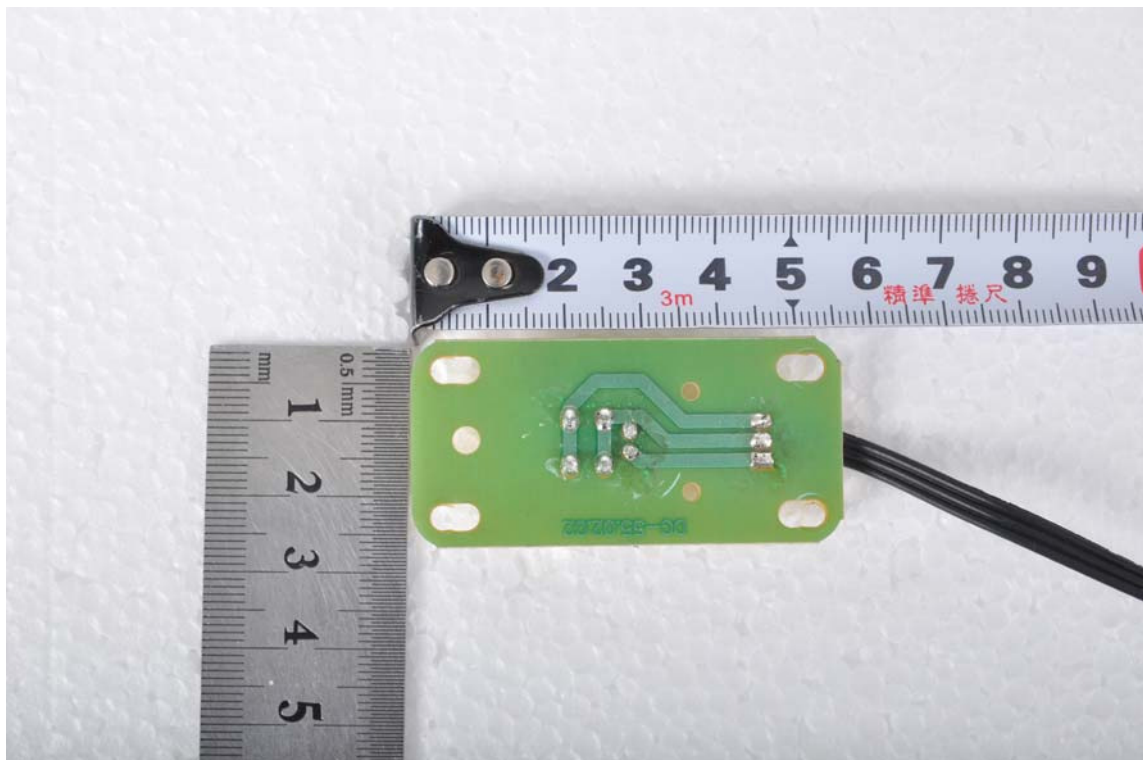

EUT PCBA 8 – Rear View

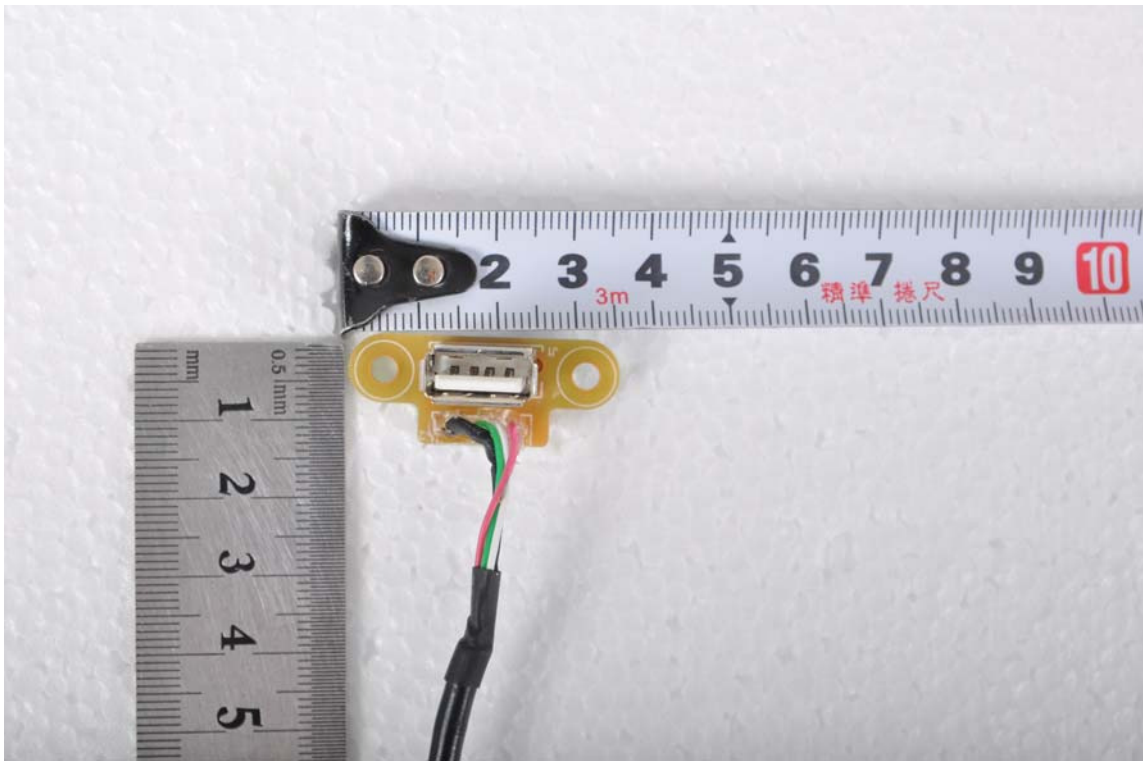

EUT PCBA 9 – Front View

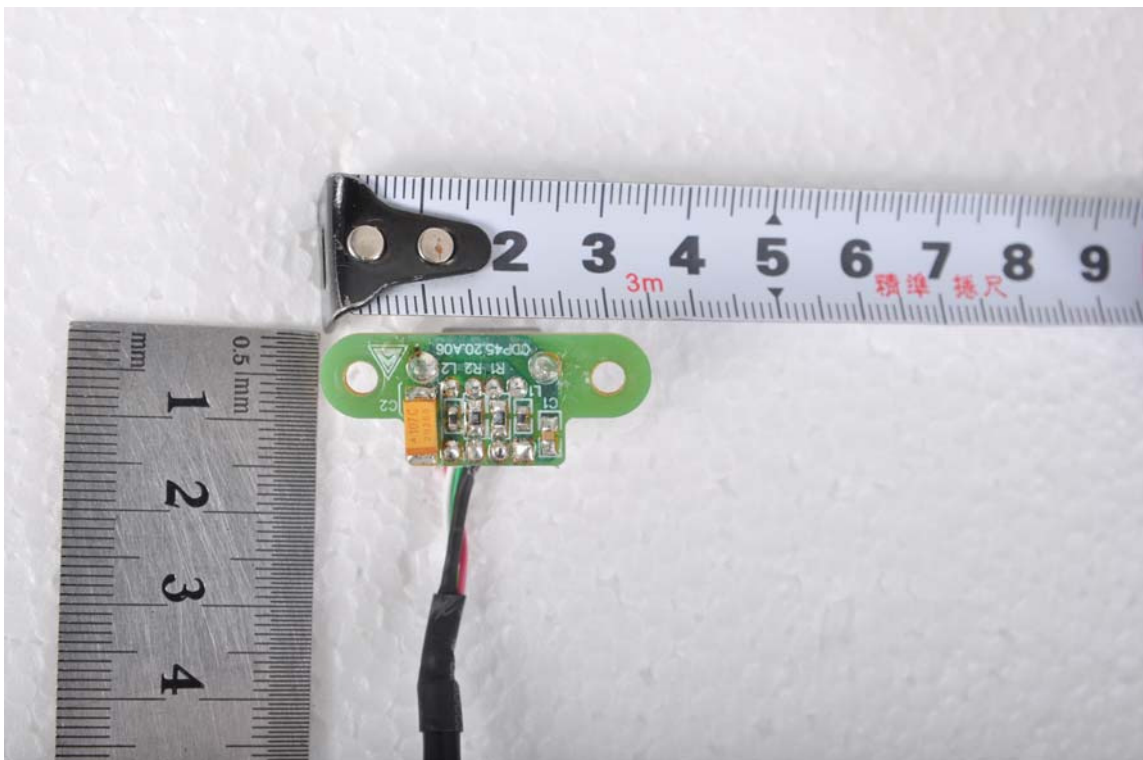


EUT PCBA 9 – Rear View

Test Report No.	16020930-FCC-E
Page	31 of 38



EUT Screen – Front View

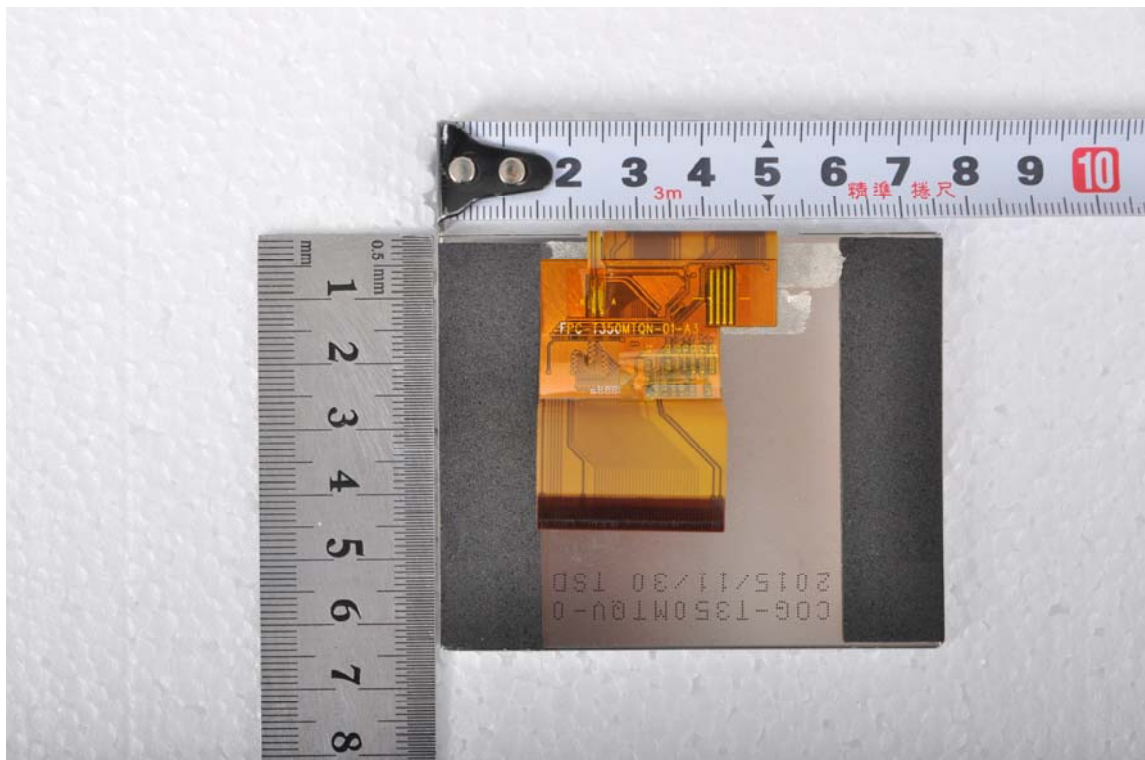

EUT Screen – Rear View

Annex B.iii. Photograph Test Setup Photo




Conducted Emissions Setup Front View



Conducted Emissions Setup Side View

Test Report No.	16020930-FCC-E
Page	33 of 38

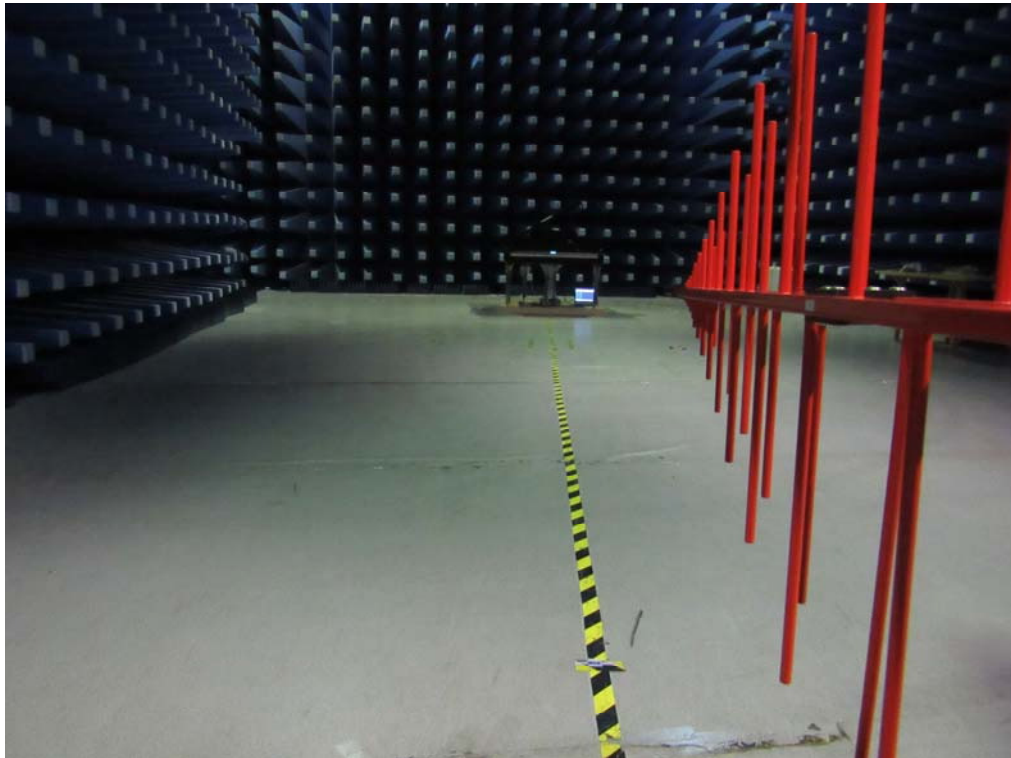


Radiated Emissions Setup Below 1GHz Front View


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.i. TEST SET UP BLOCK

Block Configuration Diagram for Conducted Emissions

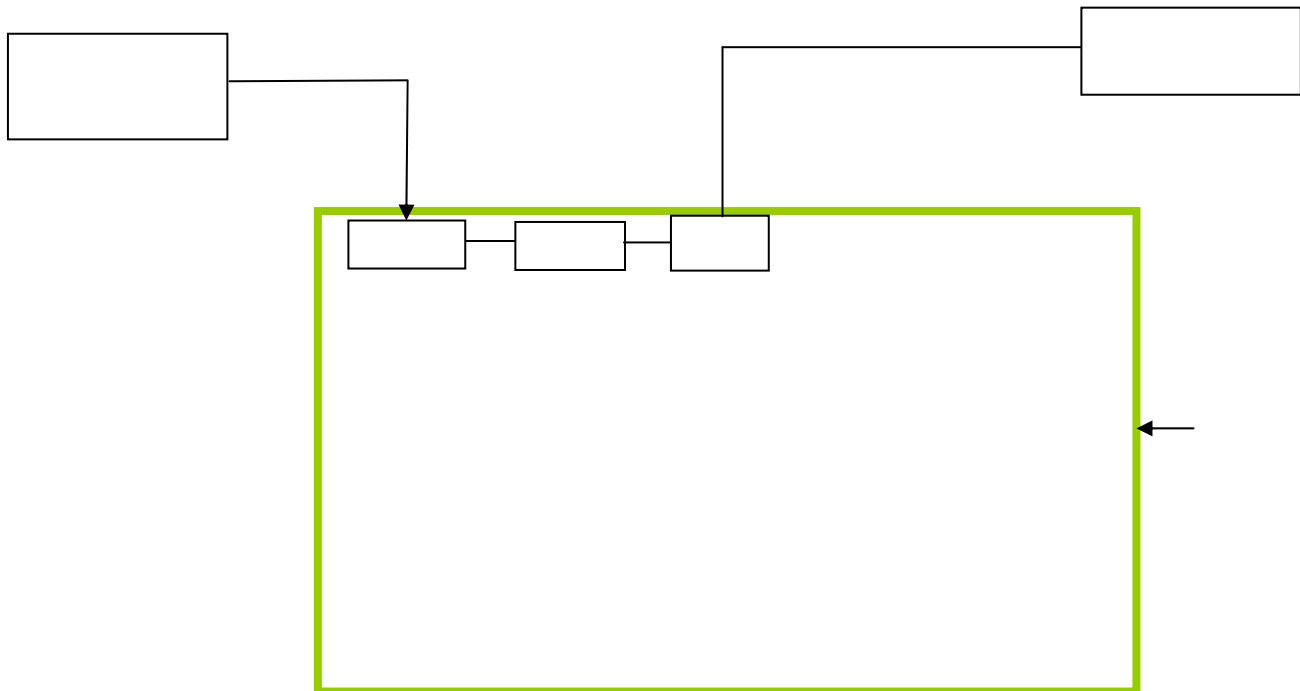

Block Configuration Diagram for Radiated Emissions



Test Report No.	16020930-FCC-E
Page	36 of 38

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description	Model	Calibration Due Date
Dell	Laptop	Inspiron14-3421	N/A

Test Report No.	16020930-FCC-E
Page	37 of 38

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see Attachment

Annex E. DECLARATION OF SIMILARITY

Ringway Tech(Jiangsu) Co.,Ltd.

To: SIEMIC(Nanjing-China) Laboratories

Declaration Letter

Dear Sir,

For our business issue and marketing requirement, we would like to list different models numbers on the FCC certificates and reports, as following:

Model No.: AG-50, AG-30
FCC ID:OCDAG-50

The difference between the two models AG-50 and AG-30 are as follows:

1. The shape of the wooden parts is different.
2. There are 8 speakers in AG-50; there are 6 speakers in AG-30.
3. The main control board, power supply board, transformer, amplifier board and other boards are same.
4. Because quantity of speaker is not same, some values of assembled parts are different between AG-50 and AG-30.

Thank you!

Signature:



Printed name/title:

Address: No. 101 West Hanjiang Road, Changzhou, Jiangsu, China