

Test Report

Applicant : Telink Semiconductor (Shanghai) Co., Ltd.
Address : 10/F, Building 1, 61 Shengxia Road, PuDong
District, Shanghai, China 201203
Product Name : TL3225B-EVK56D
Brand Mark : N/A
Model : TL3225B-EVK56D
Series model : N/A
Report Number : BLA-EMC-202604-A11102
FCC ID : OEOTL3225B-EVK56D
Date of Receipt : Apr. 23,2026
Date of Test : Apr. 23,2026 to May 26,2026
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Compiled by:

charlie

Review by:

Xavier

Approved by:

Blue Zheng

Issued Date:

May 26, 2026



BlueAsia Technical Services (Shenzhen) Co., Ltd

Address: No.41, South of Beihuan Road, Shangwu Community, Shiyuan
Subdistrict, Bao'an District, Shenzhen, Guangdong, China



The test report is effective only with both signature and specialized stamp and The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full. The results described in this report do not represent the quality or characteristics of the sampled batch, nor do they represent any similar or identical products that are not explicitly stated.

Table of Contents

1 General information	5
1.1 General information	5
1.2 General description of EUT	5
2 Test summary	6
3 Test Configuration	7
3.1 Test mode	7
3.2 Operation Frequency each of channel	7
3.3 Test channel	7
3.4 Auxiliary equipment	8
3.5 Test environment	8
4 Laboratory information	8
4.1 Laboratory and accreditations	8
4.2 Measurement uncertainty	9
5 Test equipment	10
6 Test result	12
6.1 Antenna requirement	12
6.2 Conducted emissions at AC power line (150 kHz-30 MHz)	13
6.3 Conducted peak output Power	17
6.4 Minimum 6dB bandwidth	18
6.5 Power spectrum density	19
6.6 Conducted Band Edges Measurement	20
6.7 Conducted spurious emissions	22
6.8 Radiated spurious emissions	24
6.9 Radiated emissions which fall in the restricted bands	35
7 Appendix A	42
7.1 Maximum PK Conducted Output Power	42
7.2 -6dB Bandwidth	46
7.3 Occupied Channel Bandwidth	50
7.4 Maximum Power Spectral Density Level	54
7.5 Band Edge	58

7.6 Conducted RF Spurious Emission	63
Appendix B: photographs of test setup	70
Appendix C: photographs of EUT	72

BlueAsia

Revise Record

Version No.	Date	Description
01	May 26,2026	Original

1 General information

1.1 General information

Applicant	Telink Semiconductor (Shanghai) Co., Ltd.
Address	10/F, Building 1, 61 Shengxia Road, PuDong District, Shanghai, China 201203
Manufacturer	N/A
Address	N/A
Factory	N/A
Address	N/A

1.2 General description of EUT

Product name	TL3225B-EVK56D
Model no.	TL3225B-EVK56D
Series model	N/A
Differences of Series model	N/A
Operation Frequency	2402MHz-2480MHz
Modulation Type	GFSK
Rate data	1Mbps; 2Mbps
Channel Spacing	2MHz
Number of Channels	40
Antenna Type	External antenna
Antenna Gain	3dBi(Provided by customer)
Power supply or adapter information	DC3.3V
Hardware version	V1.2
Software version	N/A
Engineer sample no.	BLA-EMC-202604-A111

Note: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

2 Test summary

No.	Test item	FCC Part Section(s)	Test Method(Clause)	Result
1	Antenna Requirement	§15.203	N/A	Pass
2	Conducted Emissions at AC Power Line (150kHz-30MHz)	§15.207	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Clause 6.2	Pass
3	Conducted Peak Output Power	§15.247(b)(3)	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Clause 7.8.5	Pass
4	Minimum 6dB Bandwidth	§15.247a(2)	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Clause 11.8.1	Pass
5	Power Spectrum Density	§15.247(d)	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Clause 11.10.2	Pass
6	Conducted Band Edges Measurement	§15.247(d)	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Clause 11.13	Pass
7	Conducted Spurious Emissions	§15.247(d)	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Clause 11.11	Pass
8	Radiated Spurious Emissions	§15.209 §15.247(d)	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Clause 6.4,6.5,6.6	Pass
9	Radiated Emissions which fall in the restricted bands	§15.209 §15.247(d)	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Clause 11.12	Pass

N/A: Not Applicable

3 Test Configuration

3.1 Test mode

Test Mode ^{Note 1}	Description
TX	Keep the EUT in continuously transmitting with modulation mode.
RX	Keep the EUT in receiving mode
TX Low channel	Keep the EUT in continuously transmitting mode in low channel
TX middle channel	Keep the EUT in continuously transmitting mode in middle channel
TX high channel	Keep the EUT in continuously transmitting mode in high channel

Note 1: The EUT was configured to measure its highest possible emission and/or immunity level. The test modes were adapted according to the operation manual for use

3.2 Operation Frequency each of channel

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
...	...	...	...	...	...	...	...
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz

3.3 Test channel

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2442MHz
The Highest channel	2480MHz

3.4 Auxiliary equipment

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	lenovo	E46OC	N/A	From lab (No.BLA-ZC-BS-2022005)
Note: “--” mean no any auxiliary device during testing.				

3.5 Test environment

Environment	Temperature	Voltage
Normal	25°C	DC 3.3V

4 Laboratory information

4.1 Laboratory and accreditations

The test facility is recognized, certified, or accredited by the following organizations:

Company name:	BlueAsia Technical Services (Shenzhen) Co.,Ltd.
Address:	No.41, South of Beihuan Road, Shangwu Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China
CNAS accredited No.:	L9788
A2LA Cert. No.:	5071.01
FCC Designation No.:	CN1252
Test Firm Registration Number:	923526
ISED CAB identifier No.:	CN0028
Company Number:	24243
Telephone:	+86-755-28682673
FAX:	+86-755-28682673

4.2 Measurement uncertainty

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

Parameter	Expanded Uncertainty
Radiated Emission(9kHz-30MHz)	$\pm 4.34\text{dB}$
Radiated Emission(30Mz-1000MHz)	$\pm 4.24\text{dB}$
Radiated Emission(1GHz-18GHz)	$\pm 4.68\text{dB}$
Radiated Emission(18GHz-40GHz)	$\pm 4.78\text{dB}$
AC Power Line Conducted Emission(150kHz-30MHz)	$\pm 3.45\text{dB}$
Occupied Channel Bandwidth	$\pm 5\%$
RF output power, conducted	$\pm 1.5\text{ dB}$
Power Spectral Density, conducted	$\pm 3.0\text{ dB}$
Unwanted Emissions, conducted	$\pm 3.0\text{ dB}$
Temperature	$\pm 3\text{ }^{\circ}\text{C}$
Supply voltages	$\pm 3\%$
Time	$\pm 5\%$

5 Test equipment

Radiated Spurious Emissions (Below 1GHz)

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-002-01	Anechoic chamber	9*6*6 chamber	SKET	N/A	2024/3/27	2027/3/26
BLA-EMC-002-02	Control room	966 control room	SKET	N/A	2024/3/27	2027/3/26
BLA-EMC-009	EMI receiver	ESR7	R&S	101199	2025/08/05	2026/08/04
BLA-EMC-043	Loop antenna	FMZB1519B	Schwarzbeck	00102	2024/06/29	2026/06/28
BLA-EMC-065	Broadband antenna	VULB9168	Schwarzbeck	01065P	2024/06/29	2026/06/27
BLA-XC-01	Coaxial Cable	N/A	BlueAsia	V01	N/A	N/A
BLA-XC-02	Coaxial Cable	N/A	BlueAsia	V02	N/A	N/A

Radiated Spurious Emissions (Above 1GHz)

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-001-01	Anechoic chamber	9*6*6 chamber	SKET	N/A	2023/11/16	2026/11/15
BLA-EMC-001-02	Control Room	966 control room	SKET	N/A	2023/11/16	2026/11/15
BLA-EMC-008	Spectrum	FSP40	R&S	100817	2025/08/05	2026/08/04
BLA-EMC-013	Horn Antenna	BBHA9120D	Schwarzbeck	01892	2024/06/29	2026/06/28
BLA-EMC-014	Amplifier	PA_000318G-45	SKET	PA2018043003	2025/08/05	2026/08/04
BLA-EMC-046	Filter bank	2.4G/5G Filter bank	SKET	N/A	2025/06/09	2026/06/08
BLA-EMC-061	Receiver	ESPI7	R&S	101477	2025/06/09	2026/06/08
BLA-EMC-066	Amplifier	LNPA_30M01G-30	SKET	SK2021060801	2025/06/09	2026/06/08
BLA-EMC-086	Amplifier	LNPA_18G40G-50dB	SKET	SK2022071301	2025/06/09	2026/06/08
BLA-EMC-087	Horn Antenna	BBHA 9170	Schwarzbeck	1106	2024/06/29	2026/06/28
BLA-XC-03	Coaxial Cable	N/A	BlueAsia	V03	N/A	N/A
BLA-XC-04	Coaxial Cable	N/A	BlueAsia	V04	N/A	N/A

Conducted emissions at AC power line (150 kHz-30 MHz)

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-003-001	Shield room	8*3*3	SKET	N/A	2023/11/16	2026/11/15
BLA-EMC-009	EMI receiver	ESR7	R&S	101199	2025/08/05	2026/08/04
BLA-EMC-011	LISN	ENV216	R&S	101372	2025/08/05	2026/08/04
BLA-EMC-033	Impedance transformer	DC-2GHz	DFXP	N/A	2025/06/09	2026/06/08
BLA-EMC-041	LISN	AT166-2	ATTEN	AKK1806000003	2025/08/05	2026/08/04
BLA-EMC-045	Impedance stable network	ISNT8-cat 6	TESEQ	53580	2025/08/05	2026/08/04
BLA-EMC-095	Single-channel vehicle artificial power network	NNBM 8124	Schwarzbeck	01045	2025/06/09	2026/06/08
BLA-EMC-096	Single-channel vehicle artificial power network	NNBM 8124	Schwarzbeck	01075	2025/06/09	2026/06/08
BLA-XC-05	Coaxial Cable	N/A	BlueAsia	V05	N/A	N/A

RF conducted

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-003-003	Shield room	5*3*3	SKET	N/A	2023/11/16	2026/11/15
BLA-EMC-016	Signal Generator	N5182A	Agilent	MY52420567	2025/06/09	2026/06/08
BLA-EMC-038	Spectrum	N9020A	Agilent	MY49100060	2025/08/05	2026/08/04
BLA-EMC-042	Power sensor	RPR3006 W	DARE	14I00889SN042	2025/08/05	2026/08/04
BLA-EMC-044	Radio communication tester	CMW500	R&S	132429	2025/08/05	2026/08/04
BLA-EMC-064	Signal Generator	N5182B	KEYSIGHT	MY58108892	2025/06/09	2026/06/08
BLA-EMC-079	Spectrum	N9020A	Agilent	MY54420161	2025/08/05	2026/08/04
BLA-EMC-088	Audio Analyzer	ATS-1	Audio Precision	ATS141094	2025/06/09	2026/06/08
BLA-EMC-100	Digital Radio Tester	RWC2010	Redwoodcomm	RWC20102490304	2025/06/09	2026/06/08

Test Software Record

Software No.	Software Name	Manufacture	Software version	Test site
BLA-EMC-S001	EZ-EMC	EZ	EEMC-3A1+	RE
BLA-EMC-S002	EZ-EMC	EZ	EEMC-3A1+	RE
BLA-EMC-S003	EZ-EMC	EZ	EEMC-3A1+	CE
BLA-EMC-S010	MTS 8310	MW	2.0.0.0	RF

6 Test result

6.1 Antenna requirement

Test Standard	47 CFR Part 15, Subpart C 15.203
Test Method	N/A

6.1.1 Requirement

Evaluation Information:

Product uses uniquely coupled antenna with intentional radiator, detachable non-standard jack antenna, it is reverse polarity, connector is RP-SMA, female screw. full the requirement of this section.

EUT antenna:

The antenna is External antenna The best case gain of the antenna is 3dBi

6.2 Conducted emissions at AC power line (150 kHz-30 MHz)


Test Standard	47 CFR Part 15, Subpart C 15.207
Test Method	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Clause 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.2.1 Limit

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

6.2.2 Test setup

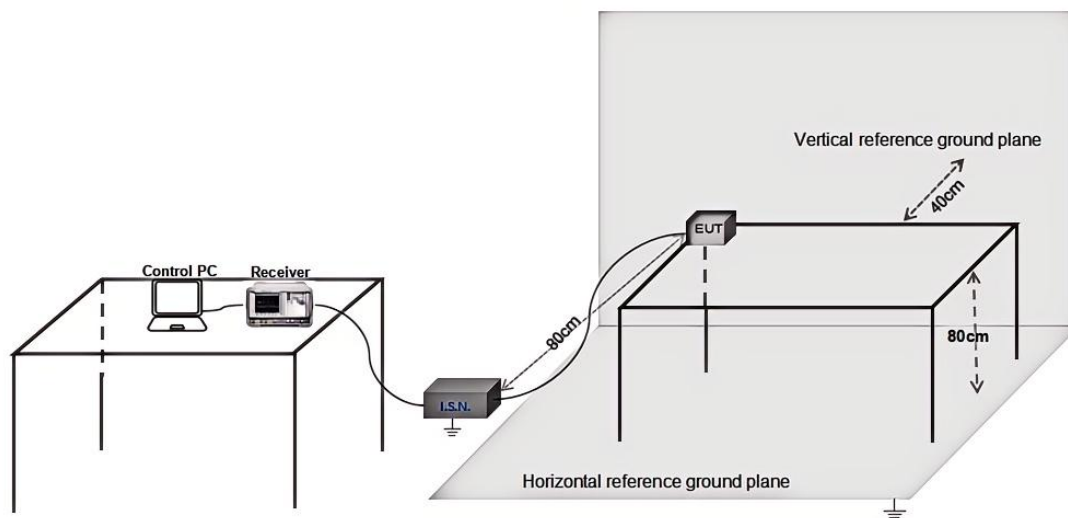

Description of test setup connection:

- Connect the control PC to the receiver through a USB to GPIB cable;
- The receiver is connected to the LISN through a coaxial line;
- Connect the power port of LISN to the EUT.


6.2.3 Procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

LISN=Read Level+ Cable Loss+ LISN Factor


6.2.4 Test data

[Test mode: TX]; [Line: Line];[Power:AC120V/60Hz]

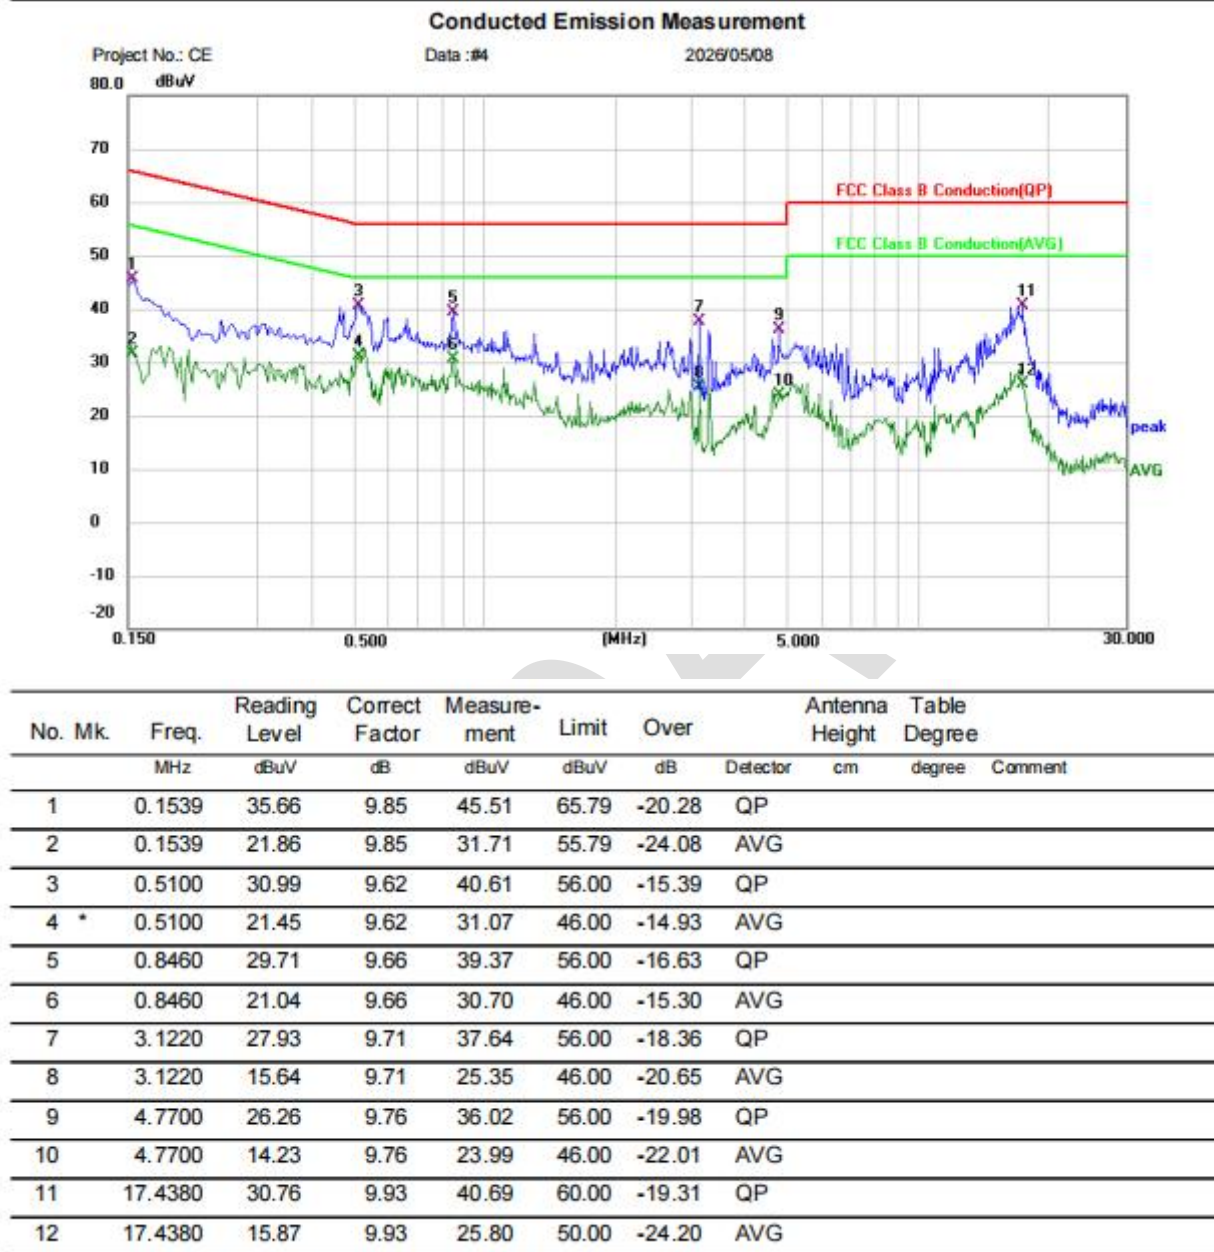

Test Result: Pass

[Test mode: TX]; [Line: Neutral];[Power:AC120V/60Hz]

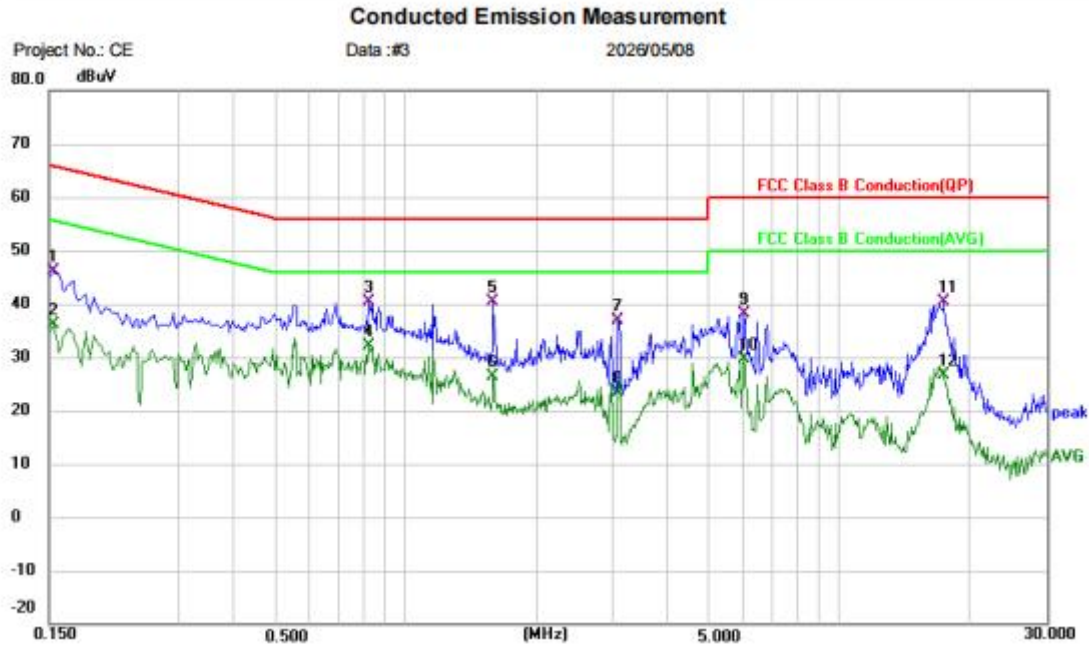

No. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
	MHz	dBuV	dB	dBuV	dBuV	dB	cm	degree	Comment
1	0.1539	36.21	9.85	46.06	65.79	-19.73	QP		
2	0.1539	26.24	9.85	36.09	55.79	-19.70	AVG		
3	0.8220	30.77	9.65	40.42	56.00	-15.58	QP		
4 *	0.8220	22.56	9.65	32.21	46.00	-13.79	AVG		
5	1.5900	30.60	9.68	40.28	56.00	-15.72	QP		
6	1.5900	16.73	9.68	26.41	46.00	-19.59	AVG		
7	3.0780	27.21	9.71	36.92	56.00	-19.08	QP		
8	3.0780	13.71	9.71	23.42	46.00	-22.58	AVG		
9	6.0540	28.45	9.79	38.24	60.00	-21.76	QP		
10	6.0540	19.79	9.79	29.58	50.00	-20.42	AVG		
11	17.4340	30.47	9.95	40.42	60.00	-19.58	QP		
12	17.4340	16.57	9.95	26.52	50.00	-23.48	AVG		

Test Result: Pass

tests have been conducted on BLE 1Mbps and 2Mbps modes, covering low, medium and high channels. Only the worst 1Mbps/low channels mode was reported.


6.3 Conducted peak output Power

Test Standard	47 CFR Part 15, Subpart C 15.247(b)(3)
Test Method	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Clause 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.3.1 Limit

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

6.3.2 Test setup

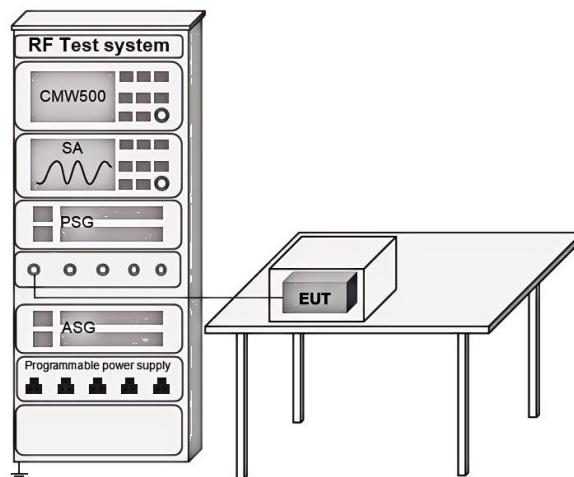

6.3.3 Test data

Note: PK power sensor is used to read PK Conducted power power directly

Pass: Please refer to appendix A for details


6.4 Minimum 6dB bandwidth

Test Standard	47 CFR Part 15, Subpart C 15.247a(2)
Test Method	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Clause 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.4.1 Limit

≥500 kHz

6.4.2 Test setup

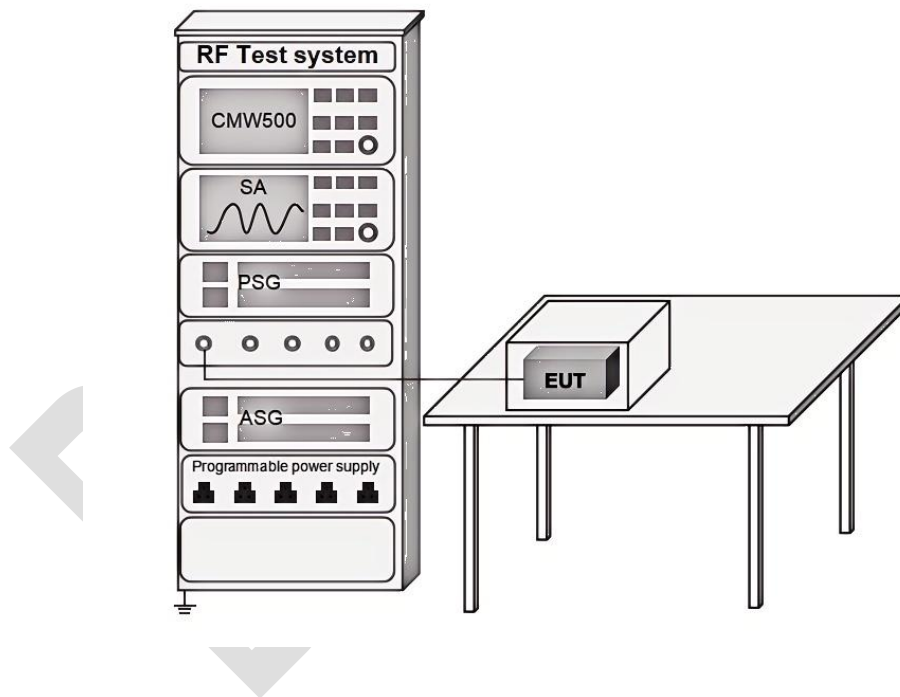

6.4.3 Test data

Pass: Please refer to appendix A for details


6.5 Power spectrum density

Test Standard	47 CFR Part 15, Subpart C 15.247(d)
Test Method	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Clause 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.5.1 Limit

≤8dBm in any 3 kHz band during any time interval of continuous transmission

6.5.2 Test setup

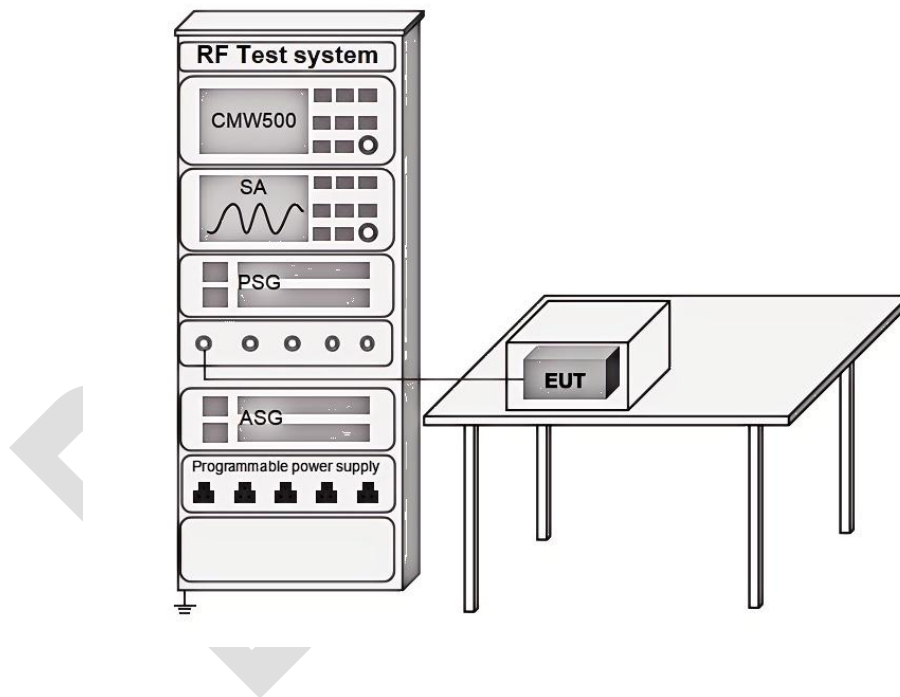

6.5.3 Test data

Pass: Please refer to appendix A for details

6.6 Conducted Band Edges Measurement

Test Standard	47 CFR Part 15, Subpart C 15.247(d)
Test Method	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Clause 11.13
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.6.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.

Attenuation below the general limits specified in §15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.6.2 Test setup

