TEST REPORT

Product Name	:	TLSR9518AWDK80D
Brand Mark	:	NA
Model No.	:	TLSR9518AWDK80D
FCC ID	:	OEOTLSR9518AWDK80
Report Number	:	BLA-EMC-202103-A11601
Date of Sample Receipt	:	2021/3/26
Date of Test	:	2021/3/30 to 2021/6/7
Date of Issue	:	2021/6/7
Test Standard	:	47 CFR Part 15, Subpart C 15.247
Test Result	:	Pass

Prepared for:

Telink Semiconductor（Shanghai）CO., LTD

Bldg 3, No.1500, Zuchongzhi Rd, Zhangjiang Hi-Tech Park, Shanghai 201203, China

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.
Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province, China
TEL: +86-755-23059481

Compiled by: Sven

Review by: Sweet. Liang

Approved by: Tomen Li

Date: 2021/6/7

BlueAsia of Technical Services(Shenzhen) Co., Ltd. BLA

REPORT REVISE RECORD

Version No.	Date	Description
00	2021/6/7	Original

TABLE OF CONTENTS

1 TEST SUMMARY 5
2 GENERAL INFORMATION 6
3 GENERAL DESCRIPTION OF E.U.T. 6
4 TEST ENVIRONMENT 7
5 TEST MODE 7
6 MEASUREMENT UNCERTAINTY 7
7 DESCRIPTION OF SUPPORT UNIT 8
8 LABORATORY LOCATION 8
9 TEST INSTRUMENTS LIST 9
1 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ) 13
1.1 LIMITS 13
1.2 BLOCK DIAGRAM OF TEST SETUP 13
1.3 PROCEDURE 13
1.4 TEST DATA 15
2 CONDUCTED BAND EDGES MEASUREMENT 17
2.1 LIMITS 17
2.2 BLOCK DIAGRAM OF TEST SETUP 17
2.3 TEST DATA 18
3 MINIMUM 6DB BANDWIDTH 19
3.1 LIMITS 19
3.2 BLOCK DIAGRAM OF TEST SETUP 19
3.3 TEST DATA 19
4 ANTENNA REQUIREMENT 20
4.1 CONCLUSION 20
5 RADIATED SPURIOUS EMISSIONS 22
5.1 LIMITS 22
5.2 BLOCK DIAGRAM OF TEST SETUP 23
5.3 PROCEDURE 23
5.4 TEST DATA 25

6 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS 41

6.1 LIMITS 41
6.2 BLOCK DIAGRAM OF TEST SETUP 42
6.3 PROCEDURE 42
6.4 TEST DATA 44

7 CONDUCTED SPURIOUS EMISSIONS 52

7.1 LIMITS 52
7.2 BLOCK DIAGRAM OF TEST SETUP 52
7.3 TEST DATA 53

8 POWER SPECTRUM DENSITY 54

8.1 LIMITS 54
8.2 BLOCK DIAGRAM OF TEST SETUP 54
8.3 TEST DATA 54

9 CONDUCTED PEAK OUTPUT POWER 55

9.1 LIMITS 55
9.2 BLOCK DIAGRAM OF TEST SETUP 55
9.3 EST DATA 56

10 APPENDIX 57

APPENDIX A: PHOTOGRAPHS OF TEST SETUP 72

APPENDIX B: PHOTOGRAPHS OF EUT 74

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass

2 GENERAL INFORMATION

Applicant	Telink Semiconductor（Shanghai）CO.,LTD
Address	Bldg 3, No.1500, Zuchongzhi Rd, Zhangjiang Hi-Tech Park, Shanghai 201203, China
Manufacturer	Telink Semiconductor（Shanghai）CO.,LTD
Address	Bldg 3, No.1500, Zuchongzhi Rd, Zhangjiang Hi-Tech Park, Shanghai 201203, China
Factory	Telink Semiconductor（Shanghai）CO.,LTD
Address	Bldg 3, No.1500, Zuchongzhi Rd, Zhangjiang Hi-Tech Park, Shanghai 201203, China
Product Name	TLSR9518AWDK80D
Test Model No.	TLSR9518AWDK80D

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	5.1
Software Version	0002

Operation Frequency:	2402MHz-2480MHz
Modulation Type:	GFSK
Channel Spacing:	2MHz
Number of Channels:	40

The product has 2 kinds of optional antennas：

Antenna Type:	ANT1: PCB Antenna
	ANT2: External Antenna with reversed polarity non standard antenna port
Antenna Gain:	ANT1: 0dBi(Provided by customer)
	ANT2: 0dBi(Provided by customer)

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	+25°C	3.3Vdc

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
TX	Keep the EUT in transmitting mode
TX middle channel	Keep the EUT in continuously transmitting mode in middle channel
TX Low channel	Keep the EUT in continuously transmitting mode in low channel
TX high channel	Keep the EUT in continuously transmitting mode in high channel
Remark:Only the data of the worst mode would be recorded in this report.	

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	HASEE	K610D	N/A	N/A

8 LABORATORY LOCATION

All tests were performed at:
BlueAsia of Technical Services(Shenzhen) Co., Ltd.
Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province, China
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673
No tests were sub-contracted.

9 TEST INSTRUMENTS LIST

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	**Manufacturer**	**Model**	**S/N**	**Cal.Date**	**Cal.Due**
Shield room	SKET	833	N/A	2020/11/25	2023/11/24
Receiver	R&S	ESPI3	101082	2020/10/12	2021/10/11
LISN	R&S	ENV216	3560.6550.15	2020/10/12	2021/10/11
LISN	AT	AT166-2	AKK1806000003	2020/10/12	2021/10/11
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A

Test Equipment Of Conducted Band Edges Measurement					
Equipment	**Manufacturer**	**Model**	**S/N**	**Cal.Date**	**Cal.Due**
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Minimum 6dB Bandwidth					
Equipment	**Manufacturer**	**Model**	**S/N**	**Cal.Date**	**Cal.Due**
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Antenna Requirement					
Equipment	**Manufacturer**	**Model**	**S/N**	**Cal.Date**	**Cal.Due**

Test Equipment Of Radiated Spurious Emissions					
Equipment	**Manufacturer**	**Model**	**S/N**	**Cal.Date**	**Cal.Due**
Chamber	SKET	966	N/A	2020/11/10	2023/11/9
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Receiver	R&S	ESR7	101199	2020/10/12	2021/10/11
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2020/9/26	2022/9/25
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	2020/9/26	2022/9/25
Amplifier	SKET	PA-000318G-45	N/A	2020/10/16	2021/10/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2020/9/26	2022/9/25
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of Radiated Emissions which fall in the restricted bands					
Equipment	**Manufacturer**	**Model**	**S/N**	**Cal.Date**	**Cal.Due**
Chamber	SKET	966	N/A	2020/11/10	2023/11/9
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Receiver	R&S	ESR7	101199	2020/10/12	2021/10/11
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2020/9/26	2022/9/25
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	2020/9/26	2022/9/25

Amplifier	SKET	PA-000318G-45	N/A	2020/10/16	2021/10/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2020/9/26	2022/9/25
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of Conducted Spurious Emissions					
Equipment	**Manufacturer**	**Model**	**S/N**	**Cal.Date**	**Cal.Due**
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Power Spectrum Density					
Equipment	**Manufacturer**	**Model**	**S/N**	**Cal.Date**	**Cal.Due**
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Conducted Peak Output Power					
Equipment	**Manufacturer**	**Model**	**S/N**	**Cal.Date**	**Cal.Due**
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11

Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

1 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Sven
Temperature	25℃
Humidity	52%

1.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		

1.2 BLOCK DIAGRAM OF TEST SETUP

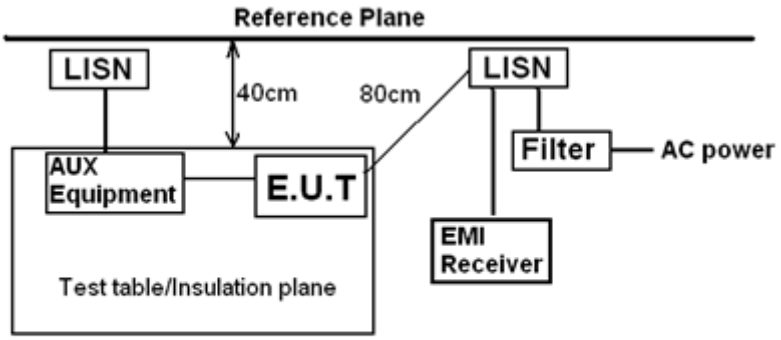

Remark:
E.U.T: Equipment Under Test
LISN: Line Impedence Stabilization Network
Test table height=0.8m

1.3 PROCEDURE

1) The mains terminal disturbance voltage test was conducted in a shielded room.
2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
Remark: LISN=Read Level+ Cable Loss+ LISN Factor

1.4 TEST DATA

[TestMode: TX][Line: Line]

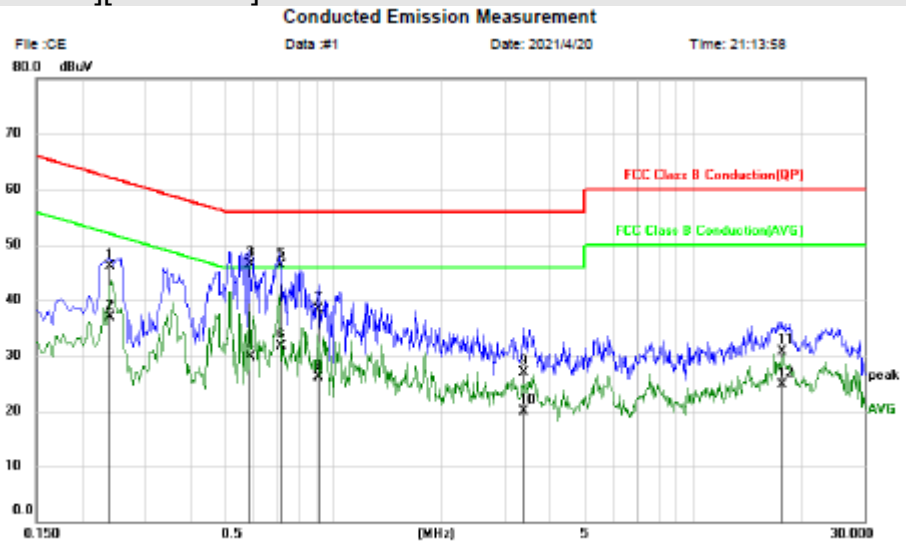

Site
Phase: L1
Temperature:
Limit: FCC Class B Conduction(QP)
Power: AC120V/60Hz
Humidity: %
EUT: TLSR9518AWDK80D
M/N: TLSR9518AWDK80D
Mode: TX mode
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.2380	36.25	9.84	46.09	62.17	-16.08	QP	
2		0.2380	27.16	9.84	37.00	52.17	-15.17	AVG	
3	*	0.5860	36.66	9.87	46.53	56.00	-9.47	QP	
4		0.5860	19.90	9.87	29.77	46.00	-16.23	AVG	
5		0.7140	36.46	9.89	46.35	56.00	-9.65	QP	
6		0.7140	21.79	9.89	31.68	46.00	-14.32	AVG	
7		0.9100	28.46	9.91	38.37	56.00	-17.63	QP	
8		0.9100	16.28	9.91	26.19	46.00	-19.81	AVG	
9		3.3980	16.91	9.97	26.88	56.00	-29.12	QP	
10		3.3980	9.87	9.97	19.84	46.00	-26.16	AVG	
11		17.7340	20.29	10.40	30.69	60.00	-29.31	QP	
12		17.7340	14.27	10.40	24.67	50.00	-25.33	AVG	

Test Result: Pass

[TestMode: TX][Line: Neutral]

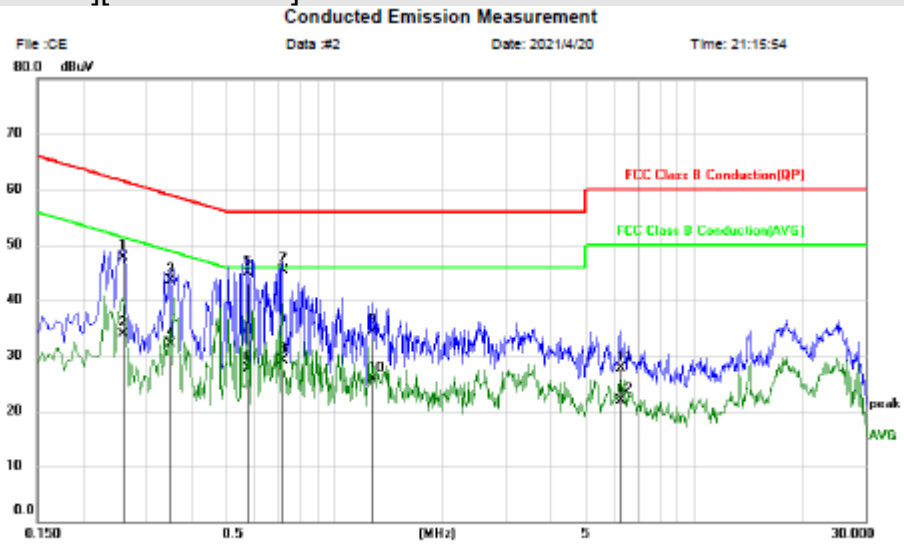

Site
Phase: N
Temperature:
Limit: FCC Class B Conduction(QP)
Power: AC120V/60Hz
Humidity: %
EUT: TLSR9518AWDK80D
M/N: TLSR9518AWDK80D
Mode: TX mode
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.2580	37.84	9.84	47.68	61.50	-13.82	QP	
2		0.2580	24.03	9.84	33.87	51.50	-17.63	AVG	
3		0.3500	33.58	9.85	43.43	58.96	-15.53	QP	
4		0.3500	22.24	9.85	32.09	48.96	-16.87	AVG	
5		0.5740	35.09	9.87	44.96	56.00	-11.04	QP	
6		0.5740	17.78	9.87	27.65	46.00	-18.35	AVG	
7	*	0.7220	35.38	9.89	45.27	56.00	-10.73	QP	
8		0.7220	19.24	9.89	29.13	46.00	-16.87	AVG	
9		1.2740	24.43	9.93	34.36	56.00	-21.64	QP	
10		1.2740	15.69	9.93	25.62	46.00	-20.38	AVG	
11		6.2460	17.72	10.06	27.78	60.00	-32.22	QP	
12		6.2460	11.93	10.06	21.99	50.00	-28.01	AVG	

Test Result: Pass

2 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Sven
Temperature	25℃
Humidity	52%

2.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

2.2 BLOCK DIAGRAM OF TEST SETUP

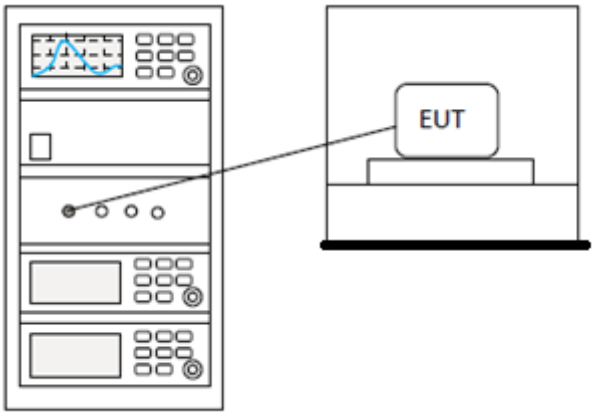

2.3 TEST DATA

Pass: Please Refer To Appendix: For Details

3 MINIMUM 6DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Sven
Temperature	25℃
Humidity	52%

3.1 LIMITS

Limit:	≥500 kHz

3.2 BLOCK DIAGRAM OF TEST SETUP

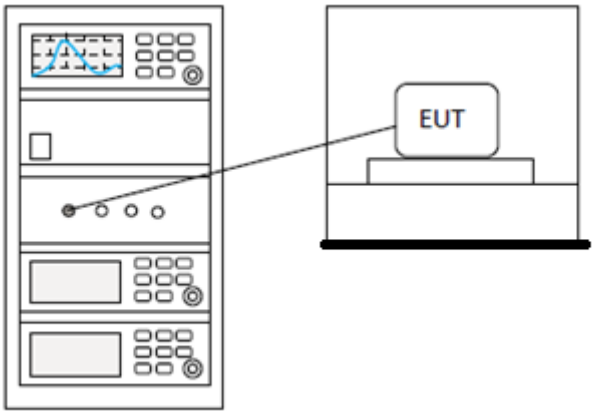

3.3 TEST DATA

Pass: Please Refer To Appendix: For Details

4 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A

4.1 CONCLUSION

Standard Requirement:
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:
The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.

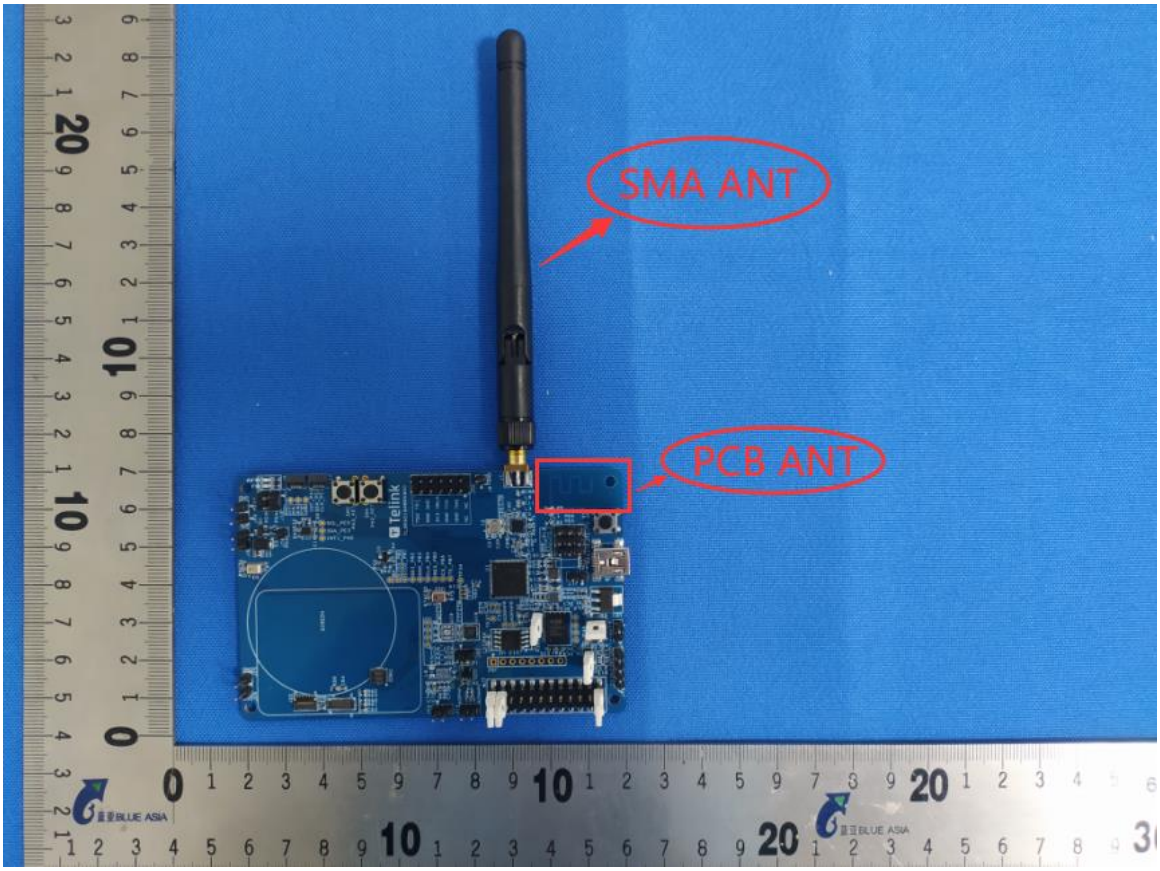

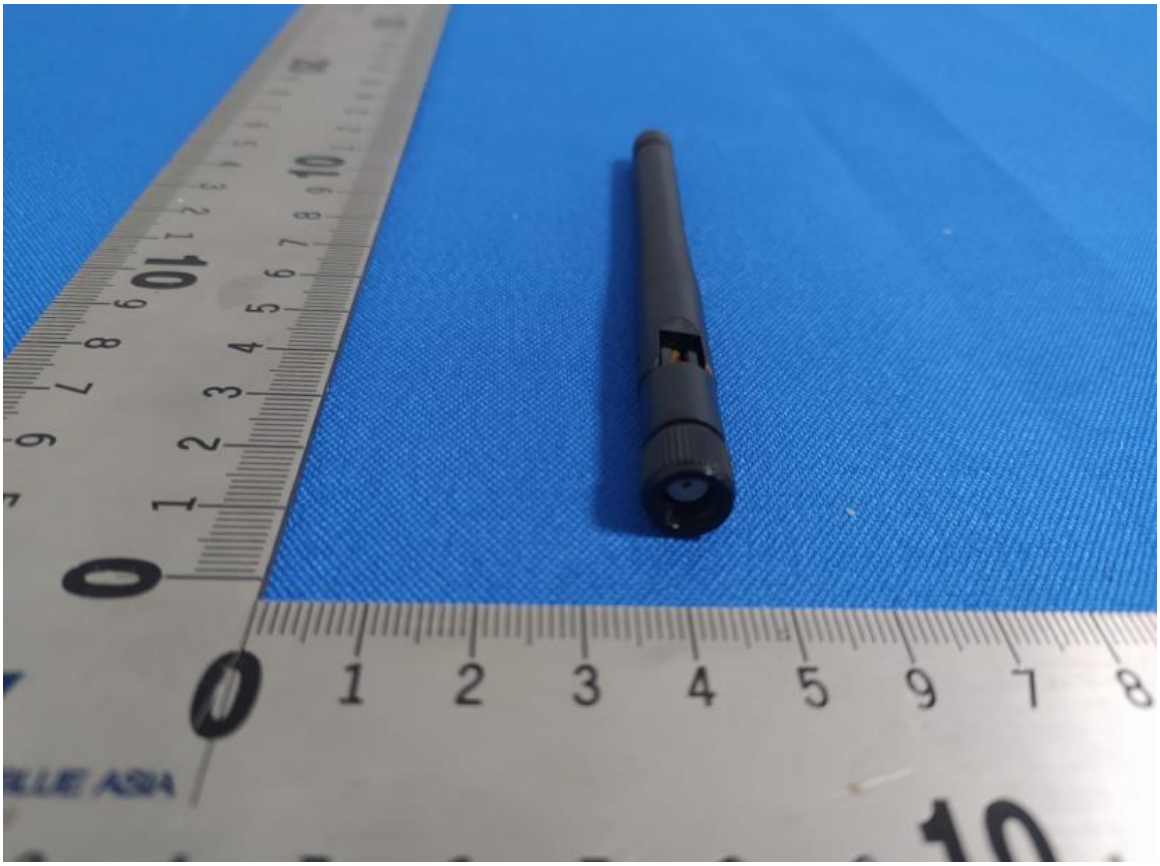

5 RADIATED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX Low channel;TX middle channel;TX high channel
Test Mode (Final Test)	TX Low channel;TX middle channel;TX high channel
Tester	Sven
Temperature	25℃
Humidity	52%

5.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3
Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.		

5.2 BLOCK DIAGRAM OF TEST SETUP

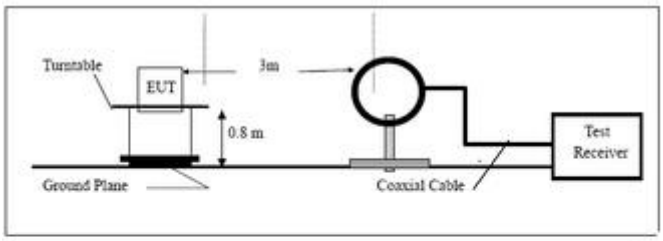

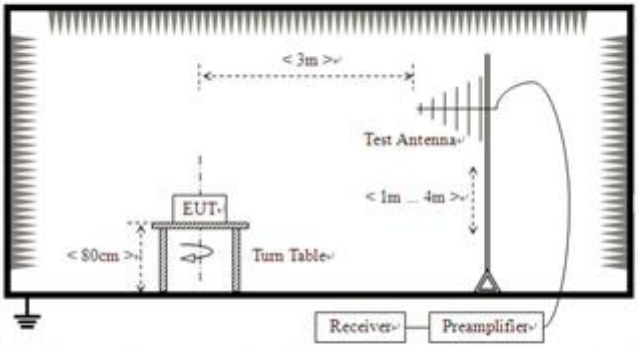

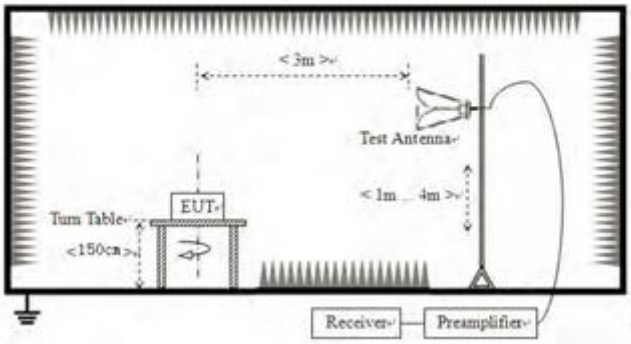

5.3 PROCEDURE

a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
j. Repeat above procedures until all frequencies measured was complete.

Remark:
1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

5.4 TEST DATA

Antenna 1: PCB ANT

Below 1GHz:

[TestMode: TX]; [Polarity: Horizontal]

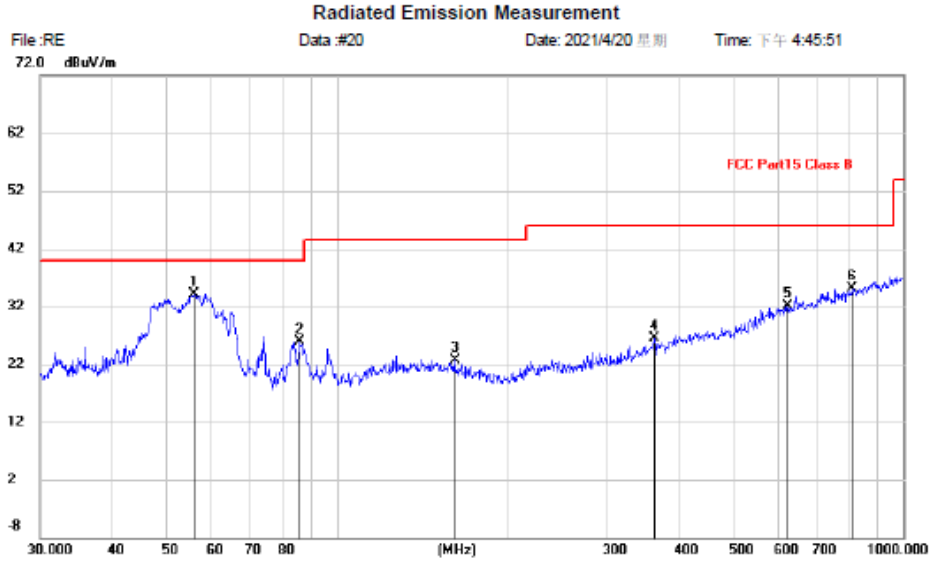

Site
Limit: FCC Part15 Class B
EUT: TLSR9518AWDK80D
M/N: TLSR9518AWDK80D
Mode: TX
Note:

Polarization: *Horizontal*
Power:
Distance: 3m

Temperature:
Humidity: %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	56.0007	10.60	23.58	34.18	40.00	-5.82	QP			
2		86.2001	6.60	19.37	25.97	40.00	-14.03	QP			
3		161.4742	-0.25	23.05	22.80	43.50	-20.70	QP			
4		362.9844	0.04	26.38	26.42	46.00	-19.58	QP			
5		625.0780	0.20	31.85	32.05	46.00	-13.95	QP			
6		813.1115	0.23	34.83	35.06	46.00	-10.94	QP			

Test Result: Pass

[TestMode: TX]; [Polarity: Vertical]

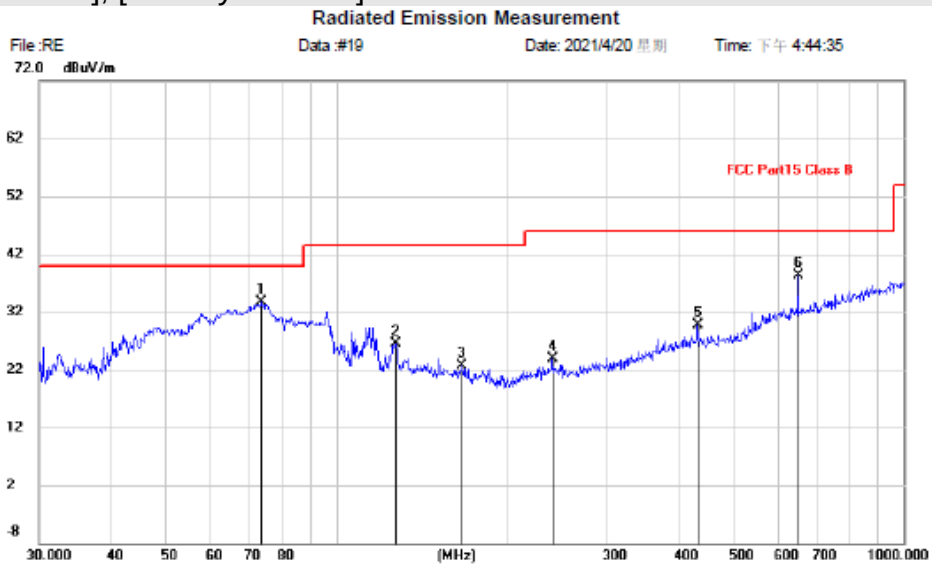

Site
Limit: FCC Part15 Class B
EUT: TLSR9518AWDK80D
M/N: TLSR9518AWDK80D
Mode: TX
Note:

Polarization: *Vertical*
Power:
Distance: 3m

Temperature:
Humidity: %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	73.8756	13.01	20.69	33.70	40.00	-6.30	QP			
2		127.2176	3.55	22.86	26.41	43.50	-17.09	QP			
3		166.6514	0.09	22.58	22.67	43.50	-20.83	QP			
4		239.9874	1.03	22.90	23.93	46.00	-22.07	QP			
5		432.5457	1.76	27.92	29.68	46.00	-16.32	QP			
6		649.6597	6.27	32.11	38.38	46.00	-7.62	QP			

Test Result: Pass

Above 1GHz:

[TestMode: TX Low channel]; [Polarity: Horizontal]

Radiated Emission Measurement

File :RE Data :#5 Date: 2021/4/20 星期 Time: 下午 2:00:05

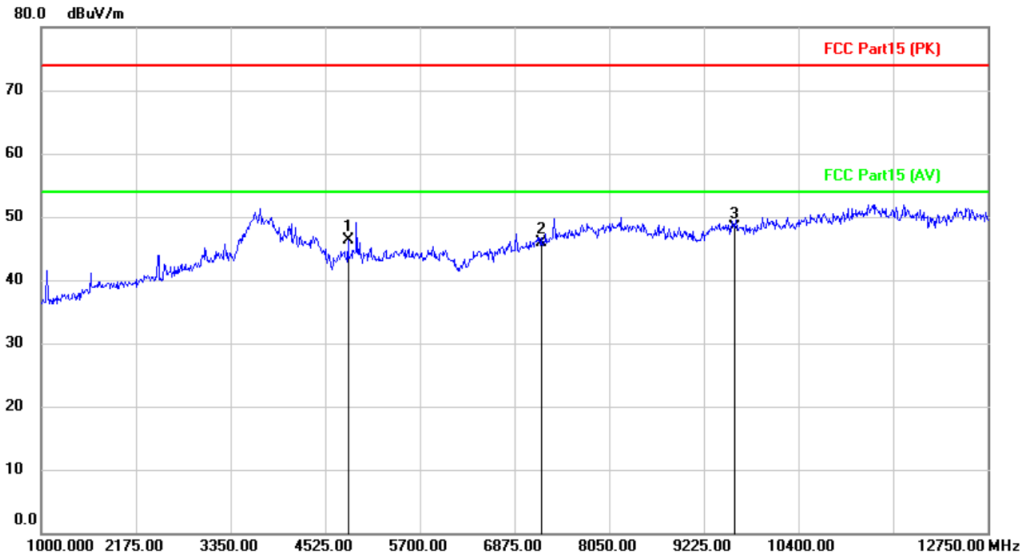

Site	Polarization: ***Horizontal***	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: TLSR9518AWDK80D	Distance: 3m	
M/N: TLSR9518AWDK80D		
Mode: TX-L		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		4804.000	42.61	3.71	46.32	74.00	-27.68	peak			
2		7206.000	39.97	5.96	45.93	74.00	-28.07	peak			
3	*	9608.000	39.09	9.29	48.38	74.00	-25.62	peak			

*:Maximum data x:Over limit !:over margin 〈Reference Only

Test Result: Pass

[TestMode: TX Low channel]; [Polarity: Vertical]

Radiated Emission Measurement

File :RE Data :#6 Date: 2021/4/20 星期 Time: 下午 2:02:25

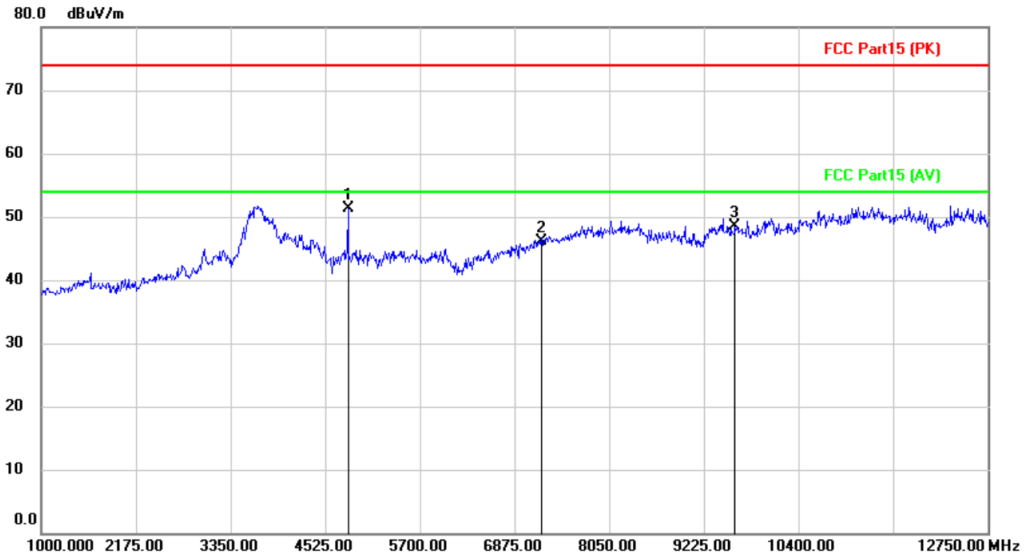

Site	Polarization: ***Vertical***	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: TLSR9518AWDK80D	Distance: 3m	
M/N: TLSR9518AWDK80D		
Mode: TX-L		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	4804.000	47.51	3.71	51.22	74.00	-22.78	peak			
2		7206.000	40.12	5.96	46.08	74.00	-27.92	peak			
3		9608.000	39.21	9.29	48.50	74.00	-25.50	peak			

*:Maximum data x:Over limit !:over margin 〈Reference Only

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Horizontal]

Radiated Emission Measurement

File :RE Data :#9 Date: 2021/4/20 星期 Time: 下午 2:12:46

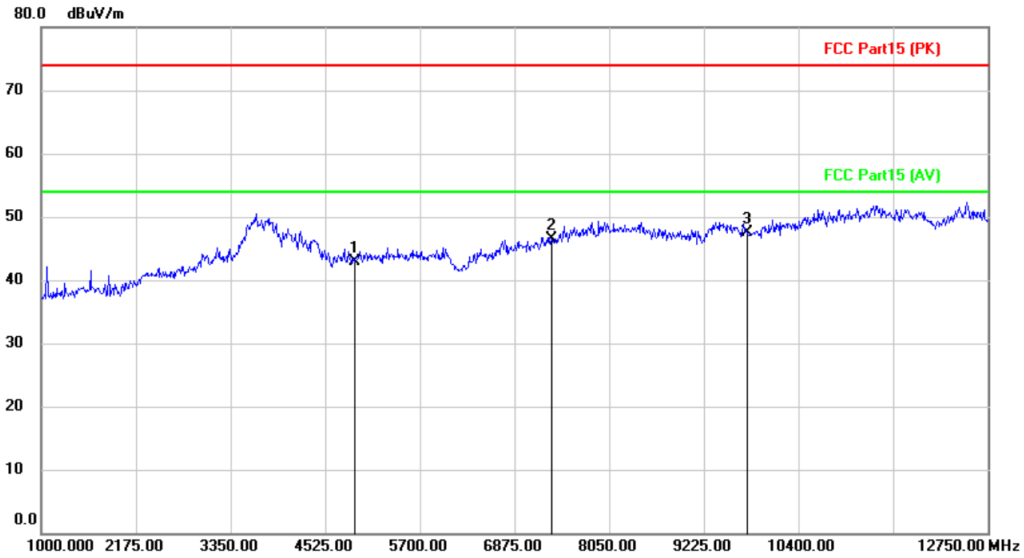

Site	Polarization: ***Horizontal***	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: TLSR9518AWDK80D	Distance: 3m	
M/N: TLSR9518AWDK80D		
Mode: TX-M		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		4882.000	39.56	3.36	42.92	74.00	-31.08	peak			
2		7323.000	40.12	6.43	46.55	74.00	-27.45	peak			
3	*	9764.000	37.86	9.63	47.49	74.00	-26.51	peak			

*:Maximum data x:Over limit !:over margin 〈Reference Only

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Vertical]

Radiated Emission Measurement

File :RE Data :#10 Date: 2021/4/20 星期 Time: 下午 2:15:24

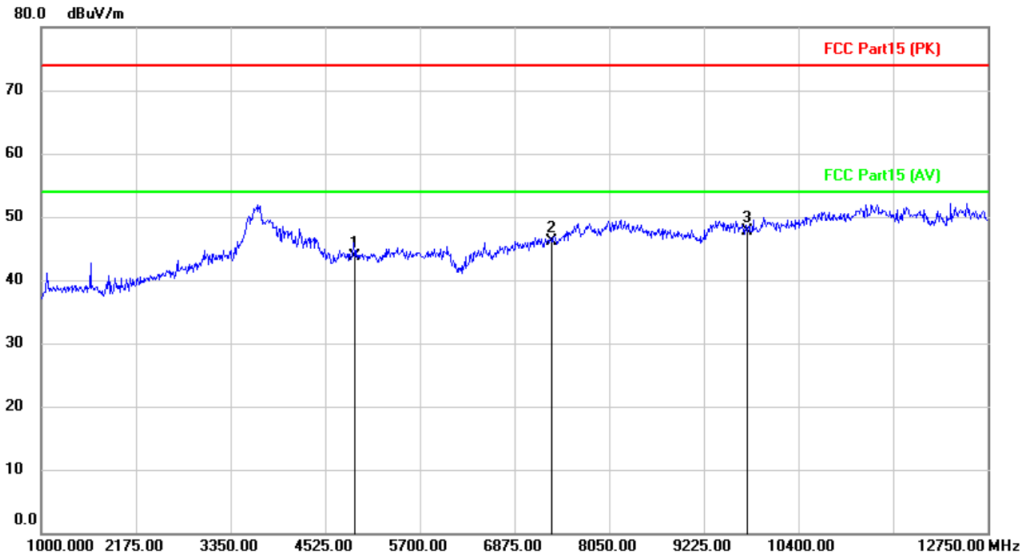

Site	Polarization: ***Vertical***	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: TLSR9518AWDK80D	Distance: 3m	
M/N: TLSR9518AWDK80D		
Mode: TX-M		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		4884.000	40.39	3.34	43.73	74.00	-30.27	peak			
2		7323.000	39.59	6.43	46.02	74.00	-27.98	peak			
3	*	9764.000	38.00	9.63	47.63	74.00	-26.37	peak			

*:Maximum data x:Over limit !:over margin 〈Reference Only

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Horizontal]

Radiated Emission Measurement

File :RE Data :#12 Date: 2021/4/20 星期 Time: 下午 2:28:35

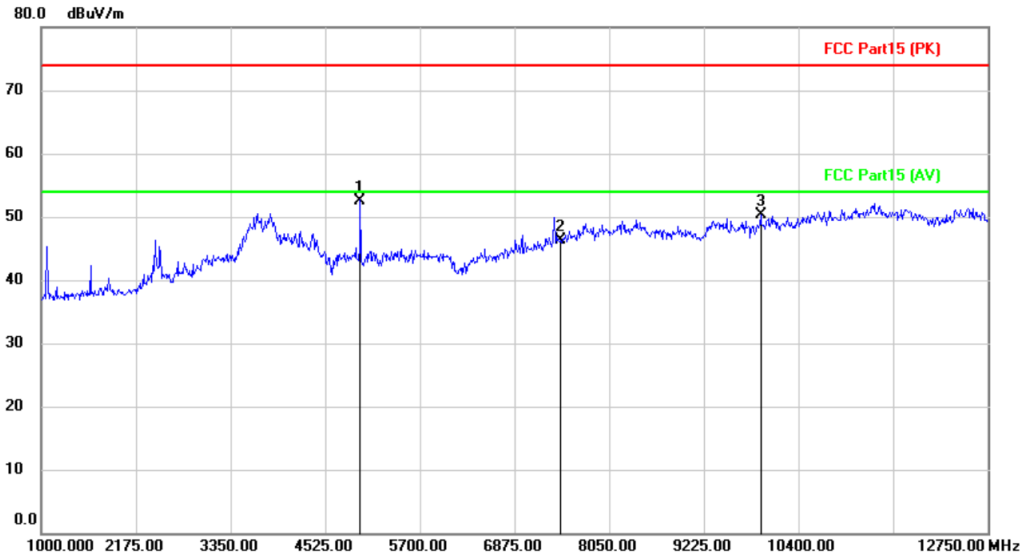

Site	Polarization: ***Horizontal***	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: TLSR9518AWDK80D	Distance: 3m	
M/N: TLSR9518AWDK80D		
Mode: TX-H		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	4959.750	48.85	3.75	52.60	74.00	-21.40	peak			
2		7440.000	39.49	6.86	46.35	74.00	-27.65	peak			
3		9920.000	40.07	10.16	50.23	74.00	-23.77	peak			

*:Maximum data x:Over limit !:over margin 〈Reference Only

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Vertical]

Radiated Emission Measurement

File :RE Data :#11 Date: 2021/4/20 星期 Time: 下午 2:18:49

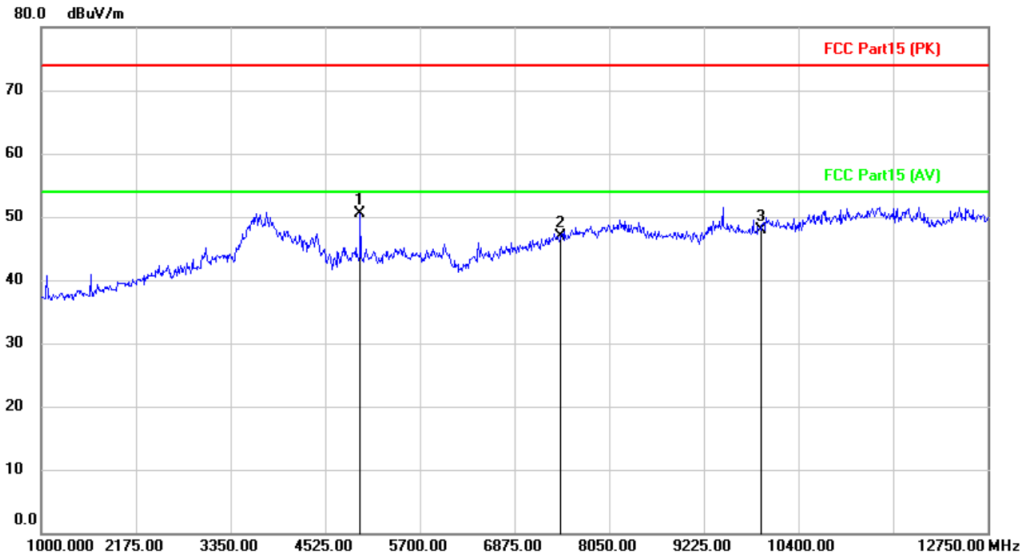

Site	Polarization: ***Vertical***	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: TLSR9518AWDK80D	Distance: 3m	
M/N: TLSR9518AWDK80D		
Mode: TX-H		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	4959.750	46.75	3.75	50.50	74.00	-23.50	peak			
2		7440.000	40.08	6.86	46.94	74.00	-27.06	peak			
3		9920.000	37.73	10.16	47.89	74.00	-26.11	peak			

*:Maximum data x:Over limit !:over margin 〈Reference Only

Test Result: Pass

Antenna 2: External ANT

Below 1GHz:

[TestMode: TX]; [Polarity: Horizontal]

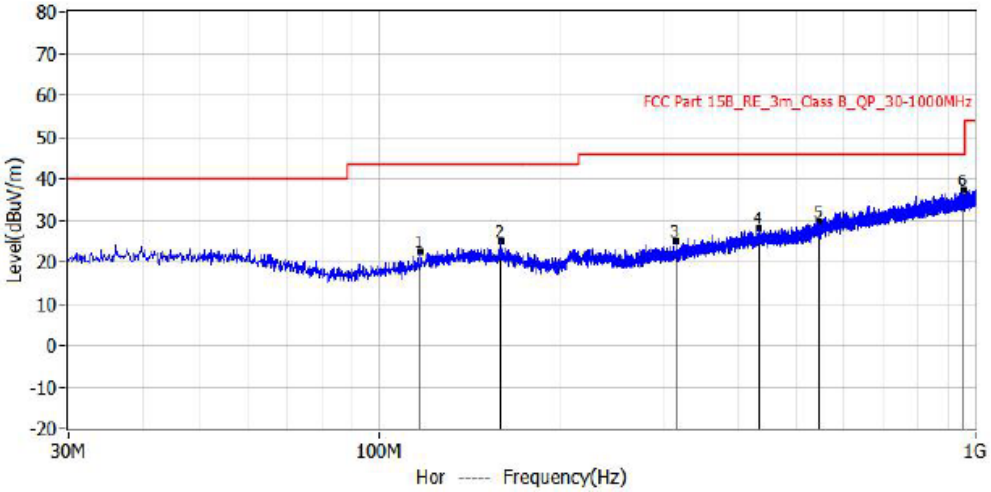

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	117.058MHz	43.5	22.5	-21.0	0.1	22.4	QP	Hor		
2*	159.980MHz	43.5	24.9	-18.6	1.6	23.3	QP	Hor		
3*	315.059MHz	46.0	24.9	-21.1	0.4	24.5	QP	Hor		
4*	434.248MHz	46.0	27.9	-18.1	0.2	27.7	QP	Hor		
5*	547.859MHz	46.0	29.6	-16.4	-0.2	29.8	QP	Hor		
6*	954.289MHz	46.0	37.1	-8.9	1.5	35.6	QP	Hor		

Test Result: Pass

[TestMode: TX]; [Polarity: Vertical]

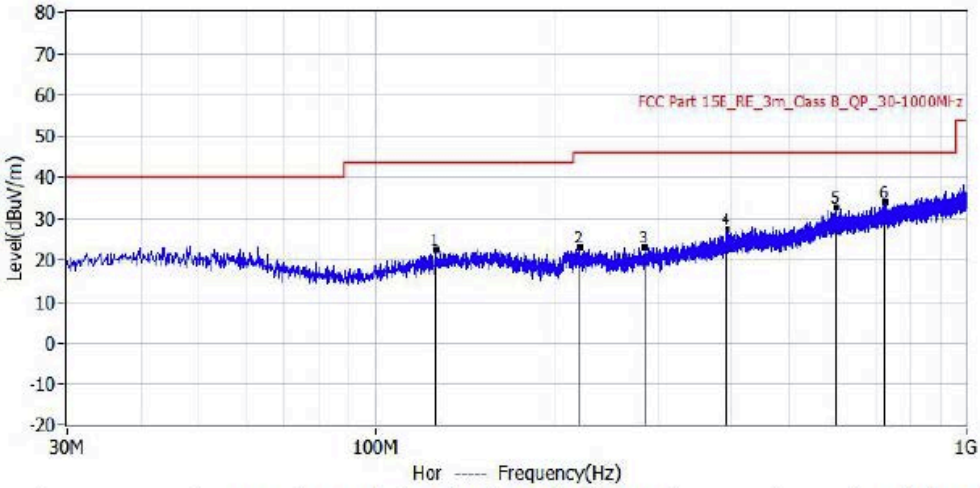

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	126.030MHz	43.5	22.4	-21.1	-0.6	23.0	QP	V		
2*	220.848MHz	46.0	23.1	-22.9	1.3	21.8	QP	V		
3*	284.746MHz	46.0	23.0	-23.0	-0.7	23.7	QP	V		
4*	392.780MHz	46.0	27.3	-18.7	0.2	27.1	QP	V		
5*	601.815MHz	46.0	32.5	-13.5	1.2	31.3	QP	V		
6*	725.005MHz	46.0	33.8	-12.2	1.3	32.5	QP	V		

Test Result: Pass

Above 1GHz:

[TestMode: TX Low channel]; [Polarity: Horizontal]

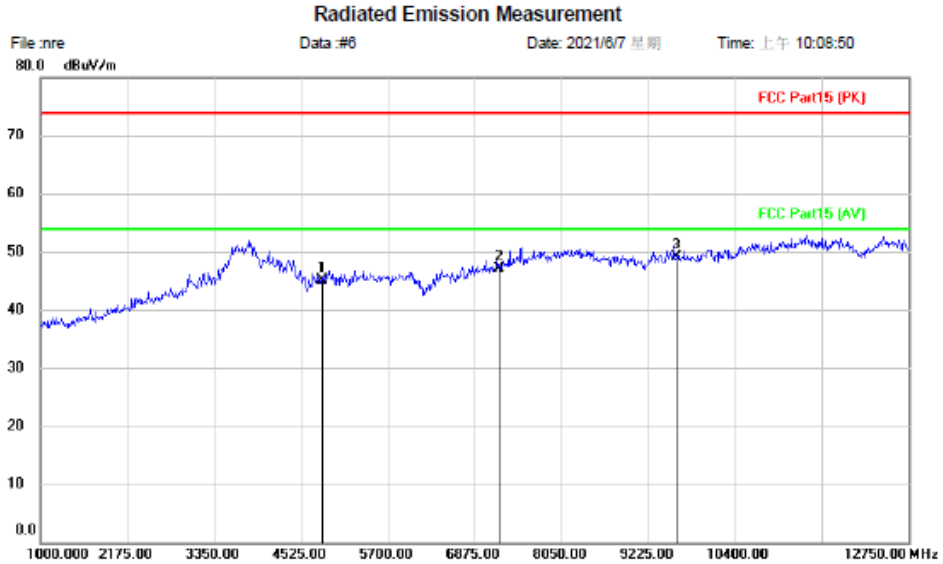

Site	Polarization: *Horizontal*	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: TLSR9518AWDK80D	Distance:	
M/N: TLSR9518AWDK80D		
Mode: TX-L		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		4804.000	41.48	3.71	45.19	74.00	-28.81	peak			
2		7206.000	41.24	5.96	47.20	74.00	-26.80	peak			
3	*	9608.000	39.78	9.29	49.07	74.00	-24.93	peak			

Test Result: Pass

[TestMode: TX Low channel]; [Polarity: Vertical]

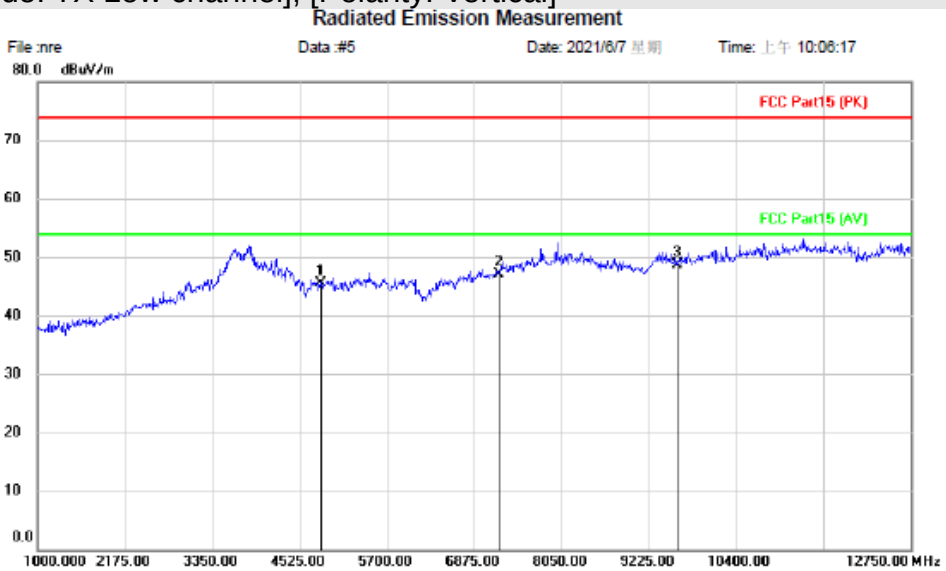

Site	Polarization: *Vertical*	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: TLSR9518AWDK80D	Distance:	
M/N: TLSR9518AWDK80D		
Mode: TX-L		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		4804.000	41.89	3.71	45.60	74.00	-28.40	peak			
2		7206.000	41.18	5.96	47.14	74.00	-26.86	peak			
3	*	9608.000	39.40	9.29	48.69	74.00	-25.31	peak			

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Horizontal]

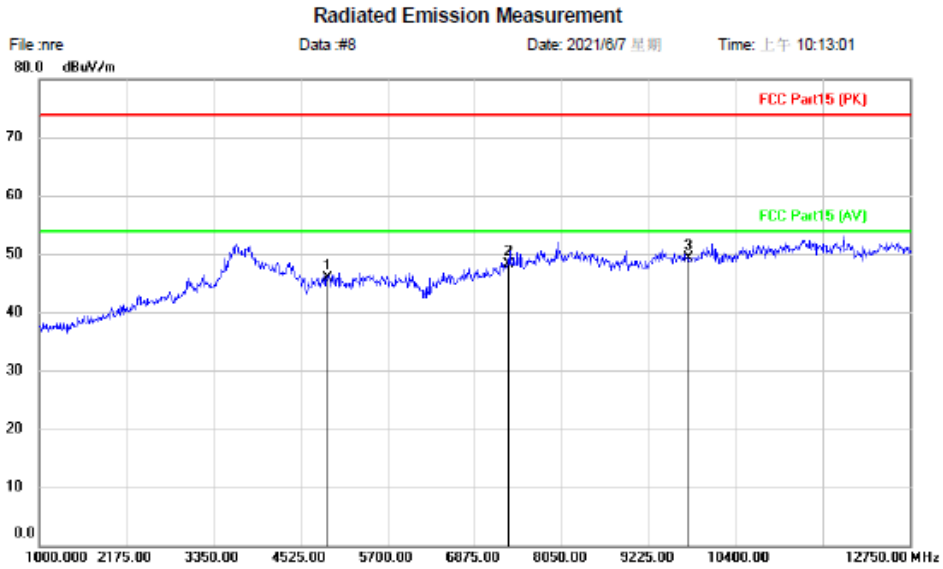

Site
Limit: FCC Part15 (PK)
EUT: TLSR9518AWDK80D
M/N: TLSR9518AWDK80D
Mode: TX-M
Note:

Polarization: *Horizontal*
Power:
Distance:

Temperature:
Humidity: %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		4884.000	42.53	3.34	45.87	74.00	-28.13	peak			
2		7323.000	41.93	6.43	48.36	74.00	-25.64	peak			
3	*	9764.000	39.76	9.63	49.39	74.00	-24.61	peak			

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Vertical]

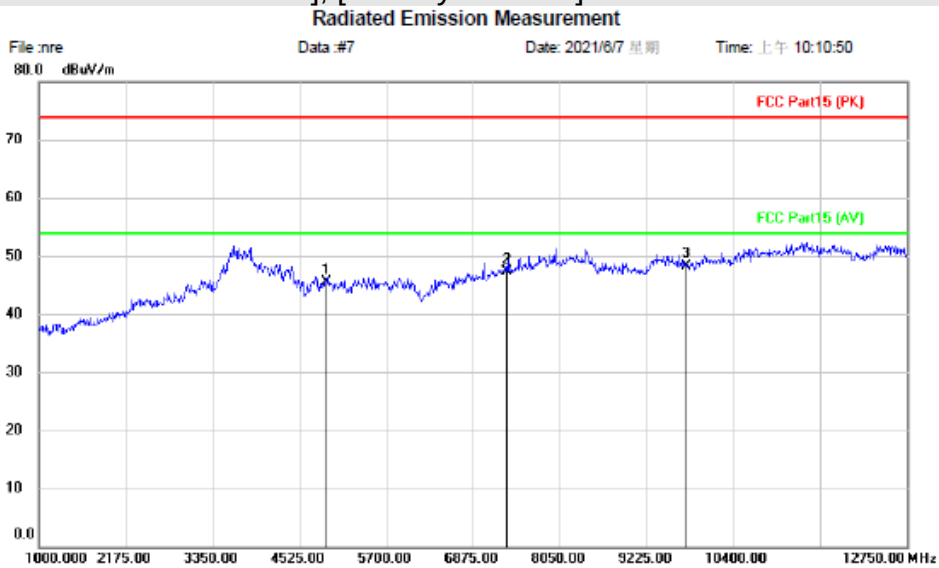

Site
Limit: FCC Part15 (PK)
EUT: TLSR9518AWDK80D
M/N: TLSR9518AWDK80D
Mode: TX-M
Note:

Polarization: *Vertical*
Power:
Distance:

Temperature:
Humidity: %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		4882.000	42.21	3.36	45.57	74.00	-28.43	peak			
2		7323.000	40.92	6.43	47.35	74.00	-26.65	peak			
3	*	9764.000	38.61	9.63	48.24	74.00	-25.76	peak			

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Horizontal]

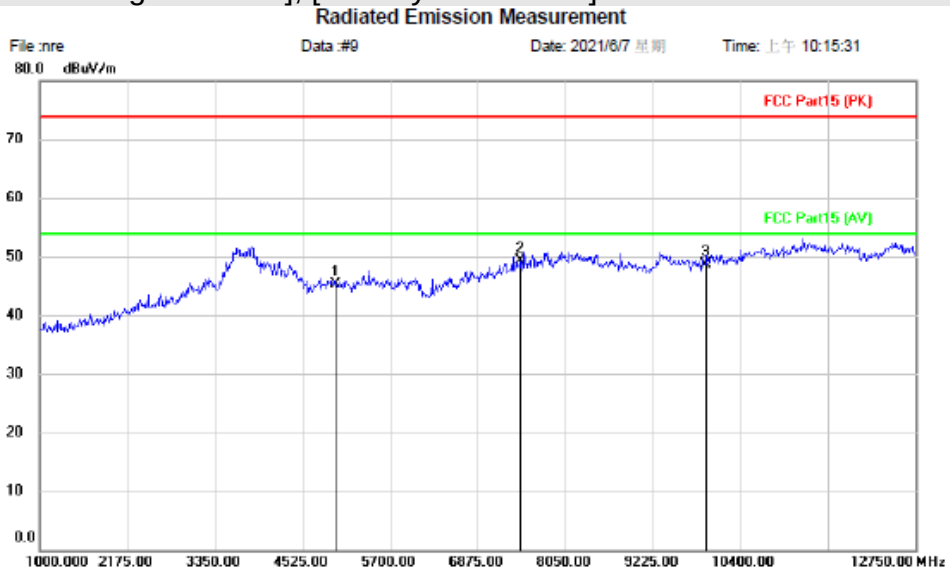

Site	Polarization: *Horizontal*	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: TLSR9518AWDK80D	Distance:	
M/N: TLSR9518AWDK80D		
Mode: TX-H		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		4960.000	41.64	3.75	45.39	74.00	-28.61	peak			
2	*	7440.000	42.37	6.86	49.23	74.00	-24.77	peak			
3		9920.000	38.63	10.16	48.79	74.00	-25.21	peak			

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Vertical]

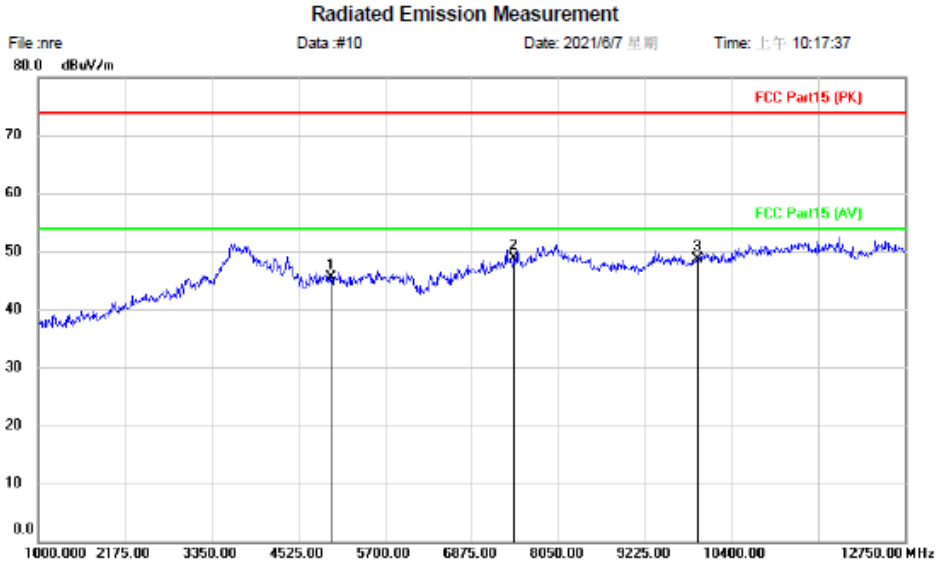

Site
Limit: FCC Part15 (PK)
EUT: TLSR9518AWDK80D
M/N: TLSR9518AWDK80D
Mode: TX-H
Note:

Polarization: *Vertical*
Power:
Distance:

Temperature:
Humidity: %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		4960.000	41.80	3.75	45.55	74.00	-28.45	peak			
2	*	7440.000	41.96	6.86	48.82	74.00	-25.18	peak			
3		9920.000	38.54	10.16	48.70	74.00	-25.30	peak			

Test Result: Pass

6 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX Low channel;TX high channel
Test Mode (Final Test)	TX Low channel;TX high channel
Tester	Sven
Temperature	25℃
Humidity	52%

6.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3
Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.		

6.2 BLOCK DIAGRAM OF TEST SETUP

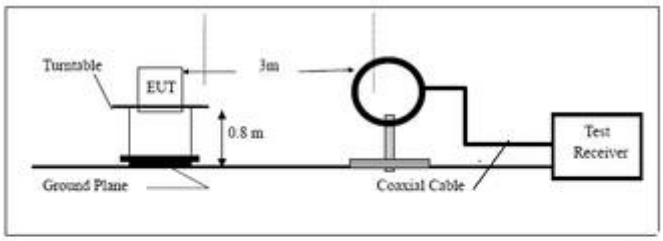

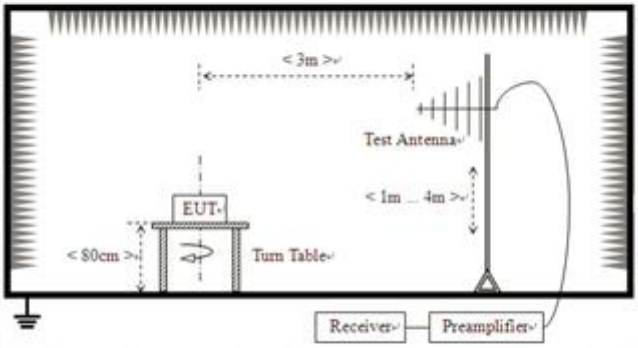

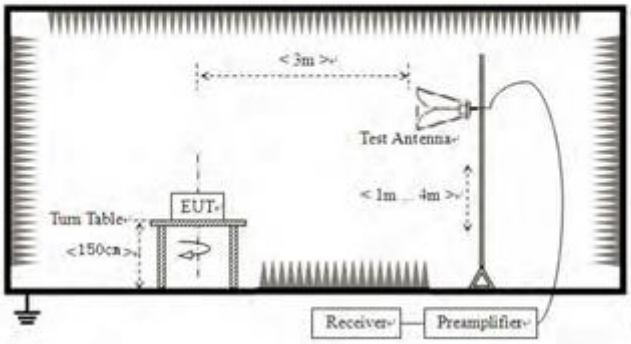

6.3 PROCEDURE

a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
j. Repeat above procedures until all frequencies measured was complete.
Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

6.4 TEST DATA

Antenna 1: PCB ANT

[TestMode: TX Low channel]; [Polarity: Horizontal]

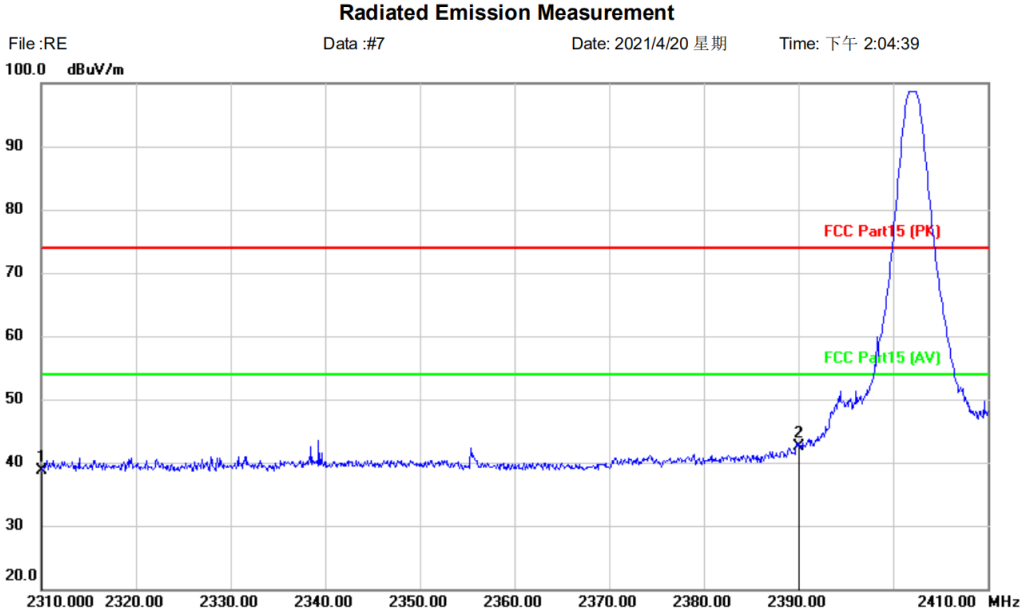

Site	Polarization: ***Horizontal***	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: TLSR9518AWDK80D	Distance: 3m	
M/N: TLSR9518AWDK80D		
Mode: TX-L		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		2310.000	43.25	-4.61	38.64	74.00	-35.36	peak			
2	*	2390.000	46.78	-4.27	42.51	74.00	-31.49	peak			

*:Maximum data x:Over limit !:over margin 〈Reference Only

Test Result: Pass

[TestMode: TX Low channel]; [Polarity: Vertical]

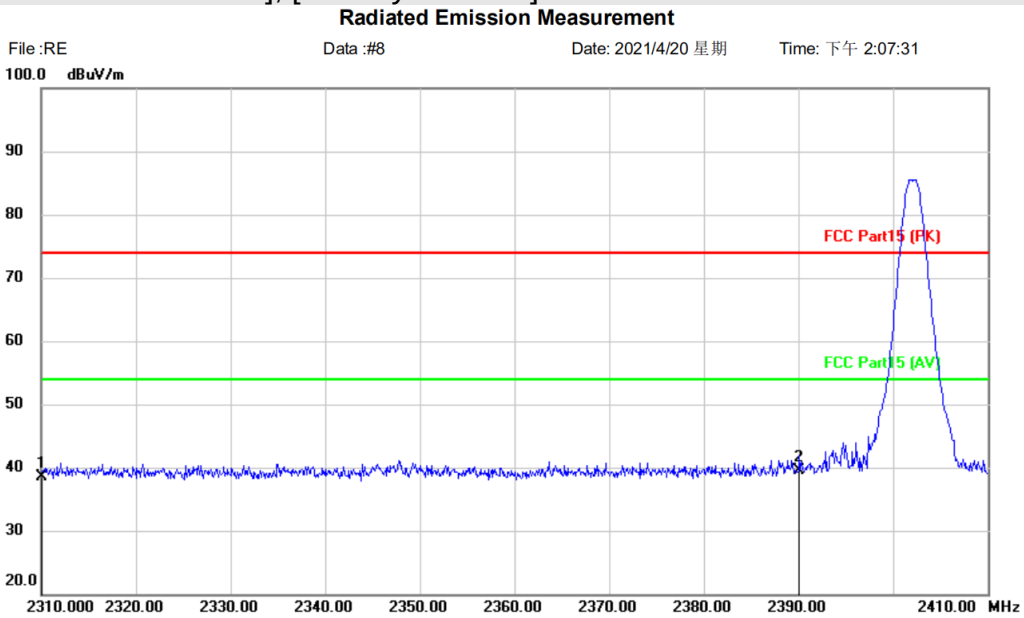

Site	Polarization: ***Vertical***	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: TLSR9518AWDK80D	Distance: 3m	
M/N: TLSR9518AWDK80D		
Mode: TX-L		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		2310.000	43.17	-4.61	38.56	74.00	-35.44	peak			
2	*	2390.000	43.78	-4.27	39.51	74.00	-34.49	peak			

*:Maximum data x:Over limit !:over margin 〈Reference Only

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Horizontal]

Radiated Emission Measurement

File :RE Data :#14 Date: 2021/4/20 星期 Time: 下午 2:41:50

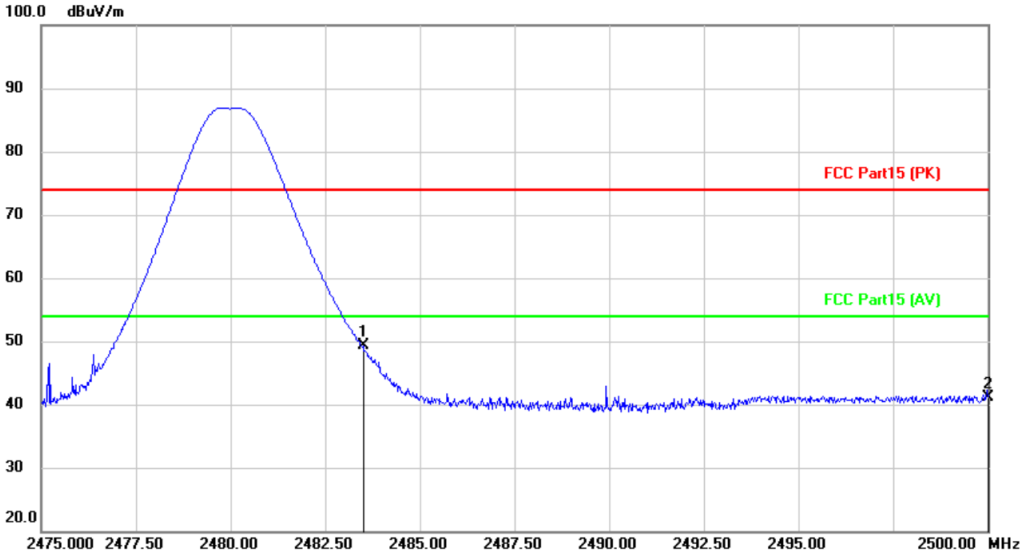

Site	Polarization: ***Horizontal***	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: TLSR9518AWDK80D	Distance: 3m	
M/N: TLSR9518AWDK80D		
Mode: TX-H		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	2483.500	53.07	-3.84	49.23	74.00	-24.77	peak			
2		2500.000	44.88	-3.78	41.10	74.00	-32.90	peak			

*:Maximum data x:Over limit !:over margin 〈Reference Only

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Vertical]

Radiated Emission Measurement

File :RE Data :#13 Date: 2021/4/20 星期 Time: 下午 2:39:30

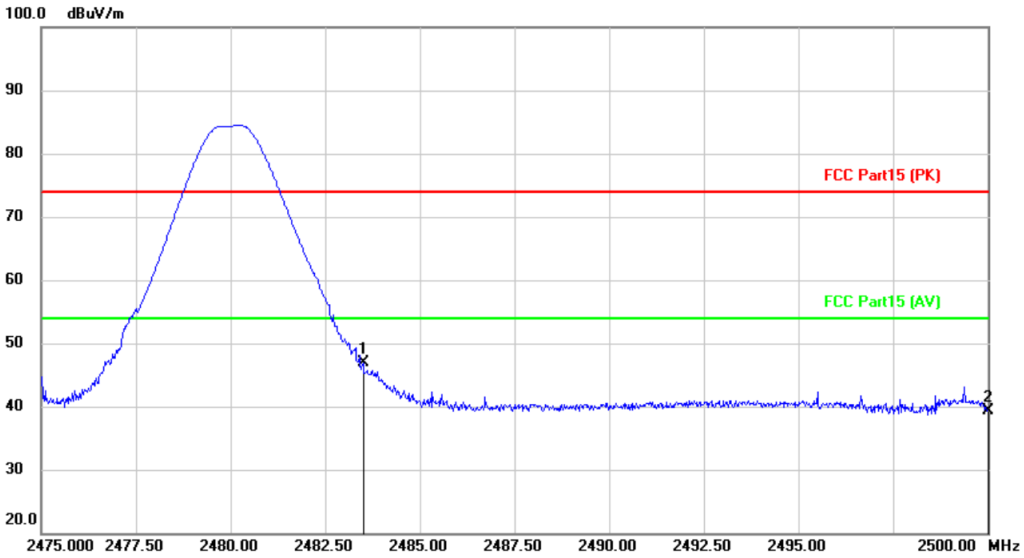

Site	Polarization: ***Vertical***	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: TLSR9518AWDK80D	Distance: 3m	
M/N: TLSR9518AWDK80D		
Mode: TX-H		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	2483.500	50.72	-3.84	46.88	74.00	-27.12	peak			
2		2500.000	43.14	-3.78	39.36	74.00	-34.64	peak			

*:Maximum data x:Over limit !:over margin 〈Reference Only

Test Result: Pass

Antenna 2: External ANT

[TestMode: TX Low channel]; [Polarity: Horizontal]

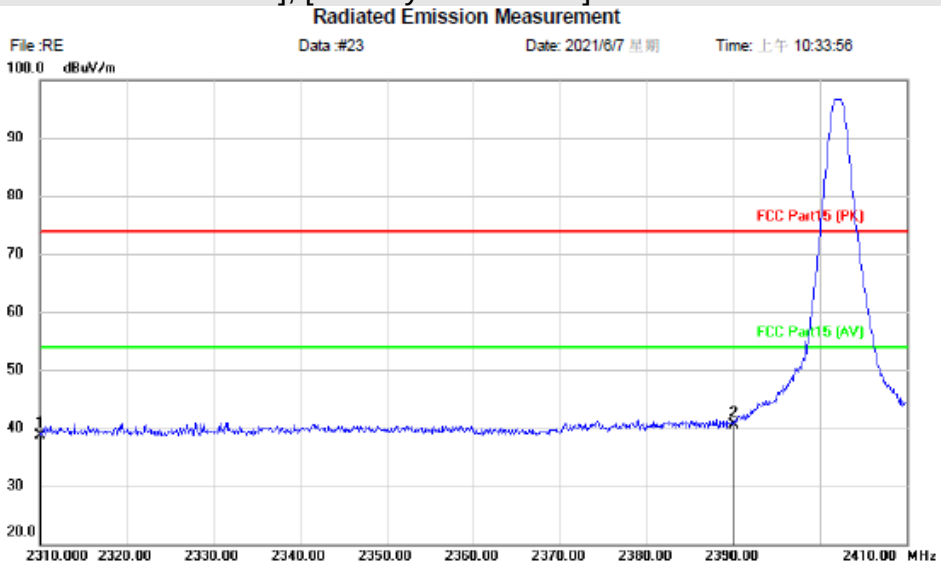

Site
Limit: FCC Part15 (PK)
EUT: TLSR9518AWDK80D
M/N: TLSR9518AWDK80D
Mode: TX-L
Note:

Polarization: *Horizontal*
Power:
Distance: 3m

Temperature:
Humidity: %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		2310.000	43.25	-4.61	38.64	74.00	-35.36	peak			
2	*	2390.000	44.78	-4.27	40.51	74.00	-33.49	peak			

Test Result: Pass

[TestMode: TX Low channel]; [Polarity: Vertical]

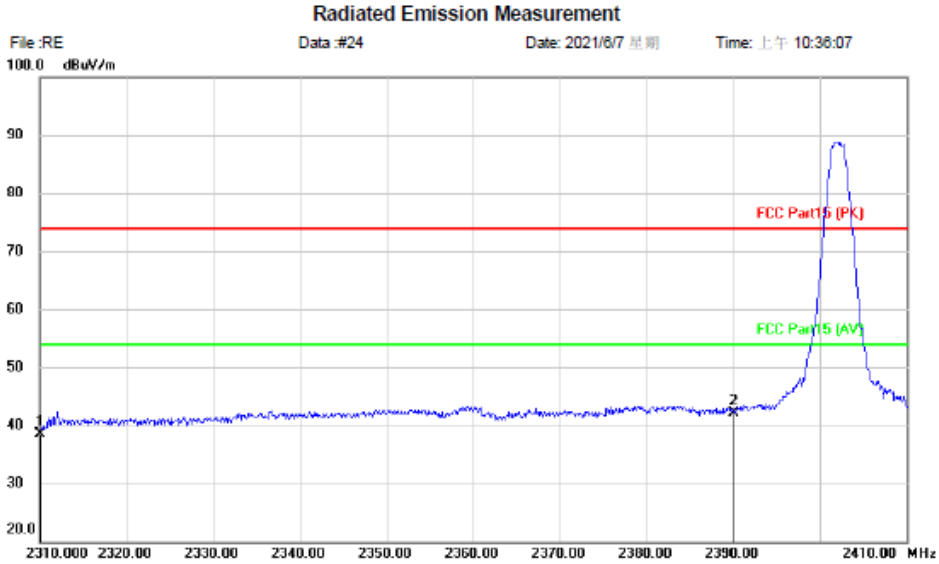

Site
Limit: FCC Part15 (PK)
EUT: TLSR9518AWDK80D
M/N: TLSR9518AWDK80D
Mode: TX-L
Note:

Polarization: *Vertical*
Power:
Distance: 3m

Temperature:
Humidity: %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		2310.000	43.17	-4.61	38.56	74.00	-35.44	peak			
2	*	2390.000	46.28	-4.27	42.01	74.00	-31.99	peak			

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Horizontal]

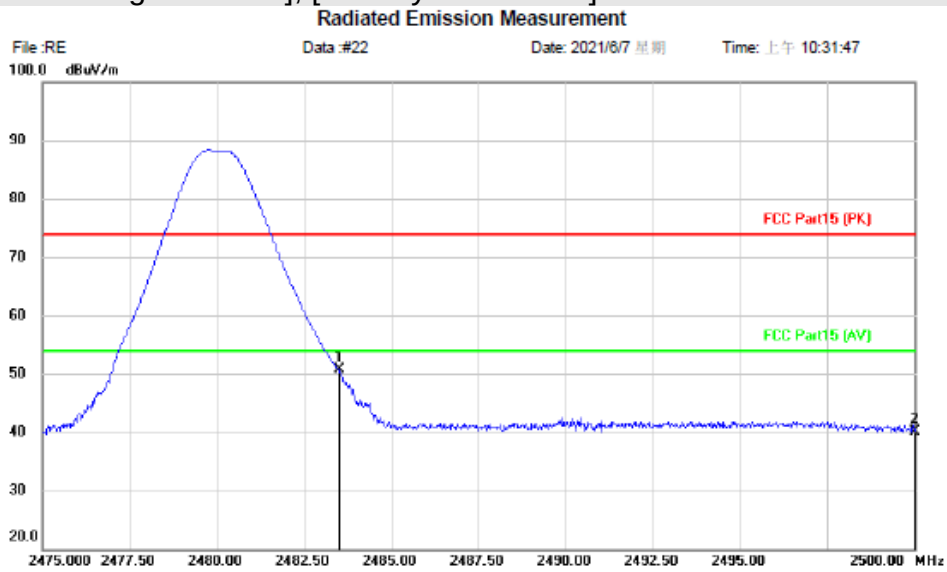

Site
Limit: FCC Part15 (PK)
EUT: TLSR9518AWDK80D
M/N: TLSR9518AWDK80D
Mode: TX-H
Note:

Polarization: *Horizontal*
Power:
Distance: 3m

Temperature:
Humidity: %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	2483.500	54.57	-3.84	50.73	74.00	-23.27	peak			
2		2500.000	43.88	-3.78	40.10	74.00	-33.90	peak			

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Vertical]

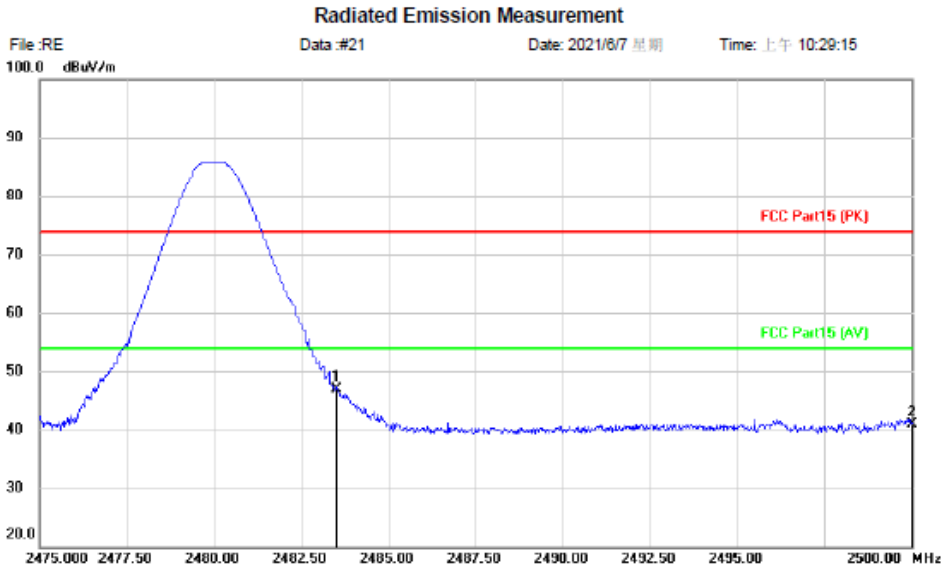

Site
Limit: FCC Part15 (PK)
EUT: TLSR9518AWDK80D
M/N: TLSR9518AWDK80D
Mode: TX-H
Note:

Polarization: *Vertical*
Power:
Distance: 3m

Temperature:
Humidity: %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	2483.500	50.72	-3.84	46.88	74.00	-27.12	peak			
2		2500.000	44.64	-3.78	40.86	74.00	-33.14	peak			

Test Result: Pass

7 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Sven
Temperature	25℃
Humidity	52%

7.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.2 BLOCK DIAGRAM OF TEST SETUP

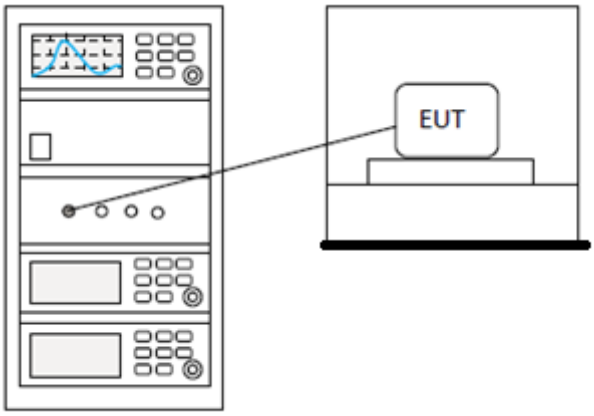

7.3 TEST DATA

Pass: Please Refer To Appendix: For Details

8 POWER SPECTRUM DENSITY

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Sven
Temperature	25℃
Humidity	52%

8.1 LIMITS

Limit:	≤8dBm in any 3 kHz band during any time interval of continuous transmission

8.2 BLOCK DIAGRAM OF TEST SETUP

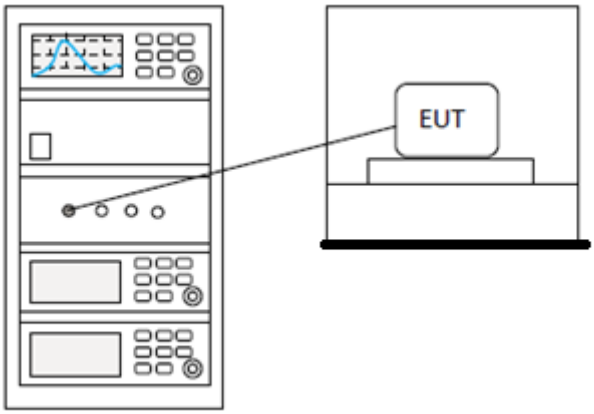

8.3 TEST DATA

Pass: Please Refer To Appendix: For Details

9 CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Sven
Temperature	25℃
Humidity	52%

9.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥50 hopping channels
	0.25 for 25≤ hopping channels <50
	1 for digital modulation
2400-2483.5	1 for ≥75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

9.2 BLOCK DIAGRAM OF TEST SETUP

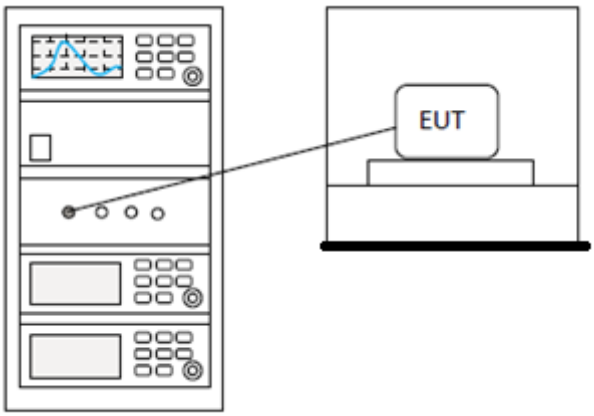

9.3 EST DATA

Pass: Please Refer To Appendix: For Details

10 APPENDIX

10.1 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	1.289	30	Pass
NVNT	BLE 1M	2442	Ant1	0.94	30	Pass
NVNT	BLE 1M	2480	Ant1	0.288	30	Pass

Power NVNT BLE 1M 2402MHz Ant1

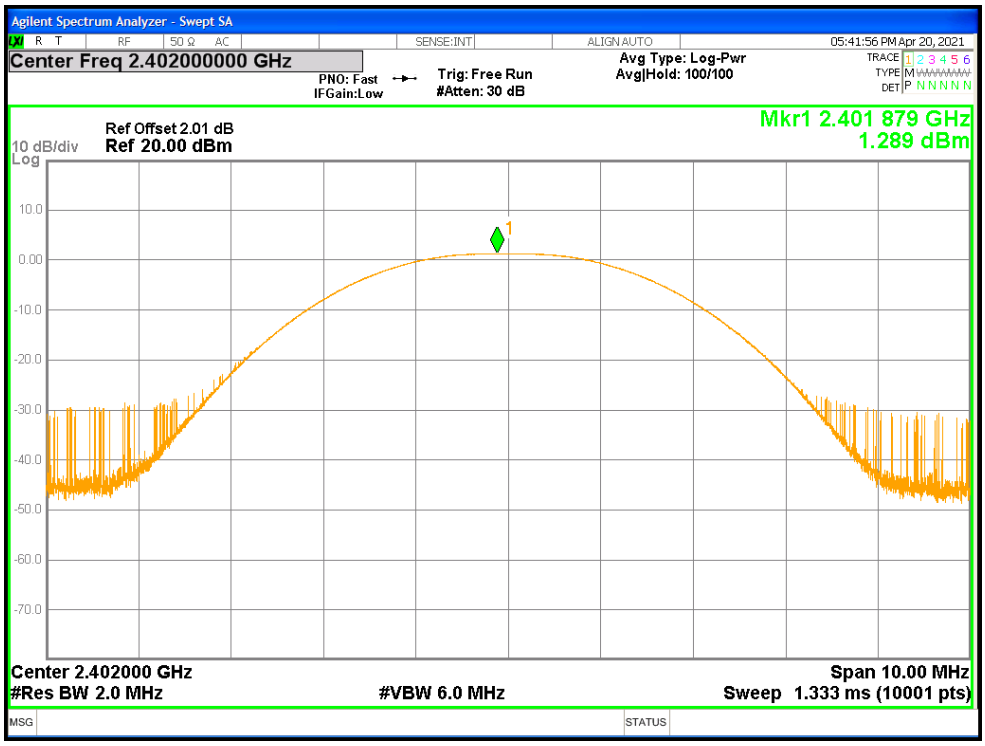

Power NVNT BLE 1M 2442MHz Ant1

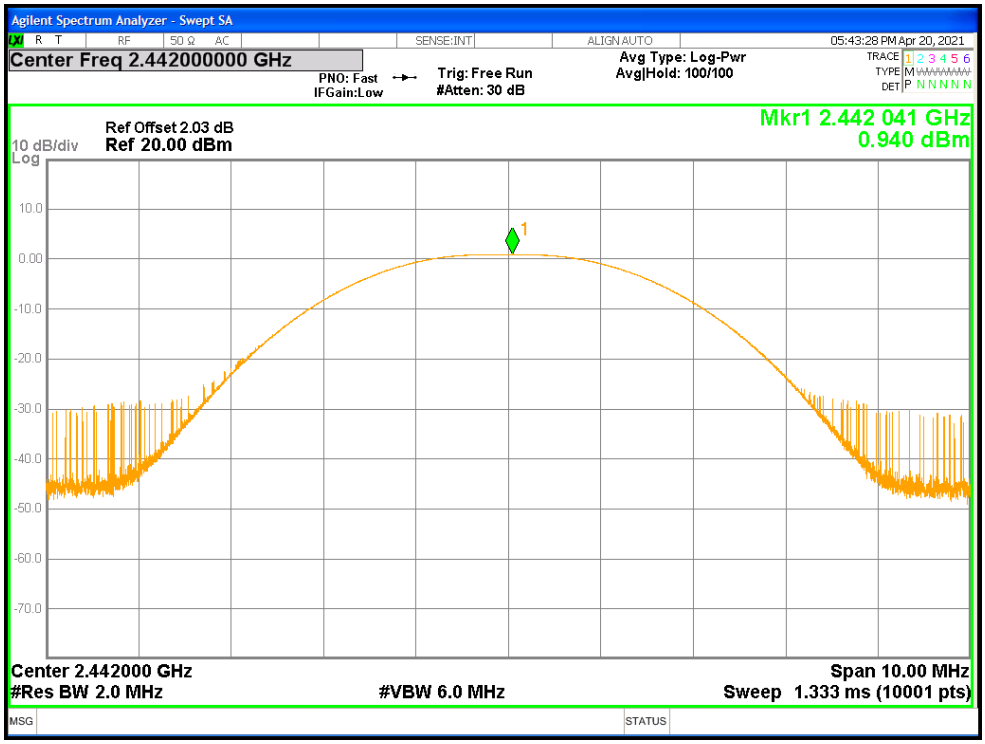

Power NVNT BLE 1M 2480MHz Ant1

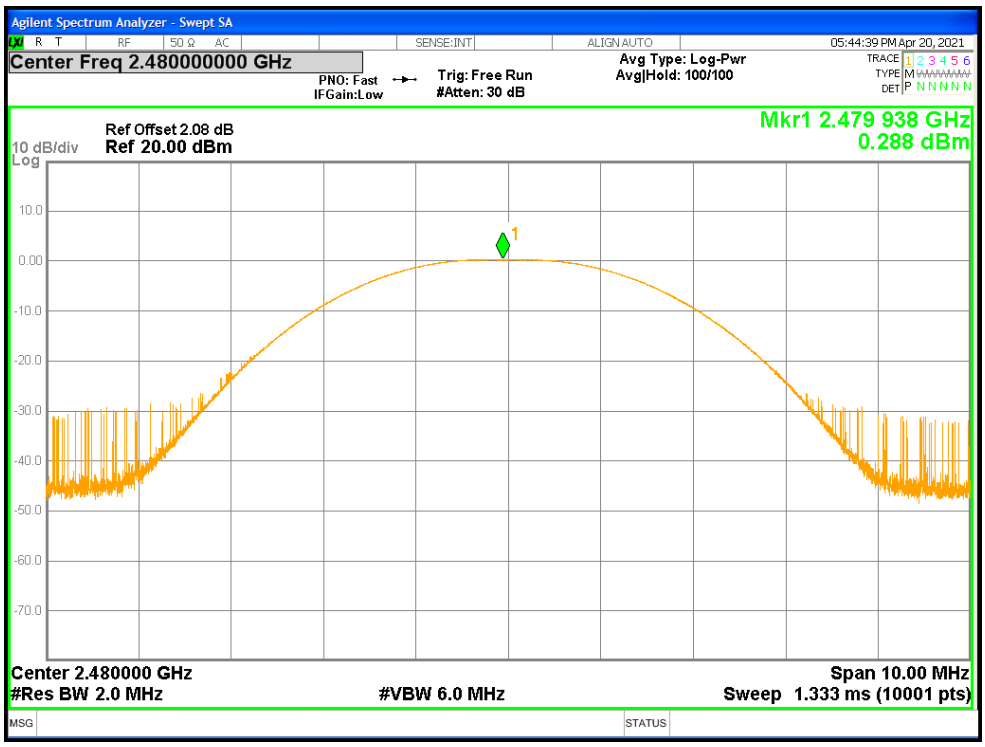

10.2 -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.677	0.5	Pass
NVNT	BLE 1M	2442	Ant1	0.683	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.687	0.5	Pass

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

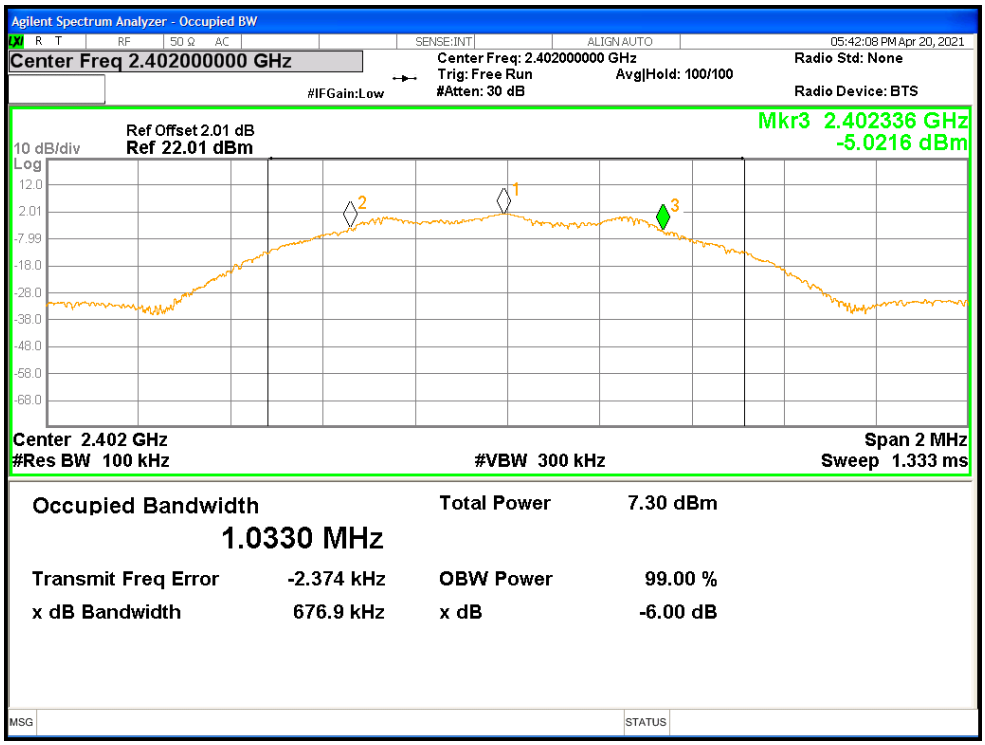

-6dB Bandwidth NVNT BLE 1M 2442MHz Ant1

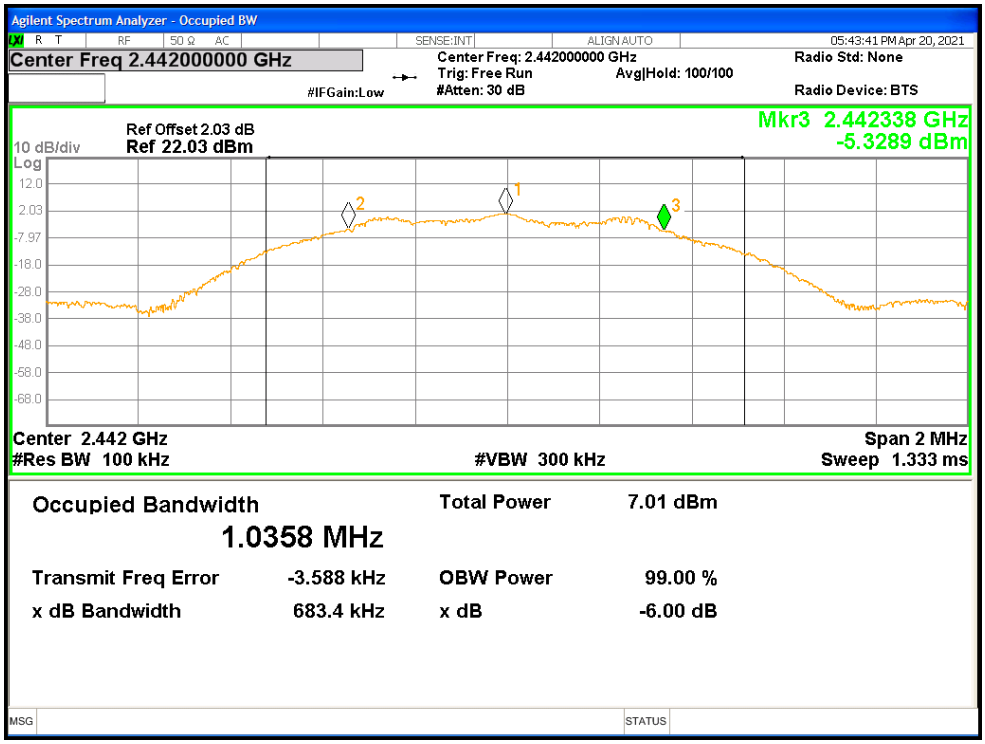

-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

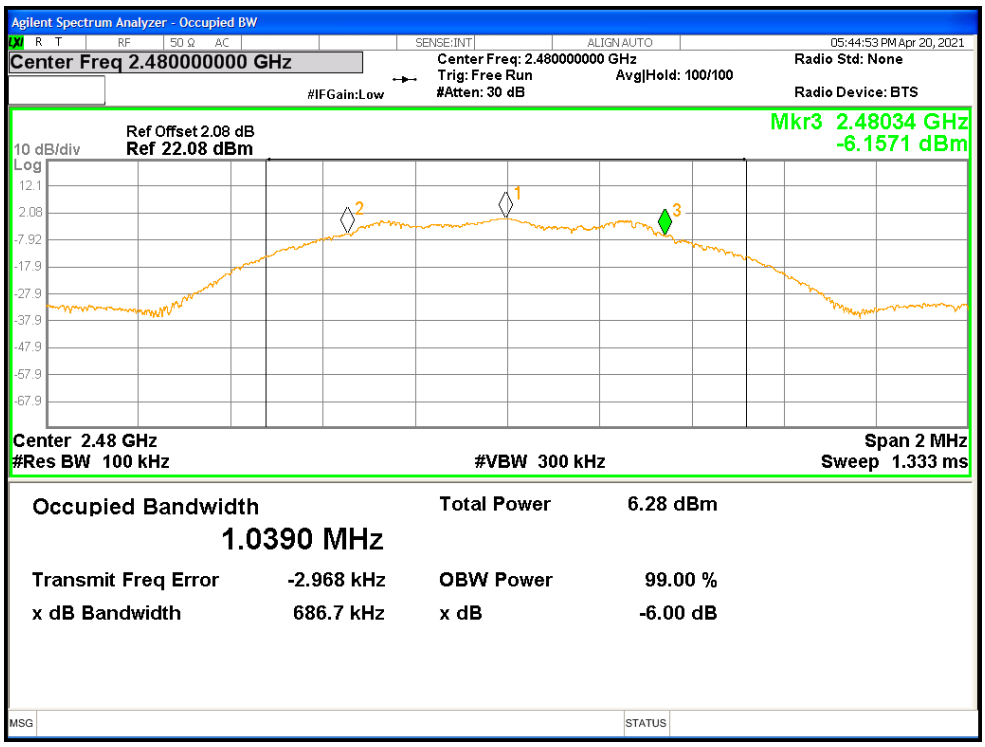

10.3 Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1M	2402	Ant1	1.017622186
NVNT	BLE 1M	2442	Ant1	1.019644131
NVNT	BLE 1M	2480	Ant1	1.018976788

OBW NVNT BLE 1M 2402MHz Ant1

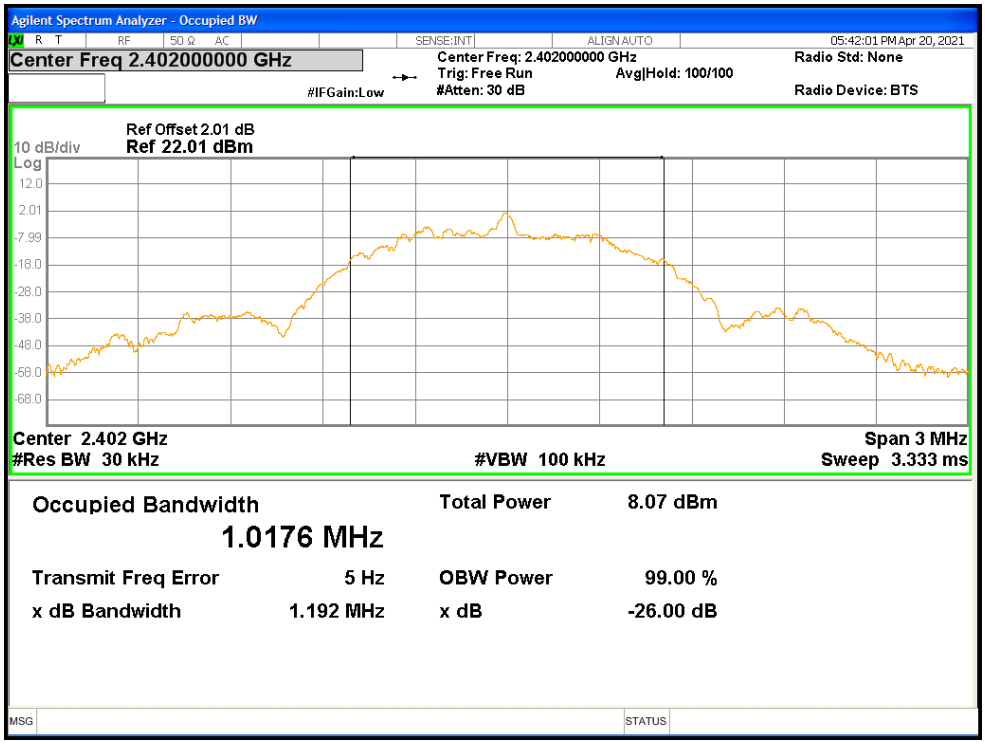

OBW NVNT BLE 1M 2442MHz Ant1

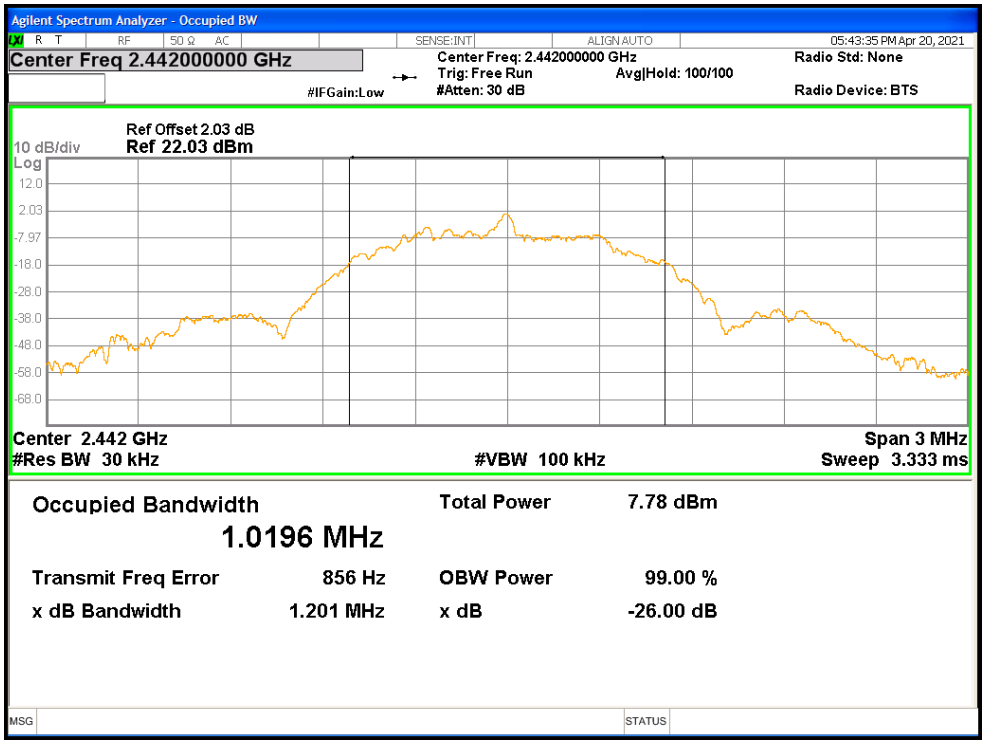

OBW NVNT BLE 1M 2480MHz Ant1

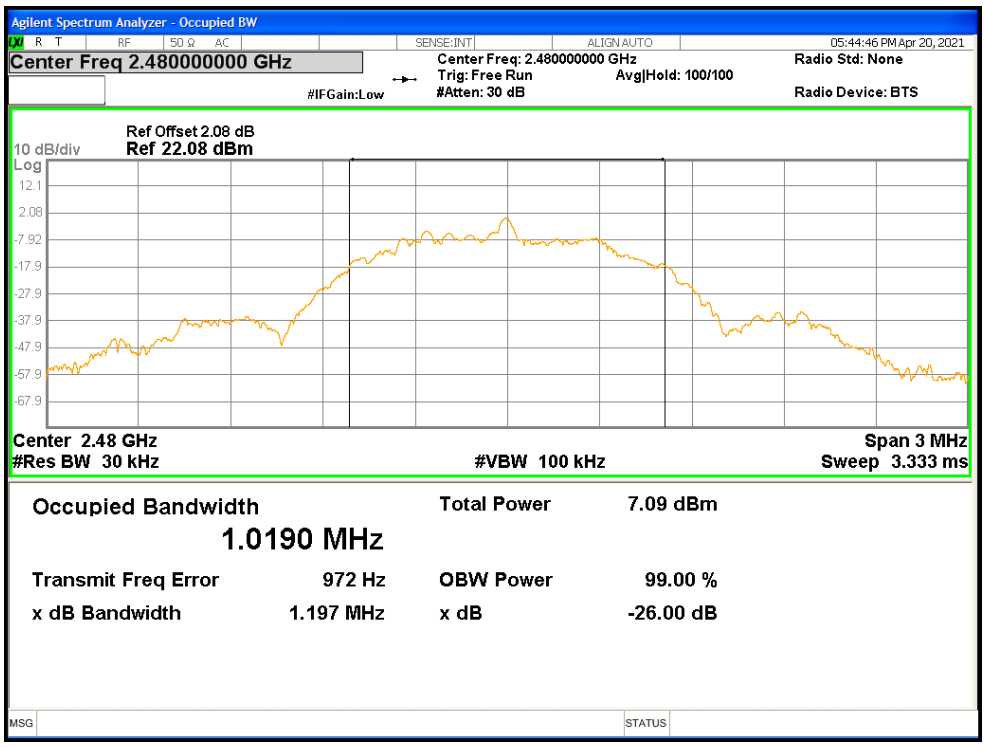

10.4 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	1.19	8	Pass
NVNT	BLE 1M	2442	Ant1	0.816	8	Pass
NVNT	BLE 1M	2480	Ant1	0.037	8	Pass

PSD NVNT BLE 1M 2402MHz Ant1

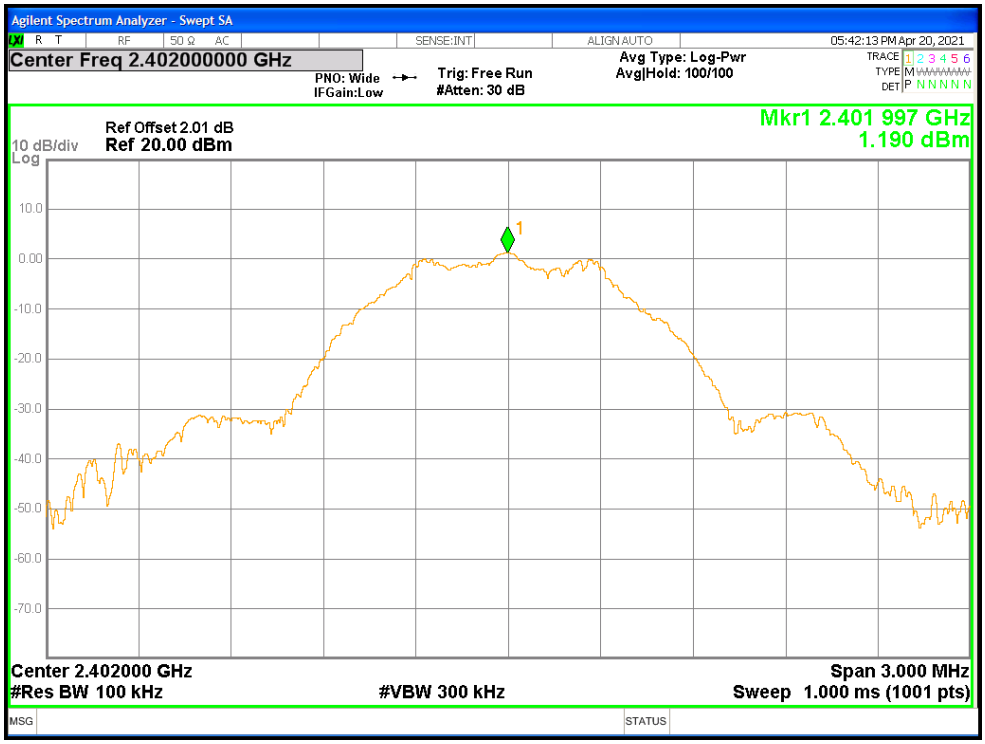

PSD NVNT BLE 1M 2442MHz Ant1

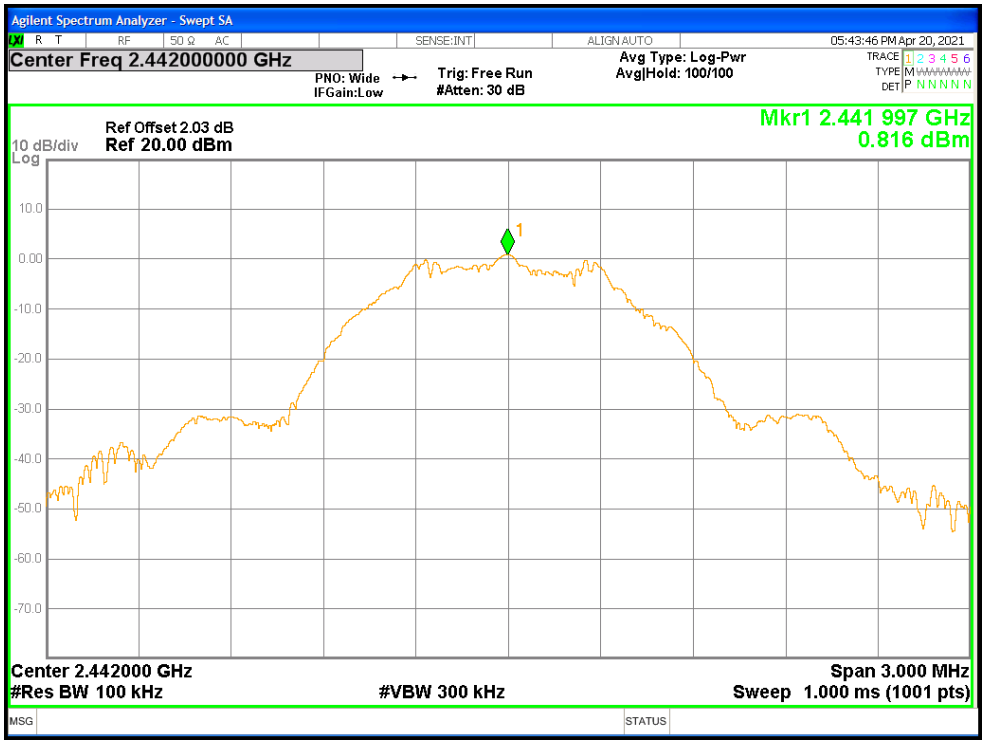

PSD NVNT BLE 1M 2480MHz Ant1

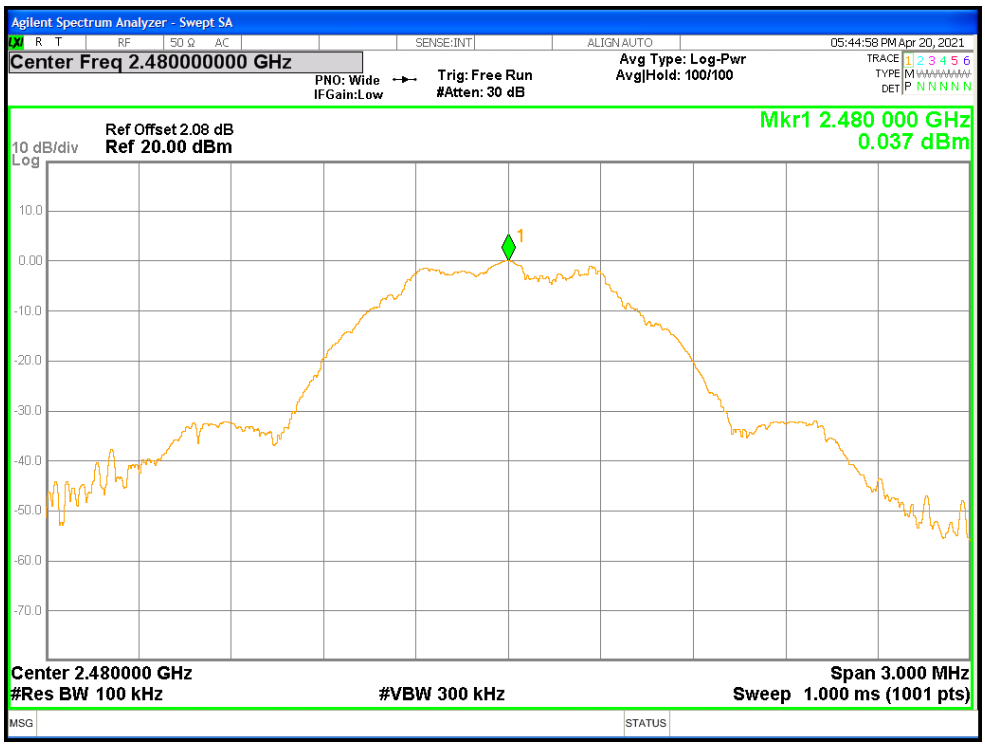

10.5 Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-56.42	-30	Pass
NVNT	BLE 1M	2480	Ant1	-54.25	-30	Pass

Band Edge NVNT BLE 1M 2402MHz Ant1 Ref

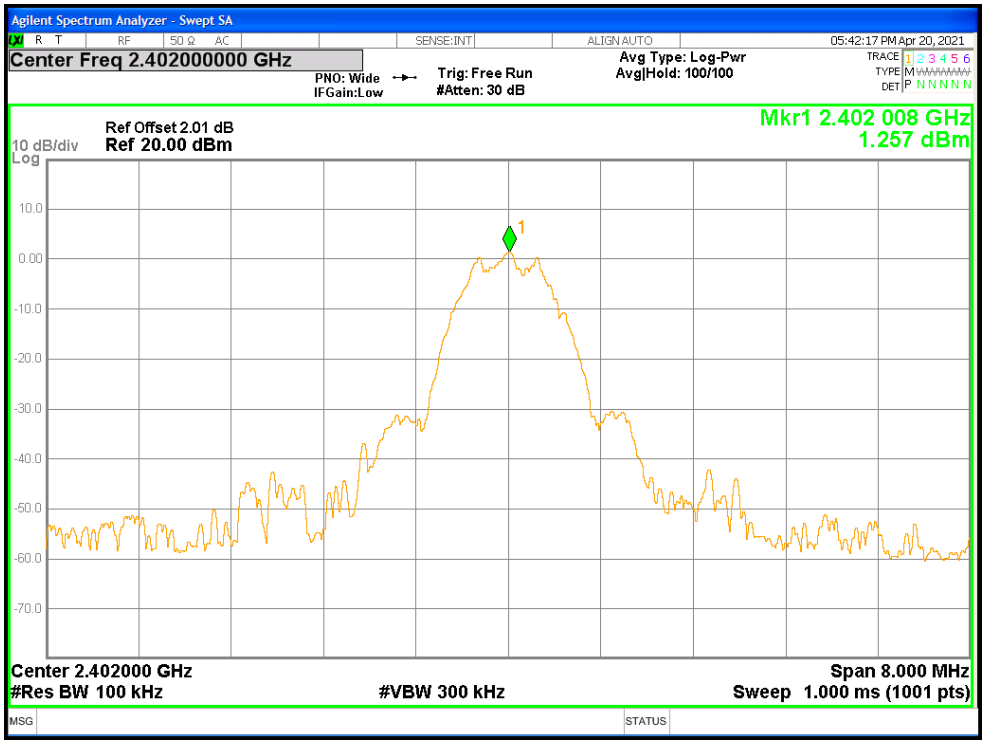

Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

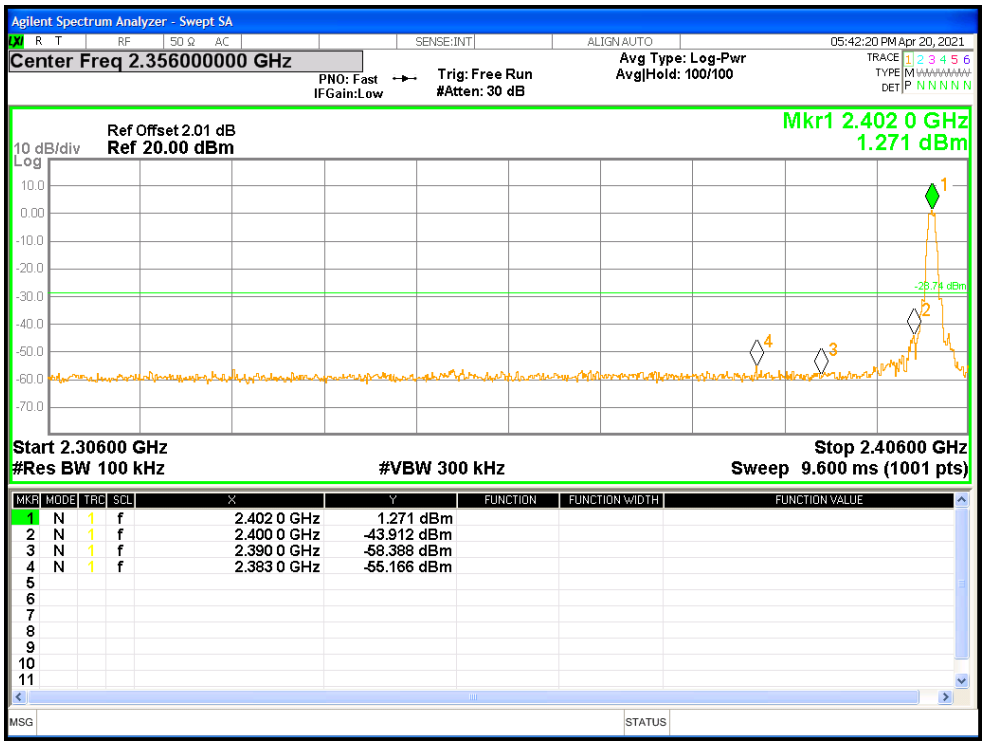

Band Edge NVNT BLE 1M 2480MHz Ant1 Ref

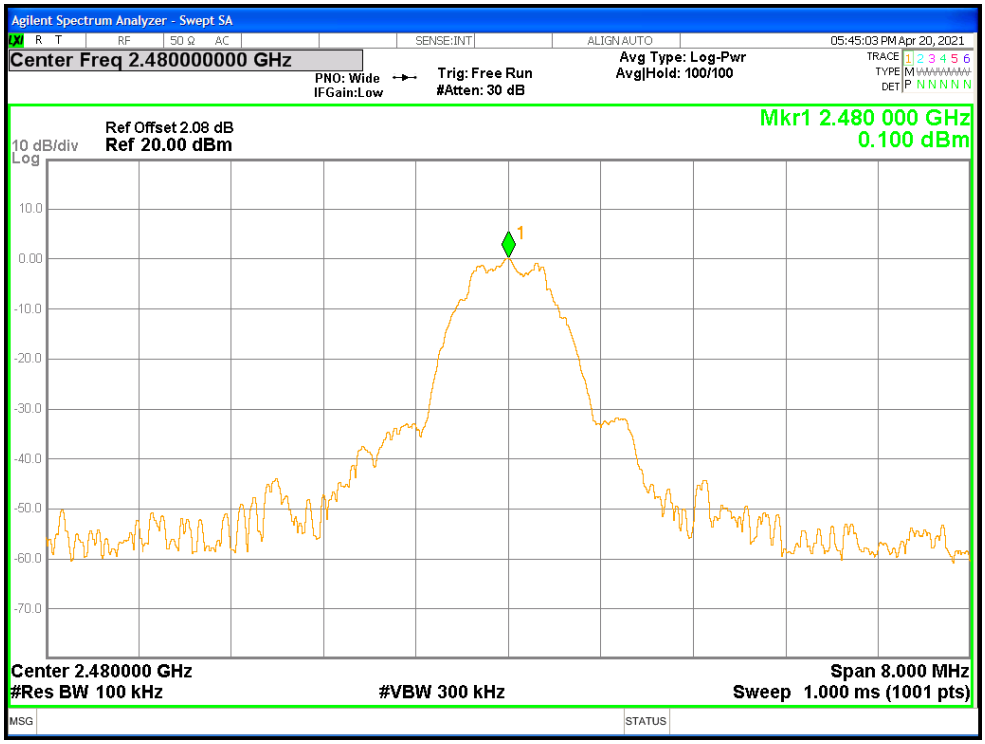

Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

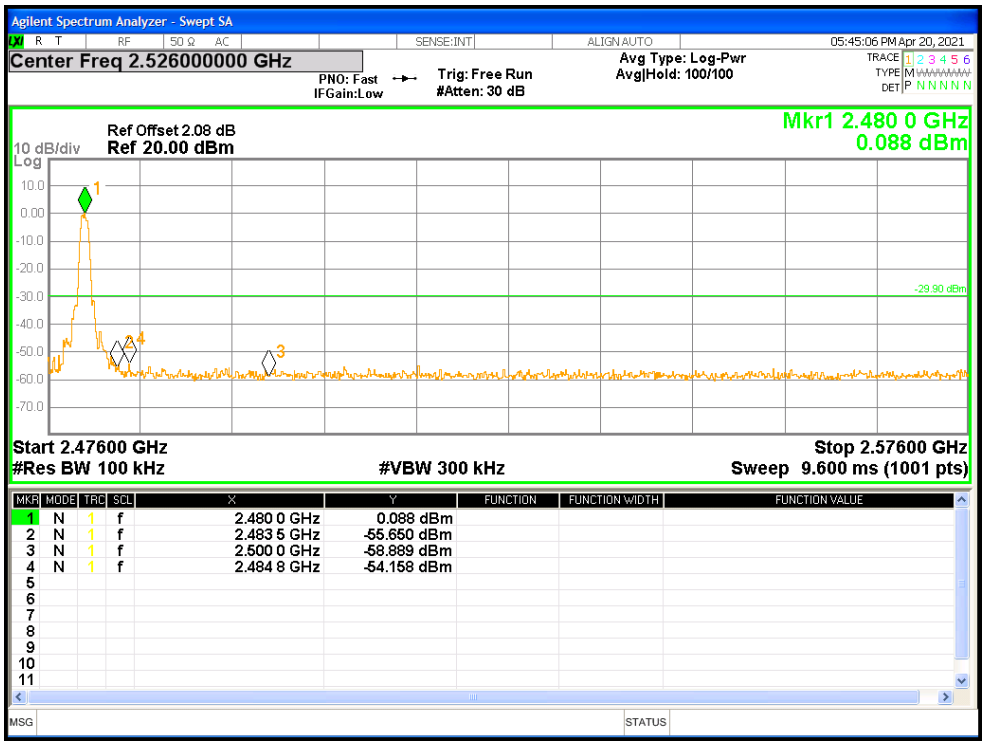

10.6 Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-45.6	-30	Pass
NVNT	BLE 1M	2442	Ant1	-46.78	-30	Pass
NVNT	BLE 1M	2480	Ant1	-45.09	-30	Pass

Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref

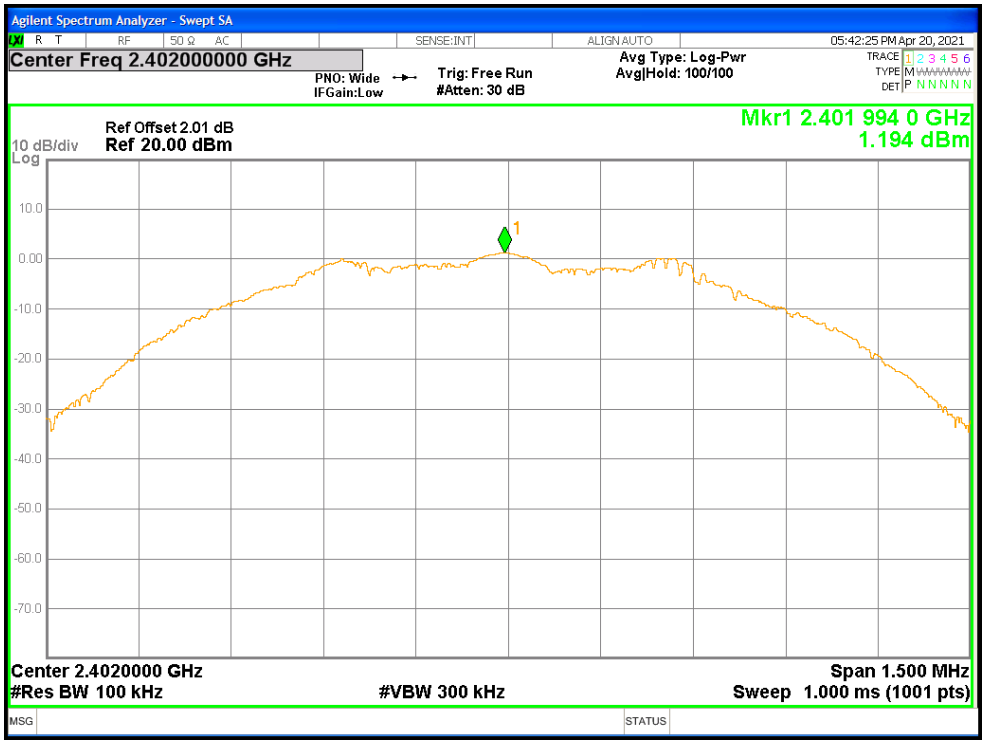

Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

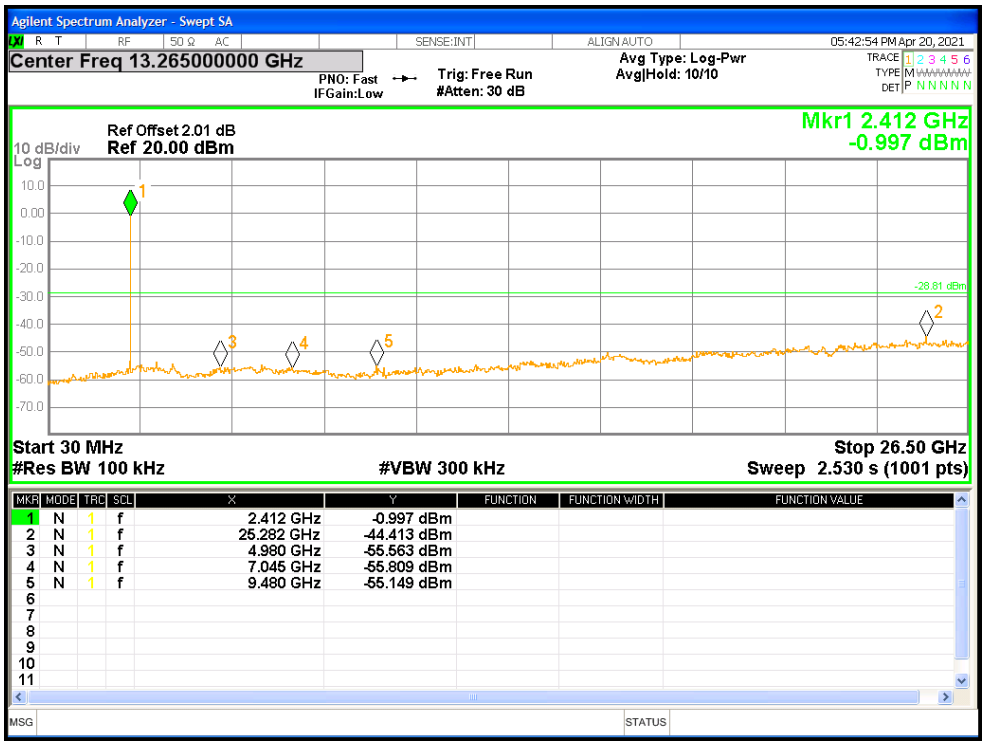

Tx. Spurious NVNT BLE 1M 2442MHz Ant1 Ref

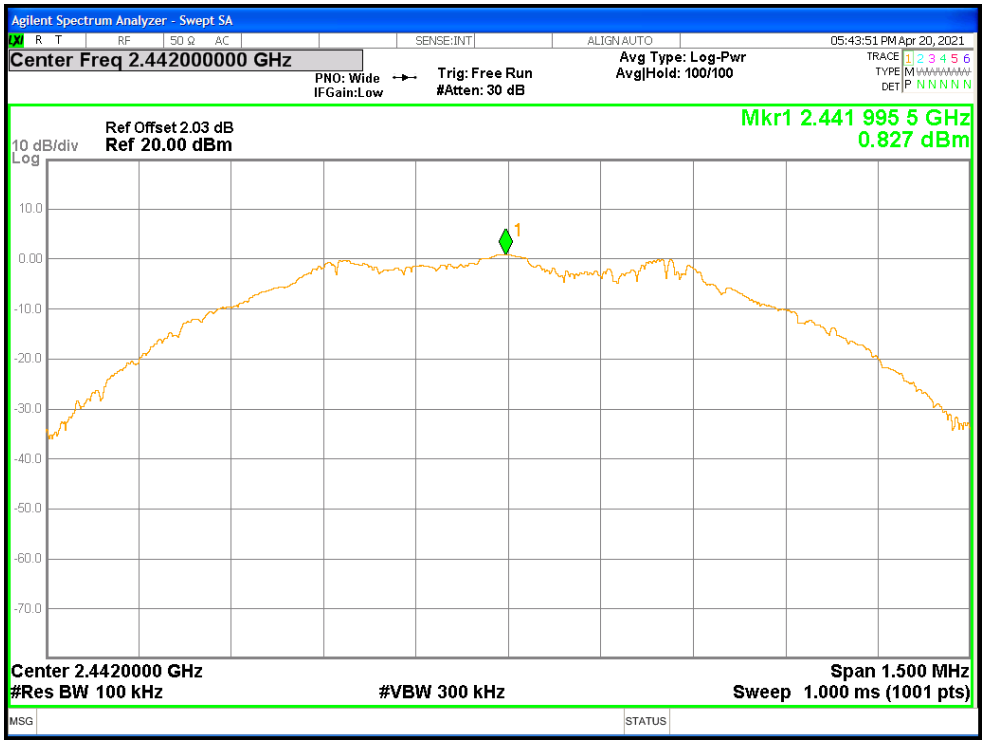

Tx. Spurious NVNT BLE 1M 2442MHz Ant1 Emission

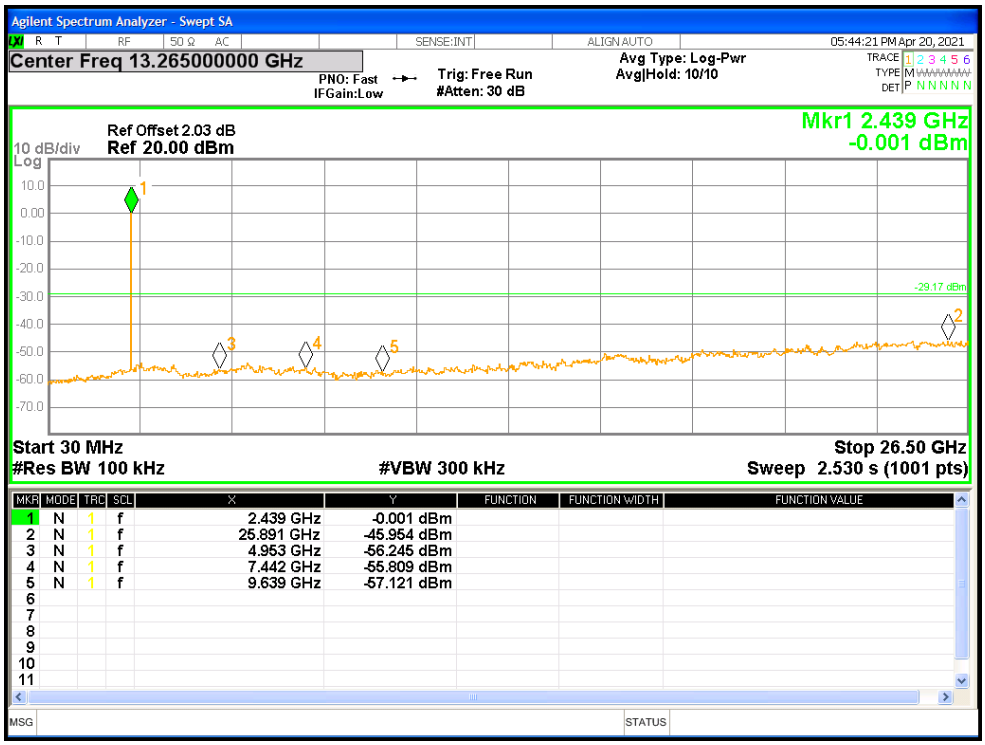

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

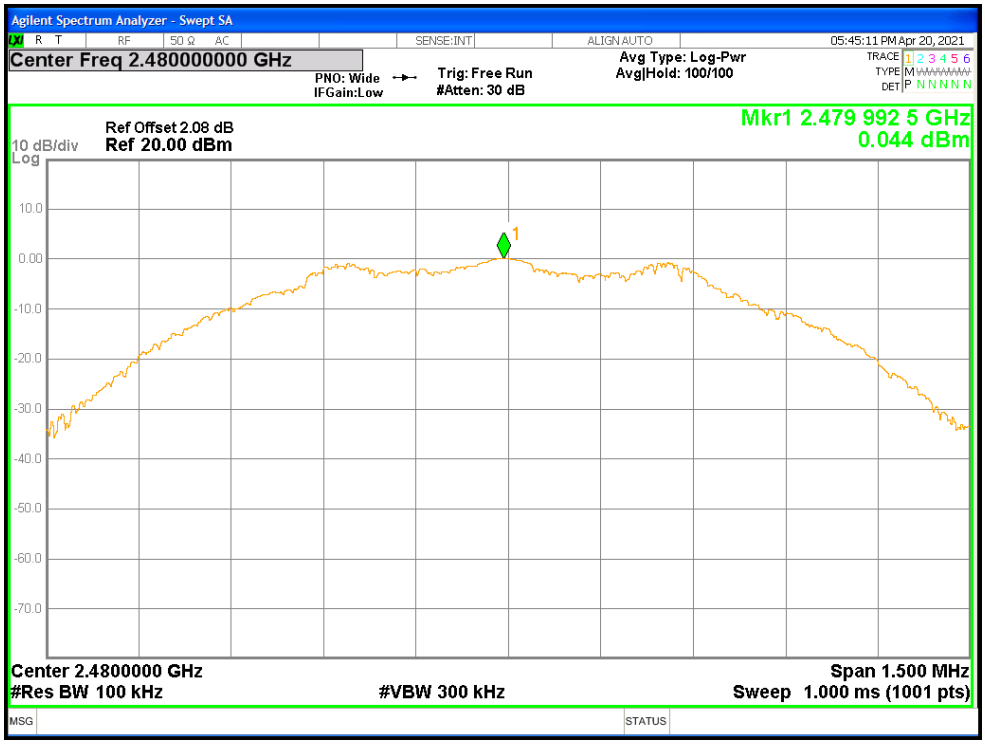

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

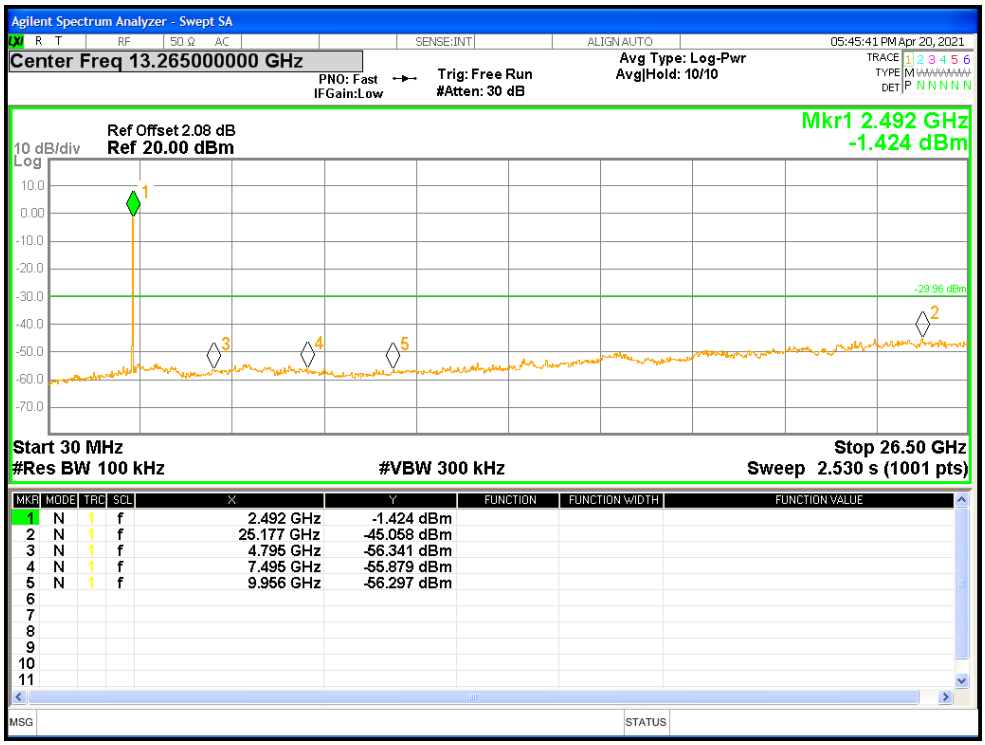

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Conducted Emissions at AC Power Line (150kHz-30MHz)

Radiated Spurious Emissions

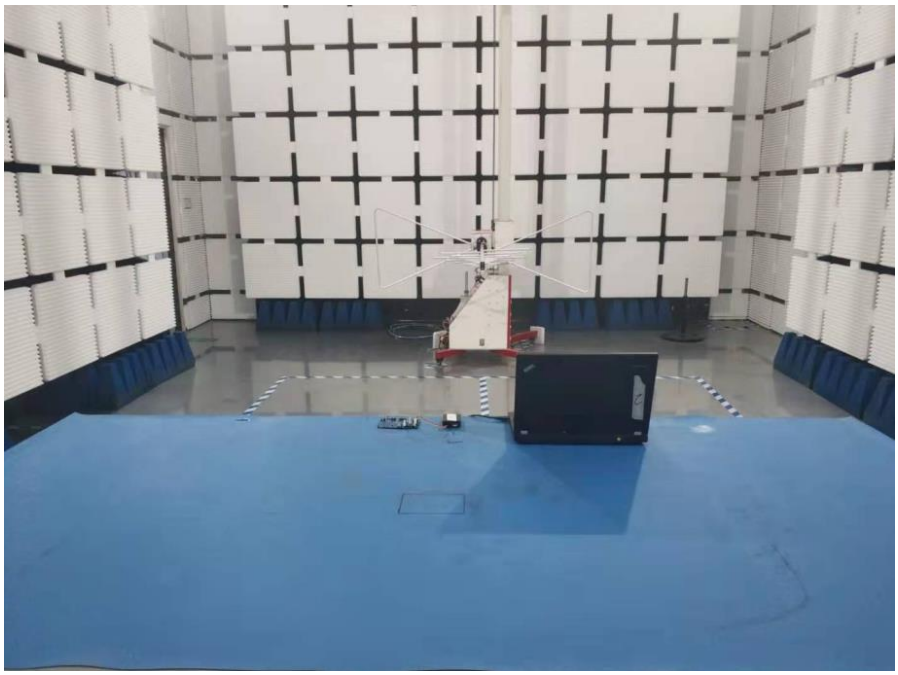

APPENDIX B: PHOTOGRAPHS OF EUT

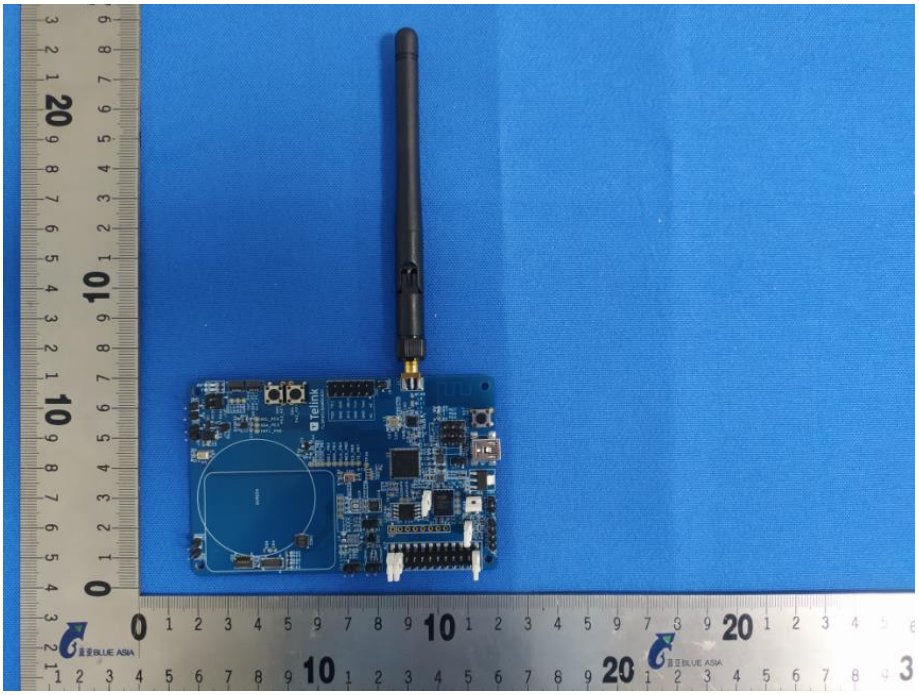

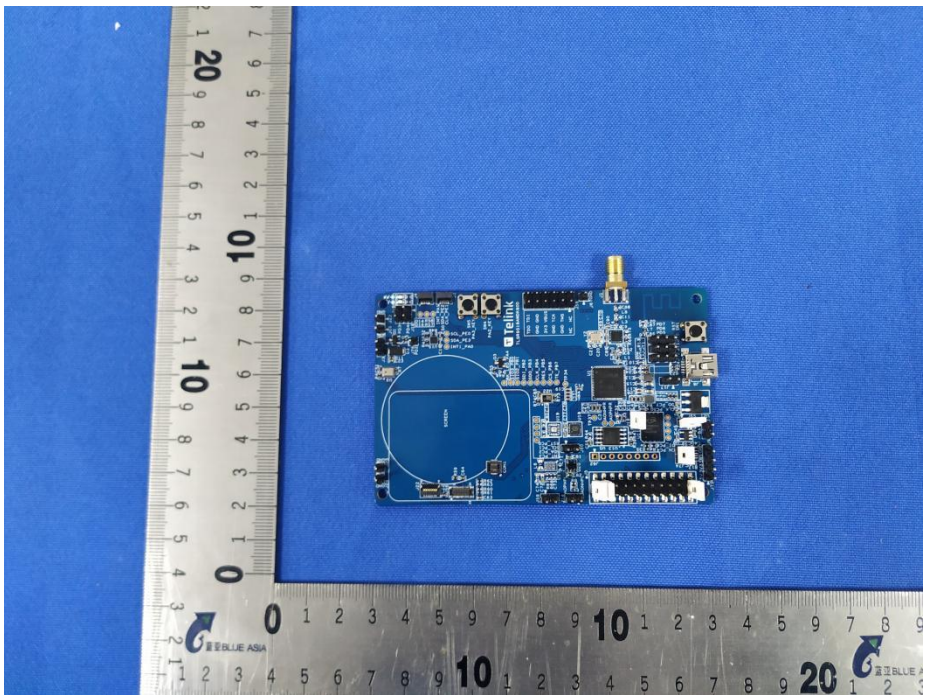

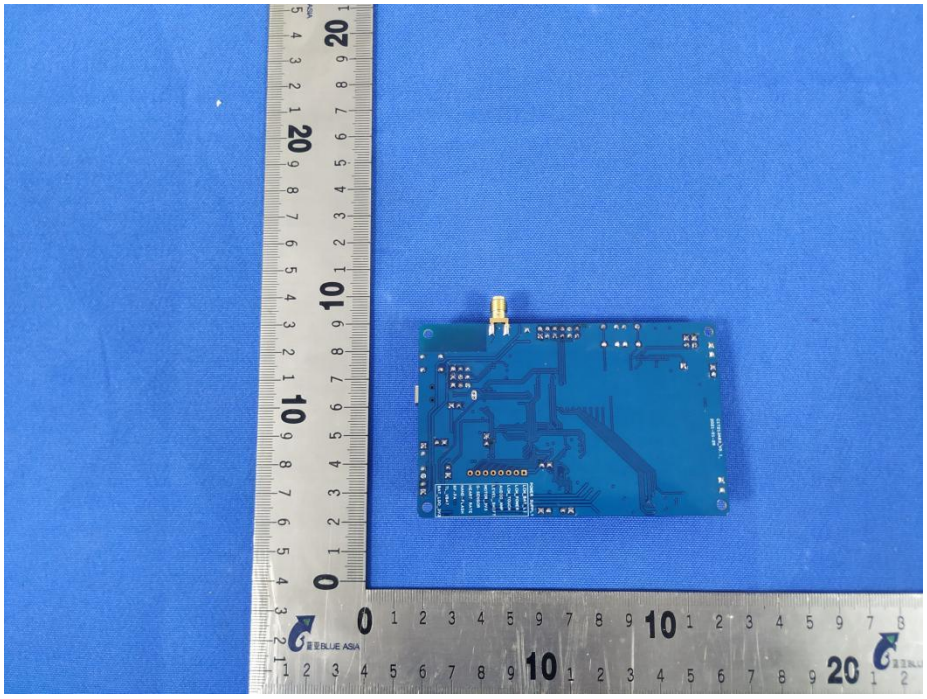

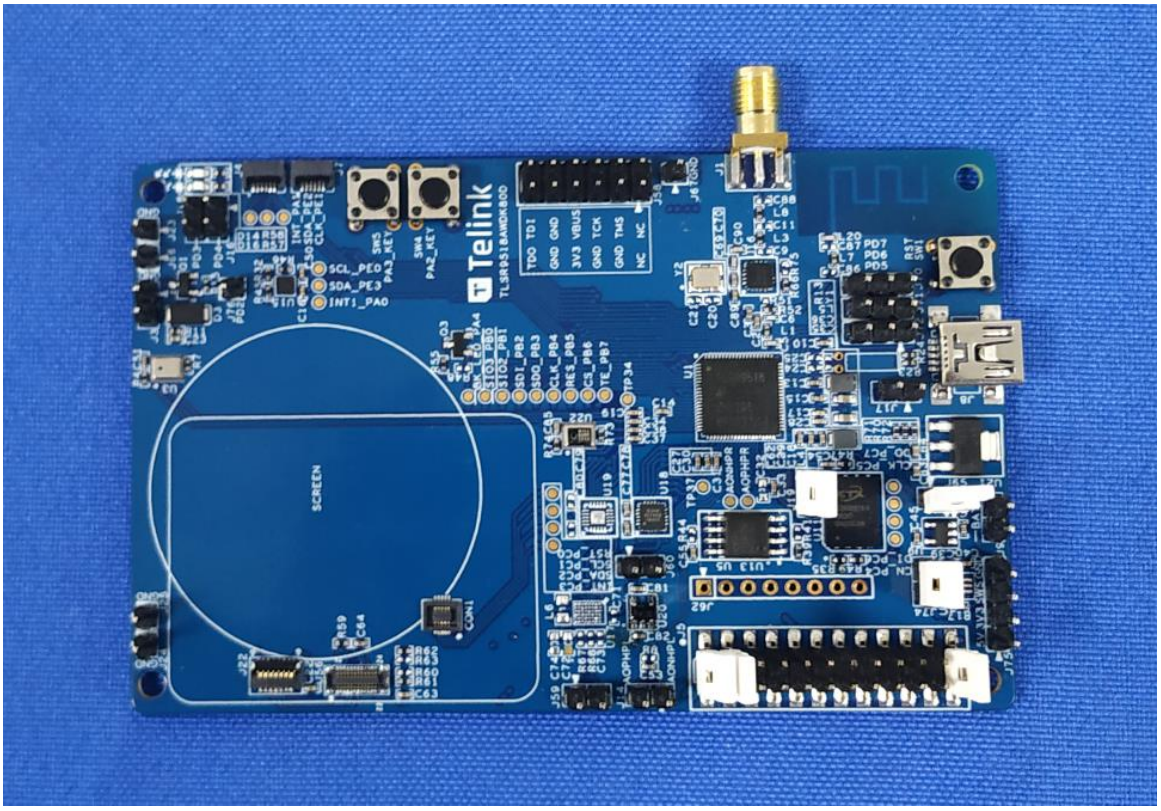
Telink
SCREEN

----END OF REPORT----

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.