

The device under test is a 450 MHz Pentium II personal computer consisting of the following components:

CASE model YC-6250 A with power supply 250W YHI
ASUSTek DUAL motherboard model P2-BDS
Matrox Millenium G100 8Mb AGP graphics card
Svec model PN-100 LAN card
Fujitsu model MPB3032AT hard drive
ALPS Electric Co., LTD model DF354H911B 3.5 " floppy drive
LG Electronics model CRD-8322B 32x CD-ROM drive

Underwriters Laboratories Inc.
1285 Walt Whitman Road
Melville, New York 11747-3081
(516) 271-6200

**Report of Measurements
of Electromagnetic Compatibility Testing**

Test Report File No. : NC2579 Date of issue: February 25, 1999
Applicant : Impex Italia SRL
Model / Serial No. : GAVP7
Product Type : Computer System
Power Supply : 115 V ac
Manufacturer : Same as Applicant
License holder : Same as Applicant
Address : Via del Paracadutista, 8
: 42100 Reggio Emilia Italy,
Test Result : ☒ Positive ☐ Negative
Test Project Number : 99ME50017
References(s)
FCC Grantee Code: OGO
FCC ID: OGOGAVP7

Underwriters Laboratories Inc. authorizes the above-named company to reproduce this Report provided it is reproduced in its entirety.

Underwriters Laboratories Inc. reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. Underwriters Laboratories Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from Underwriters Laboratories Inc. issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval. This report shall not be used by the client to claim product endorsement by NVLAP or any agency of the US government

Report Directory

<u>Title</u>	<u>Section</u>
☒ General Product Description	1.0
☒ Device Configuration During Test	1.1
☐ Deviations from ANSI C63.4 Standard Test Set-up	1.1.1
☐ Device Modifications	1.2
☒ Emissions Test Regulations	2.0
☒ Operational Mode	2.1
☒ Conducted Emissions (Voltage and Current)	2.1.1
☐ Conducted Click Emissions	2.1.2
☐ Reserved for Future Use	2.2.1
☒ Radiated Emissions Test (10 Meter Semi-Anechoic Chamber)	2.2.2
☐ RFI Power Measurements	2.2.3
☐ Harmonic Disturbances	2.2.4
☒ Emissions Test Results	2.3
☐ Immunity Test Regulations	3.0
☐ Operational Mode	3.1
☐ Electrostatic Discharge (ESD) Test	3.1.1
☐ Radiated Field (RF) Test	3.1.2
☐ Electrical Fast Transient (EFT)/Burst Test	3.1.3
☐ Surge Transient Tests	3.1.4
☐ Conducted Immunity Tests	3.1.5
☐ Voltage, Dips and Interruptions	3.1.6
☐ Immunity Test Results	3.2
☒ Summary of Test Results	4.0
☒ Emissions Test Data Pages	Appendix A
☒ Sample Calculations	Appendix B

1.0 GENERAL - Product Description

The device under test is a 450 MHz Pentium II personal computer consisting of the following components:

CASE model YC-6250 A with power supply 250W YHI
ASUSTek DUAL motherboard model P2-BDS
Matrox Millenium G100 8Mb AGP graphics card
Svec model PN-100 LAN card
Fujitsu model MPB3032AT hard drive
ALPS Electric Co., LTD model DF354H911B 3.5 " floppy drive
LG Electronics model CRD-8322B 32x CD-ROM drive

1.1 Device Configuration During Test

The device under test was configured for testing with the following peripherals:

104 keys NMB Italiana Keyboard FCC ID AQ6-8Z15
Three key mouse G@VI computers FCC ID 10WCM-PS2C
ADI Corp. monitor model LM-1564 FCC ID BR8LM-1564
Panasonic printer model KX-P1124i FCC ID ACJ5Z6KX-P1125

The system was configured in the standard ANSI C63.4 tabletop setup.

1.1.1 Deviations from ANSI C63.4 Standard Test Set-up

☒ None

☐ As described below:

1.2 Device Modifications Necessary for Compliance

☒ N/A

☐ As described below:

Environmental conditions in the lab:

Temperature:	<u>Range</u> 20-25°C
Relative Humidity	30 - 60 %
Atmospheric pressure	680 - 1060 mbar

2.0 EMISSIONS TEST REGULATIONS:

- | | | |
|---|---|---|
| ☐ EN 50081-1 /1992 | ☐ Group 1 | ☐ Group 2 |
| ☐ EN 50081-2 /1993 | ☐ Class A | ☐ Class B |
| ☐ EN 55011 / 3.1991 | | |
| ☐ EN 55013 / 6.1990 | ☐ Household appliances and similar | |
| ☐ EN 55014 / 2.1987 | ☐ Portable tools | |
| | ☐ Semiconductor devices | |
|
 | | |
| ☐ EN 55014 / 12.1993 | ☐ Household appliances and similar | |
| | ☐ Portable tools | |
| | ☐ Semiconductor devices | |
|
 | | |
| ☐ EN 55015 / 1993 | | |
| ☐ EN 55022 / 4.1987 | ☐ Class A | ☐ Class B |
| ☐ EN 55020 / 1994 | | |
| ☐ EN60555-2/1987, EN60555-3/1987 | | |
| ☐ EN61000-3-2, 1995, EN61000-3-3, 1995 | | |
| ☐ VCCI | ☐ Class 1 | ☐ Class 2 |
| ☒ FCC Part, 15, Subpart B | ☐ Class A | ☒ Class B |
| ☐ FCC Part, 15, Subpart C | | |
| ☐ FCC Part 18 | | |
| ☐ CISPR 11 (1990) | | |
| ☐ CISPR 14 (1993) | | |
| ☐ CISPR 22 | | |
| ☐ DENTORI | | |
| ☐ AS3548 | | |
| ☐ (OTHER) _____ | | |

2.1 EUT OPERATION MODE - EMISSIONS TESTS:

- ☐ Standby
- ☐ Test program (H-Pattern)
- ☐ Test program (color bar)
- ☐ Test program (customer specific)
- ☐ Practice operation
- ☒ Normal operation Mode: Displaying continuous "H" patterns to monitor reading/writing data files from CD ROM to hard drive to floppy drive and back to hard drive, and printing "H" pattern to parallel printer.
- ☐ As per manufacturer's instructions
- ☐ Other

2.1.1 Conducted Emissions Tests:☒ Test Applicable ☐ Test Not Applicable**All Data Pages located in Appendix A.**

Frequency range on each side of line.

- | | | |
|--|---|----------------------------------|
| ☐ 150kHz to 30MHz | ☐ Voltage | ☐ Current |
| ☒ 450kHz to 30 MHz | ☒ Voltage | ☐ Current |
| ☐ 500kHz to 30MHz | ☐ Voltage | ☐ Current |
| ☐ 10kHz to 30MHz | ☐ Voltage | ☐ Current |

Test equipment used for conducted emissions:

- | | | | |
|--|-----------------|--------------------------|-------------------------|
| ☐ HP - 8566B | Hewlett-Packard | Spectrum Analyzer | Equipment No.: ME5-589 |
| ☐ HP - 85662A | Hewlett-Packard | Analyzer Display | Equipment No.: ME5-590 |
| ☐ HP - 85650A | Hewlett-Packard | Quasi-Peak Adapter | Equipment No.: ME5-591 |
| ☐ HP - 85685A | Hewlett-Packard | Preselector | Equipment No.: ME5-588 |
| ☐ NM- 17/27B | Carnel Labs | Field Intensity Meter | Equipment No.: ME5A-054 |
| ☐ CCA7 | Carnel Labs | CISPR Quasi-peak Adapter | Equipment No.: ME5A-053 |
| ☒ R3261C | Advantest | Spectrum Analyzer | Equipment No.: ME5A-228 |
| ☒ R3551 | Advantest | Pre-Selector | Equipment No.: ME5A-229 |

Test Accessories:

- | | | | |
|--------------------------------------|--------------------------|------------------|------------------------|
| ☐ EC - 3825/2 | Electro-Mechanics (EMCO) | 50 Ω LISN | Equipment No.: ME5-629 |
| ☐ EC - 3825/2 | Electro-Mechanics (EMCO) | 50 Ω LISN | Equipment No.: ME5-790 |
| ☐ EC - 3820/4 | Electro-Mechanics (EMCO) | 50 Ω LISN | Equipment No.: ME5-438 |

2.1.2 Conducted Click Emissions Tests:☐ Test Applicable ☒ Test Not Applicable**2.2.1 Reserved for Future Use**

2.2.2 Radiated Emissions Test (10 Meter Semi-Anechoic Chamber):☒ Test Applicable ☐ Test Not Applicable**All Data Pages located in Appendix A.**The measurement antenna distance ☒ 3 ☐ 10 meters from the EUT.**Test equipment used for final radiated emissions tests:**

☒ HP - 8566B	Hewlett-Packard	Spectrum Analyzer	Equipment No.: ME5-589
☒ HP - 85662A	Hewlett-Packard	Analyzer Display	Equipment No.: ME5-590
☒ HP - 85650A	Hewlett-Packard	Quasi-Peak Adapter	Equipment No.: ME5-591
☒ HP - 85685A	Hewlett-Packard	Preselector	Equipment No.: ME5-588
☐ NM- 17/27B	Carnel Labs	Field Intensity Meter	Equipment No.: ME5A-054
☐ CCA7	Carnel Labs	CISPR Quasi-peak Adapter	Equipment No.: ME5A-053
☐ R3261C	Advantest	Spectrum Analyzer	Equipment No.: ME5A-228
☐ R3551	Advantest	Pre-Selector	Equipment No.: ME5A-229

Test Accessories:

☐ 3104C	EMCO	Biconnical Antenna	Equipment No.: ME5-810
☐ 94455-1	Ailtech	Biconnical Antenna	Equipment No.: ME5-439
☐ 3146	EMCO	Log Periodic Antenna	Equipment No.: ME5-451
☐ 3146	EMCO	Log Periodic Antenna	Equipment No.: ME5-811
☐ 3142	EMCO	BiconiLog Antenna	Equipment No.: ME5A-131
☐ 3142	EMCO	BiconiLog Antenna	Equipment No.: ME5A-261

2.2.3 RFI Power Measurements:☐ Test Applicable ☒ Test Not Applicable**2.2.4 Harmonic Disturbances:**☐ Test Applicable ☒ Test Not Applicable

2.3 EMISSIONS TEST RESULTS

☒ Conducted Emissions

☒ Voltage(Section 2.1.1)

☒ MET

☐ NOT MET

☐ Current(Section 2.1.1)

☐ MET

☐ NOT MET

☐ Clicks(Section 2.1.2)

☐ MET

☐ NOT MET

☒ Radiated Emissions(Section 2.2.2)

☒ MET

☐ NOT MET

☐ RFI Power(Section 2.2.3)

☐ MET

☐ NOT MET

☐ Harmonic Disturbances

☐ Steady State(Section 2.2.4)

☐ MET

☐ NOT MET

☐ Fluctuating(Section 2.2.4)

☐ MET

☐ NOT MET

The tractability of the measurements contained in this report is achieved by the use of calibrated equipment which is traceable back to NIST.

3.0 IMMUNITY TEST REGULATIONS:

- ☒ NOT APPLICABLE
- ☐ EN50082-1:1992
- ☐ EN50082-2:1995
- ☐ EN55014-2: 1997
- ☐ FDA - Reviewer Guide
- ☐ Bellcore GR-1089, Core
- ☐ IEC 601-1-2

In accordance with:

- | | | |
|--------------------------------------|--|---------------------------------|
| ☐ IEC 801-2, | ☐ IEC 1000-4-2 | Electrostatic Discharge (ESD) |
| ☐ IEC 801-3, | ☐ ENV50140 | RF Immunity |
| ☐ IEC 801-4, | ☐ IEC 1000-4-4 | Electrical Fast Transient (EFT) |
| ☐ IEC 801-5, | ☐ IEC 1000-4-5 | Surge (Lighting) |
| ☐ IEC 801-6, | ☐ ENV50141 | Conducted Immunity |
| ☐ IEC 801-11, | ☐ IEC 1000-4-11 | Voltage Dips and Interruptions |

3.1 EUT OPERATION MODE - IMMUNITY TESTS:

- ☐ Standby
- ☐ Test program (H-Pattern)
- ☐ Test program (color bar)
- ☐ Test program (customer specific)
- ☐ Practice operation
- ☐ Normal operating Mode:
- ☐ As per manufacture's instructions

3.1.1 Electrostatic Discharge (ESD) Test:

☐ Test Applicable ☒ Test Not Applicable

3.1.2 Radiated Field (RF Immunity) Test:

☐ Test Applicable ☒ Test Not Applicable

3.1.3 Electrical Fast Transient (EFT)/Burst test:

☐ Test Applicable ☒ Test Not Applicable

3.1.4 Voltage Surge Test:

☐ Test Applicable ☒ Test Not Applicable

3.1.5 Conducted Immunity Test:

☐ Test Applicable ☒ Test Not Applicable

3.1.6 Voltage Dips and Interruptions:

☐ Test Applicable ☒ Test Not Applicable

File Number: NC2579

Issued: February 25, 1999

Project Number: 99ME50017, FCC Grantee Code: OGO

Model Number: GAVP7 Grantee Code: OGO FCC ID: OGOGAVP7

4.0 SUMMARY:

The equipment under test has

☒ met the technical requirements as defined under section(s) ☒ 2.0 and ☐ 3.0.

☐ not met the technical requirements as defined under section(s) ☐ 2.0 and ☐ 3.0.

Test Start Date: 2/8/99

Test Completion Date: 2/11/99

- UNDERWRITERS LABORATORIES, INC. -

Project Engineer



William Wack (Ext. 23057)
EMC Engineering Associate
International EMC Services
Engineering Services-3014AMEL

Reviewer



Robert DeLisi (Ext. 22452)
EMC Engineering Team Leader
International EMC Services
Engineering Services-3014AMEL

APPENDIX A

EMISSIONS TEST DATA

1. ☒ Conducted Emissions ☒ voltage ☐ current
 - ☒ Peak traces, Data Pages A1 and A3.
 - ☐ Quasi-Peak traces, Data Pages A___ and/through A___
 - ☐ Average traces, Data Pages A___ and/through A___
 - ☒ Discrete Frequencies, Data Pages A2 and A4.
☐ Discontinuous Interference (Clicks)
 - ☐ No clicks exceeded the steady state quasi-peak limit
 - ☐ Clicks exceeded the steady state quasi-peak limit. The limit was adjusted to _____ dB and no clicks exceeded the adjusted limit.
 - ☐ Clicks exceeded the adjusted limit. See Data Page A___ for details.
2. ☒ Radiated Emissions
 - ☒ Peak traces, Data Pages A5 and A8.
 - ☐ Quasi-Peak traces, Data Pages A___ and/through A___
 - ☐ Open Area Test Data, Data Pages A___ and/through A___.
 - ☒ Discrete Frequencies, Data Pages A6, A7 and A9.
3. ☐ RFI Power Measurements
 - ☐ Peak traces, Data Pages A___ and/through A___
 - ☐ Quasi-Peak traces, Data Pages A___ and/through A___
 - ☐ Average Traces, Data Pages A___ and/through A___
4. ☐ Harmonic Disturbances
 - ☐ Steady State Harmonics, Data Pages A___ and/through A___
 - ☐ Fluctuating Harmonics, Data Pages A___ and/through A___
 - ☐ Changing Voltage, Data Pages A___ and/through A___

Conducted RFI Voltage
Impex Italia
G@UP7 115v ac LINE 1
File: NC2579 Project: 99ME50017
Tested By: BP PEAK=BL QP=GR

FCC Part 15 Subpart B, Class B

dB[μV/m]

Frequency [MHz]

40

60

50

30

20

45

1

10

30

UL - EMC TEST SYSTEM

Date Tested: 9 Feb 199
18:12:45

Impex Italia
G@VP7 115v ac LINE 1
File:NC2579 Project:99ME50017
Tested By;BP PEAK=BL QP=GR


MKR NO.	TEST FREQUENCY [MHz]	METER READING [dB(uV)]	GAIN/LOSS FACTOR [dB]	TRANSDUCER FACTOR [dB]	LEVEL	LIMIT:1 dB[uVolts]	2	3	4
1	.63706	33.5 pk	10.3	0	43.8	47.9	N/A	N/A	N/A
2	1.00591	30.1 pk	10.3	0	40.4	47.9	N/A	N/A	N/A
3	1.60871	28.6 pk	10.4	0	39	47.9	N/A	N/A	N/A
4	3.84709	31.7 pk	10.5	0	42.2	47.9	N/A	N/A	N/A
5	5.86838	21.7 pk	10.5	0	32.2	47.9	N/A	N/A	N/A
6	18.78755	22.9 pk	11.1	0	34	47.9	N/A	N/A	N/A

pk - Peak detector
qp - Quasi-peak detector
av - Average detector
tm - Trace Math Result

LIMIT 1 : FCC Part 15 Subpart B, Class B
LIMIT 2 : NONE
LIMIT 3 : NONE
LIMIT 4 : NONE

Conducted RFI Voltage
Impex Italia
G0VP7 115V ac LINE 2
File:NC2579 Project:99ME50017
Tested By:BP PEAK=BL QP=GR

FCC Part 15 Subpart B, Class B

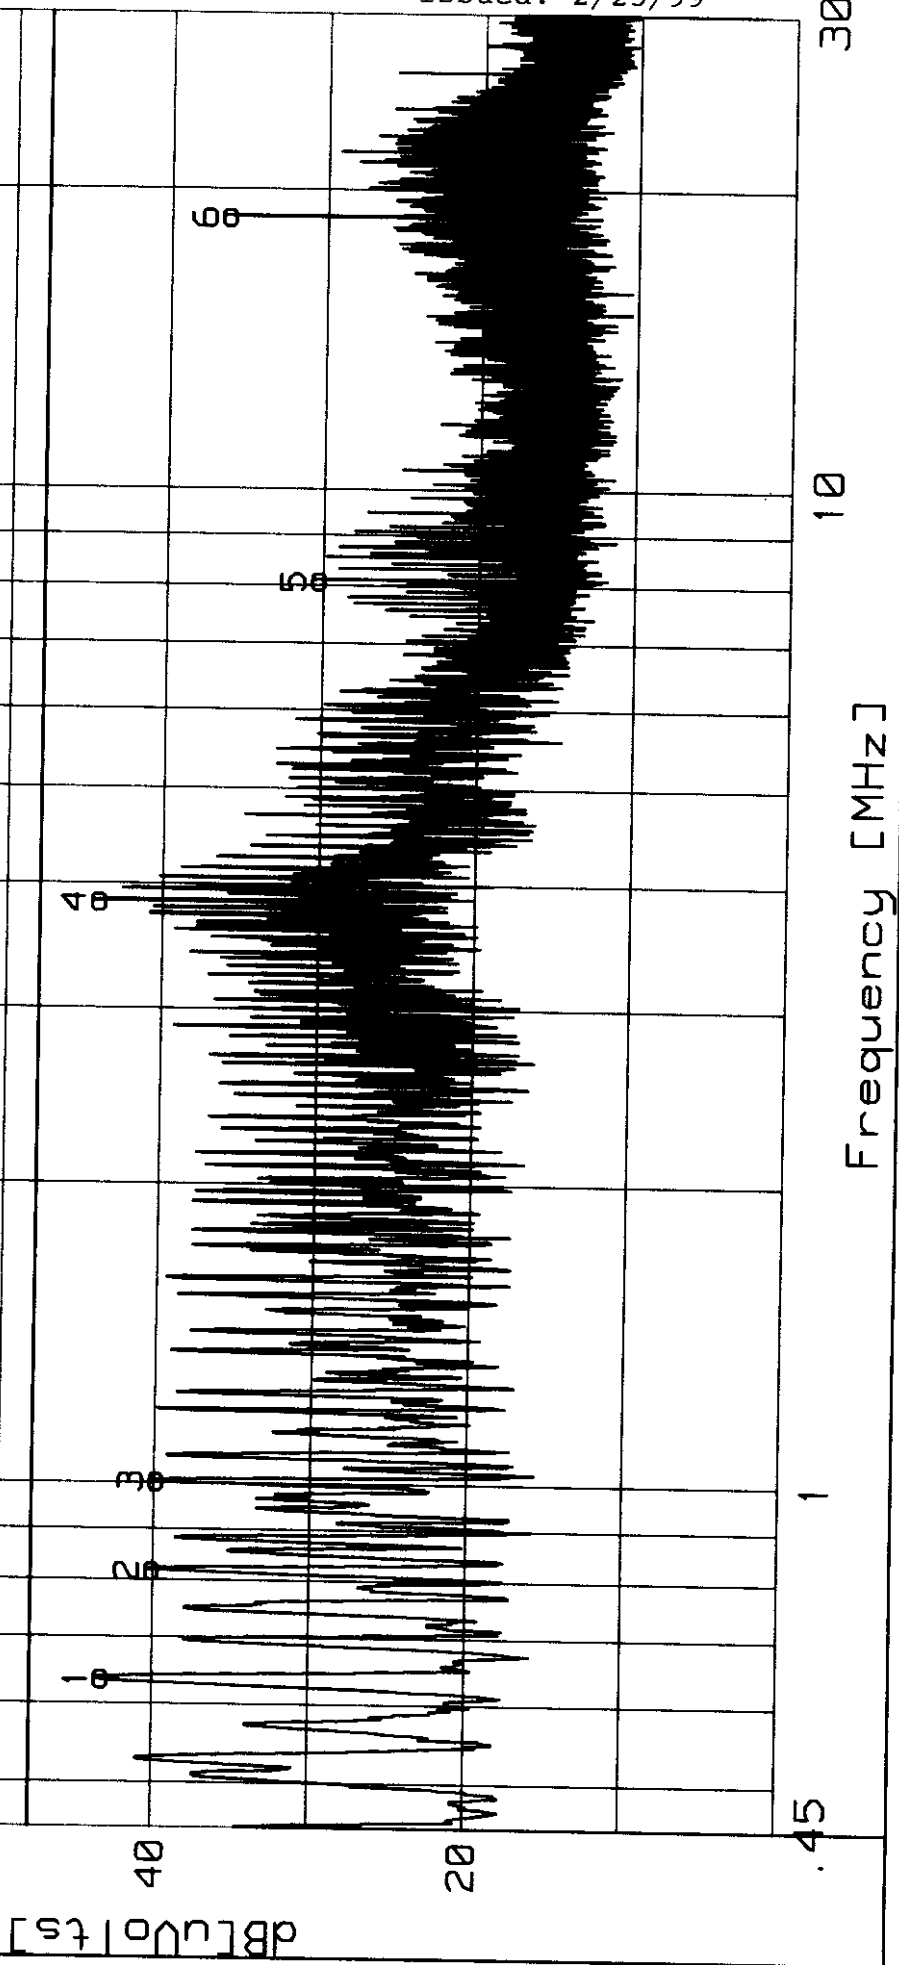

Date Tested: 9 Feb 199
19:12:02Impex Italia
G@VP7 115V ac LINE 2
File:NC2579 Project:99ME50017
Tested By;BP PEAK=BL QP=GR

MKR NO.	TEST FREQUENCY [MHz]	METER READING [dB(uV)]	GAIN/LOSS FACTOR [dB]	TRANSDUCER FACTOR [dB]	LEVEL	LIMIT:1 dB[uVolts]	2	3	4
1	.63706	33.3 pk	10.3	0	43.6	47.9	N/A	N/A	N/A
2	.82043	30.1 pk	10.3	0	40.4	47.9	N/A	N/A	N/A
3	1.00591	29.9 pk	10.3	0	40.2	47.9	N/A	N/A	N/A
4	3.84393	33.9 pk	10.5	0	44.4	47.9	N/A	N/A	N/A
5	8.10676	20 pk	10.6	0	30.6	47.9	N/A	N/A	N/A
6	18.78649	25.5 pk	11.1	0	36.6	47.9	N/A	N/A	N/A

pk - Peak detector
qp - Quasi-peak detector
av - Average detector
tm - Trace Math ResultLIMIT 1 : FCC Part 15 Subpart B, Class B
LIMIT 2 : NONE
LIMIT 3 : NONE
LIMIT 4 : NONE

Radiated Emissions
Impex Italia
G0VP7


File: NC2579 Project: 99ME50017
Tested By BP; BL=H0RZ GR=VERT

FCC Part 15 Subpart B Class B

dB[μ V/m]

85 65 45 25 5 30 100 1000

Frequency [MHz]

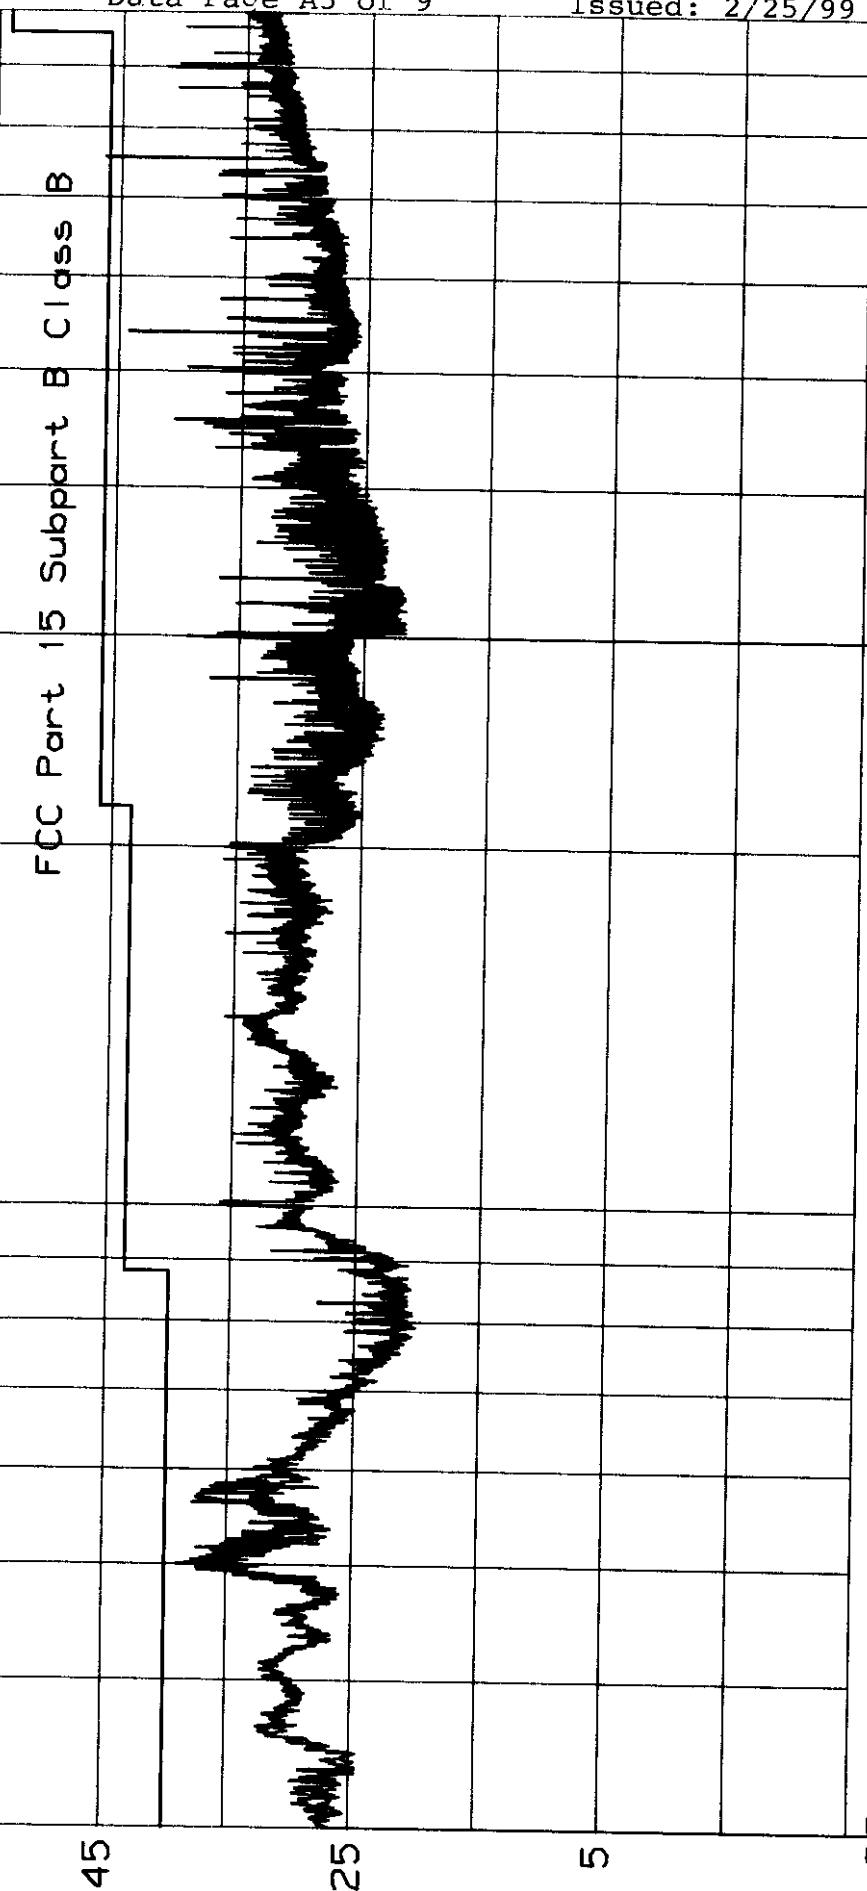

Date Tested: 9 Feb 1999

21:11:13

Impex Italia

G@VP7

File:NC2579 Project:99ME50017

Tested By BP; BL=HORZ GR=VERT

DATA POINT [No.]	TEST FREQUENCY [MHz]	METER READING [dB(uV)]	GAIN/LOSS FACTOR [dB]	TRANSDUCER FACTOR [dB]	LEVEL dB[uVolts/meter]	LIMITS:1	2	3	4
1	49.71754	14.0	.4	12.8	27.2	40.0	0.0	0.0	0.0
Azimuth : 343		Height : 138 V		Margin [dB]		-12.8	---	---	---
2	49.99046	7.9	.4	12.8	21.1	40.0	0.0	0.0	0.0
Azimuth : 345		Height : 367 V		Margin [dB]		-18.9	---	---	---
3	49.99541	15.7	.4	12.8	28.9	40.0	0.0	0.0	0.0
Azimuth : 354		Height : 109 V		Margin [dB]		-11.1	---	---	---
4	50.01711	16.0	.4	12.8	29.2	40.0	0.0	0.0	0.0
Azimuth : 0		Height : 99 V		Margin [dB]		-10.8	---	---	---
5	50.02584	14.9	.4	12.8	28.1	40.0	0.0	0.0	0.0
Azimuth : 0		Height : 99 H		Margin [dB]		-11.9	---	---	---
6	50.40432	13.8	.4	12.8	27.0	40.0	0.0	0.0	0.0
Azimuth : 1		Height : 100 V		Margin [dB]		-13	---	---	---
7	50.79480	16.2	.4	12.7	29.3	40.0	0.0	0.0	0.0
Azimuth : 1		Height : 100 H		Margin [dB]		-10.7	---	---	---
8	51.03834	10.7	.5	12.7	23.9	40.0	0.0	0.0	0.0
Azimuth : 1		Height : 100 H		Margin [dB]		-16.1	---	---	---
9	51.37103	9.1	.5	12.7	22.3	40.0	0.0	0.0	0.0
Azimuth : 314		Height : 99 V		Margin [dB]		-17.7	---	---	---
10	51.76444	16.2	.5	12.7	29.4	40.0	0.0	0.0	0.0
Azimuth : 314		Height : 99 H		Margin [dB]		-10.6	---	---	---
11	56.48953	19.9	.5	12.2	32.6	40.0	0.0	0.0	0.0
Azimuth : 224		Height : 99 V		Margin [dB]		-7.4	---	---	---
12	57.82106	15.0	.5	11.9	27.4	40.0	0.0	0.0	0.0
Azimuth : 224		Height : 99 H		Margin [dB]		-12.6	---	---	---
13	58.41174	16.7	.5	11.9	29.1	40.0	0.0	0.0	0.0
Azimuth : 75		Height : 243 V		Margin [dB]		-10.9	---	---	---
14	540.05350	20.1	2.1	18.8	41.0	46.0	0.0	0.0	0.0
Azimuth : 75		Height : 243 V		Margin [dB]		-5	---	---	---
15	540.05937	23.1	2.1	18.8	44.0	46.0	0.0	0.0	0.0

Azimuth : 75	Height : 243 H	Margin [dB]	-2	---	---	---
16 756.03038	20.6	2.5	21.7	44.8	46.0	0.0
Azimuth : 75	Height : 243 H	Margin [dB]	-1.2	---	---	---
17 756.05419	16.2	2.5	21.7	40.4	46.0	0.0
Azimuth : 75	Height : 243 V	Margin [dB]	-5.6	---	---	---

H - indicates horizontal antenna polarization.
V - indicates vertical antenna polarization.

LIMIT 1 : FCC Part 15 Subpart B Class B
LIMIT 2 : NONE
LIMIT 3 : NONE
LIMIT 4 : NONE

Radiated Emissions
Impex Italia
GQUP7

File: NC2579 Project: 99ME50017
Tested By BP; BL=HORIZ GR=VERT

FCC PT15 CLASS B-RADIATED (3m)


dB[uV/m]

3000
2000
1000

Frequency [MHz]

1000

10000

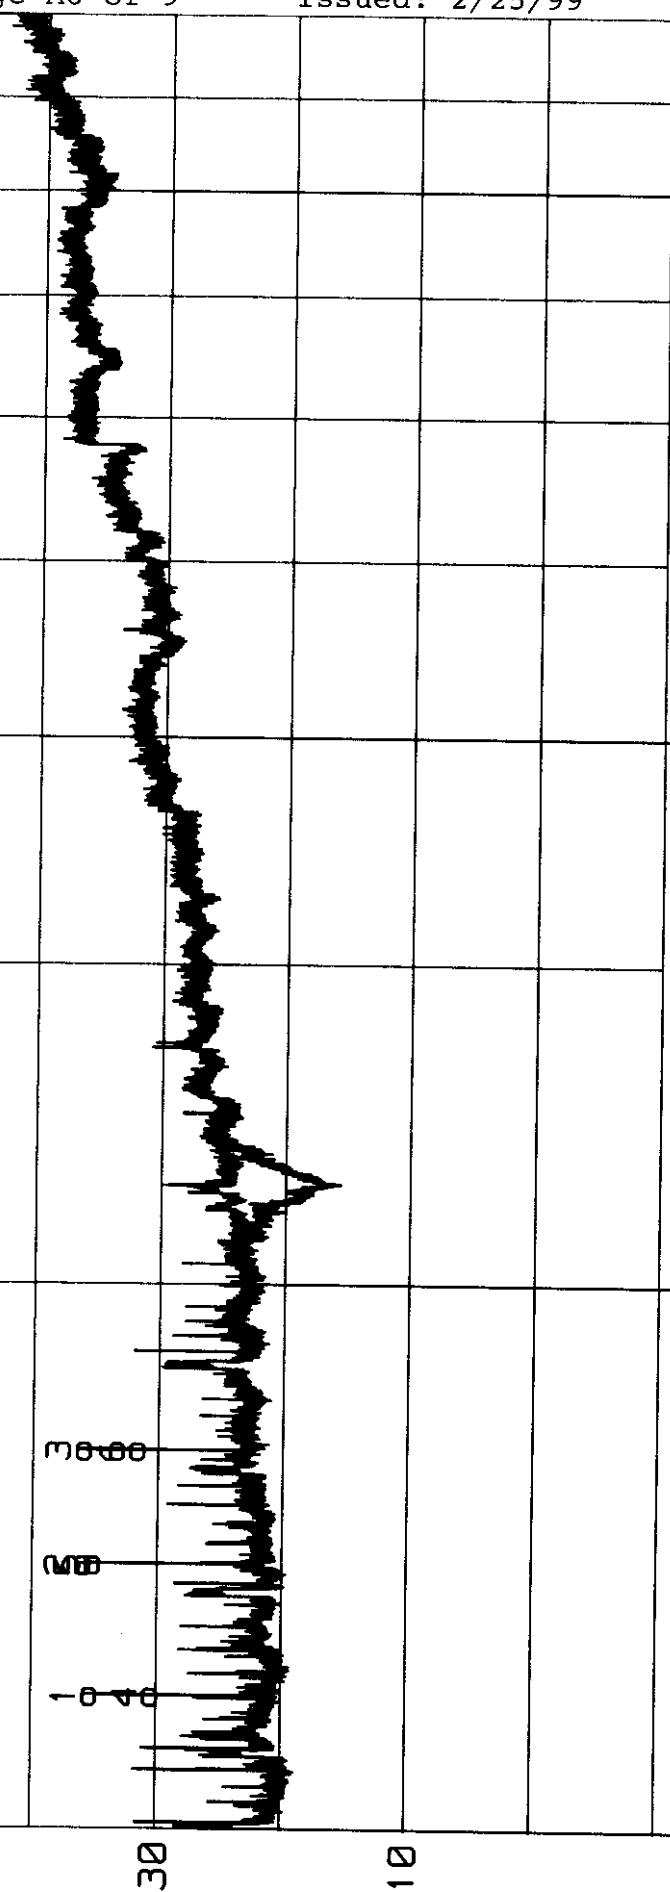

Date Tested: 9 Feb 1999
20:02:27

Impex Italia

G@VP7

File:NC2579 Project:99ME50017

Tested By BP; BL=HORZ GR=VERT

MKR	TEST	METER	GAIN/LOSS	TRANSDUCER	LEVEL	LIMIT:1	2	3	4
NO.	FREQUENCY	READING	FACTOR	FACTOR		dB[uVolts/meter]			
	[MHz]	[dB(uV)]	[dB]	[dB]					
1	1187.188	45.1 pk	-35	25.6	35.7	54	N/A	N/A	N/A
2	1403.222	44.5 pk	-34.7	26.5	36.3	54	N/A	N/A	N/A
3	1619.256	43.3 pk	-34.3	27.3	36.3	54	N/A	N/A	N/A
4	1187.188	40.2 pk	-35	25.6	30.8	54	N/A	N/A	N/A
5	1403.472	43.7 pk	-34.7	26.5	35.5	54	N/A	N/A	N/A
6	1619.256	39 pk	-34.3	27.3	32	54	N/A	N/A	N/A

pk - Peak detector

qp - Quasi-peak detector

av - Average detector

tm - Trace Math Result

LIMIT 1 : FCC PT15 CLASS B-RADIATED (3m)

LIMIT 2 : NONE

LIMIT 3 : NONE

LIMIT 4 : NONE

Exhibit 4

Report of Measurements Paragraph 2.1c33(b) (6)