

Report of Measurements of Electromagnetic Compatibility Testing

FCC ID: XXXMM6800

Underwriters Laboratories Inc. reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. Underwriters Laboratories Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from Underwriters Laboratories Inc. issued reports.

Underwriters Laboratories Inc. 1285 Walt Whitman Rd. Melville, New York 11747 USA Tel.: 516 271-6200 Fax: 516 439-6095 Rev. No 1.2

Report Directory

<u>Title</u>	<u>Section</u>
☒ General Product Description	1.0
☒ Device Configuration During Test	1.1
☐ Deviations from ANSI C63.4 Standard Test Set-up	1.1.1
☐ Device Modifications	1.2
☒ Emissions Test Regulations	2.0
☒ Operational Mode	2.1
☐ Conducted Emissions (Voltage and Current)	2.1.1
☐ Conducted Click Emissions	2.1.2
☐ Reserved for Future Use	2.2.1
☒ Radiated Emissions Test (10 Meter Semi-Anechoic Chamber)	2.2.2
☐ RFI Power Measurements	2.2.3
☐ Harmonic Disturbances	2.2.4
☒ Emissions Test Results	2.3
☐ Immunity Test Regulations	3.0
☐ Operational Mode	3.1
☐ Electrostatic Discharge (ESD) Test	3.1.1
☐ Radiated Field (RF) Test	3.1.2
☐ Electrical Fast Transient (EFT)/Burst Test	3.1.3
☐ Surge Transient Tests	3.1.4
☐ Conducted Immunity Tests	3.1.5
☐ Voltage, Dips and Interruptions	3.1.6
☐ Immunity Test Results	3.2
☒ Summary of Test Results	4.0
☒ Emissions Test Data Pages	Appendix A
☒ Photographs and Diagrams	Appendix B
☒ Sample Calculations	Appendix C

1.0 GENERAL - Product Description

The device under test is a Doorframe Proximity Reader which operates at 125kHz and is powered by a dc source. This Radio Frequency Identification (RFID) reader or proximity reader uses radio frequency to identify, locate and track people and objects that carry the appropriate transponders. Proximity reader can work in none line-of-sight situations and in darkness, bright sun light or through dirt, grimes and smudges.

File Number: BP7169
Project Number: 98ME50398
Model Number: Sentinal-Prox MM-6800
FCC ID: XXXMM6800

Issued: February 3, 1999

1.1 Device Configuration During Test

The EUT was configured as a stand-alone device. Tests were performed with both a 5Vdc and 12Vdc supply connected to the EUT.

1.1.1 Deviations from ANSI C63.4 Standard Test Set-up

☒ None

☐ As described below:

1.2 Device Modifications Necessary for Compliance

☒ N/A

☐ As described below:

Environmental conditions in the lab:

Temperature:	<u>Range</u> 20-25°C
Relative Humidity	30 - 60 %
Atmospheric pressure	680 - 1060 mbar

File Number: BP7169
Project Number: 98ME50398
Model Number: Sentinal-Prox MM-6800
FCC ID: XXXMM6800

Issued: February 3, 1999

2.0 EMISSIONS TEST REGULATIONS:

- | | | |
|---|---|----------------------------------|
| ☐ EN 50081-1 /1992 | ☐ Group 1 | ☐ Group 2 |
| ☐ EN 50081-2 /1993 | ☐ Class A | ☐ Class B |
| ☐ EN 55011 / 3.1991 | | |
| ☐ EN 55013 / 6.1990 | ☐ Household appliances and similar | |
| ☐ EN 55014 / 2.1987 | ☐ Portable tools | |
| | ☐ Semiconductor devices | |
| ☐ EN 55014 / 12.1993 | ☐ Household appliances and similar | |
| | ☐ Portable tools | |
| | ☐ Semiconductor devices | |
| ☐ EN 55015 / 1993 | | |
| ☐ EN 55022 / 4.1987 | ☐ Class A | ☐ Class B |
| ☐ EN 55020 / 1994 | | |
| ☐ EN60555-2/1987, EN61000-3-2, 1995 | | |
| ☐ EN60555-3/1987, EN61000-3-3, 1995 | | |
| ☐ VCCI | ☐ Class 1 | ☐ Class 2 |
| ☒ FCC Part , 15, Subpart B | ☒ Class A | ☐ Class B |
| ☒ FCC Part , 15, Subpart C, Paragraph 15.209. | | |
| ☐ FCC Part 18 | | |
| ☐ CISPR 11 (1990) | | |
| ☐ CISPR 14 (1993) | | |
| ☐ CISPR 22 | | |
| ☐ DENTORI | | |
| ☐ AS3548 | | |
| ☐ (OTHER) _____ | | |

2.1 EUT OPERATION MODE - EMISSIONS TESTS:

- ☐ Standby
- ☐ Test program (H-Pattern)
- ☐ Test program (color bar)
- ☐ Test program (customer specific)
- ☐ Practice operation
- ☒ Normal operation Mode: continuous sense for entry badge
- ☒ As per manufacturer's instructions
- ☐ other

File Number: BP7169
Project Number: 98ME50398
Model Number: Sentinal-Prox MM-6800
FCC ID: XXXMM6800

Issued: February 3, 1999

2.1.1 Conducted Emissions Tests:

☐ Test Applicable ☒ Test Not Applicable

2.1.2 Conducted Click Emissions Tests:

☐ Test Applicable ☒ Test Not Applicable

2.2.1 Reserved for Future Use

2.2.2 Radiated Emissions Test (10 Meter Semi-Anechoic Chamber):

☒ Test Applicable ☐ Test Not Applicable

All Data Pages located in Appendix A.

120kHz-30MHz Using Magnetic Loop Antenna

The measurement antenna distance ☒ 3 ☐ 10 meters from the EUT.

30MHz-1000MHz

The measurement antenna distance ☐ 3 ☒ 10 meters from the EUT.

Tests were performed on the transmitter in accordance with the limitations set forth by CFR47 FCC Part 15, Subpart B, Class A, Paragraph 15.209 and tested in accordance with the test procedures and methodologies in ANSI C63.4: 1992.

The EUT was checked throughout the frequency band 120KHz to 100MHz. The transmitter operated at 125KHz. The allowable field strength limits in accordance with 15.209 were applied to the frequency. All other emissions were tested in accordance with the general limitations in 15.209.

From 120KHz to 30MHz, measurements were made at a distance of 3 meters. The limit was adjusted using the 40dB/decade limit extrapolation method.

Test equipment used for final radiated emissions tests:

☒ HP - 8566B	Hewlett-Packard	Spectrum Analyzer	Equipment No.: ME5-589
☒ HP - 85662A	Hewlett-Packard	Analyzer Display	Equipment No.: ME5-590
☒ HP - 85650A	Hewlett-Packard	Quasi-Peak Adapter	Equipment No.: ME5-591
☒ HP - 85685A	Hewlett-Packard	Preselector	Equipment No.: ME5-588
☐ NM- 17/27B	Carnel Labs	Field Intensity Meter	Equipment No.: ME5A-054
☐ CCA7	Carnel Labs	CISPR Quasi-peak Adapter	Equipment No.: ME5A-053
☐ R3261C	Advantest	Spectrum Analyzer	Equipment No.: ME5A-228
☐ R3551	Advantest	Pre-Selector	Equipment No.: ME5A-229

Test Accessories:

☒ 6507	EMCO	Active Loop Antenna	Equipment No.: ME5A-288
☐ 94455-1	Ailtech	Biconnical Antenna	Equipment No.: ME5-439
☐ 3146	EMCO	Log Periodic Antenna	Equipment No.: ME5-451
☐ 3146	EMCO	Log Periodic Antenna	Equipment No.: ME5-811
☒ 3142	EMCO	BiconiLog Antenna	Equipment No.: ME5A-436
☐ 3142	EMCO	BiconiLog Antenna	Equipment No.: ME5A-261

2.2.3 RFI Power Measurements:

☐ Test Applicable ☒ Test Not Applicable

2.2.4 Harmonic Disturbances:

File Number: BP7169
Project Number: 98ME50398
Model Number: Sentinal-Prox MM-6800
FCC ID: XXXMM6800

Issued:February 3, 1999

☐ Test Applicable ☒ Test Not Applicable

File Number: BP7169
Project Number: 98ME50398
Model Number: Sentinal-Prox MM-6800
FCC ID: XXXMM6800

Issued:February 3, 1999

2.3 EMISSIONS TEST RESULTS

☐ Conducted Emissions

☐ Voltage(Section 2.1.1)	☐ MET	☐ NOT MET
☐ Current(Section 2.1.1)	☐ MET	☐ NOT MET
☐ Clicks(Section 2.1.2)	☐ MET	☐ NOT MET

☒ Radiated Emissions(Section 2.2.2)	☒ MET	☐ NOT MET
---	---	----------------------------------

☐ RFI Power(Section 2.2.3)	☐ MET	☐ NOT MET
---	------------------------------	----------------------------------

☐ Harmonic Disturbances

☐ Steady State(Section 2.2.4)	☐ MET	☐ NOT MET
☐ Fluctuating(Section 2.2.4)	☐ MET	☐ NOT MET

The tractability of the measurements contained in this report is achieved by the use of calibrated equipment which is traceable back to NIST.

3.0 IMMUNITY TEST REGULATIONS:

- ☒ NOT APPLICABLE
- ☐ EN50082-1:1992
- ☐ EN50082-2:1995
- ☐ EN55104 : 1995
- ☐ FDA - Reviewer Guide
- ☐ Bellcore GR-1089, Core
- ☐ IEC 601-1-2

In accordance with:

- | | | |
|--------------------------------------|--|---------------------------------|
| ☐ IEC 801-2, | ☐ IEC 1000-4-2 | Electrostatic Discharge (ESD) |
| ☐ IEC 801-3, | ☐ ENV50140 | RF Immunity |
| ☐ IEC 801-4, | ☐ IEC 1000-4-4 | Electrical Fast Transient (EFT) |
| ☐ IEC 801-5, | ☐ IEC 1000-4-5 | Surge (Lighting) |
| ☐ IEC 801-6, | ☐ ENV50141 | Conducted Immunity |
| ☐ IEC 801-11, | ☐ IEC 1000-4-11 | Voltage Dips and Interruptions |

3.1 EUT OPERATION MODE - IMMUNITY TESTS:

- ☐ Standby
- ☐ Test program (H-Pattern)
- ☐ Test program (color bar)
- ☐ Test program (customer specific)
- ☐ Practice operation
- ☐ Normal operating Mode:
- ☐ As per manufacture's instructions

File Number: BP7169
Project Number: 98ME50398
Model Number: Sentinal-Prox MM-6800
FCC ID: XXXMM6800

Issued:February 3, 1999

3.1.1 Electrostatic Discharge (ESD) Test:

☐ Test Applicable ☒ Test Not Applicable

3.1.2 Radiated Field (RF Immunity) Test:

☐ Test Applicable ☒ Test Not Applicable

3.1.3 Electrical Fast Transient (EFT)/Burst test:

☐ Test Applicable ☒ Test Not Applicable

3.1.4 Voltage Surge Test:

☐ Test Applicable ☒ Test Not Applicable

3.1.5 Conducted Immunity Test:

☐ Test Applicable ☒ Test Not Applicable

3.1.6 Voltage Dips and Interruptions:

☐ Test Applicable ☒ Test Not Applicable

File Number: BP7169
Project Number: 98ME50398
Model Number: Sentinal-Prox MM-6800
FCC ID: XXXMM6800

Issued: February 3, 1999

4.0 SUMMARY:

The equipment under test has

☒ met the technical requirements as defined under section(s) ☒ 2.0 and ☐ 3.0

☐ not met the technical requirements as defined under section(s) ☐ 2.0 and ☐ 3.0.

Test Start Date: 12/8/98

Test Completion Date: 12/22/98


- UNDERWRITERS LABORATORIES, INC. -

Project Engineer



Bernie Papocchia (Ext.23294)
EMC Senior Engineering Associate
International EMC Services
Engineering Services 3014AMEL

Reviewer



Bob DeLisi (Ext.22452)
EMC Engineering Team Leader
International EMC Services
Engineering Services 3014AMEL

APPENDIX A

EMISSIONS TEST DATA

1. ☐ Conducted Emissions ☐ voltage ☐ current
 - ☐ Peak traces, Data Pages A___ and/through A___
 - ☐ Quasi-Peak traces, Data Pages A___ and/through A___
 - ☐ Average traces, Data Pages A___ and/through A___
- ☐ Discontinuous Interference (Clicks)
 - ☐ No clicks exceeded the steady state quasi-peak limit
 - ☐ Clicks exceeded the steady state quasi-peak limit. The limit was adjusted to _____ dB and no clicks exceeded the adjusted limit.
 - ☐ Clicks exceeded the adjusted limit. See Data Page A___ for details.
2. ☒ Radiated Emissions
 - ☒ Peak traces, Data Pages A1, A4, A7, A10 and A13.
 - ☒ Peak Data, Data Pages A14 and A15.
 - ☒ Average traces Data, Data Pages A2, A5, A8 and A11
 - ☒ Average Data, Data Pages A3, A6, A9 and A12.
3. ☐ RFI Power Measurements
 - ☐ Peak traces, Data Pages A___ and/through A___
 - ☐ Quasi-Peak traces, Data Pages A___ and/through A___
 - ☐ Average Traces, Data Pages A___ and/through A___
4. ☐ Harmonic Disturbances
 - ☐ Steady State Harmonics, Data Pages A___ and/through A___
 - ☐ Fluctuating Harmonics, Data Pages A___ and/through A___
 - ☐ Changing Voltage, Data Pages A___ and/through A___

Radiated Emissions
 Applied Wireless Inc. T190
 Prox. Card Reader MM6800 w12V
 FILE:BP7169,PROJECT:98ME50398
 TESTED BY:BP BL=H,Gr=V A0deg

E-FIELD FCC Pt. 15 SUB C (3M)

dB[μV/meter]

Frequency [MHz]

30

10

1

.12

120

110

100

90

80

.12

22 Dec 1998 07:01:20

UL - EMC TEST SYSTEM

120

Radiated Emissions
 Applied Wireless Inc. T190
 Prox. Card Reader MM6800 w12V
 FILE:BP7169,PROJECT:98ME50398
 TESTED BY:BP BL=H,Gr=V A0deg

E-FIELD FCC Pt. 15 SUB C (3M)

*

100

90

80

.12

Frequency [MHz]

10

30

UL - EMC TEST SYSTEM

Date Tested: 22 Dec 1998
07:01:20Applied Wireless Inc. T190
Prox. Card Reader MM6800 w12V
FILE:BP7169,PROJECT:98ME50398
TESTED BY:BP BL=H,Gr=V A0deg

TEST REQUIREMENTS: Radiated Emissions

RECEIVER : Hewlett-Packard Spectrum Analyzer, Model HP8566B
DETECTION MODE : Average
BANDWIDTH : 200Hz for measurements 9kHz to 150kHz
: 10kHz for measurements 150kHz to 30MHz
: 100kHz for measurements above 30MHz

TEST	METER	GAIN/LOSS	TRANSDUCER	LEVEL	LIMITS:	1	2	3	4
FREQUENCY	READING	FACTOR	FACTOR						
[MHz]	[dB(uV)]	[dB]	[dB]						dB[uVolts/meter]
.1275	85.8	.2	16.6	102.6	106	N/A	N/A	N/A	

LIMIT 1 E-FIELD FCC Pt.15 SUB C (3M)
LIMIT 2 NONE
LIMIT 3 NONE
LIMIT 4 NONE

Radiated Emissions
Applied Wireless Inc. T151
Prox. Card Reader MM6800 w12V
FILE:BP7169,PROJECT:98ME50398
TESTED BY:BP BL=H,Gr=V A45deg

E-FIELD FCC Pt. 15 SUB C (3M)

dB[μV/meter]

Frequency [MHz]

30

10

1

12

100

90

80

110

120

Radiated Emissions
 Applied Wireless Inc. T151
 Prox. Card Reader MM6800 w12V
 FILE:BP7169,PROJECT:98ME50398
 TESTED BY:BP BL=H,Gr=V A45deg

E-FIELD FCC Pt. 15 SUB C (3M)

dB[uV/meter] Average Detection

120

110

100

90

80

1

10

30

Frequency [MHz]

UL - EMC TEST SYSTEM

Date Tested: 22 Dec 1998

07:18:09

Applied Wireless Inc. T151
Prox. Card Reader MM6800 w12V
FILE:BP7169,PROJECT:98ME50398
TESTED BY:BP BL=H,Gr=V A45deg

TEST REQUIREMENTS: Radiated Emissions

RECEIVER : Hewlett-Packard Spectrum Analyzer, Model HP8566B
DETECTION MODE : Average
BANDWIDTH : 200Hz for measurements 9kHz to 150kHz
: 10kHz for measurements 150kHz to 30MHz
: 100kHz for measurements above 30MHz

TEST	METER	GAIN/LOSS	TRANSDUCER	LEVEL	LIMITS:	1	2	3	4
FREQUENCY	READING	FACTOR	FACTOR						
[MHz]	[dB(uV)]	[dB]	[dB]						dB[uVolts/meter]
=====									
.12538	84.4	.2	16.6	101.2	106	N/A	N/A	N/A	

LIMIT 1 E-FIELD FCC Pt.15 SUB C (3M)
LIMIT 2 NONE
LIMIT 3 NONE
LIMIT 4 NONE

Radiated Emissions
 Applied Wireless Inc. T248
 Prox. Card Reader MM6800 w12V
 FILE:BP7169,PROJECT:98ME50398
 TESTED BY:BP BL=H,Gr=V A90deg

E-FIELD FCC Pt. 15 SUB C (3M)

dB[μV/meter]

120

110

100

90

80

70

1


10

30

Frequency [MHz]



dB[uVols/meter] Average Detection

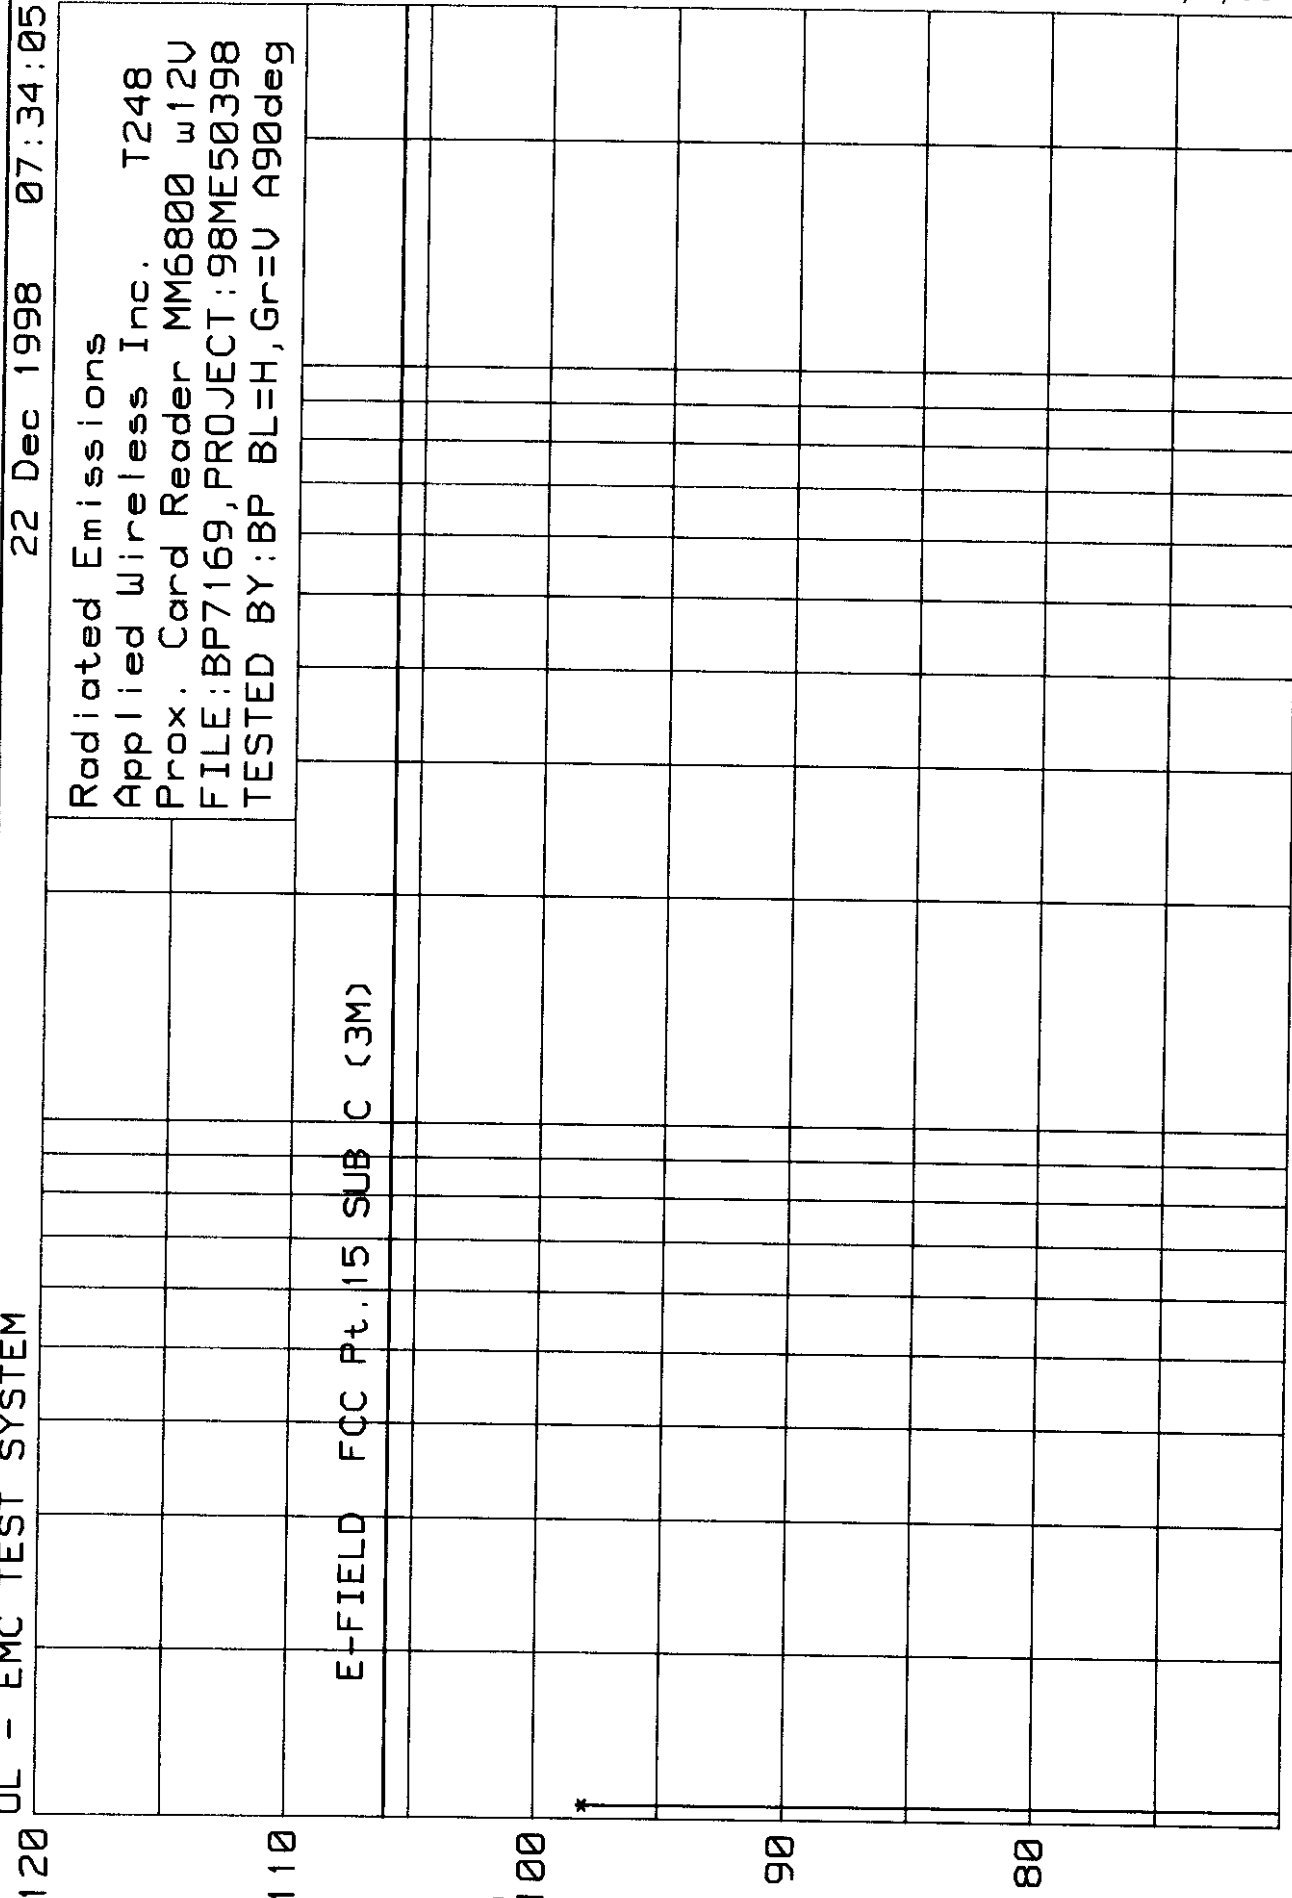

120

1

Frequency [MHz]

10

30

Radiated Emissions
Applied Wireless Inc. T248
Prox. Card Reader MM6800 w12V
FILE:BP7169,PROJECT:98ME50398
TESTED BY:BP BL=H,Gr=V A90deg

Issued: 2/3/99

Date Tested: 22 Dec 1998
07:34:05

Applied Wireless Inc. T248
Prox. Card Reader MM6800 w12V
FILE:BP7169,PROJECT:98ME50398
TESTED BY:BP BL=H,Gr=V A90deg

TEST REQUIREMENTS: Radiated Emissions

RECEIVER : Hewlett-Packard Spectrum Analyzer, Model HP8566B
DETECTION MODE : Average
BANDWIDTH : 200Hz for measurements 9kHz to 150kHz
: 10kHz for measurements 150kHz to 30MHz
: 100kHz for measurements above 30MHz

TEST	METER	GAIN/LOSS	TRANSDUCER	LEVEL	LIMITS:	1	2	3	4
FREQUENCY	READING	FACTOR	FACTOR						
[MHz]	[dB(uV)]	[dB]	[dB]						dB[uVolts/meter]
=====									
.12532	81.3	.2	16.6	98.1	106	N/A	N/A	N/A	

LIMIT 1 E-FIELD FCC Pt.15 SUB C (3M)
LIMIT 2 NONE
LIMIT 3 NONE
LIMIT 4 NONE

Radiated Emissions
Applied Wireless Inc. T199
Prox. Card Reader MM6800 w12V
FILE:BP7169,PROJECT:98ME50398
TESTED BY:BP BL=H,Gr=V A135deg

E-FIELD FCC Pt. 15 SUB C (3M)

dB[μV/m]

Frequency [MHz]


30

10

1

.12

dB[uV/m] Average Detection

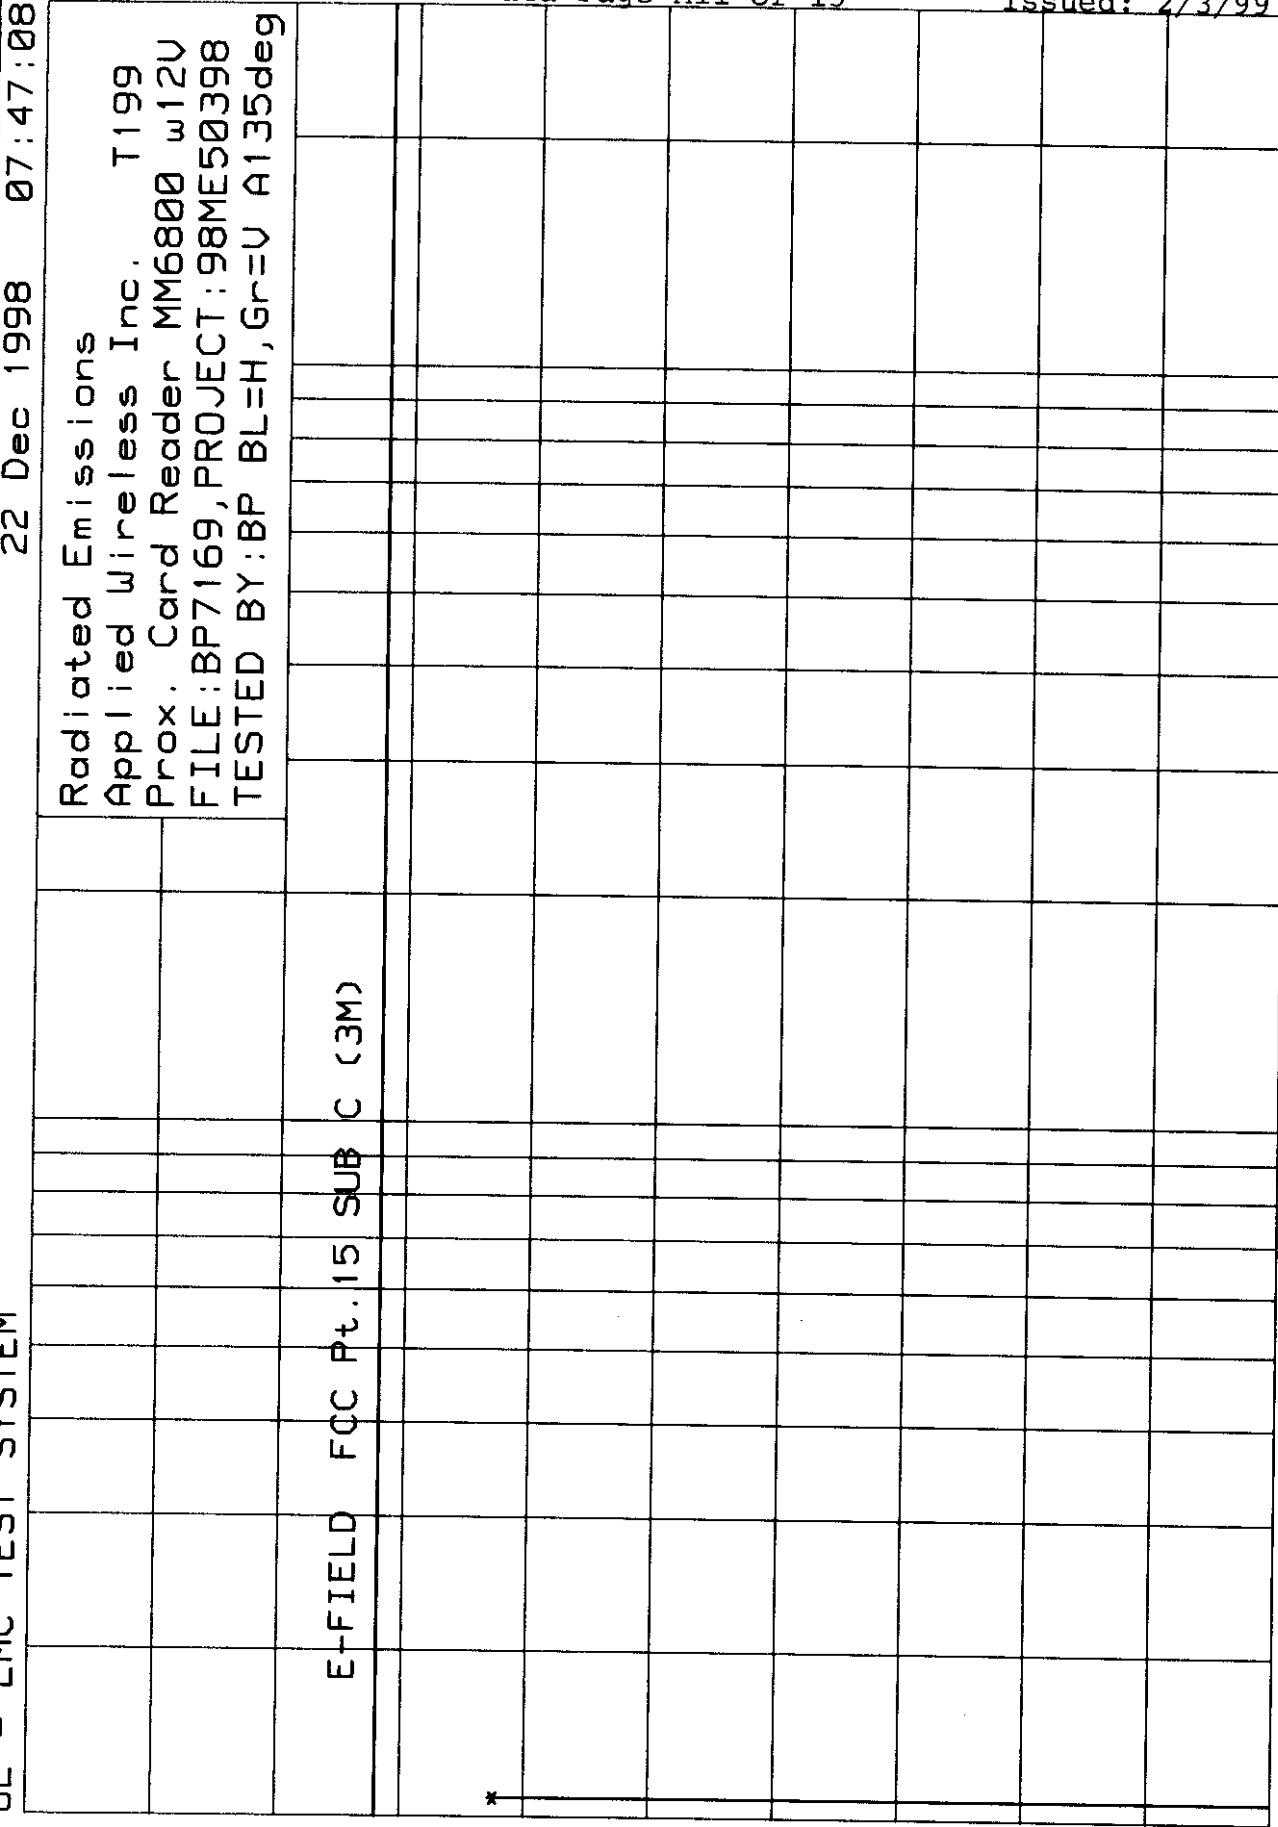

120
110
100
90
80
0.12 1 10 30

Frequency [MHz]

Radiated Emissions
Applied Wireless Inc. T199
Prox. Card Reader MM6800 w12V
FILE:BP7169,PROJECT:98ME50398
TESTED BY:BP BL=H,Gr=U A135deg

UL - EMC TEST SYSTEM

Date Tested: 22 Dec 1998

07:47:08

Applied Wireless Inc. T199
Prox. Card Reader MM6800 w12V
FILE:BP7169,PROJECT:98ME50398
TESTED BY:BP BL=H,Gr=V A135deg

TEST REQUIREMENTS: Radiated Emissions

RECEIVER : Hewlett-Packard Spectrum Analyzer, Model HP8566B
DETECTION MODE : Average
BANDWIDTH : 200Hz for measurements 9kHz to 150kHz
: 10kHz for measurements 150kHz to 30MHz
: 100kHz for measurements above 30MHz

TEST	METER	GAIN/LOSS	TRANSDUCER	LEVEL	LIMITS:1	2	3	4
FREQUENCY	READING	FACTOR	FACTOR					
[MHz]	[dB(uV)]	[dB]	[dB]					
.1275	84.5	.2	16.6	101.3	106	N/A	N/A	N/A

LIMIT 1 E-FIELD FCC Pt.15 SUB C (3M)
LIMIT 2 NONE
LIMIT 3 NONE
LIMIT 4 NONE

Radiated Emissions
 Applied Wireless Inc.
 Prox. Card Reader MM-6800 w/12V
 FILE:BP7169,PROJECT:98ME50398
 TESTED BY:BP BLUE=H, GREEN=V

FCC PT15 CLASS A-RADIATED(10m)

dB[μV/meter]

Frequency [MHz]

30


100

1000

20 30 40 50 60

60

80

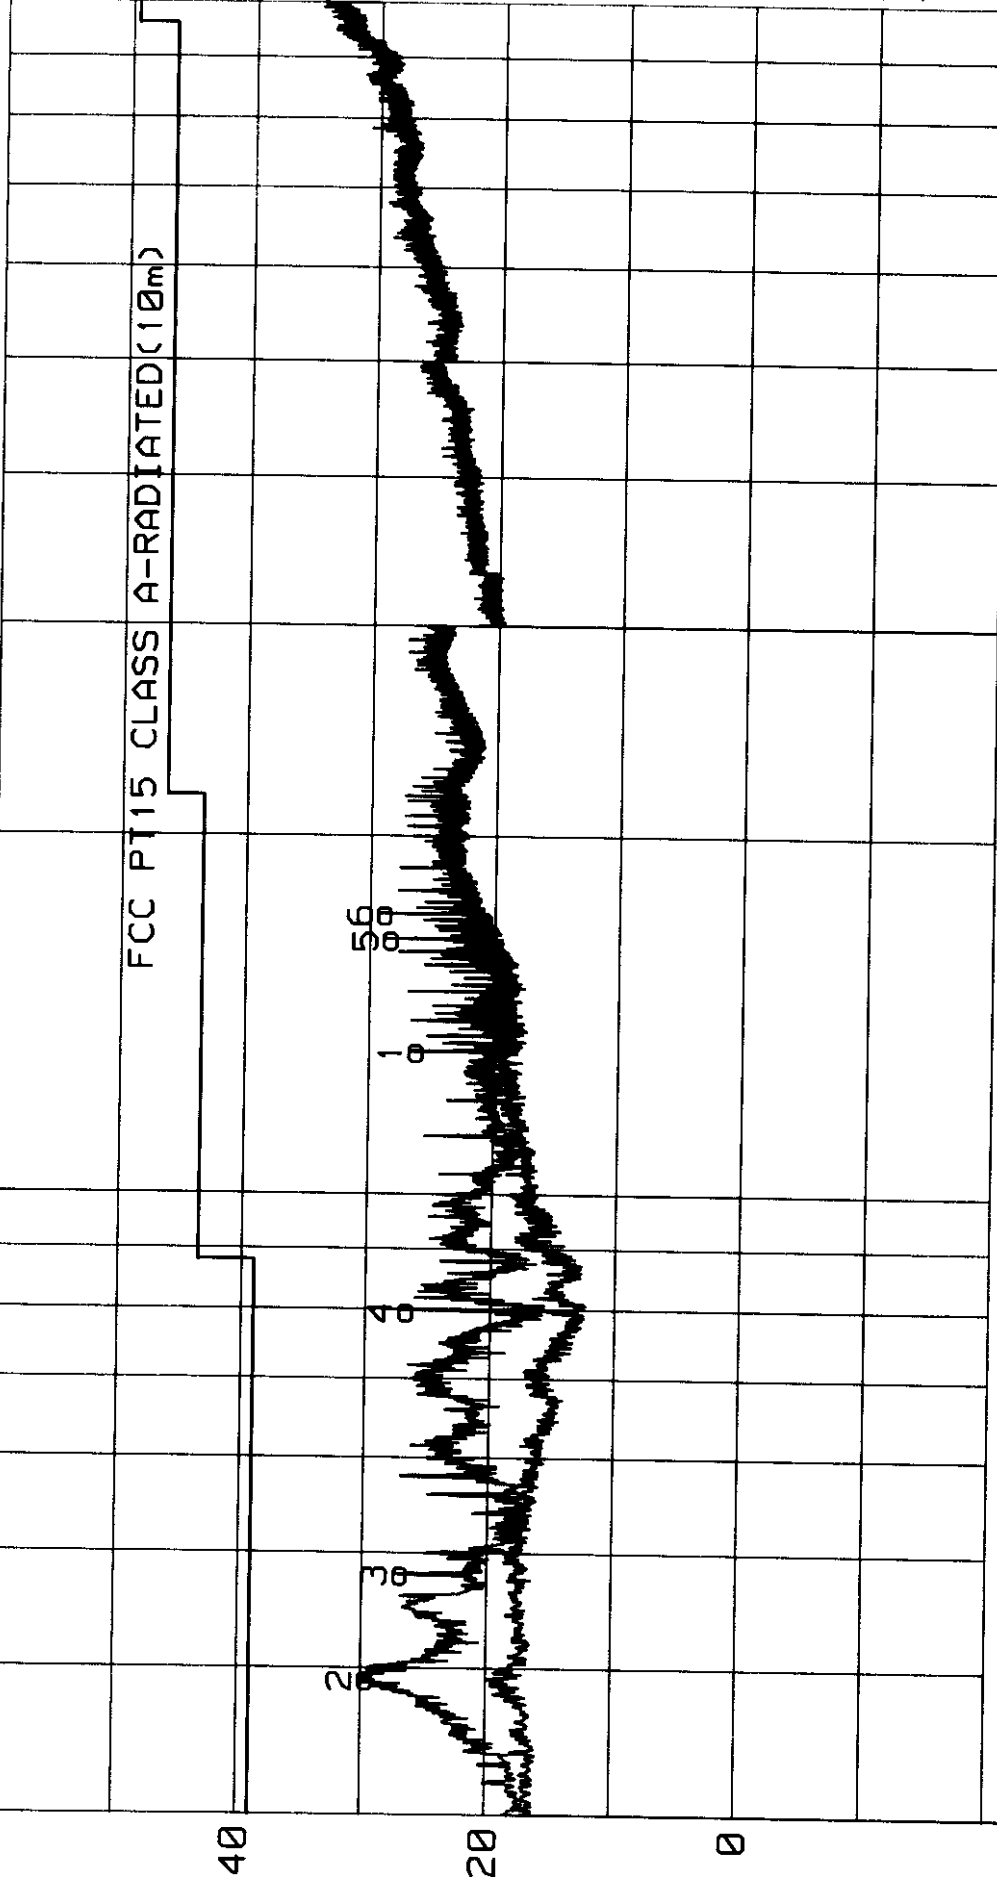

UL - EMC TEST SYSTEM

Date Tested: 18 Dec 1998

09:04:31

Applied Wireless Inc.

Prox.Card Reader MM-6800 w/12V

FILE:BP7169,PROJECT:98ME50398

TESTED BY:BP BLUE=H,GREEN=V

MKR	TEST	METER	GAIN/LOSS	TRANSDUCER	LEVEL	LIMIT:1	2	3	4
NO.	FREQUENCY	READING	FACTOR	FACTOR					
	[MHz]	[dB(uV)]	[dB]	[dB]					
1	131.8906	13 pk	.7	12.9	26.6	43.5	N/A	N/A	N/A
2	39.1371	17.3 pk	.3	12.4	30	39	N/A	N/A	N/A
3	47.9708	14.1 pk	.4	12.8	27.3	39	N/A	N/A	N/A
4	79.799	19.6 pk	.6	6.9	27.1	39	N/A	N/A	N/A
5	163.8199	13.6 pk	.8	14.3	28.7	43.5	N/A	N/A	N/A
6	171.8444	13.1 pk	.8	15.3	29.2	43.5	N/A	N/A	N/A

pk - Peak detector

qp - Quasi-peak detector

av - Average detector

tm - Trace Math Result

LIMIT 1 : FCC PT15 CLASS A-RADIATED(10m)

LIMIT 2 : NONE

LIMIT 3 : NONE

LIMIT 4 : NONE

UL - EMC TEST SYSTEM

Date Tested: 18 Dec 1998

09:04:31

Applied Wireless Inc.

Prox.Card Reader MM-6800 w/12V

FILE:BP7169,PROJECT:98ME50398

TESTED BY:BP BLUE=H, GREEN=V

MARK TRACE - POSITIONS

MARKER NO.	TEST FREQUENCY	LEVEL	LIMIT:1 dB[uVolts/meter]	2	3	4	TABLE AZIMUTH(deg)	TOWER HEIGHT (cm)
1	131.8906	26.6 pk	43.5	N/A	N/A	N/A	0	400 H
2	39.1371	30 pk	39	N/A	N/A	N/A	214	98 V
3	47.9708	27.3 pk	39	N/A	N/A	N/A	223	98 V
4	79.799	27.1 pk	39	N/A	N/A	N/A	168	301 V
5	163.8199	28.7 pk	43.5	N/A	N/A	N/A	278	98 V
6	171.8444	29.2 pk	43.5	N/A	N/A	N/A	299	98 V

pk - Peak detector

qp - Quasi-peak detector

LIMIT 1 : FCC PT15 CLASS A-RADIATED(10m)

LIMIT 2 : NONE

LIMIT 3 : NONE

LIMIT 4 : NONE

File Number: BP7169
Project Number: 98ME50398
Model Number: Sentinal-Prox MM-6800
FCC ID: XXXMM6800

Issued:February 3, 1999

APPENDIX B

PHOTOGRAPHS AND DIAGRAMS

File Number: BP7169
Project Number: 98ME50398
Model Number: Sentinal-Prox MM-6800
FCC ID: XXXMM6800

Issued: February 3, 1999

APPENDIX C

SAMPLE CALCULATIONS

APPENDIX C

Sample Calculations

Radiated Emissions Limit conversion from $\mu\text{V/m}$ to $\text{dB}\mu\text{V/m}$
(limits in accordance with paragraph 15.109)

$$\text{Radiated Emissions Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

$$\text{Radiated Emissions Limit (dB}\mu\text{V/m)} = 20 * \log (90)$$

$$\text{Radiated Emissions Limit (dB}\mu\text{V/m)} = 39.1$$

Radiated Emissions test data obtained during measurements.

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{Measured field strength (dB}\mu\text{V/m)} + \text{Antenna Factor (dB)} + \text{Cable Factor (dB)}$$

$$\text{Field Strength (dB}\mu\text{V/m)} = 17.3 \text{ dB}\mu\text{V/m} + 12.4 \text{ dB} + 0.3 \text{ dB}$$

$$\text{Field Strength (dB}\mu\text{V/m)} = 30$$

Radiated Emissions Limit conversion from $\mu\text{V/m}$ to $\text{dB}\mu\text{V/m}$ and 40dB/decade
(limits in accordance with paragraph 15.209)

Radiated Emission Limits; General Requirements

$$\text{Frequency between 0.009-0.490 MHz} \quad 2400/F(\text{kHz}) \text{ at 300 meters} = \text{Field Strength in } \mu\text{V/meter}$$

$$125 \text{ kHz} \quad 2400/(125) \text{ at 300 meters}$$

$$\text{Radiated emissions at 125 kHz at 300 meters} = 19.2 \mu\text{V/meter}$$

$$\text{dB}\mu\text{V/m} = 20 * \log(19.2 \mu\text{V/m})$$

$$\text{dB}\mu\text{V/m} = 25.67 \text{ at 300 meters}$$

$$40 \text{ dB/decade}$$

$$300 \text{ meters to 3 meters} = 80 \text{ dB}$$

$$\text{Radiated Emissions Limit} = \text{dB}\mu\text{V/m} + \text{dB}$$

$$25.66 + 80$$

$$105.66 \text{ dB}\mu\text{V/m}$$