



## Band Edge With Hopping On


### CH00 (2402MHz) DH5(1Mbps)

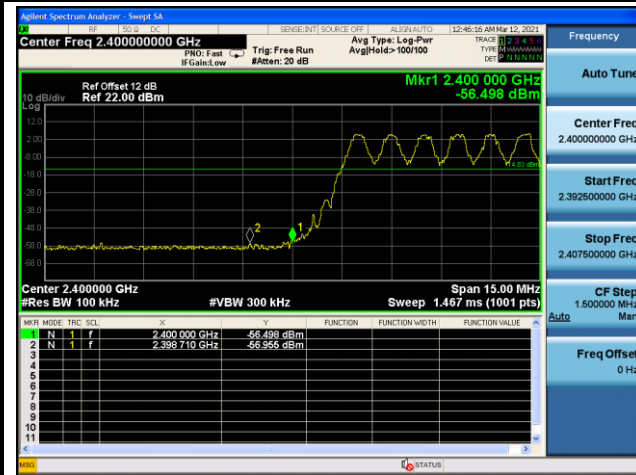


### CH78 (2480MHz) DH5(1Mbps)

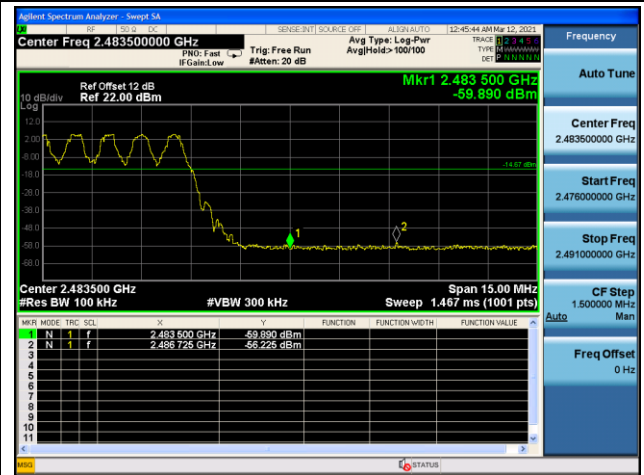

### CH00 (2402MHz) 3-DH5(3Mbps)

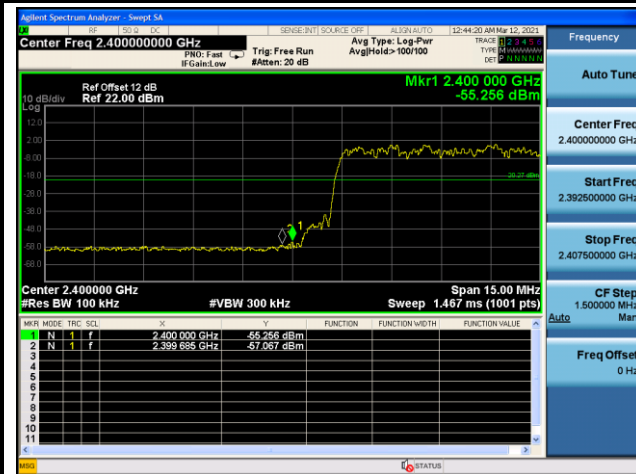

### CH78 (2480MHz) 3-DH5(3Mbps)

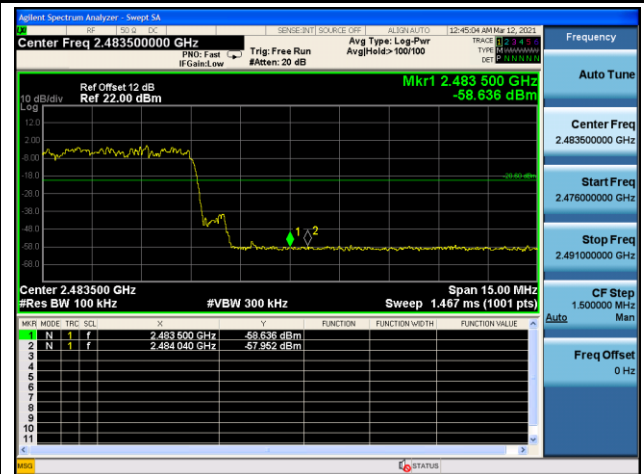

## 7.8. Radiated Spurious Emission Measurement

### 7.8.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 |                         |                               |
|----------------------------------------|-------------------------|-------------------------------|
| Frequency<br>[MHz]                     | Field Strength<br>[V/m] | Measured Distance<br>[Meters] |
| 0.009 - 0.490                          | 2400/F (kHz)            | 300                           |
| 0.490 - 1.705                          | 24000/F (kHz)           | 30                            |
| 1.705 – 30                             | 30                      | 30                            |
| 30 – 88                                | 100                     | 3                             |
| 88 – 216                               | 150                     | 3                             |
| 216 – 960                              | 200                     | 3                             |
| Above 960                              | 500                     | 3                             |

### 7.8.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.12.1

### 7.8.3. Test Setting

#### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3 \* RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold

- Trace was allowed to stabilize

**Table 1 - RBW as a function of frequency**


| Frequency     | RBW           |
|---------------|---------------|
| 9 ~ 150 kHz   | 200 ~ 300 Hz  |
| 0.15 ~ 30 MHz | 9 ~ 10 kHz    |
| 30 ~ 1000 MHz | 100 ~ 120 kHz |
| > 1000 MHz    | 1 MHz         |

#### **Average Field Strength Measurements**


- Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- RBW = 1MHz
- $VBW \geq 1/T$
- De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold
- Allow max hold to run for at least 50 times (1/duty cycle) traces

#### 7.8.4. Test Setup


##### 9kHz ~ 30MHz Test Setup:

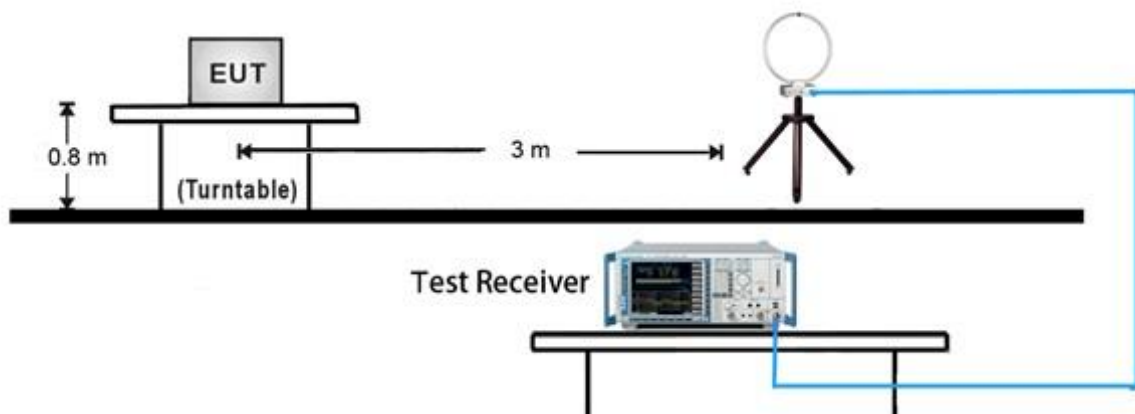


##### 30MHz ~ 1GHz Test Setup:

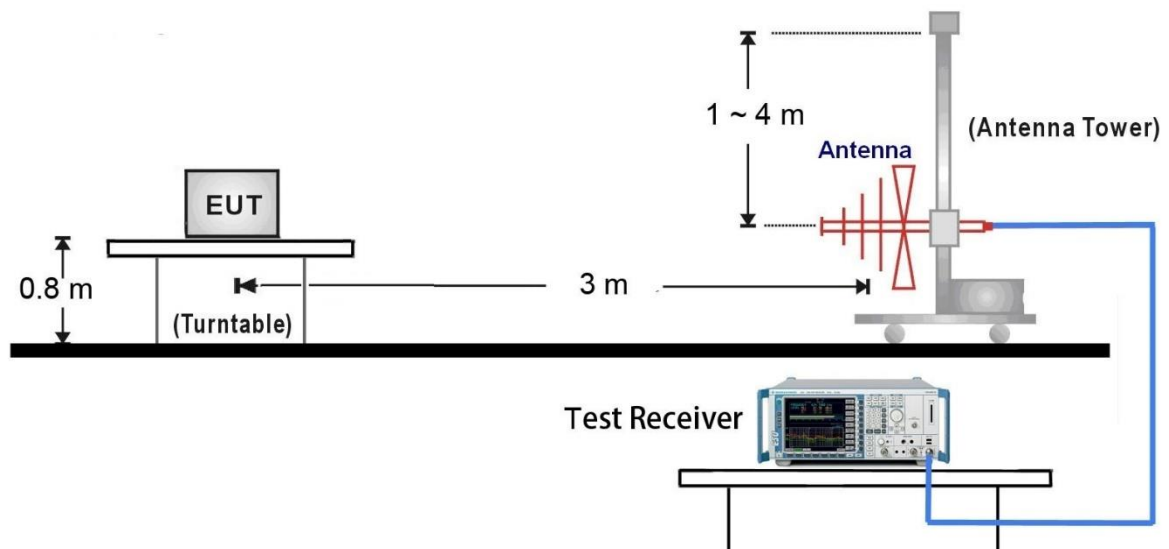

### 1GHz ~ 18GHz Test Setup:

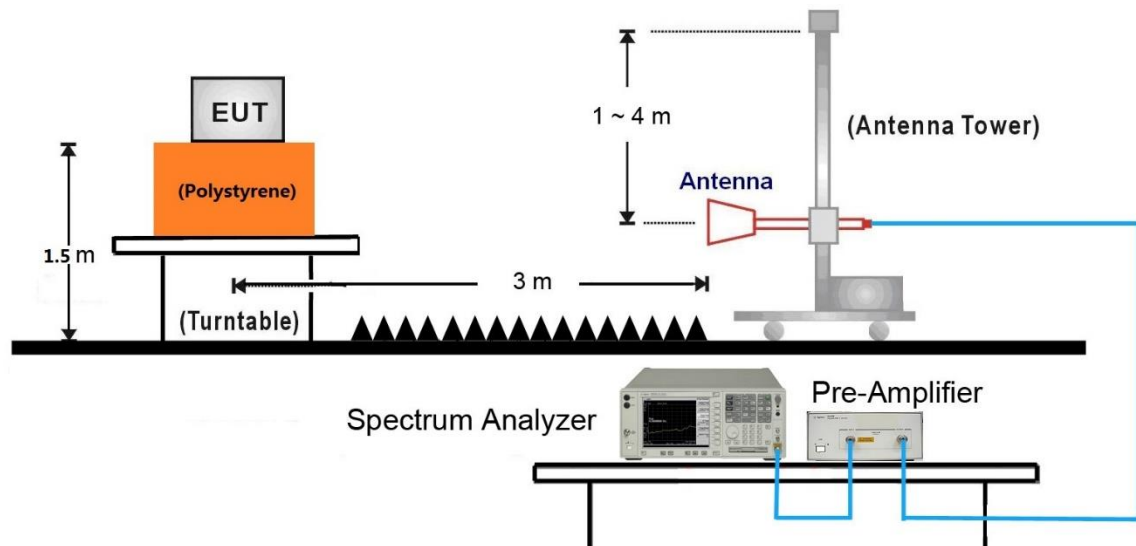


### 18GHz ~40GHz Test Setup:

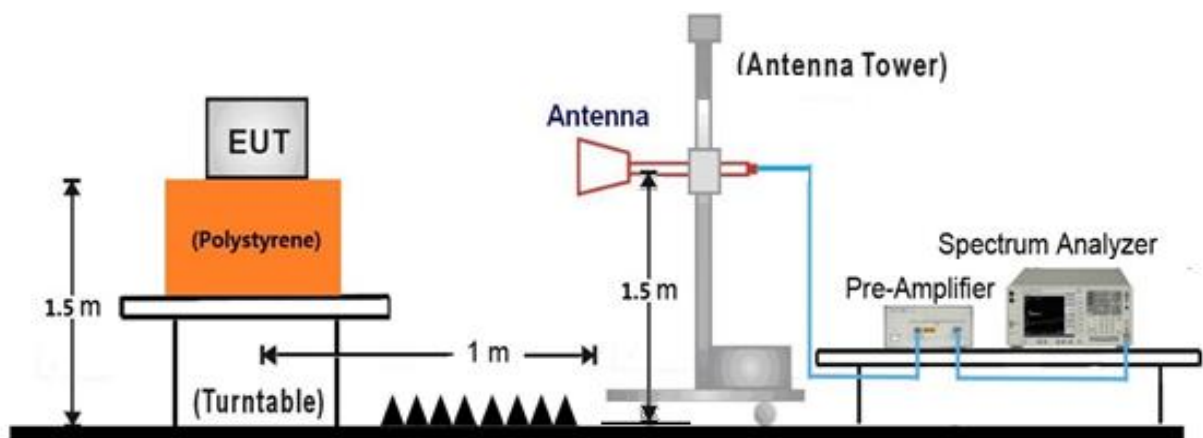

### 7.8.5. Test Result

|           |                 |                      |              |
|-----------|-----------------|----------------------|--------------|
| EUT       | Rugged Tablet   | Date of Test         | 2021-03-26   |
| Factor    | VULB 9162       | Temp. / Humidity     | 23°C /64%    |
| Polarity  | Horizontal      | Site / Test Engineer | AC1 / Kaunaz |
| Test Mode | BT_TX_DH5_CH 39 | Test Voltage         | AC 120V/60Hz |

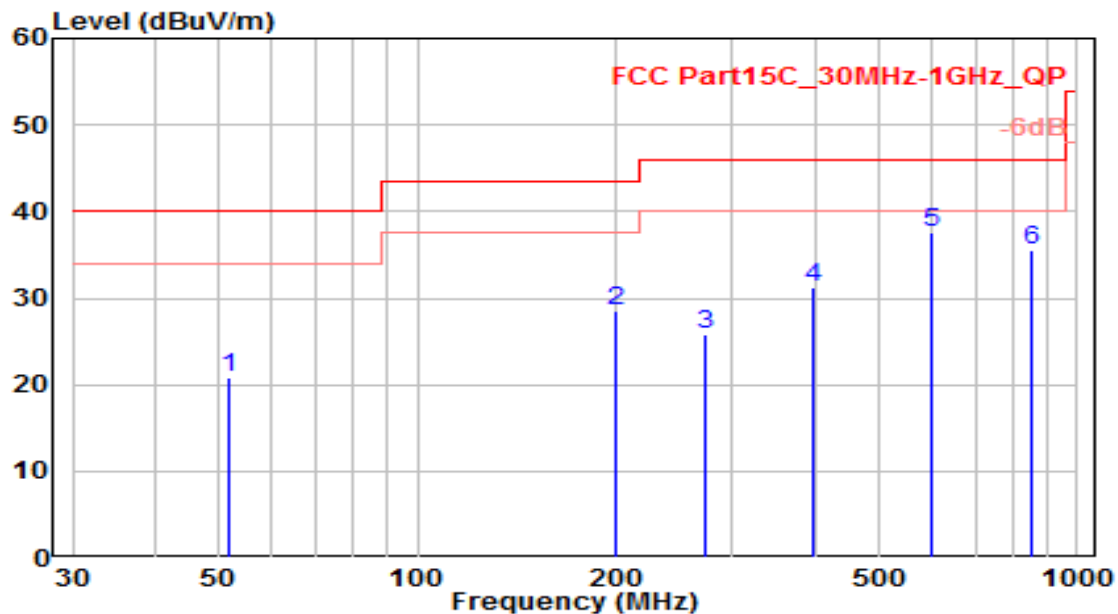


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 51.857          | -0.86          | 21.71    | 20.85                | -19.15      | 40.00          | 100         | 260         | QP                |
| 2  | 199.635         | 9.29           | 19.24    | 28.53                | -14.97      | 43.50          | 100         | 155         | QP                |
| 3  | 272.874         | 4.97           | 20.80    | 25.77                | -20.23      | 46.00          | 100         | 340         | QP                |
| 4  | 399.251         | 7.12           | 24.05    | 31.16                | -14.84      | 46.00          | 100         | 80          | QP                |
| 5  | * 600.965       | 9.84           | 27.82    | 37.66                | -8.34       | 46.00          | 100         | 325         | QP                |
| 6  | 856.241         | 4.06           | 31.52    | 35.58                | -10.42      | 46.00          | 100         | 140         | QP                |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                 |                      |              |
|-----------|-----------------|----------------------|--------------|
| EUT       | Rugged Tablet   | Date of Test         | 2021-03-26   |
| Factor    | VULB 9162       | Temp. / Humidity     | 23°C /64%    |
| Polarity  | Vertical        | Site / Test Engineer | AC1 / Kaunaz |
| Test Mode | BT_TX_DH5_CH 39 | Test Voltage         | AC 120V/60Hz |

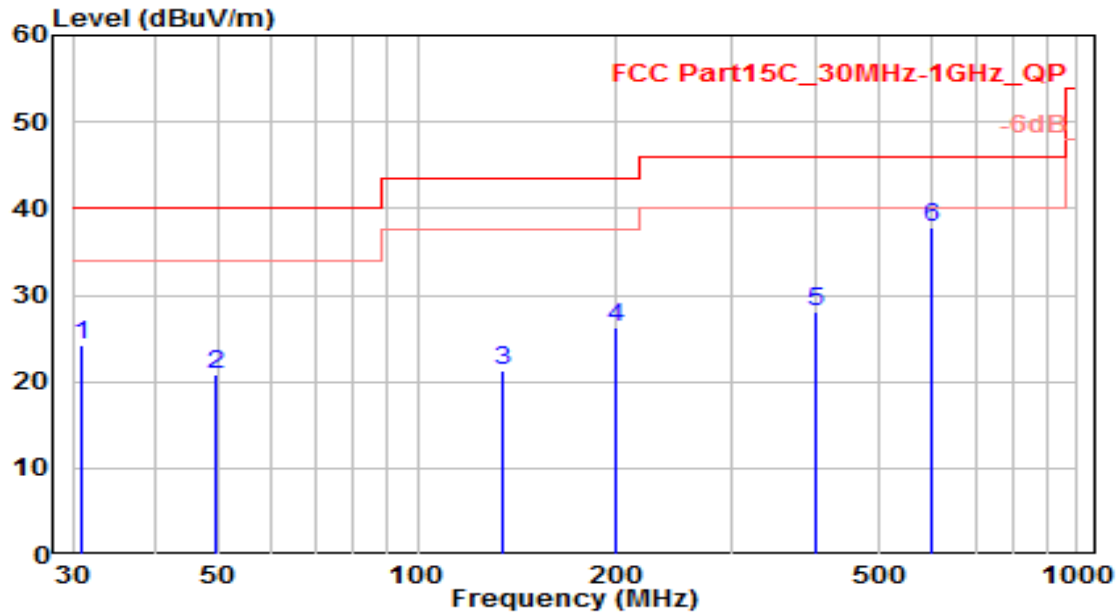


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 30.854          | 5.59           | 18.56    | 24.15                | -15.85      | 40.00          | 100         | 55          | QP                |
| 2  | 49.263          | -1.29          | 22.01    | 20.72                | -19.28      | 40.00          | 100         | 360         | QP                |
| 3  | 134.147         | 5.15           | 16.18    | 21.33                | -22.17      | 43.50          | 100         | 280         | QP                |
| 4  | 199.852         | 7.11           | 19.25    | 26.36                | -17.14      | 43.50          | 100         | 165         | QP                |
| 5  | 399.968         | 3.93           | 24.06    | 27.99                | -18.01      | 46.00          | 100         | 70          | QP                |
| 6  | * 600.374       | 10.05          | 27.81    | 37.86                | -8.14       | 46.00          | 100         | 115         | QP                |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                        |                      |              |
|-----------|------------------------|----------------------|--------------|
| EUT       | Rugged Tablet          | Date of Test         | 2021-03-17   |
| Factor    | BBHA 9120D & BBHA 9170 | Temp. / Humidity     | 23°C /59%    |
| Polarity  | Horizontal             | Site / Test Engineer | AC1 / Kaunaz |
| Test Mode | BT_TX_DH5_CH 0         | Test Voltage         | AC 120V/60Hz |

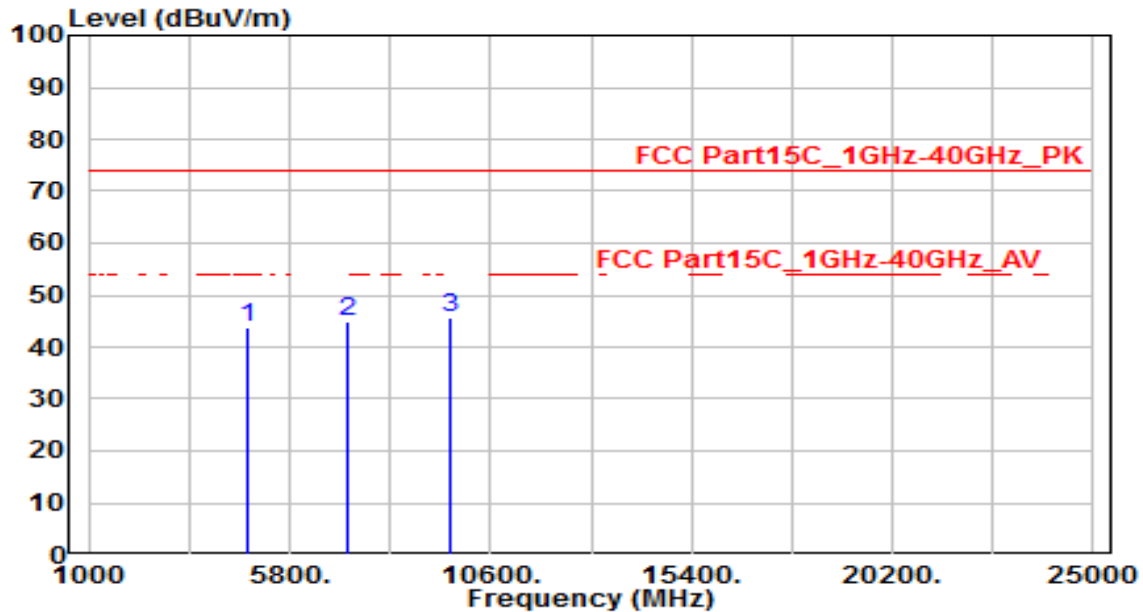


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4804.000        | 40.60          | 3.28     | 43.88                | -30.12      | 74.00          | 150         | 360         | Peak              |
| 2  | 7206.000        | 33.94          | 10.88    | 44.82                | -29.18      | 74.00          | 150         | 360         | Peak              |
| 3  | * 9608.000      | 31.01          | 14.62    | 45.64                | -28.36      | 74.00          | 150         | 360         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                        |                      |              |
|-----------|------------------------|----------------------|--------------|
| EUT       | Rugged Tablet          | Date of Test         | 2021-03-17   |
| Factor    | BBHA 9120D & BBHA 9170 | Temp. / Humidity     | 23°C /59%    |
| Polarity  | Vertical               | Site / Test Engineer | AC1 / Kaunaz |
| Test Mode | BT_TX_DH5_CH 0         | Test Voltage         | AC 120V/60Hz |

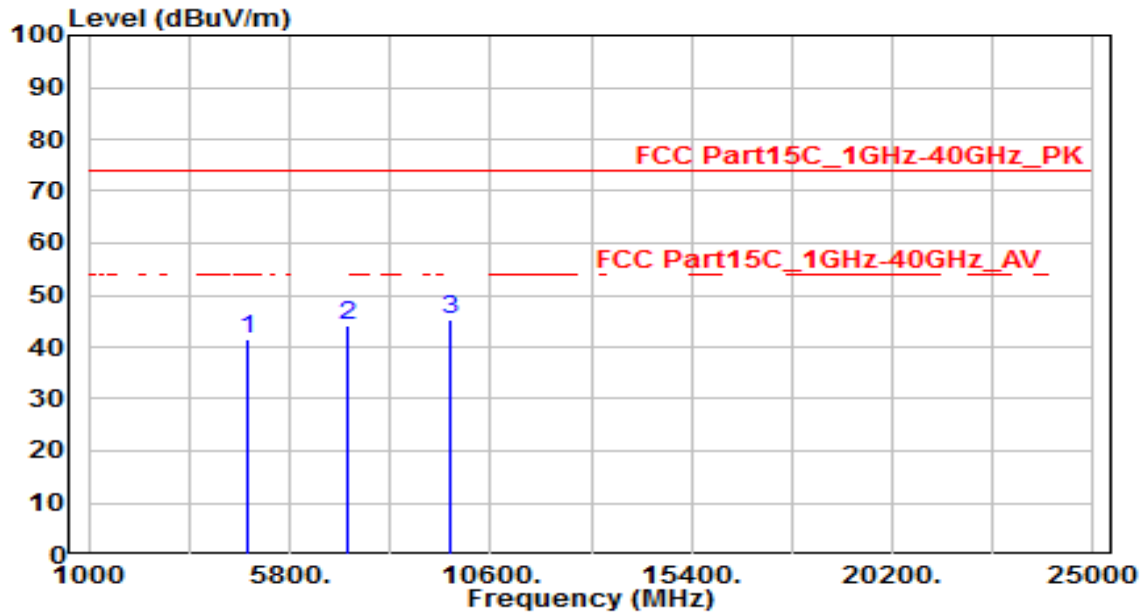


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4804.000        | 38.30          | 3.28     | 41.58                | -32.42      | 74.00          | 150         | 360         | Peak              |
| 2  | 7206.000        | 33.09          | 10.88    | 43.97                | -30.03      | 74.00          | 150         | 360         | Peak              |
| 3  | * 9608.000      | 30.83          | 14.62    | 45.45                | -28.55      | 74.00          | 150         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                        |                      |              |
|-----------|------------------------|----------------------|--------------|
| EUT       | Rugged Tablet          | Date of Test         | 2021-03-17   |
| Factor    | BBHA 9120D & BBHA 9170 | Temp. / Humidity     | 23°C /59%    |
| Polarity  | Horizontal             | Site / Test Engineer | AC1 / Kaunaz |
| Test Mode | BT_TX_DH5_CH 39        | Test Voltage         | AC 120V/60Hz |

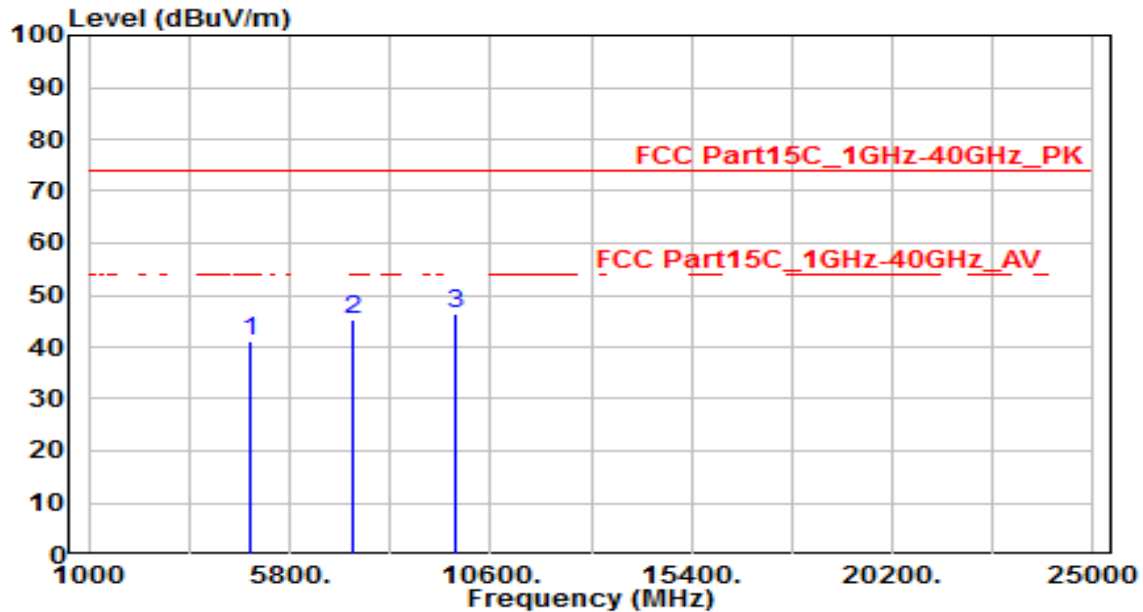


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4882.000        | 37.76          | 3.47     | 41.22                | -32.78      | 74.00          | 150         | 360         | Peak              |
| 2  | 7323.000        | 33.98          | 11.21    | 45.20                | -28.80      | 74.00          | 150         | 360         | Peak              |
| 3  | * 9764.000      | 31.37          | 14.92    | 46.29                | -27.71      | 74.00          | 150         | 360         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                        |                      |              |
|-----------|------------------------|----------------------|--------------|
| EUT       | Rugged Tablet          | Date of Test         | 2021-03-17   |
| Factor    | BBHA 9120D & BBHA 9170 | Temp. / Humidity     | 23°C /59%    |
| Polarity  | Vertical               | Site / Test Engineer | AC1 / Kaunaz |
| Test Mode | BT_TX_DH5_CH 39        | Test Voltage         | AC 120V/60Hz |

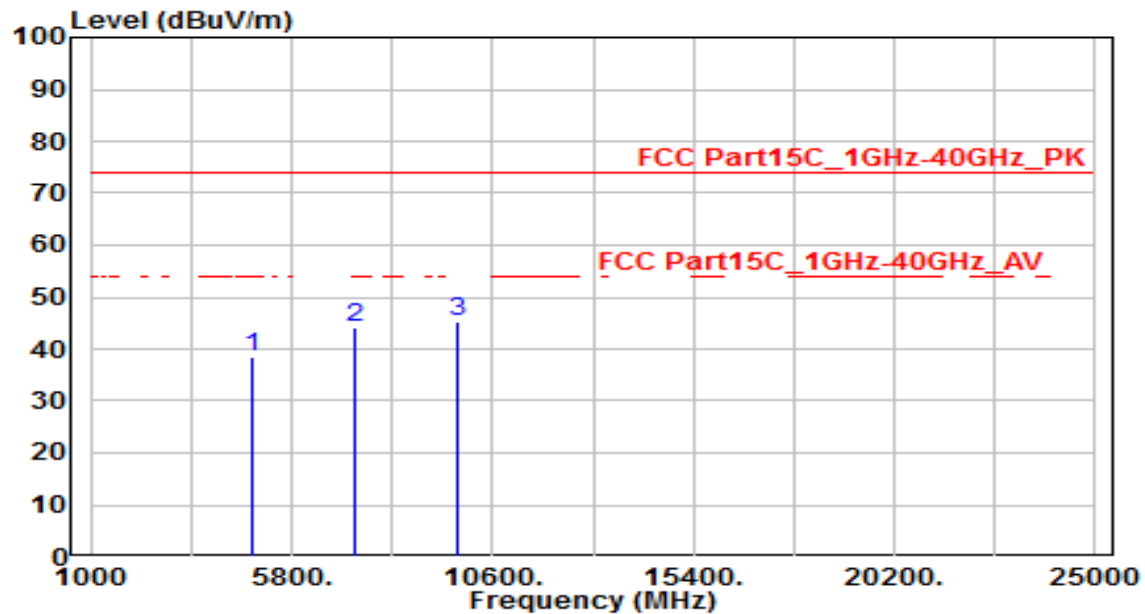


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4882.000        | 35.07          | 3.47     | 38.53                | -35.47      | 74.00          | 150         | 360         | Peak              |
| 2  | 7323.000        | 32.76          | 11.21    | 43.97                | -30.03      | 74.00          | 150         | 360         | Peak              |
| 3  | * 9764.000      | 30.44          | 14.92    | 45.35                | -28.65      | 74.00          | 150         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                        |                      |              |
|-----------|------------------------|----------------------|--------------|
| EUT       | Rugged Tablet          | Date of Test         | 2021-03-17   |
| Factor    | BBHA 9120D & BBHA 9170 | Temp. / Humidity     | 23°C /59%    |
| Polarity  | Horizontal             | Site / Test Engineer | AC1 / Kaunaz |
| Test Mode | BT_TX_DH5_CH 78        | Test Voltage         | AC 120V/60Hz |

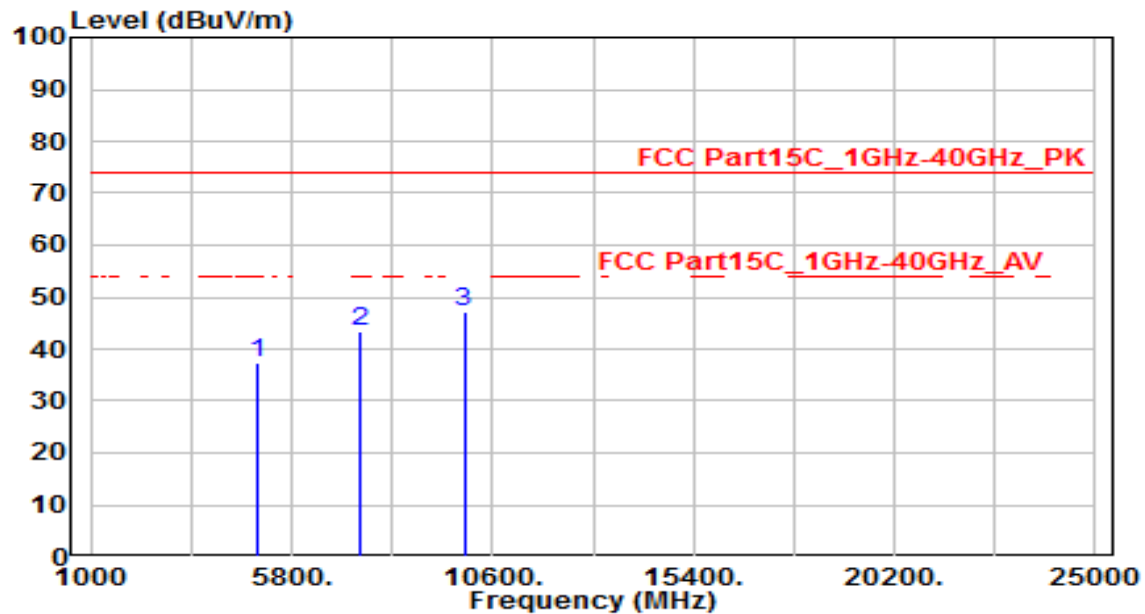


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4960.000        | 33.73          | 3.65     | 37.38                | -36.62      | 74.00          | 150         | 360         | Peak              |
| 2  | 7440.000        | 32.00          | 11.55    | 43.55                | -30.45      | 74.00          | 150         | 360         | Peak              |
| 3  | * 9920.000      | 32.09          | 15.21    | 47.30                | -26.70      | 74.00          | 150         | 360         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                        |                      |              |
|-----------|------------------------|----------------------|--------------|
| EUT       | Rugged Tablet          | Date of Test         | 2021-03-17   |
| Factor    | BBHA 9120D & BBHA 9170 | Temp. / Humidity     | 23°C /59%    |
| Polarity  | Vertical               | Site / Test Engineer | AC1 / Kaunaz |
| Test Mode | BT_TX_DH5_CH 78        | Test Voltage         | AC 120V/60Hz |

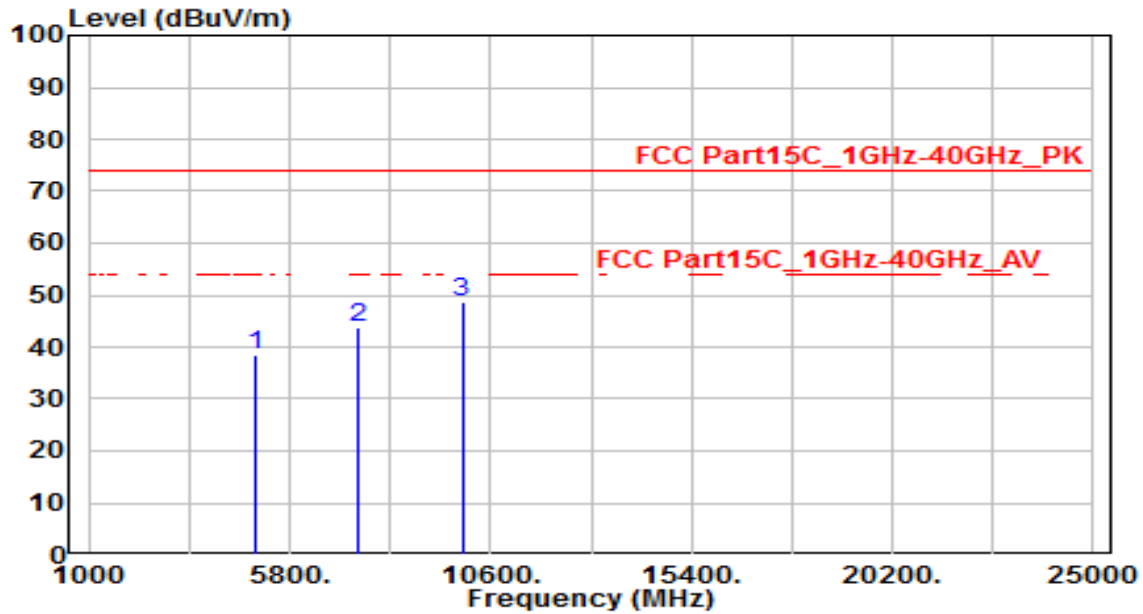


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4960.000        | 34.97          | 3.65     | 38.62                | -35.38      | 74.00          | 150         | 360         | Peak              |
| 2  | 7440.000        | 32.20          | 11.55    | 43.75                | -30.25      | 74.00          | 150         | 360         | Peak              |
| 3  | * 9920.000      | 33.39          | 15.21    | 48.60                | -25.40      | 74.00          | 150         | 360         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                        |                      |              |
|-----------|------------------------|----------------------|--------------|
| EUT       | Rugged Tablet          | Date of Test         | 2021-03-17   |
| Factor    | BBHA 9120D & BBHA 9170 | Temp. / Humidity     | 23°C /59%    |
| Polarity  | Horizontal             | Site / Test Engineer | AC1 / Kaunaz |
| Test Mode | BT_TX_3DH5_CH 0        | Test Voltage         | AC 120V/60Hz |

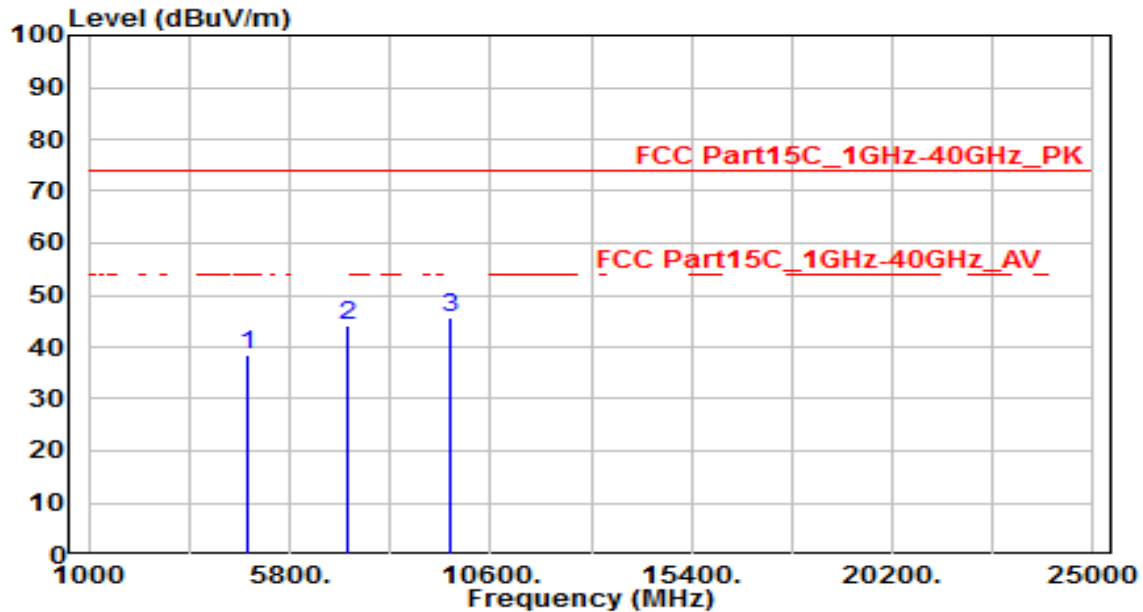


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4804.000        | 35.18          | 3.28     | 38.46                | -35.54      | 74.00          | 150         | 360         | Peak              |
| 2  | 7206.000        | 33.36          | 10.88    | 44.24                | -29.76      | 74.00          | 150         | 360         | Peak              |
| 3  | * 9608.000      | 31.05          | 14.62    | 45.67                | -28.33      | 74.00          | 150         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                        |                      |              |
|-----------|------------------------|----------------------|--------------|
| EUT       | Rugged Tablet          | Date of Test         | 2021-03-17   |
| Factor    | BBHA 9120D & BBHA 9170 | Temp. / Humidity     | 23°C /59%    |
| Polarity  | Vertical               | Site / Test Engineer | AC1 / Kaunaz |
| Test Mode | BT_TX_3DH5_CH 0        | Test Voltage         | AC 120V/60Hz |

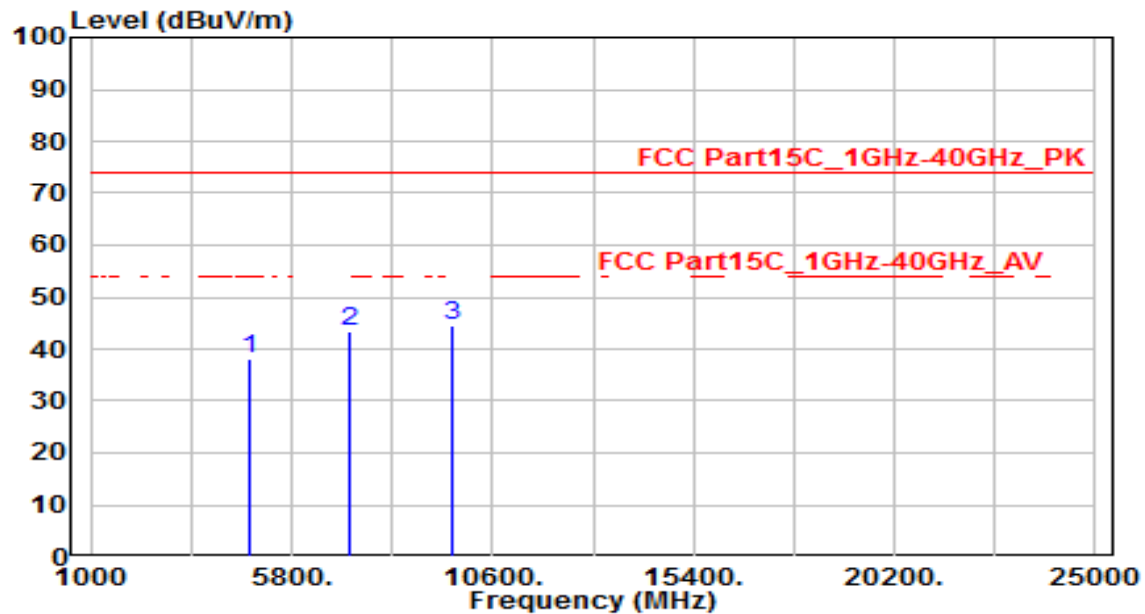


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4804.000        | 34.82          | 3.28     | 38.10                | -35.90      | 74.00          | 150         | 360         | Peak              |
| 2  | 7206.000        | 32.61          | 10.88    | 43.49                | -30.51      | 74.00          | 150         | 360         | Peak              |
| 3  | * 9608.000      | 29.87          | 14.62    | 44.49                | -29.51      | 74.00          | 150         | 360         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                        |                      |              |
|-----------|------------------------|----------------------|--------------|
| EUT       | Rugged Tablet          | Date of Test         | 2021-03-17   |
| Factor    | BBHA 9120D & BBHA 9170 | Temp. / Humidity     | 23°C /59%    |
| Polarity  | Horizontal             | Site / Test Engineer | AC1 / Kaunaz |
| Test Mode | BT_TX_3DH5_CH 39       | Test Voltage         | AC 120V/60Hz |

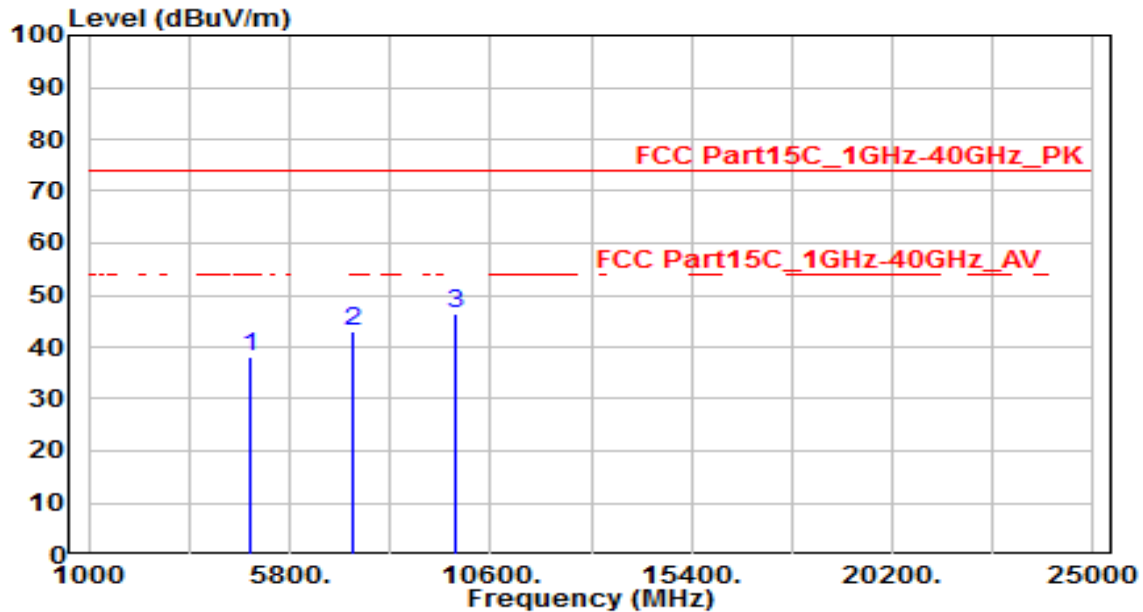


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4882.000        | 34.80          | 3.47     | 38.27                | -35.73      | 74.00          | 150         | 360         | Peak              |
| 2  | 7323.000        | 31.85          | 11.21    | 43.07                | -30.93      | 74.00          | 150         | 360         | Peak              |
| 3  | * 9764.000      | 31.49          | 14.92    | 46.41                | -27.59      | 74.00          | 150         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                        |                      |              |
|-----------|------------------------|----------------------|--------------|
| EUT       | Rugged Tablet          | Date of Test         | 2021-03-17   |
| Factor    | BBHA 9120D & BBHA 9170 | Temp. / Humidity     | 23°C /59%    |
| Polarity  | Vertical               | Site / Test Engineer | AC1 / Kaunaz |
| Test Mode | BT_TX_3DH5_CH 39       | Test Voltage         | AC 120V/60Hz |

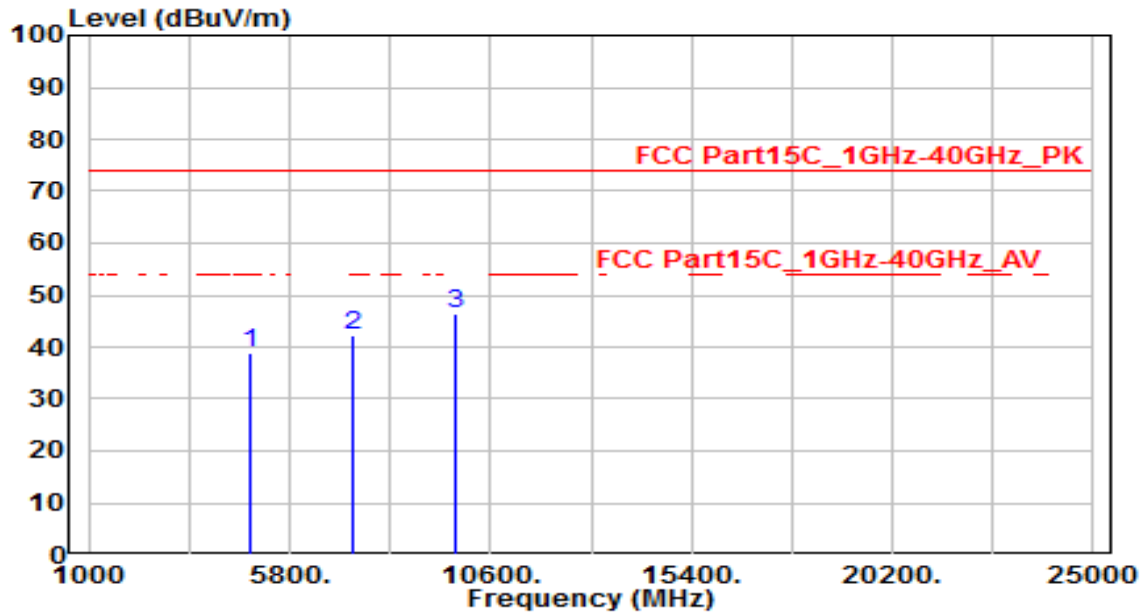


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4882.000        | 35.44          | 3.47     | 38.91                | -35.09      | 74.00          | 150         | 360         | Peak              |
| 2  | 7323.000        | 31.18          | 11.21    | 42.40                | -31.60      | 74.00          | 150         | 360         | Peak              |
| 3  | * 9764.000      | 31.66          | 14.92    | 46.57                | -27.43      | 74.00          | 150         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                        |                      |              |
|-----------|------------------------|----------------------|--------------|
| EUT       | Rugged Tablet          | Date of Test         | 2021-03-17   |
| Factor    | BBHA 9120D & BBHA 9170 | Temp. / Humidity     | 23°C /59%    |
| Polarity  | Horizontal             | Site / Test Engineer | AC1 / Kaunaz |
| Test Mode | BT_TX_3DH5_CH 78       | Test Voltage         | AC 120V/60Hz |

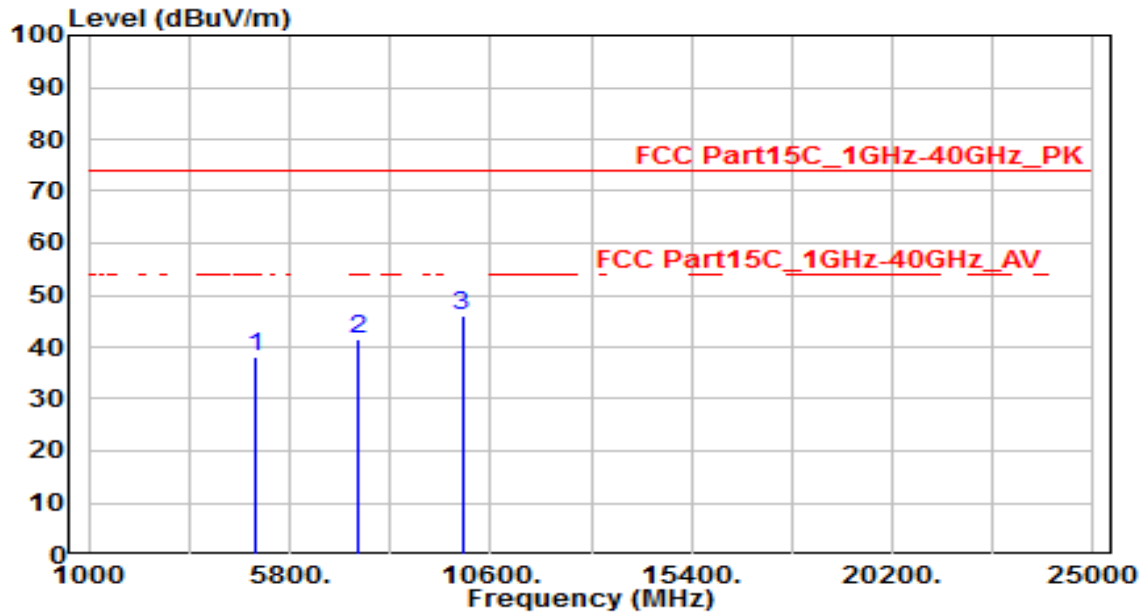


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4960.000        | 34.28          | 3.65     | 37.93                | -36.07      | 74.00          | 150         | 360         | Peak              |
| 2  | 7440.000        | 30.03          | 11.55    | 41.58                | -32.42      | 74.00          | 150         | 360         | Peak              |
| 3  | * 9920.000      | 30.79          | 15.21    | 46.00                | -28.00      | 74.00          | 150         | 360         | Peak              |

#### Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                        |                      |              |
|-----------|------------------------|----------------------|--------------|
| EUT       | Rugged Tablet          | Date of Test         | 2021-03-17   |
| Factor    | BBHA 9120D & BBHA 9170 | Temp. / Humidity     | 23°C /59%    |
| Polarity  | Vertical               | Site / Test Engineer | AC1 / Kaunaz |
| Test Mode | BT_TX_3DH5_CH 78       | Test Voltage         | AC 120V/60Hz |

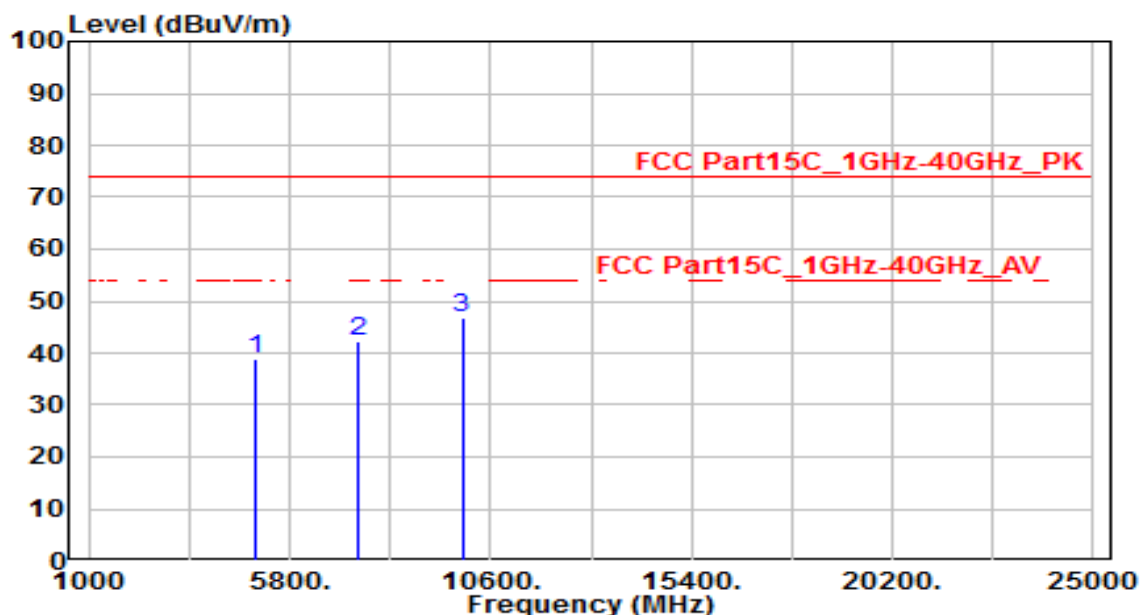

| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4960.000        | 35.12          | 3.65     | 38.77                | -35.23      | 74.00          | 150         | 360         | Peak              |
| 2  | 7440.000        | 30.72          | 11.55    | 42.26                | -31.74      | 74.00          | 150         | 360         | Peak              |
| 3  | * 9920.000      | 31.45          | 15.21    | 46.66                | -27.34      | 74.00          | 150         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 7.9. Radiated Restricted Band Edge Measurement

### 7.9.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 |                         |                               |
|----------------------------------------|-------------------------|-------------------------------|
| Frequency<br>[MHz]                     | Field Strength<br>[V/m] | Measured Distance<br>[Meters] |
| 0.009 - 0.490                          | 2400/F (kHz)            | 300                           |
| 0.490 - 1.705                          | 24000/F (kHz)           | 30                            |
| 1.705 – 30                             | 30                      | 30                            |
| 30 – 88                                | 100                     | 3                             |
| 88 – 216                               | 150                     | 3                             |
| 216 – 960                              | 200                     | 3                             |
| Above 960                              | 500                     | 3                             |

### 7.9.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.12.1

### 7.9.3. Test Setting

#### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3 \* RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold

- Trace was allowed to stabilize

**Table 1 - RBW as a function of frequency**


| Frequency     | RBW           |
|---------------|---------------|
| 9 ~ 150 kHz   | 200 ~ 300 Hz  |
| 0.15 ~ 30 MHz | 9 ~ 10 kHz    |
| 30 ~ 1000 MHz | 100 ~ 120 kHz |
| > 1000 MHz    | 1 MHz         |

**Average Field Strength Measurements**


- Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- RBW = 1MHz
- VBW  $\geq 1/T$
- De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold
- Allow max hold to run for at least 50 times (1/duty cycle) traces

#### 7.9.4. Test Setup

##### 1GHz ~ 18GHz Test Setup:

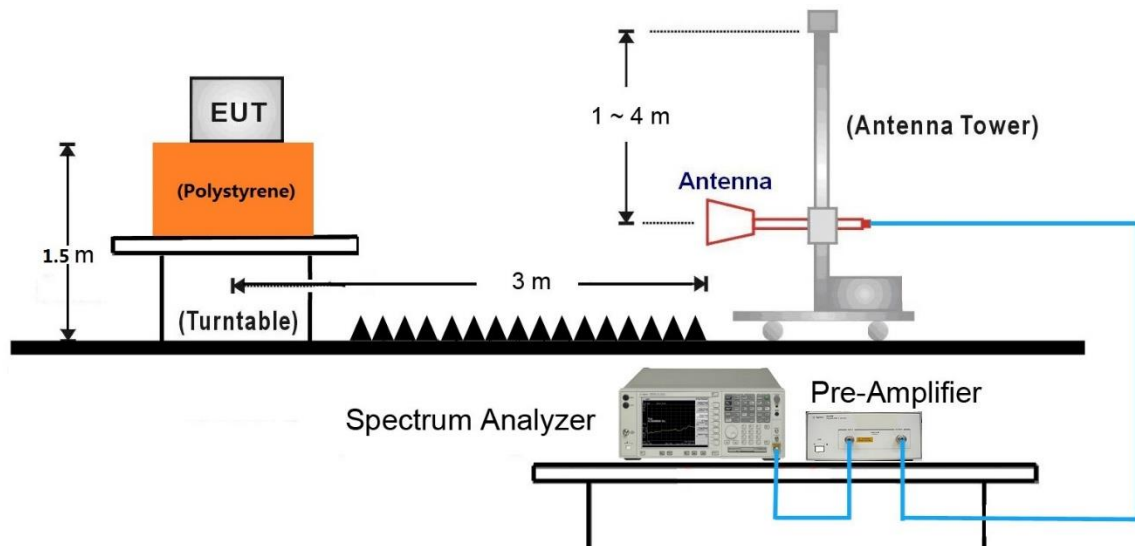


##### 18GHz ~40GHz Test Setup:

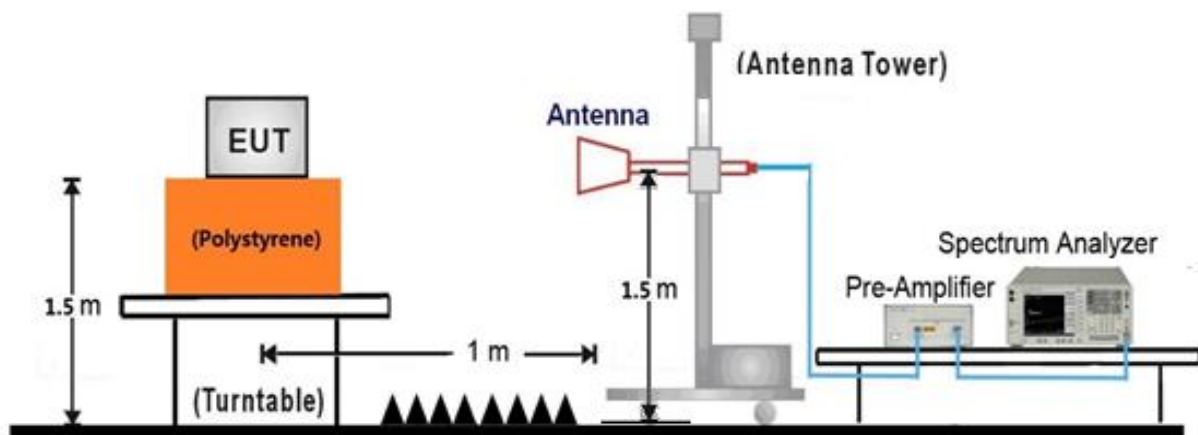

### 7.9.5. Test Result

|           |                |                      |              |
|-----------|----------------|----------------------|--------------|
| EUT       | Rugged Tablet  | Date of Test         | 2021-03-17   |
| Factor    | BBHA 9120D     | Temp. / Humidity     | 23°C /59%    |
| Polarity  | Horizontal     | Site / Test Engineer | AC1 / Kaunaz |
| Test Mode | BT_TX_DH5_CH 0 | Test Voltage         | AC 120V/60Hz |

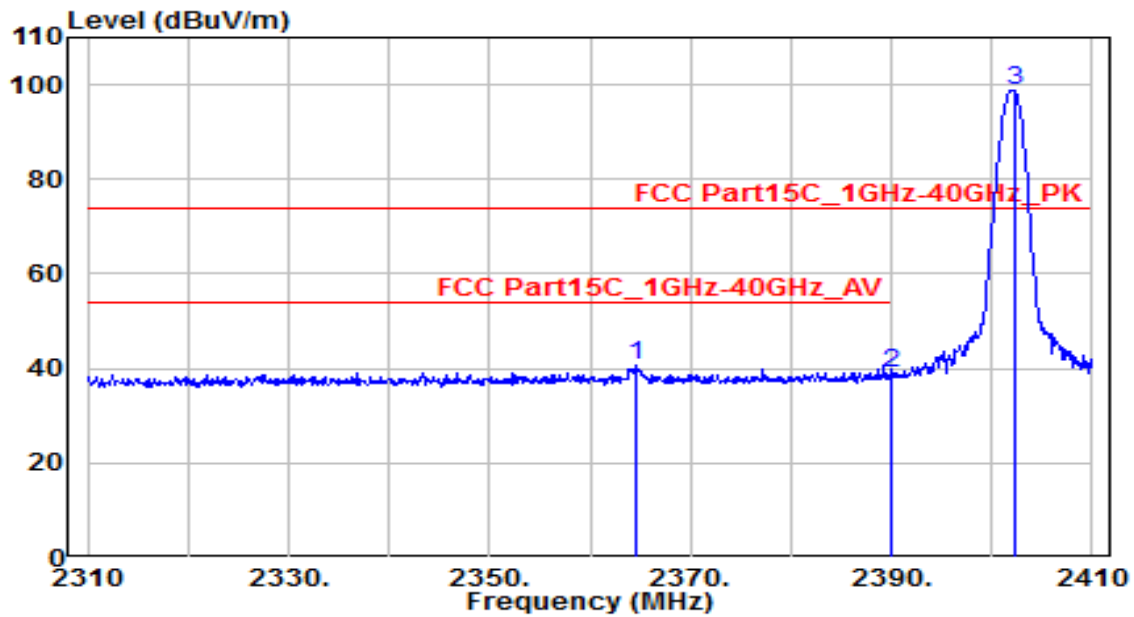


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2364.700        | 43.32          | -2.82    | 40.51                | -33.49      | 74.00          | 155         | 20          | Peak              |
| 2  |   | 2390.000        | 41.80          | -2.70    | 39.10                | -34.90      | 74.00          | 155         | 20          | Peak              |
| 3  |   | 2402.200        | 101.37         | -2.65    | 98.72                | N/A         | N/A            | 155         | 20          | Peak              |

Note:

1. " \*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                |                      |              |
|-----------|----------------|----------------------|--------------|
| EUT       | Rugged Tablet  | Date of Test         | 2021-03-17   |
| Factor    | BBHA 9120D     | Temp. / Humidity     | 23°C /59%    |
| Polarity  | Vertical       | Site / Test Engineer | AC1 / Kaunaz |
| Test Mode | BT_TX_DH5_CH 0 | Test Voltage         | AC 120V/60Hz |

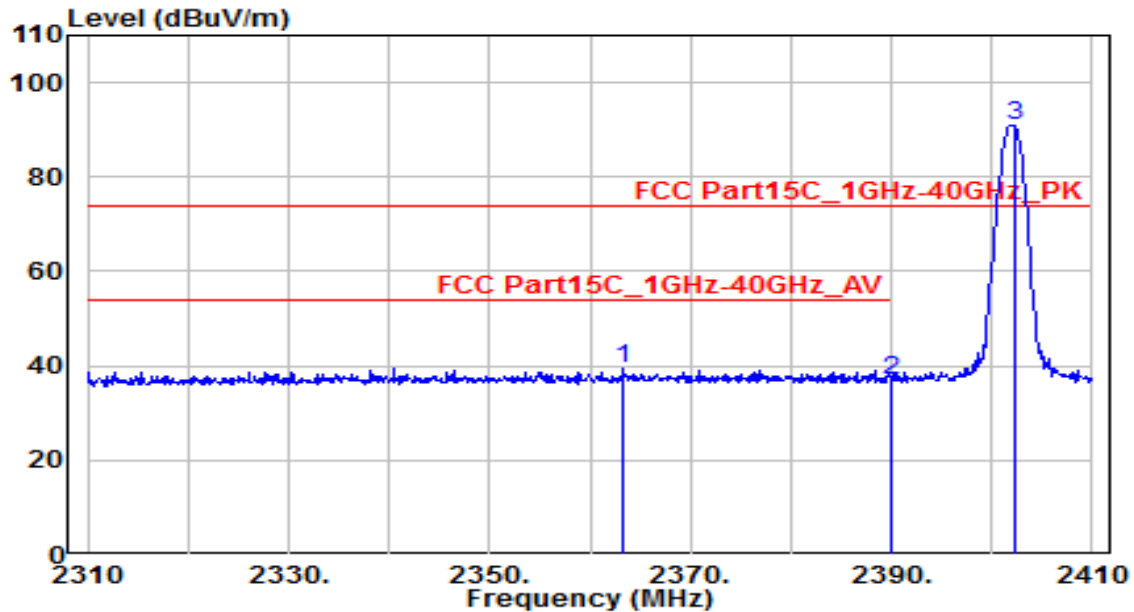


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 2363.400      | 42.07          | -2.82    | 39.25                | -34.75      | 74.00          | 100         | 280         | Peak              |
| 2  | 2390.000        | 39.70          | -2.70    | 36.99                | -37.01      | 74.00          | 100         | 280         | Peak              |
| 3  | 2402.200        | 93.62          | -2.65    | 90.97                | N/A         | N/A            | 100         | 280         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                 |                      |              |
|-----------|-----------------|----------------------|--------------|
| EUT       | Rugged Tablet   | Date of Test         | 2021-03-17   |
| Factor    | BBHA 9120D      | Temp. / Humidity     | 23°C /59%    |
| Polarity  | Horizontal      | Site / Test Engineer | AC1 / Kaunaz |
| Test Mode | BT_TX_DH5_CH 78 | Test Voltage         | AC 120V/60Hz |

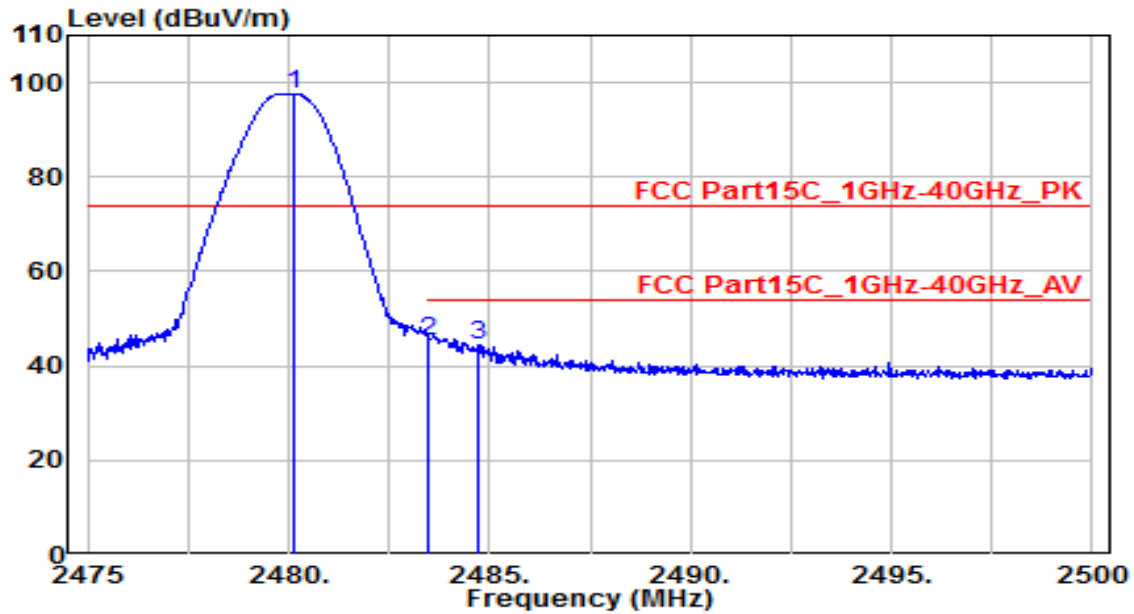


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2480.125        | 100.00         | -2.31    | 97.69                | N/A         | N/A            | 200         | 5           | Peak              |
| 2  | * 2483.500      | 47.69          | -2.29    | 45.40                | -28.60      | 74.00          | 200         | 5           | Peak              |
| 3  | 2484.725        | 46.89          | -2.29    | 44.60                | -29.40      | 74.00          | 200         | 5           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                 |                      |              |
|-----------|-----------------|----------------------|--------------|
| EUT       | Rugged Tablet   | Date of Test         | 2021-03-17   |
| Factor    | BBHA 9120D      | Temp. / Humidity     | 23°C /59%    |
| Polarity  | Vertical        | Site / Test Engineer | AC1 / Kaunaz |
| Test Mode | BT_TX_DH5_CH 78 | Test Voltage         | AC 120V/60Hz |

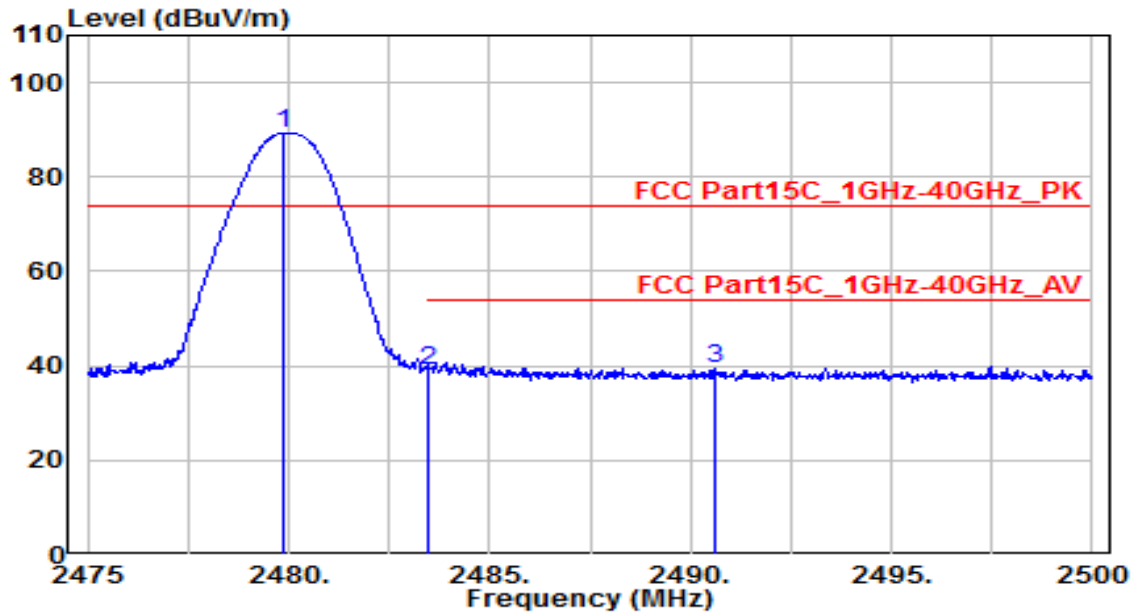


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2479.850        | 91.45          | -2.31    | 89.14                | N/A         | N/A            | 190         | 280         | Peak              |
| 2  | 2483.500        | 41.33          | -2.29    | 39.04                | -34.96      | 74.00          | 190         | 280         | Peak              |
| 3  | * 2490.600      | 41.76          | -2.26    | 39.50                | -34.50      | 74.00          | 190         | 280         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                 |                      |              |
|-----------|-----------------|----------------------|--------------|
| EUT       | Rugged Tablet   | Date of Test         | 2021-03-17   |
| Factor    | BBHA 9120D      | Temp. / Humidity     | 23°C /59%    |
| Polarity  | Horizontal      | Site / Test Engineer | AC1 / Kaunaz |
| Test Mode | BT_TX_3DH5_CH 0 | Test Voltage         | AC 120V/60Hz |

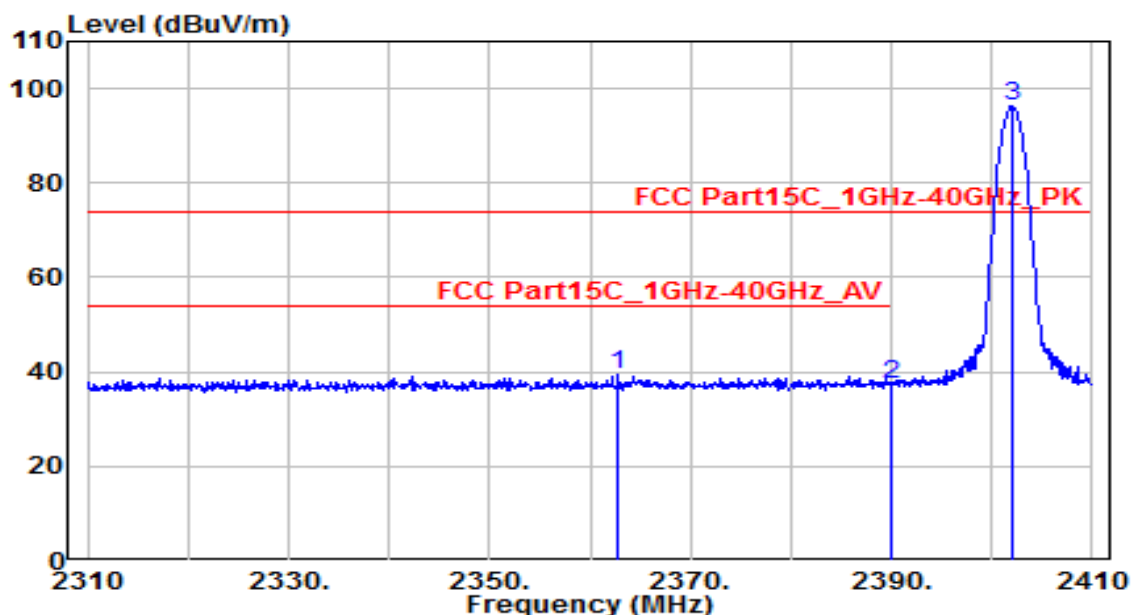


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2362.800        | 42.11          | -2.82    | 39.29                | -34.71      | 74.00          | 155         | 20          | Peak              |
| 2  |   | 2390.000        | 40.20          | -2.70    | 37.49                | -36.51      | 74.00          | 155         | 20          | Peak              |
| 3  |   | 2402.000        | 98.82          | -2.65    | 96.17                | N/A         | N/A            | 155         | 20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                 |                      |              |
|-----------|-----------------|----------------------|--------------|
| EUT       | Rugged Tablet   | Date of Test         | 2021-03-17   |
| Factor    | BBHA 9120D      | Temp. / Humidity     | 23°C /59%    |
| Polarity  | Vertical        | Site / Test Engineer | AC1 / Kaunaz |
| Test Mode | BT_TX_3DH5_CH 0 | Test Voltage         | AC 120V/60Hz |

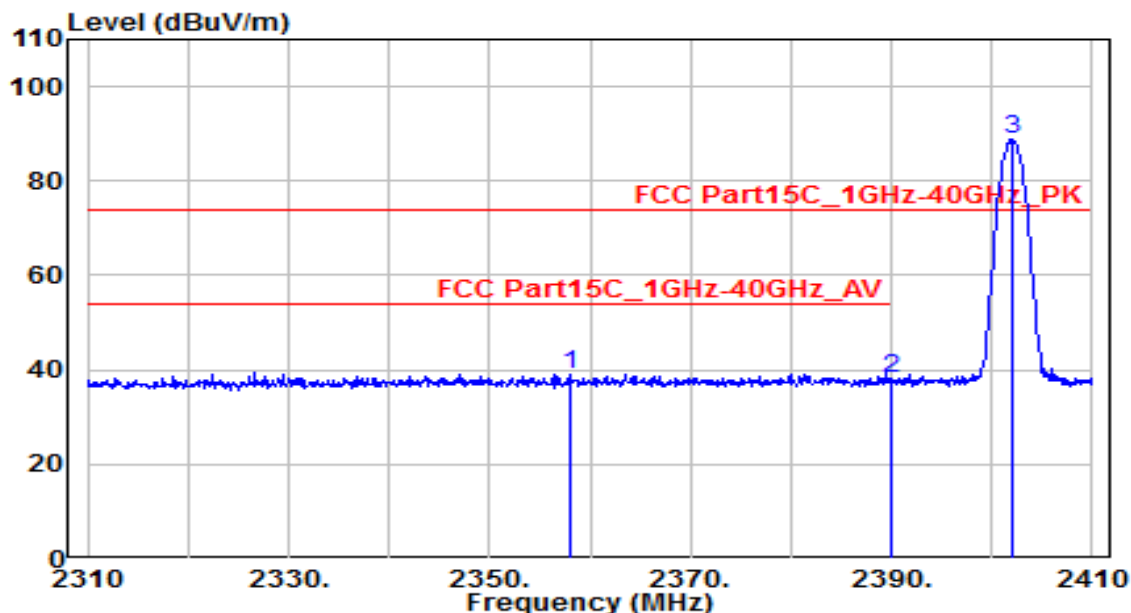


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 2358.000      | 41.99          | -2.84    | 39.15                | -34.85      | 74.00          | 100         | 280         | Peak              |
| 2  | 2390.000        | 40.72          | -2.70    | 38.01                | -35.99      | 74.00          | 100         | 280         | Peak              |
| 3  | 2402.000        | 91.36          | -2.65    | 88.71                | N/A         | N/A            | 100         | 280         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                  |                      |              |
|-----------|------------------|----------------------|--------------|
| EUT       | Rugged Tablet    | Date of Test         | 2021-03-17   |
| Factor    | BBHA 9120D       | Temp. / Humidity     | 23°C /59%    |
| Polarity  | Horizontal       | Site / Test Engineer | AC1 / Kaunaz |
| Test Mode | BT_TX_3DH5_CH 78 | Test Voltage         | AC 120V/60Hz |

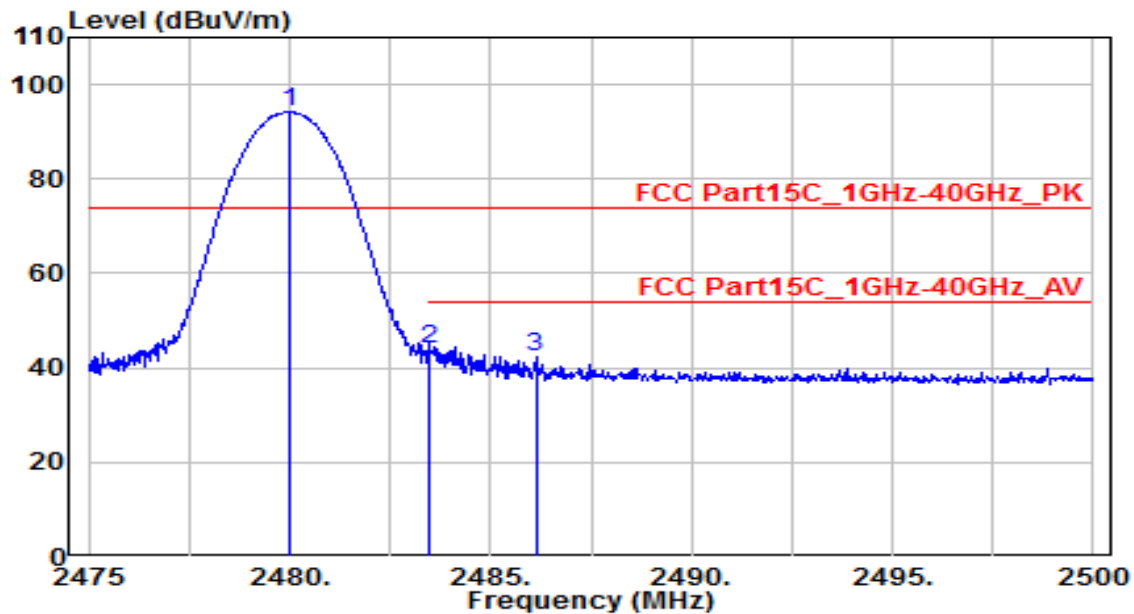


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2480.000        | 96.52          | -2.31    | 94.22                | N/A         | N/A            | 200         | 5           | Peak              |
| 2  | * 2483.500      | 46.27          | -2.29    | 43.98                | -30.02      | 74.00          | 200         | 5           | Peak              |
| 3  | 2486.125        | 44.63          | -2.28    | 42.35                | -31.65      | 74.00          | 200         | 5           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                  |                      |              |
|-----------|------------------|----------------------|--------------|
| EUT       | Rugged Tablet    | Date of Test         | 2021-03-17   |
| Factor    | BBHA 9120D       | Temp. / Humidity     | 23°C /59%    |
| Polarity  | Vertical         | Site / Test Engineer | AC1 / Kaunaz |
| Test Mode | BT_TX_3DH5_CH 78 | Test Voltage         | AC 120V/60Hz |

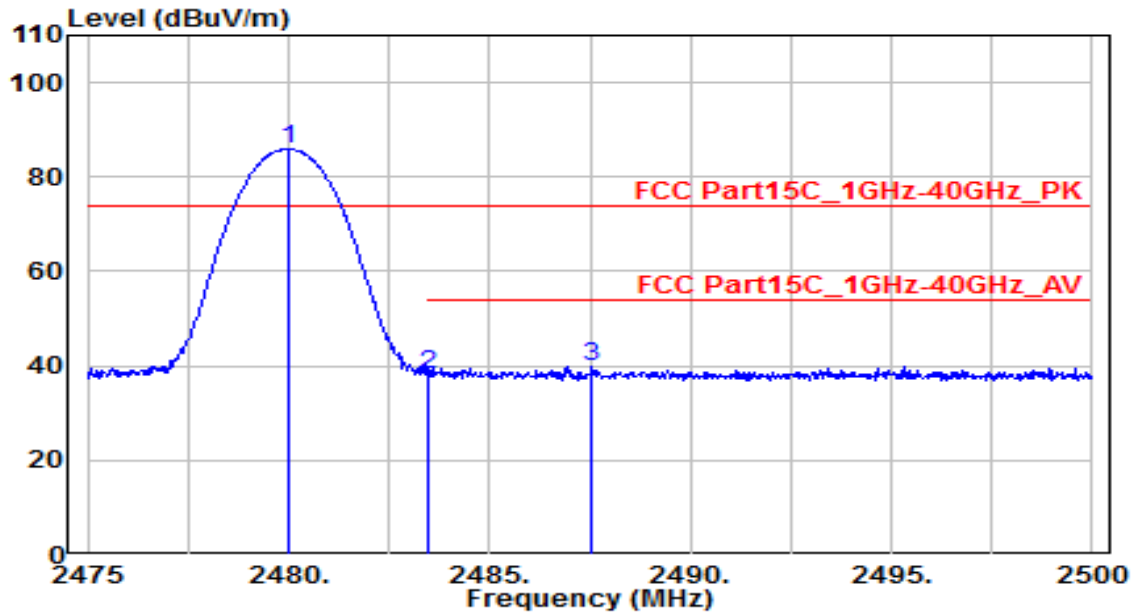

| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2480.000        | 88.34          | -2.31    | 86.03                | N/A         | N/A            | 190         | 280         | Peak              |
| 2  | 2483.500        | 40.54          | -2.29    | 38.25                | -35.75      | 74.00          | 190         | 280         | Peak              |
| 3  | * 2487.525      | 42.23          | -2.27    | 39.95                | -34.05      | 74.00          | 190         | 280         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 7.10. AC Conducted Emissions Measurement


### 7.10.1. Test Limit

| FCC Part 15 Subpart C Paragraph 15.207 / RSS-Gen Limits |                 |                      |
|---------------------------------------------------------|-----------------|----------------------|
| Frequency (MHz)                                         | QP (dB $\mu$ V) | Average (dB $\mu$ V) |
| 0.15 - 0.50                                             | 66 - 56         | 56 - 46              |
| 0.50 - 5.0                                              | 56              | 46                   |
| 5.0 - 30                                                | 60              | 50                   |

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 7.10.2. Test Setup

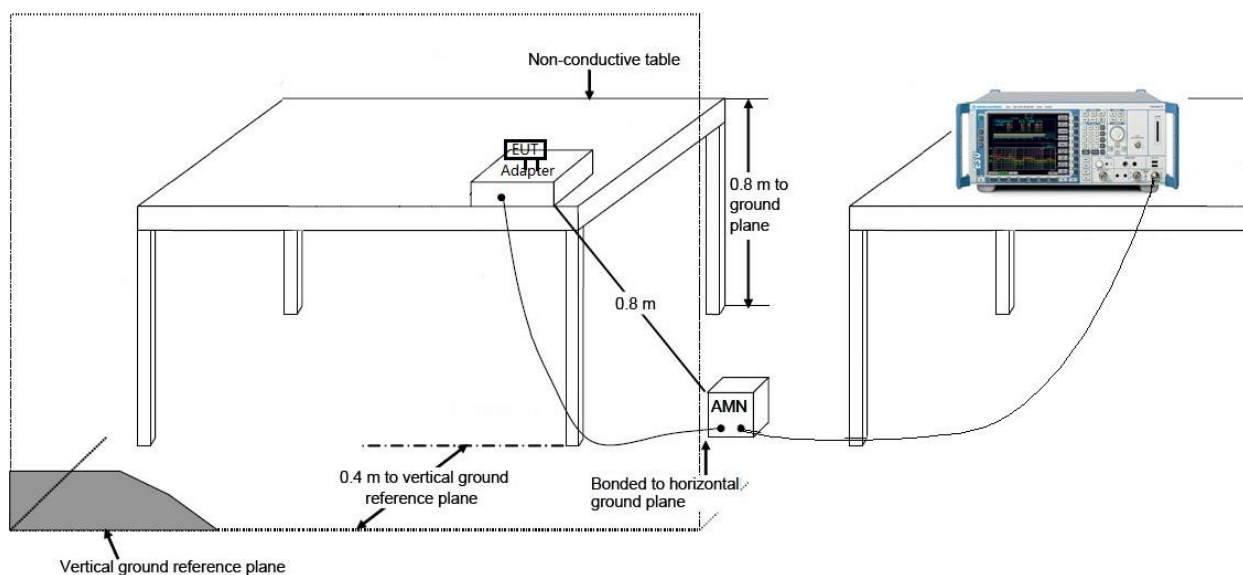

### 7.10.3. Test Result

|           |                          |                      |              |
|-----------|--------------------------|----------------------|--------------|
| EUT       | Rugged Tablet            | Date of Test         | 2021-03-16   |
| Factor    | CE_ENV216-L1 (Filter ON) | Temp. / Humidity     | 27°C /57%    |
| Polarity  | Line1                    | Site / Test Engineer | SR2 / Tim    |
| Test Mode | BT_TX_DH5_CH 39          | Test Voltage         | AC 120V/60Hz |

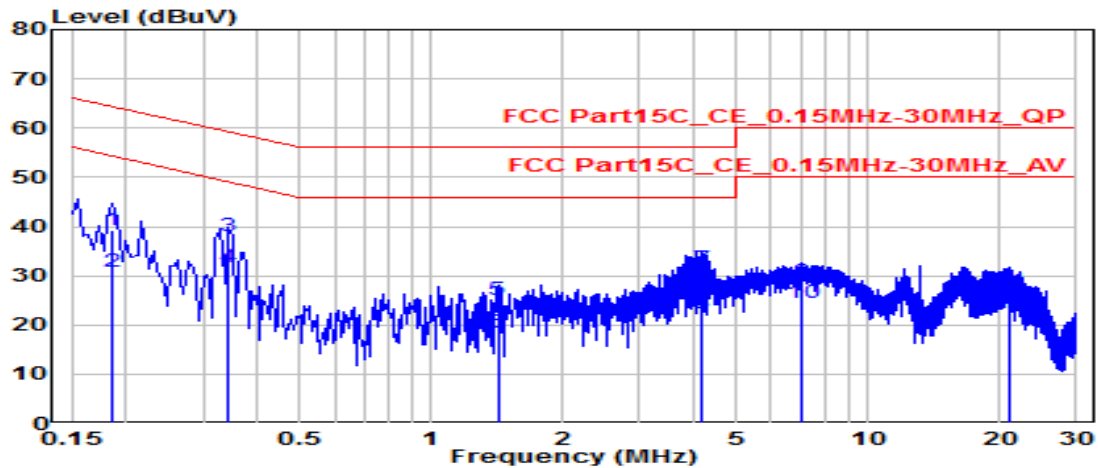


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 0.186           | 29.65          | 9.61     | 39.26                | -24.95      | 64.21          | QP                |
| 2  | 0.186           | 21.09          | 9.61     | 30.70                | -23.52      | 54.21          | Average           |
| 3  | * 0.343         | 28.53          | 9.62     | 38.15                | -20.96      | 59.12          | QP                |
| 4  | * 0.343         | 21.98          | 9.62     | 31.60                | -17.52      | 49.12          | Average           |
| 5  | 1.419           | 15.25          | 9.67     | 24.92                | -31.08      | 56.00          | QP                |
| 6  | 1.419           | 8.67           | 9.67     | 18.34                | -27.66      | 46.00          | Average           |
| 7  | 4.182           | 21.64          | 9.72     | 31.37                | -24.63      | 56.00          | QP                |
| 8  | 4.182           | 12.49          | 9.72     | 22.22                | -23.78      | 46.00          | Average           |
| 9  | 7.052           | 18.80          | 9.80     | 28.60                | -31.40      | 60.00          | QP                |
| 10 | 7.052           | 14.58          | 9.80     | 24.38                | -25.62      | 50.00          | Average           |
| 11 | 21.113          | 16.82          | 10.00    | 26.82                | -33.18      | 60.00          | QP                |
| 12 | 21.113          | 12.41          | 10.00    | 22.41                | -27.59      | 50.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                         |                      |              |
|-----------|-------------------------|----------------------|--------------|
| EUT       | Rugged Tablet           | Date of Test         | 2021-03-16   |
| Factor    | CE_ENV216-N (Filter ON) | Temp. / Humidity     | 27°C /57%    |
| Polarity  | Neutral                 | Site / Test Engineer | SR2 / Tim    |
| Test Mode | BT_TX_DH5_CH 39         | Test Voltage         | AC 120V/60Hz |

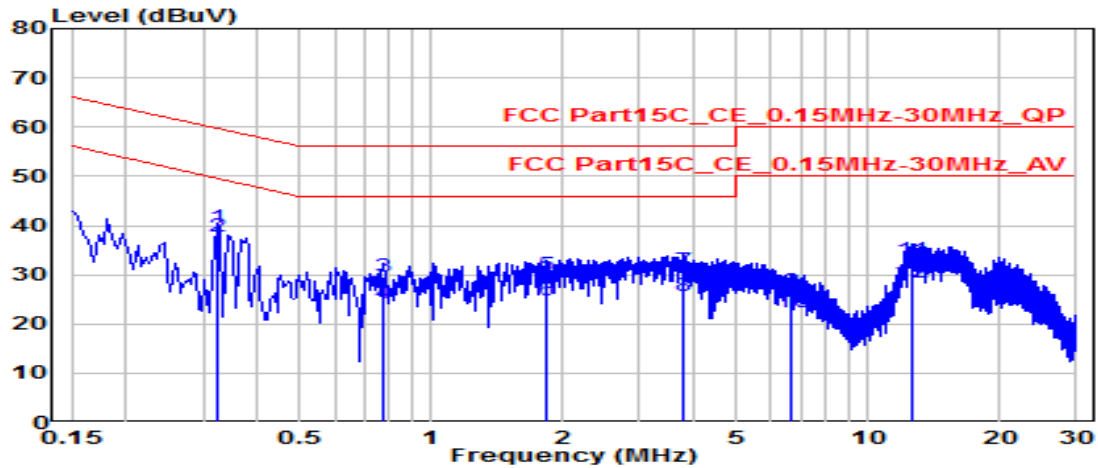


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 0.325           | 30.03          | 9.63     | 39.66                | -19.91      | 59.57          | QP                |
| 2  | * | 0.325           | 28.21          | 9.63     | 37.84                | -11.73      | 49.57          | Average           |
| 3  |   | 0.780           | 19.91          | 9.66     | 29.57                | -26.43      | 56.00          | QP                |
| 4  |   | 0.780           | 14.43          | 9.66     | 24.09                | -21.91      | 46.00          | Average           |
| 5  |   | 1.828           | 20.26          | 9.69     | 29.94                | -26.06      | 56.00          | QP                |
| 6  |   | 1.828           | 15.03          | 9.69     | 24.72                | -21.28      | 46.00          | Average           |
| 7  |   | 3.786           | 21.19          | 9.73     | 30.92                | -25.08      | 56.00          | QP                |
| 8  |   | 3.786           | 15.88          | 9.73     | 25.61                | -20.39      | 46.00          | Average           |
| 9  |   | 6.634           | 16.91          | 9.80     | 26.71                | -33.29      | 60.00          | QP                |
| 10 |   | 6.634           | 12.44          | 9.80     | 22.23                | -27.77      | 50.00          | Average           |
| 11 |   | 12.537          | 23.09          | 9.93     | 33.03                | -26.97      | 60.00          | QP                |
| 12 |   | 12.537          | 18.58          | 9.93     | 28.51                | -21.49      | 50.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                          |                      |              |
|-----------|--------------------------|----------------------|--------------|
| EUT       | Rugged Tablet            | Date of Test         | 2021-03-16   |
| Factor    | CE_ENV216-L1 (Filter ON) | Temp. / Humidity     | 27°C /57%    |
| Polarity  | Line1                    | Site / Test Engineer | SR2 / Tim    |
| Test Mode | BT_TX_DH5_CH 39          | Test Voltage         | AC 240V/60Hz |

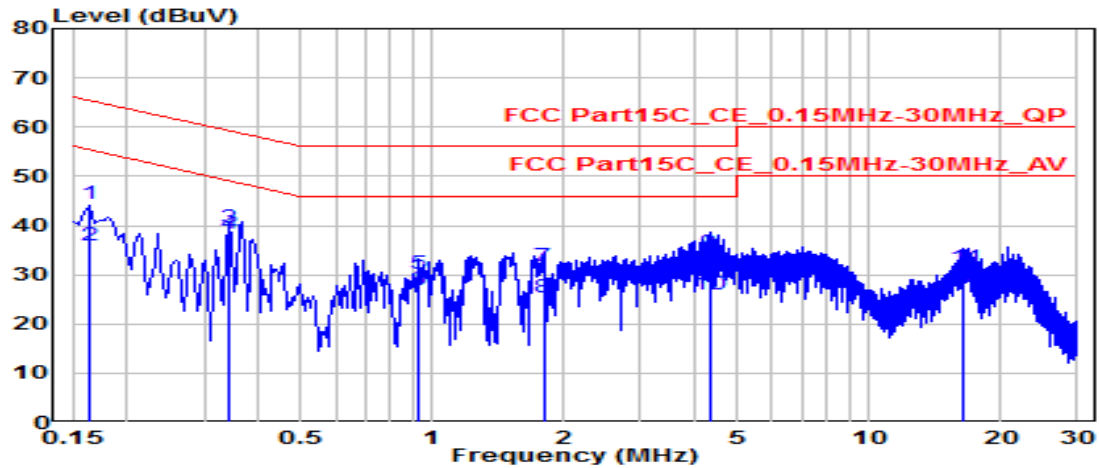


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 0.163           | 34.88          | 9.61     | 44.49                | -20.79      | 65.28          | QP                |
| 2  | 0.163           | 26.22          | 9.61     | 35.83                | -19.45      | 55.28          | Average           |
| 3  | * 0.343         | 29.91          | 9.62     | 39.53                | -19.59      | 59.12          | QP                |
| 4  | * 0.343         | 28.57          | 9.62     | 38.19                | -10.92      | 49.12          | Average           |
| 5  | 0.928           | 20.42          | 9.66     | 30.07                | -25.93      | 56.00          | QP                |
| 6  | 0.928           | 17.15          | 9.66     | 26.81                | -19.19      | 46.00          | Average           |
| 7  | 1.797           | 21.98          | 9.68     | 31.67                | -24.33      | 56.00          | QP                |
| 8  | 1.797           | 15.71          | 9.68     | 25.40                | -20.60      | 46.00          | Average           |
| 9  | 4.308           | 24.63          | 9.73     | 34.35                | -21.65      | 56.00          | QP                |
| 10 | 4.308           | 16.27          | 9.73     | 26.00                | -20.00      | 46.00          | Average           |
| 11 | 16.497          | 21.37          | 9.95     | 31.32                | -28.68      | 60.00          | QP                |
| 12 | 16.497          | 17.40          | 9.95     | 27.35                | -22.65      | 50.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                         |                      |              |
|-----------|-------------------------|----------------------|--------------|
| EUT       | Rugged Tablet           | Date of Test         | 2021-03-16   |
| Factor    | CE_ENV216-N (Filter ON) | Temp. / Humidity     | 27°C /57%    |
| Polarity  | Neutral                 | Site / Test Engineer | SR2 / Tim    |
| Test Mode | BT_TX_DH5_CH 39         | Test Voltage         | AC 240V/60Hz |

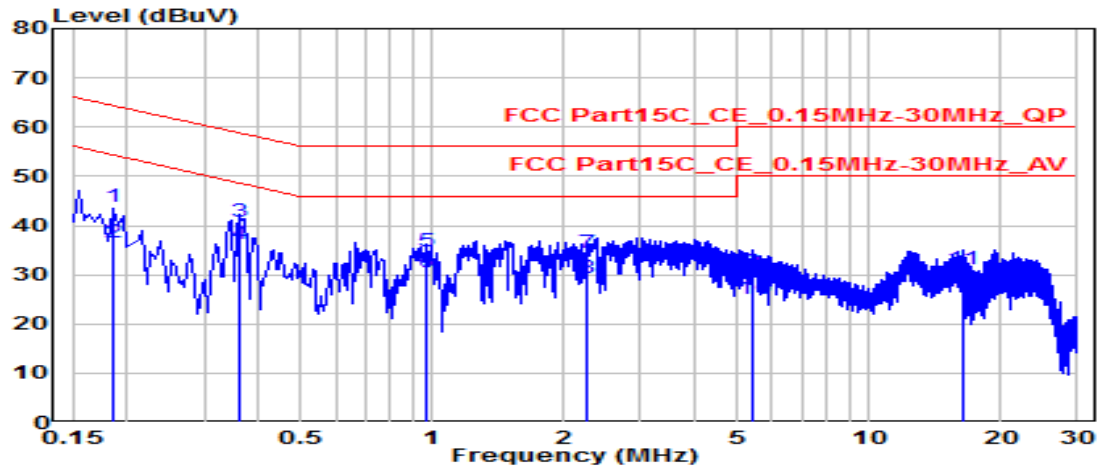

| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 0.186           | 34.23          | 9.62     | 43.85                | -20.36      | 64.21          | QP                |
| 2  | 0.186           | 26.98          | 9.62     | 36.60                | -17.62      | 54.21          | Average           |
| 3  | * 0.361         | 31.06          | 9.63     | 40.69                | -18.00      | 58.69          | QP                |
| 4  | * 0.361         | 26.46          | 9.63     | 36.10                | -12.60      | 48.69          | Average           |
| 5  | 0.973           | 25.00          | 9.67     | 34.67                | -21.33      | 56.00          | QP                |
| 6  | 0.973           | 20.69          | 9.67     | 30.36                | -15.64      | 46.00          | Average           |
| 7  | 2.260           | 24.59          | 9.70     | 34.29                | -21.71      | 56.00          | QP                |
| 8  | 2.260           | 19.53          | 9.70     | 29.23                | -16.77      | 46.00          | Average           |
| 9  | 5.405           | 20.64          | 9.76     | 30.40                | -29.60      | 60.00          | QP                |
| 10 | 5.405           | 15.19          | 9.76     | 24.96                | -25.04      | 50.00          | Average           |
| 11 | 16.348          | 20.98          | 10.00    | 30.98                | -29.02      | 60.00          | QP                |
| 12 | 16.348          | 16.38          | 10.00    | 26.39                | -23.61      | 50.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

## 8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Rugged Tablet**, is in compliance with Part 15C of the FCC Rules.

\_\_\_\_\_ The End \_\_\_\_\_