

EMI – TEST REPORT

- Human exposure -

Test Report No. : T28855-00-09KJ

19. December 2014

Date of issue

Type / Model Name : US-4046

Product Description : Repeater

Applicant : smaXtec animal care sales GmbH

Address : Wastiangasse 4

8010 GRAZ, AUSTRIA

Manufacturer : smaXtec animal care sales GmbH

Address : Wastiangasse 4

8010 GRAZ, AUSTRIA

Licence holder : smaXtec animal care sales GmbH

Address : Wastiangasse 4

8010 GRAZ, AUSTRIA

Test Result according to the standards listed in clause 1 test standards:

POSITIVE



The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test results
without the written permission of the test laboratory.

Contents

1	<u>TEST STANDARDS</u>	<u>3</u>
2	<u>EQUIPMENT UNDER TEST</u>	<u>4</u>
2.1	Photo documentation of the EUT – Detailed photos see attachment A	4
2.2	Equipment type, category	4
2.3	Short description of the equipment under test (EUT)	4
2.4	Variants of the EUT	4
2.5	Operation frequency and channel plan	5
2.6	Transmit operating modes	5
2.7	Power supply system utilised	5
2.8	Peripheral devices and interface cables	5
2.9	Final measurement conditions	5
3	<u>TEST RESULT SUMMERY</u>	<u>7</u>
3.1	Final assessment	7
4	<u>TEST ENVIRONMENT</u>	<u>8</u>
4.1	Address of the test laboratory	8
4.2	Environmental conditions	8
4.3	Statement of the measurement uncertainty	8
4.4	Measurement protocol for FCC and IC	9
5	<u>TEST CONDITIONS AND RESULTS</u>	<u>10</u>
5.1	Maximum peak radiated output power	10
6	<u>HUMAN EXPOSURE</u>	<u>11</u>
6.1	Maximum permissible exposure (MPE)	11
6.2	Co-location and Co-transmission	13
6.3	SAR test exclusion considerations	14

1 TEST STANDARDS

The tests were performed according to following standards:

FCC Rules and Regulations Part 1, Subpart I - Procedures Implementing the National Environmental Policy Act of 1969

Part 1, Subpart I, Section 1.1310 Radiofrequency radiation exposure limits

Part 1, Subpart 2, Section 2.1093 Radiofrequency radiation exposure evaluation: portable device

OET Bulletin 65, 65A, 65B Edition 97-01, August 1997 – Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields.

KDB 447498 D01 v05r02 Mobile and portable devices RF Exposure procedures and equipment authorisation policies, February 7, 2014.

ANSI C95.1: 2005 IEEE Standard for Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz

CISPR 16-4-2: 2013 Uncertainty in EMC measurement

2 EQUIPMENT UNDER TEST

2.1 Photo documentation of the EUT – Detailed photos see attachment A



2.2 Equipment type, category

Fixed equipment with three operation bands: 905 MHz / 2.4 GHz Zigbee / GSM

2.3 Short description of the equipment under test (EUT)

The Repeater is an electronic device that is intended to read measurement data from smaxtec Temp Sensor, Climate Sensor, and pH & Temp Sensor. The data is forwarded over a multihop network on 2.4 GHz built up by repeaters to a smaXtec Basestation.

Number of tested samples: 1
Serial number: Prototype

2.4 Variants of the EUT

There are no variants.

2.5 Operation frequency and channel plan

TX 1: Operation frequency 902 MHz to 928 MHz:

TX 2: Operating frequency 2400 MHz to 2483.5 MHz.

2.6 Transmit operating modes

TX 1: 905.5 MHz

TX 2: 2405 MHz

2.7 Power supply system utilised

Power supply voltage, V_{nom} : 100-240 VAC, 50-60 Hz / tested with 115 VAC, 60 Hz

2.8 Peripheral devices and interface cables

The following peripheral devices and interface cables are connected during the measurements:

- _____ Model : _____
- _____ Model : _____

2.9 Final measurement conditions



TX 1: EIRP = -5.7 dBm

TX 2: EIRP = 10.9 dBm

2.9.1 Test jig

No test jig

2.9.2 Test software

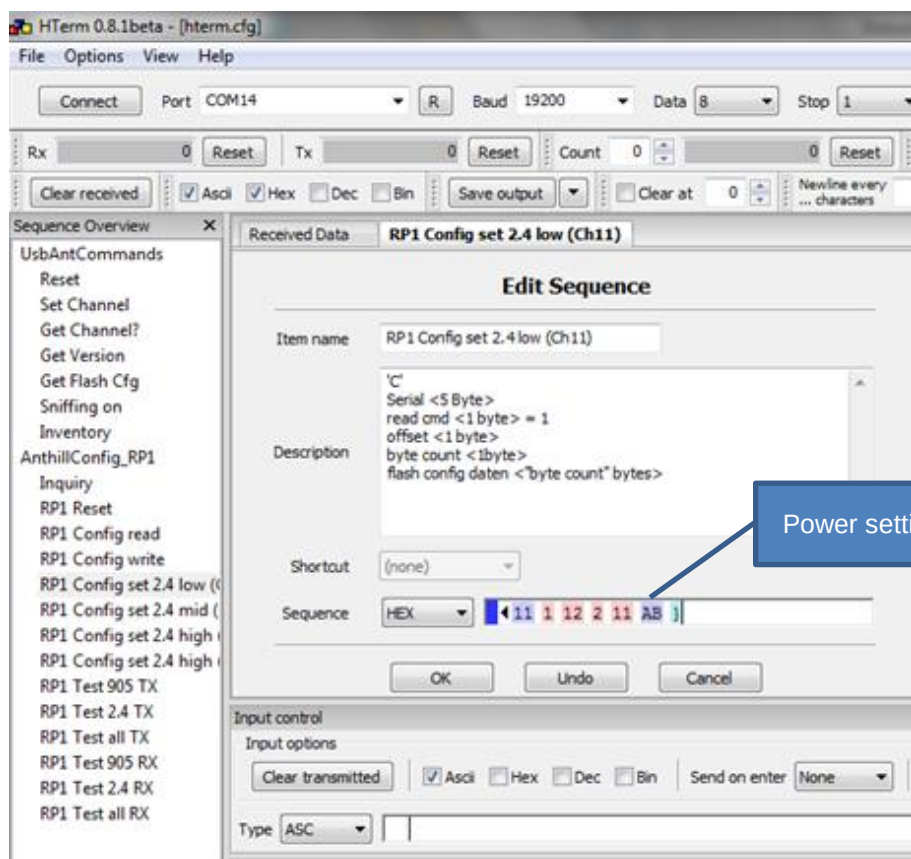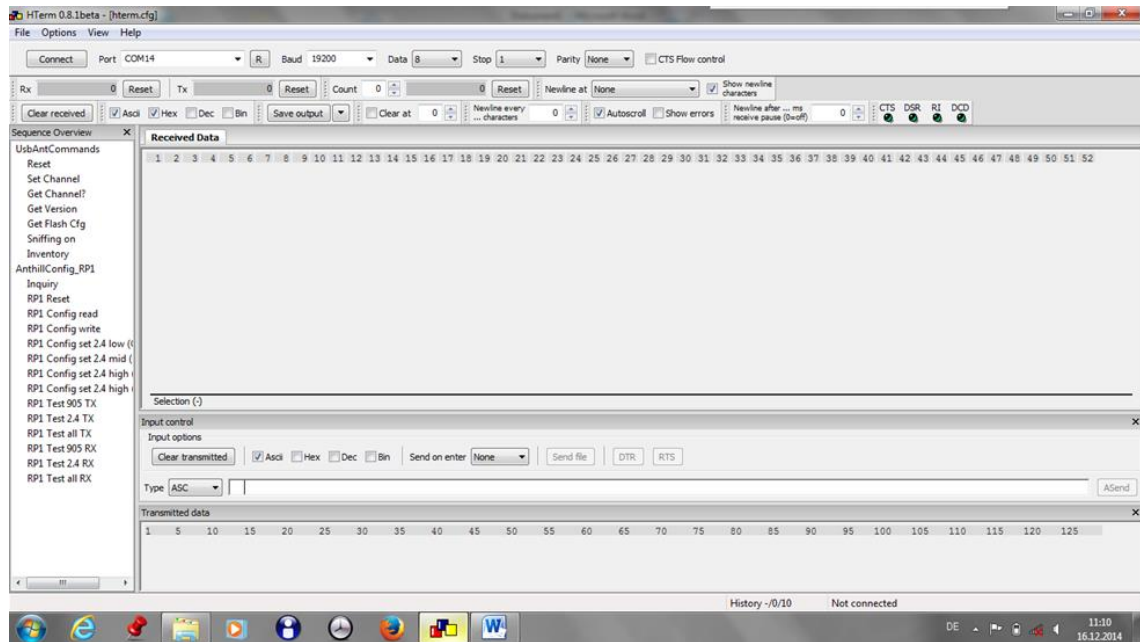

3 TEST RESULT SUMMERY

Device using digital modulation:

FCC Rule Part	RSS Rule Part	Description	Result
15.247(i)	RSS 102, 2.5.2	MPE	passed
KDB 447498	RSS 102, 2.5.1	SAR exclusion consideration	not applicable
OET Bulletin 65	RSS102, 3.2	Co-location, Co-transmission	passed

The mentioned RSS Rule Parts in the above table are related to:
RSS 102, Issue 4, March 2010

3.1 Final assessment

The equipment under test fulfills the EMI requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 15 December 2014

Testing concluded on : 16 December 2014

Checked by:

Tested by:



Klaus Gegenfurtner
I confirm the correctness and
Integrity of this documents
2014.12.19 08:22:42 +01'00'

Klaus Gegenfurtner
Teamleader Radio



Josef Knab
I'm the autor of this
document
2014.12.19 08:20:36 +01'00'

Josef Knab
Radio Team

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

**CSA Group Bayern GmbH
Ohmstrasse 1-4
94342 STRASSKIRCHEN
GERMANY**

4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	<u>15-35 °C</u>
Humidity:	<u>30-60 %</u>
Atmospheric pressure:	<u>86-106 kPa</u>

4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. It is noted that the expanded measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor $k = 2$. The true value is located in the corresponding interval with a probability of 95 %. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16-4-2 / 11.2003 „Uncertainties, statistics and limit modelling – Uncertainty in EMC measurements“ and is documented in the quality system acc. to DIN EN ISO/IEC 17025. For all measurements shown in this report, the measurement uncertainty of the test laboratory, CSA Group Bayern GmbH, is below the measurement uncertainty as defined by CISPR. Therefore, no special measures must be taken into consideration with regard to the limits according to CISPR. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

4.4 Measurement protocol for FCC and IC

4.4.1 General information

4.4.1.1 Test methodology

The Open Area test site is a listed Open Site under the Canadian Test-Sites File-No:

IC 3009A

In compliance with RSS 210 testing for RSS compliance may be achieved by following the procedures set out in ANSI C63.4 and applying the CISPR 22 limits.

4.4.1.2 Justification

The equipment under test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral using the appropriate impedance characteristic or left unterminated. Where appropriate, cables are manually manipulated with respect to each other thus obtaining maximum disturbances from the unit.

4.4.1.3 Details of test procedures

In compliance with 47 CFR Part 15 Subpart A, Section 15.38 testing for FCC compliance may be achieved by following the procedures set out in ANSI C63.4 and applying the CISPR 22 limits.

5 TEST CONDITIONS AND RESULTS

5.1 Maximum peak radiated output power

5.1.1 Test result

TX1 at 905.5 MHz: max radiated output power 89.5 dB μ V/m (measurement distance 3 m) equal to -5.7 dBm
(according to the test report "T38855-00-01KJ" from CSA Group Bayern GmbH)

TX2 at 2405 MHz: max radiated output power 10.9 dBm
(according to the test report "T38855-00-05KJ" from CSA Group Bayern GmbH)

Remarks:

6 HUMAN EXPOSURE

6.1 Maximum permissible exposure (MPE)

6.1.1 Applicable standard

According to FCC Part 15, Section 15.247(i):

Systems operating under the provisions of this section shall be operated in a manner that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

The test methods used comply with ANSI/IEEE C95.1, "IEEE Standard for Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz".

This test report shows the compliance with the limits for Maximum Permissible Exposure (MPE) specified in FCC Part 1, Section 1.1310 and the criteria to evaluate the environmental impact of human exposure to radio frequency (RF) radiation as specified in FCC Part 1, Section 1.1307(b).

6.1.2 Description of calculation

The maximum total power output of the antenna has been measured radiated.

Friis transmission formula:

$$P_d = \frac{P_{out} * G}{4 * \pi * r^2}$$

Where:

P_d = power density (mW/cm²)

P_{out} = output power to antenna (mW)

G = gain of antenna (linear scale)

r = distance between antenna and observation point (cm)

According to FCC Rules 47CFR 2.1093(b) the EUT is not a portable device. The EUT is designed to be used that radiating structures are 20 cm outside of the body of the user. ($r = 20$ cm)

6.1.3 Test result

TX 1 at 905.5 MHz

Frequency	Power	P(EIRP)	A	P	S	Limit S_{eq}
MHz		(dBm)	(mW)	(W)	(mW/cm ²)	(mW/cm ²)
905.5	full power	-5.7	0.27	0.0003	0.00005	0.6

TX 2 at 2405 MHz

Frequency	Power	P(EIRP)	A	P	S	Limit S_{eq}
MHz		(dBm)	(mW)	(W)	(mW/cm ²)	(mW/cm ²)
2405	full power	10.9	12.30	0.0123	0.00245	1.0

Limits for maximum permissible exposure (MPE):

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(B) Limits for General Population / Uncontrolled Exposure				
0.3 – 3.0	614	1.63	100	30
3.0 – 30	824/ f	2.19/ f	180/ f^2	30
30 - 300	27.5	0.073	0.2	30
300-1500	---	---	$f/1500$	30
1500-100000	---	---	1.0	30

f = Frequency in MHz

The requirements are **FULFILLED**.

Remarks:

6.2 Co-location and Co-transmission

Applicable standard:

OET Bulletin 65, Edition 97-01, Section 2: Multiple-transmitter sites and Complex Environments

The FCC's MPE limits vary with frequency. Therefore, in mixed or broadband RF fields where several sources and frequencies are involved, the fraction of the recommended limit (in terms of power density or square of the electric or magnetic field strength) incurred within each frequency interval should be determined, and the sum of all fractional contributions should not exceed 1.0, or 100 % in terms of percentage.

1. TX 1	$P_d = 0.0005 \text{ mW/cm}^2$ Limit: 0.6 mW/cm^2 Fraction of MPE: 0.083 %
2. TX 2:	$P_d = 0.00245 \text{ mW/cm}^2$ Limit: 1 mW/cm^2 Fraction of MPE: 0.245 %

TX 1 + TX 2 = 0.328 %

The requirements are **FULFILLED**.

Remarks:

6.3 SAR test exclusion considerations

6.3.1 Applicable standard

According to RF exposure guidance:

Systems operating under the provisions of this section shall be operated in a manner that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

Remarks: Not applicable because of fixed station equipment
