

TEST REPORT



Your Ref:

Date: 3 Jul 2004

Our Ref: 56S040553/01

Page: 1 of 33

DID: +65-6885 1448

Fax: +65-6777 6409

NOTE: This report is issued subject to PSB Corporation's "Terms and Conditions Governing Technical Services". The terms and conditions governing the issue of this report are set out as attached within this report.

FORMAL REPORT ON TESTING IN ACCORDANCE WITH
FCC Parts 15C : 2003
OF A
BLUETOOTH HEADSET
[MODEL : HS805]
[FCC ID : OHH-HS805]

TEST FACILITY Telecoms & EMC, Testing Group, PSB Corporation Pte Ltd
1 Science Park Drive, Singapore 118221

FCC REG. NO. 90937 (3m & 10m OATS)
99142 (10m Anechoic Chamber)
871638 (5m Anechoic Chamber)

IND. CANADA REG. NO. IC 4257 (10m Anechoic Chamber)

PREPARED FOR Cal-Comp Electronics (Thailand) Co. Ltd
191/54, 57, 18th Floor, Rachadapisek Road
Klongtoey Bangkok
Thailand (10110)

Tel : 886 2 89 13 2001-32 Fax : 886 2 8913 2043-44

JOB NUMBER 56S040553

TEST PERIOD 23 Jun 2004 – 3 Jul 2004

PREPARED BY

Lim Cher Hwee
Engineer

APPROVED BY

Deng Jun Hong
Assistance Vice President



LA-2001-0212-A
LA-2001-0213-F
LA-2001-0214-E
LA-2001-0215-B
LA-2001-0216-G
LA-2001-0217-G
The results reported herein have been performed in accordance with the laboratory's terms of accreditation under the Singapore Accreditation Council - Singapore Laboratory Accreditation Scheme

TEST SUMMARY

PRODUCT DESCRIPTION

SUPPORTING
EQUIPMENT LIST

EUT OPERATING
CONDITION

TEST RESULTS

- | | |
|---------|--|
| ANNEX A | - TEST INSTRUMENTATION & GENERAL PROCEDURES |
| ANNEX B | - EUT PHOTOGRAPHS / DIAGRAMS |
| ANNEX C | - USER MANUAL, TECHNICAL DESCRIPTION, BLOCK & CIRCUIT DIAGRAMS |
| ANNEX D | - FCC LABEL & POSITION |

The product was tested in accordance with the customer's specifications.

Test Results Summary

Test Standard	Description	Pass / Fail
FCC Part 15: 2003		
15.205	Radiated Emissions (Restricted Band Requirements)	Pass
15.209	Radiated Emissions (Spurious Emissions)	Pass
15.247 (a)(1)	Carrier Frequency Separation	Pass
	Spectrum Bandwidth (20dB Bandwidth Measurement)	Pass
15.247 (a)(1)(iii)	Number of Hopping Frequencies	Pass
	Average Frequency Dwell Time	Pass
15.247 (b)(1)	Maximum Peak Power	Pass
15.247 (c)	RF Conducted Spurious Emissions & Band Edge Compliance at the Transmitter Antenna Terminal	Pass
15.247 (d)	Peak Power Spectral Density	Pass

Notes

- The conducted emissions test was not applicable as the Equipment Under test (EUT), i.e Bluetooth Headset is a battery operated device and contains no provision to connect to public mains switch.
- Three channels as listed below, which respectively represent the lower, middle and upper channels of the equipment under test (EUT) were chosen and tested. For each channel, the EUT was configured to operate in the Bluetooth test mode

<u>Transmit Channel</u>	<u>Frequency (GHz)</u>
Channel 0	2.402
Channel 39	2.441
Channel 78	2.480
- All the measurements in section 15.247 were done based on conducted measurements.
- The EUT meets the verification requirement of a receiver as stated in FCC Part 15B Clause 15.101(b).

Modifications

No modifications were done.

PRODUCT DESCRIPTION

Description	: The Equipment Under Test (EUT) is a V1.2 Bluetooth Headset .
Manufacturer	: Cal-Comp Electronics (Thailand) Public Company Limited 60 Moo 8, Sethakji Road, Klong Maduea, Kratoom Bean Samuthsakorn 74110 Thailand
Model Number	: HS805
FCC ID	: OHH-HS805
Serial Number	: Nil
Microprocessor	: CSR BC219159A-BN-E4
Operating / Transmitting Frequency	: 2.402GHz to 2.480GHz 79 channels. Starting at 2.402MHz with subsequent channel at 1MHz interval from the preceding channel.
Clock Frequency	: 16MHz
Modulation	: Gaussian Frequency Shift Keying (GFSK) with BT = 0.5
Pulse Train Cycle	: 1.25ms / 3.75ms / 6.25ms / Continuous signal (in testing)
Port / Connectors	: Nil
Rated Input Power	: 1.5VDC AAA alkaline battery

SUPPORTING EQUIPMENT DESCRIPTION

The EUT was tested as a stand-alone unit during radiated emissions test. It was tested with following supporting devices during RF Conducted tests.

Equipment Description (Including Brand Name)	Model, Serial & FCC ID Number	Cable Description (List Length, Type & Purpose)
NEC Notebook	M/N: Versa Note S/N: 1186100011 FCC ID: Doc	Nil
NEC Notebook AC/DC Adapter	M/N: ADP-50MB S/N: 9201421DA FCC ID: DoC	2.0m unshielded AC power cable 2.0m unshielded DC power cable with moulded ferrite bead
CSR Headset Development Board	M/N: SCL1 S/N: Nil FCC ID: Nil	2.0m UTP Ethernet cable 2.0m shielded RS232 cable
Agilent DC Power Supply (as a power source to CSR Headset Development Board)	M/N: E3620A S/N: MY40000448 FCC ID: Nil	2.0m unshielded AC power cable 2.0m unshielded DC power cable

EUT OPERATING CONDITIONS

The Bluetooth Headset was powered from a 1.5VDC AAA alkaline battery.

Tests	Description Of Operation
1. Radiated Emissions 2. Carrier Frequency Separation 3. Spectrum Bandwidth (20dB Bandwidth Measurement) 4. Number Of Hopping Frequencies 5. Average Frequency Dwell Time 6. Maximum Peak Power 7. RF Conducted Spurious Emissions at the Transmitter Antenna Terminal 8. Band Edge Compliance at the Transmitter Antenna Terminal 9. Peak Power Spectral Density	The EUT was exercised by operating in the Bluetooth test mode with maximum transmitting power and following configuration during the tests: <u>Carrier Frequency Separation, Number of Hopping Frequency, Average Frequency Dwell Time and Band Edge at the Transmitting Antenna</u> Frequency hopping and modulation are on. <u>Radiated Emissions, Spectrum Bandwidth (6dB Bandwidth Measurement), Maximum Peak Power, RF Conducted Spurious Emissions at the Transmitter Antenna Terminal and Peak Power Spectral Density</u> Frequency hopping is off and the modulation is on. Note: For all the tests mentioned above, the DH1 packet was used with the PRBS 9 as the payload.

FCC Part 15C (15.209) Radiated Emission (Spurious Emissions) Results

Test Distance : 3m

Spurious Emissions ranging from 30MHz – 1GHz

Frequency (MHz)	Q-P Value (dBµV/m)	Q-P Margin (dB)	Channel	Azimuth (Degrees)	Height (cm)	Polarisation (H/V)
288.6000	26.7	-19.3	39	137	100	H
361.9000	25.6	-20.4	78	89	121	V
365.1000	22.8	-23.2	39	24	105	V
436.3000	24.8	-21.2	0	35	100	V
--	--	--	--	--	--	--
--	--	--	--	--	--	--

Spurious Emissions above 1GHz

Frequency (GHz)	Peak Value (dBµV/m)	Average Value (dBµV/m)	Average Margin (dB) See Note 3	Channel	Azimuth (Degrees)	Height (cm)	Pol (H/V)
1.2422	45.2	See Note 2	-8.8	78	165	120	H
1.7600	40.2	See Note 2	-13.8	78	19	100	H
2.0622	42.2	See Note 2	-11.8	39	60	104	H
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--

Tested by: LCH

Notes :

- Environmental Conditions

Temperature	22°C
Relative Humidity	60%
Atmospheric Pressure	1030mbar
- As the measured peak shows compliance to the average limit, as such no average measurement was required.
- The average margin indicates the margin of the measured peak value below the average limit.
- "--" indicates no emissions were found and shows compliance to the limits as specified in section 15.209. The emissions were merely the noise floor.
- Quasi-peak measurement was used for frequency measurement up to 1GHz. Average and peak measurements were used for emissions above 1GHz. The average measurement was done by averaging over a complete cycle of the pulse train, including the blanking interval as the pulse train duration does not exceed 0.1 second.
- A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
- EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:
30MHz - 1GHz
RBW: 120kHz VBW: 1MHz
>1GHz
RBW: 1MHz VBW: 1MHz
- The peak emissions above 1GHz show compliance to the requirement stated in Section 15.35 (b).

9. The upper frequency of radiated emission investigations were according to requirements stated in Section 15.33 (a) for intentional radiators & Section 15.33 (b) for unintentional radiators.
10. The channel in the table refers to the transmit channel of the EUT.
11. Radiated Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 30MHz – 25GHz (QP only @ 3m & 10m) is $\pm 4.3\text{dB}$ (for EUTs < 0.5m X 0.5m X 0.5m).

TEST RESULTS

FCC Part 15C (15.205) Radiated Emissions (Restricted Band Requirements) Results

Test Distance : 3m

Spurious Emissions (Restricted Band) ranging from 30MHz – 1GHz

Frequency (MHz)	Q-P Value (dBµV/m)	Q-P Margin (dB)	Channel	Azimuth (Degrees)	Height (cm)	Polarisation (H/V)
258.4000	23.8	-22.2	78	245	100	V
284.3000	23.4	-22.6	0	102	105	V
--	--	--	--	--	--	--
--	--	--	--	--	--	--
--	--	--	--	--	--	--
--	--	--	--	--	--	--

Spurious Emissions (Restricted Band) above 1GHz

Frequency (GHz)	Peak Value (dBµV/m)	Average Value (dBµV/m)	Average Margin (dB) See Note 3	Channel	Azimuth (Degrees)	Height (cm)	Pol (H/V)
1.2044	45.0	See Note 2	-9.0	0	43	100	V
1.2222	46.6	See Note 2	-7.4	39	321	103	H
1.4999	44.5	See Note 2	-9.5	0	20	100	V
1.5000	42.0	See Note 2	-12.0	39	89	100	H
2.4886	47.6	See Note 2	-6.4	78	0	100	H
--	--	--	--	--	--	--	--

Tested by: LCH

Notes :

- Environmental Conditions

Temperature	22°C
Relative Humidity	60%
Atmospheric Pressure	1030mbar
- As the measured peak shows compliance to the average limit, as such no average measurement was required.
- The average margin indicates the margin of the measured peak value below the average limit.
- "--" indicates no emissions were found and shows compliance to the limits as specified in section 15.209. The emissions were merely the noise floor.
- Quasi-peak measurement was used for frequency measurement up to 1GHz. Average and peak measurements were used for emissions above 1GHz. The average measurement was done by averaging over a complete cycle of the pulse train, including the blanking interval as the pulse train duration does not exceed 0.1 second.
- A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
- EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:
30MHz - 1GHz
RBW: 120kHz VBW: 1MHz
>1GHz
RBW: 1MHz VBW: 1MHz
- The peak emissions above 1GHz show compliance to the requirement stated in Section 15.35 (b).

9. The upper frequency of radiated emission investigations were according to requirements stated in Section 15.33 (a) for intentional radiators & Section 15.33 (b) for unintentional radiators.
10. The channel in the table refers to the transmit channel of the EUT.
11. Radiated Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 30MHz – 25GHz (QP only @ 3m & 10m) is $\pm 4.3\text{dB}$ (for EUTs < 0.5m X 0.5m X 0.5m).



Radiated Emissions Setup (Front View)



Radiated Emissions Setup (Rear View)

FCC Part 15C (15.247(a)(1)) Carrier Frequency Separation Results

The EUT shows compliance to the requirements of this section, which states the adjacent carrier frequencies must be separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

Adjacent Channels	Channel Separation (MHz)
0 and 1 (2.402GHz and 2.403GHz)	1.010
38 and 39 (2.440GHz and 2.441GHz)	1.010
39 and 40 (2.441GHz and 2.442GHz)	1.015
77 and 78 (2.479GHz and 2.480GHz)	1.010

Please refer to the attached Plots 1 - 4 for details.

Tested by: LCH

Notes :


- Environmental Conditions

Temperature	24°C
Relative Humidity	60%
Atmospheric Pressure	1030mbar




Carrier Frequency Separation Measurement Test Setup

CARRIER FREQUENCY SEPARATION PLOTS

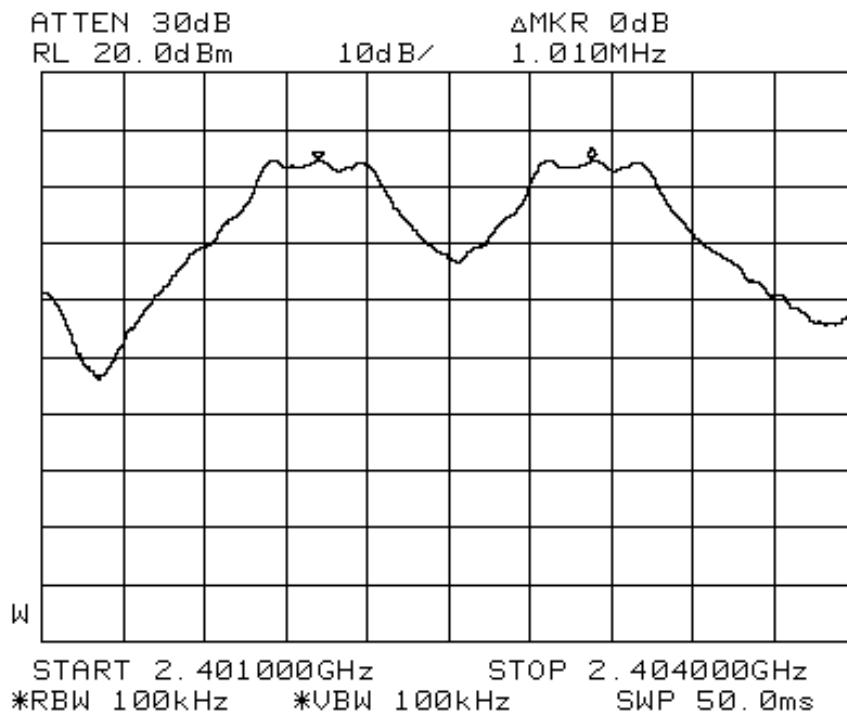


Plot 1- Channels 0 and 1 Separation

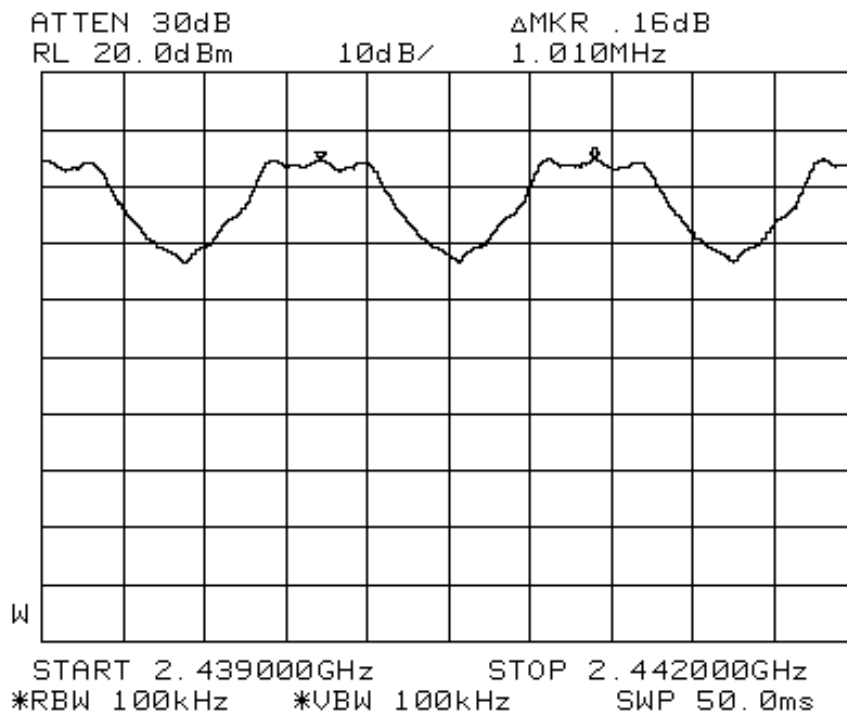


Plot 2 – Channels 38 and 39 Separation

CARRIER FREQUENCY SEPARATION PLOTS

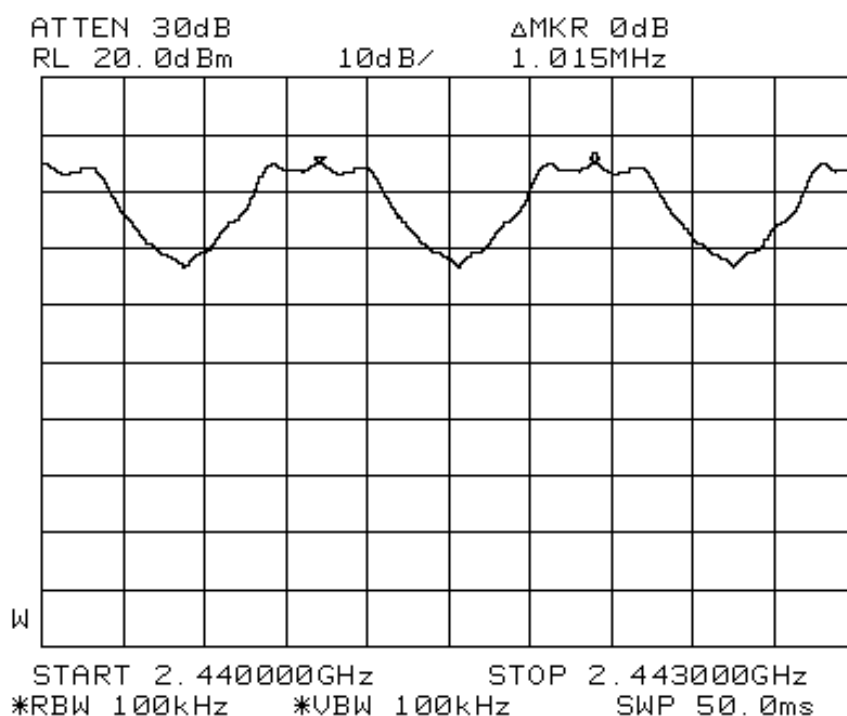

Plot 3 - Channel 39 & 40 Separation

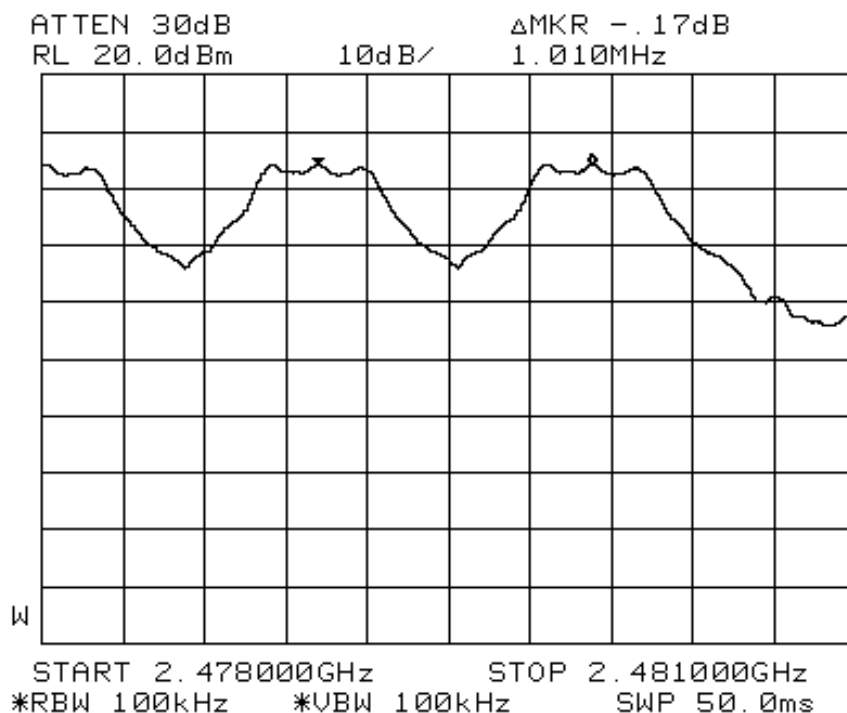

Plot 4 - Channel 77 and 78 Separation

FCC Part 15C (15.247(a)(1)) Spectrum Bandwidth (20dB Bandwidth Measurement) Results

The EUT shows compliance to the requirements of this section, which states that the 20dB bandwidth of the hopping channel shall be the channel frequency separation by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

Channel	Channel Frequency (GHz)	20dB Bandwidth (MHz)
0	2.402	0.775
39	2.441	0.808
78	2.480	0.733

Note: The EUT is a Bluetooth device, which supports no overlapping for each channel.

Please refer to attached Plots 5 - 7 for details.

Tested by: LCH


Notes :

- | | | | |
|----|---------------------------------|----------------------|----------|
| 1. | <u>Environmental Conditions</u> | Temperature | 24°C |
| | | Relative Humidity | 60% |
| | | Atmospheric Pressure | 1030mbar |




Spectrum Bandwidth Measurement Test Setup

SPECTRUM BANDWIDTH (20DB BANDWIDTH MEASUREMENT) PLOTS

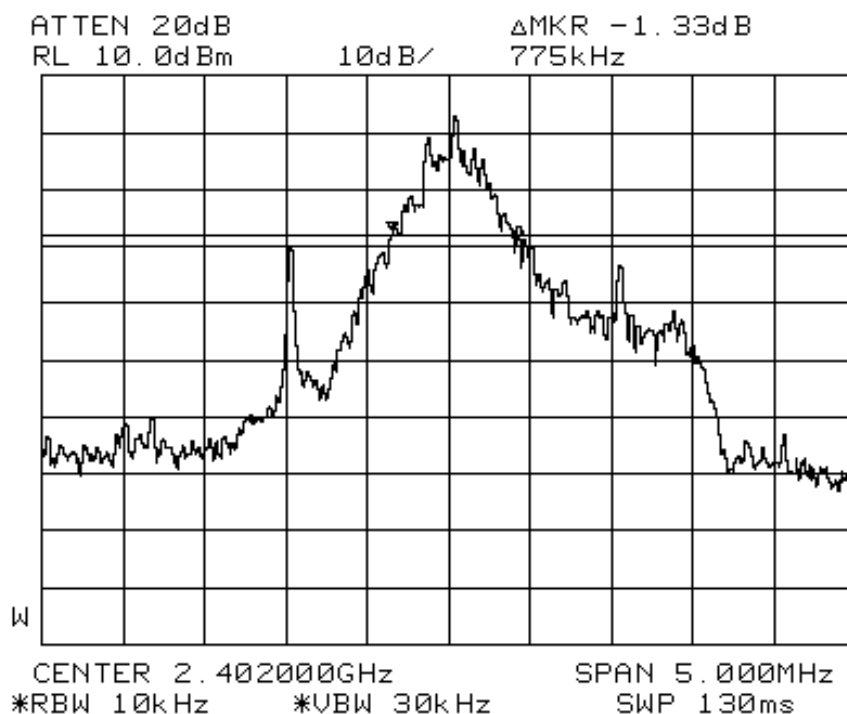


Plot 5 – Channel 0

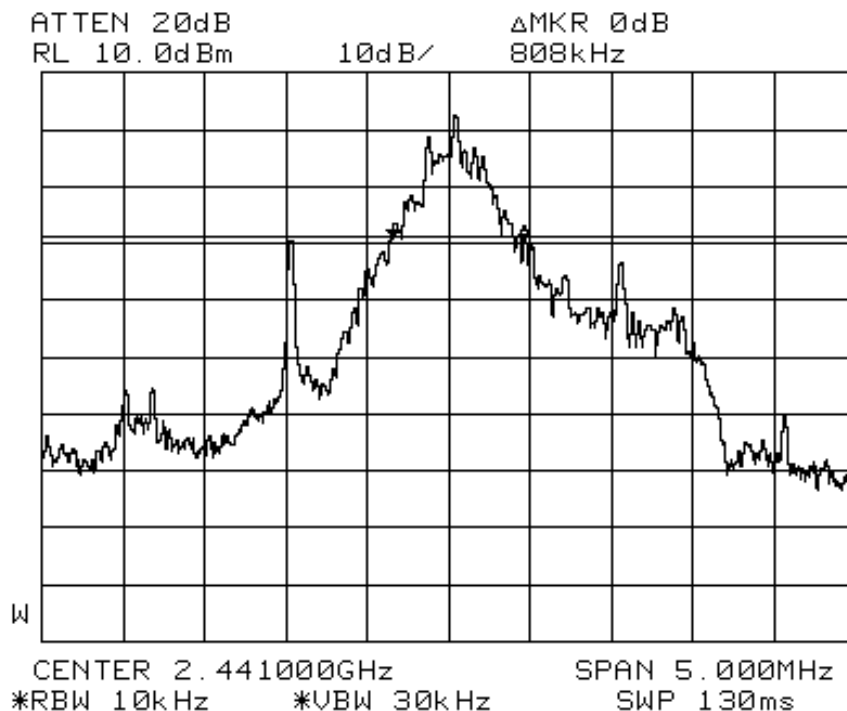

Plot 6 – Channel 39

SPECTRUM BANDWIDTH (20DB BANDWIDTH MEASUREMENT) PLOTS

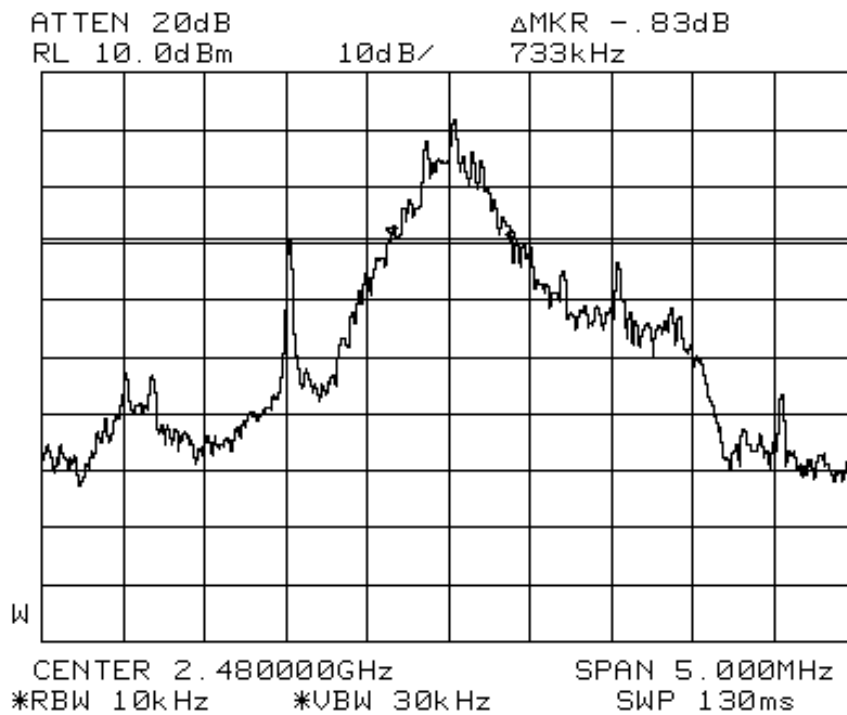

Plot 7 – Channel 78

FCC Part 15C (15.247(a)(1)(iii)) Number of Hopping Frequencies Results

The EUT shows compliance to the requirements of this section, which states the number of hopping frequencies shall be at least 75.

The EUT was found to have 79 hopping frequencies.

Please refer to the attached Plots 8 - 11 for details.

Tested by: LCH


Notes :

- | | | | |
|----|---------------------------------|----------------------|----------|
| 1. | <u>Environmental Conditions</u> | Temperature | 24°C |
| | | Relative Humidity | 60% |
| | | Atmospheric Pressure | 1030mbar |




Number of Hopping Frequencies Measurement Test Setup

NUMBER OF HOPPING FREQUENCIES PLOTS

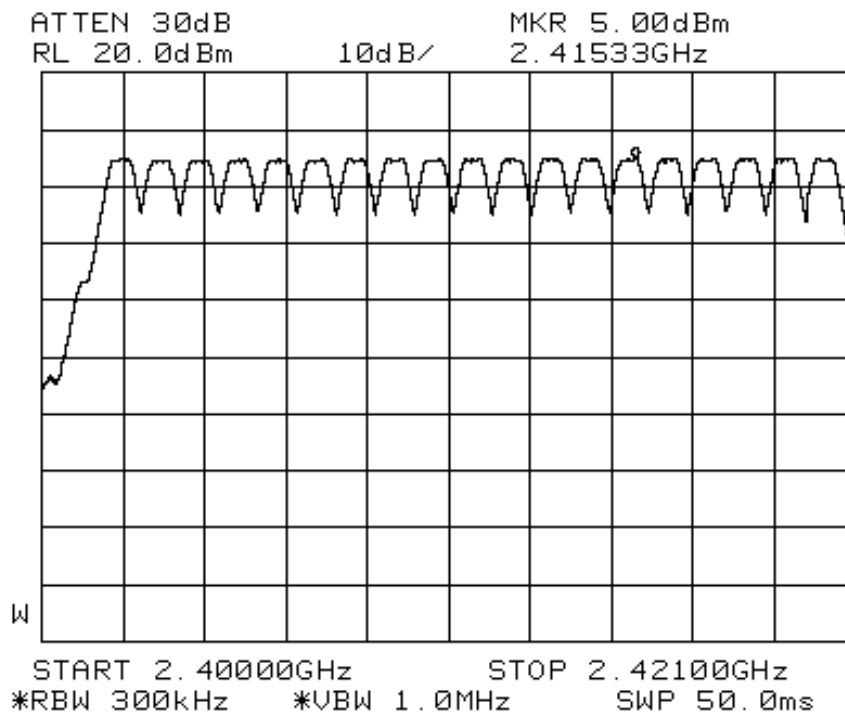


Plot 8 - Channels 0 to 18

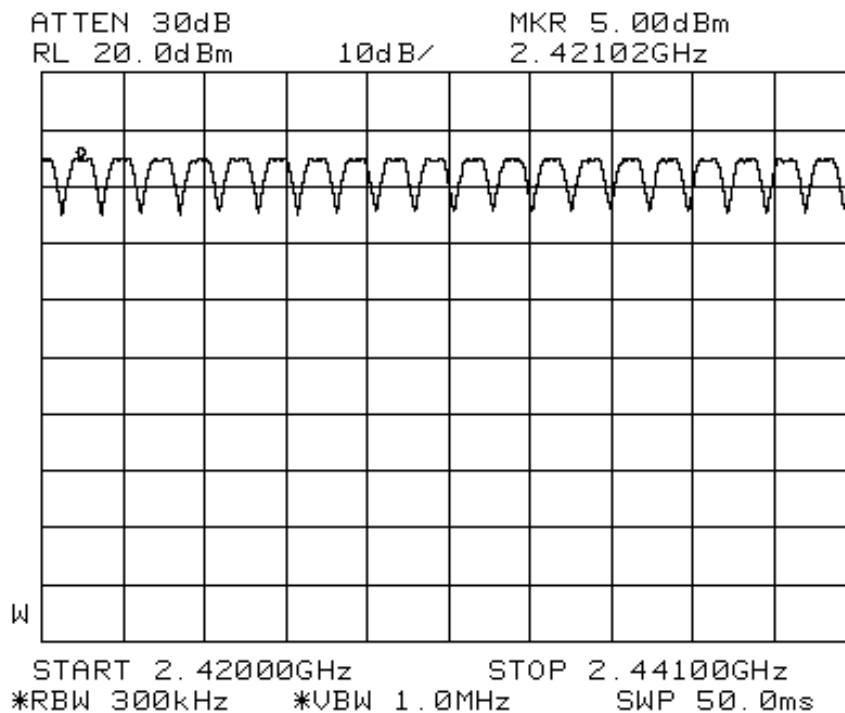


Plot 9 - Channels 19 to 38

NUMBER OF HOPPING FREQUENCIES PLOTS

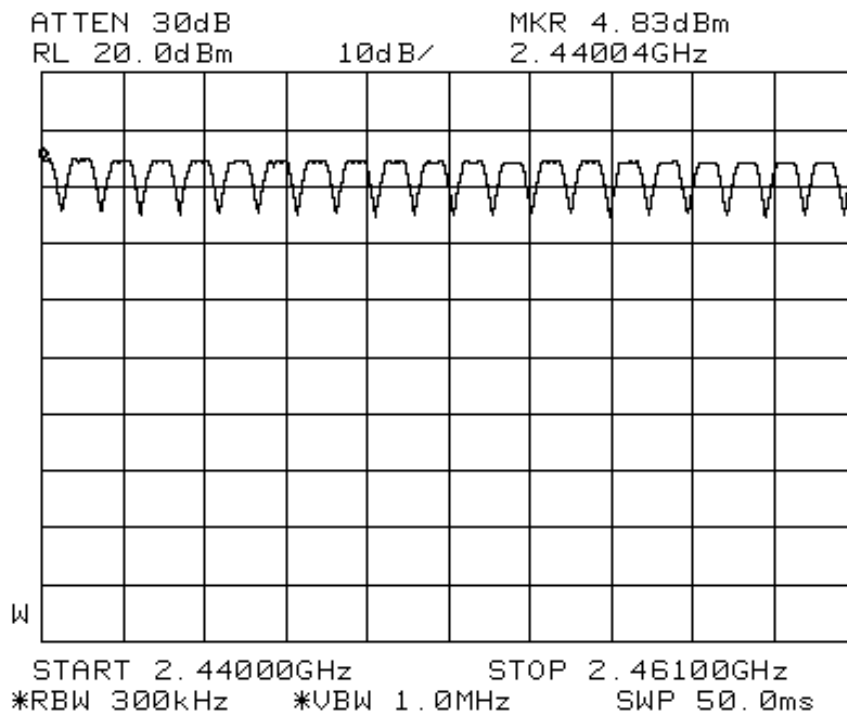

Plot 10 - Channels 39 to 58

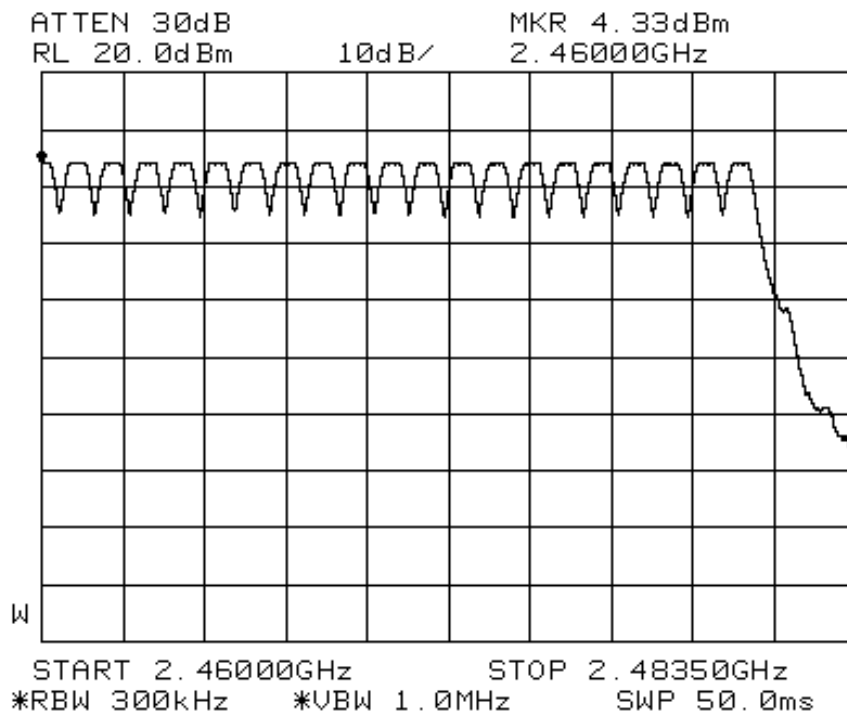

Plot 11 - Channels 59 to 78

FCC Part 15C (15.247(a)(1)(iii)) Average Frequency Dwell Time Results

The EUT shows compliance to the requirements of this section, which states the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a period of 0.4second multiplied by the number of hopping channels employed.

EUT hopping rate = 1600 hops/s

Number of EUT hopping frequencies = 79 hops

DH1packet was used as a transmission packet

Average Frequency Dwell Time = measured time slot length (l) x hopping rate (h) / number of hopping frequencies x 30 seconds period

Channel	Channel Frequency (GHz)	Measured Time Slot Length for DH1 Packet(μs)	Average Frequency Dwell Time (s)	Average Occupancy Limit (s)
0	2.402	625	0.380	0.4
39	2.441	625	0.380	0.4
78	2.480	625	0.380	0.4

Please refer to the attached Plots 12 – 14 for details.

Tested by: LCH

Notes :


- Environmental Conditions

Temperature	24°C
Relative Humidity	60%
Atmospheric Pressure	1030mbar




Average Frequency Dwell Time Measurement Test Setup

AVERAGE FREQUENCY DWELL TIME PLOTS

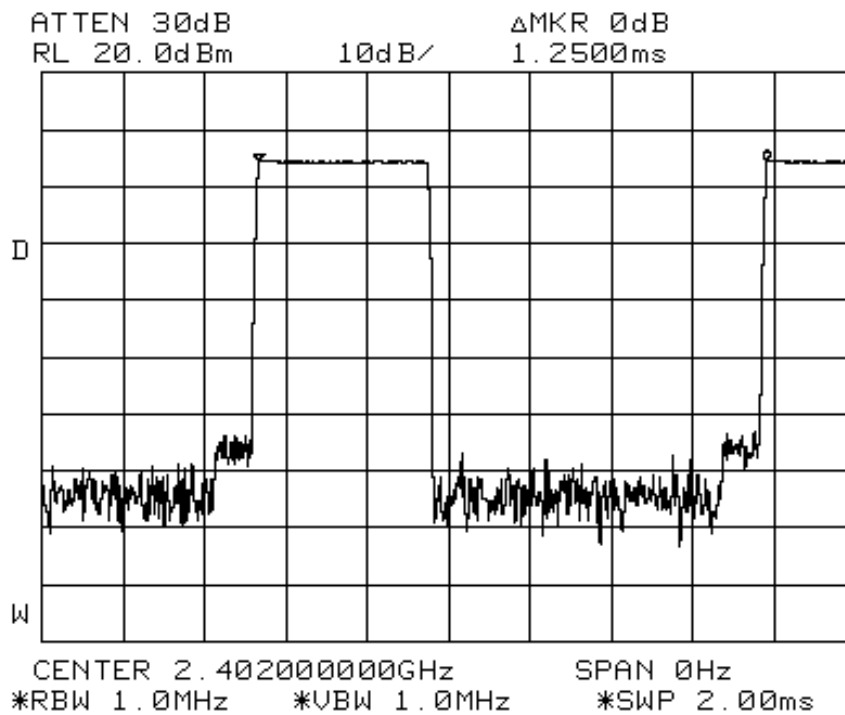


Plot 12 – Channel 0

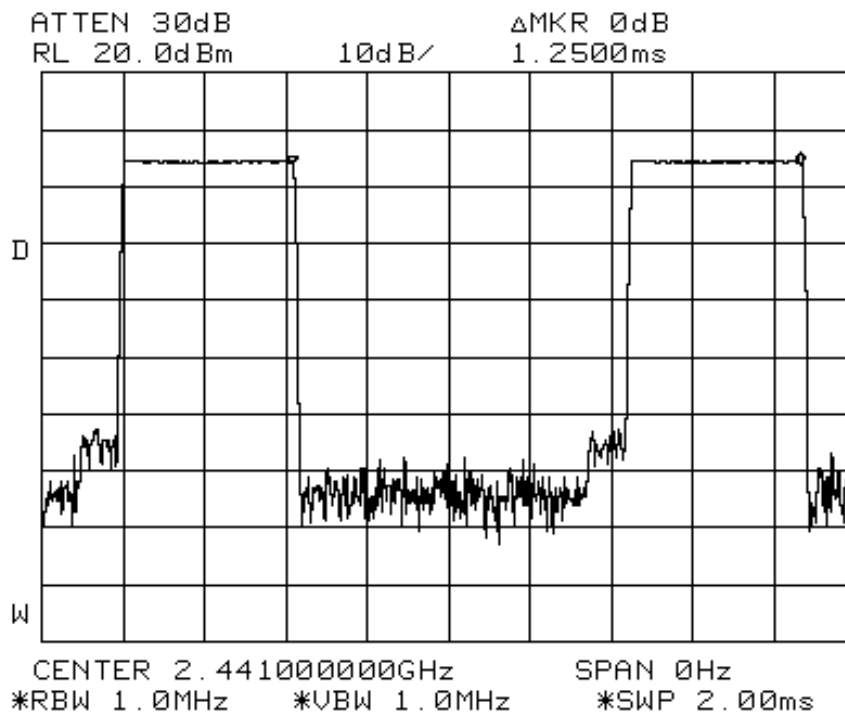

Plot 13 – Channel 39

AVERAGE FREQUENCY DWELL TIME PLOTS

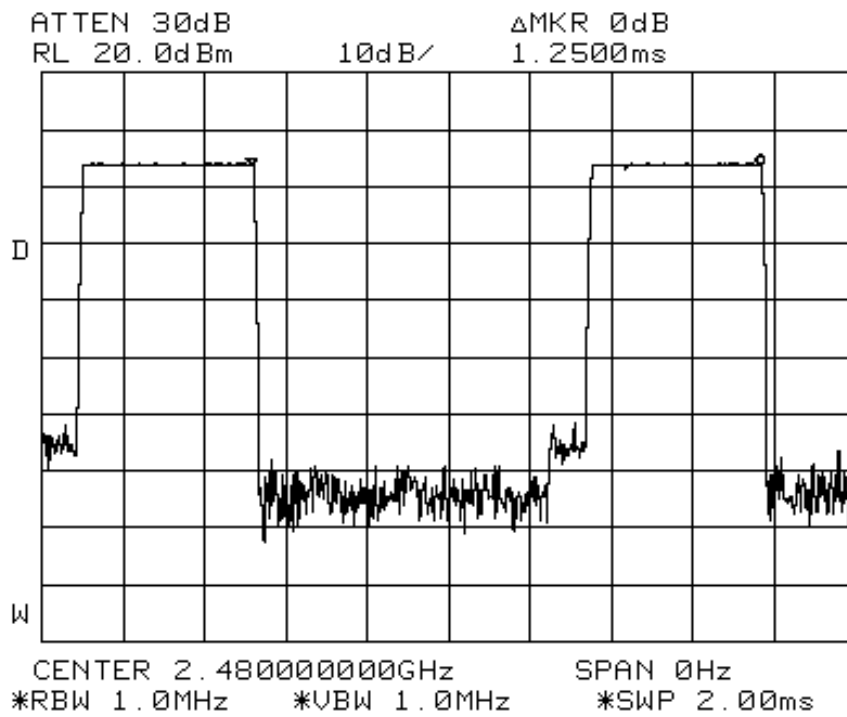

Plot 14 – Channel 78

FCC Part 15C (15.247(b)(1)) Maximum Peak Power Results

The EUT shows compliance to the requirements of this section, which states the peak power of an intentional radiator (EUT) shall not exceed 30dBm (1 Watt).

The maximum peak power for Channels 0, 39 and 78 at 2.402GHz, 2.441GHz and 2.480GHz respectively were investigated and found below 30dBm (1Watt).

Channel	Channel Frequency (GHz)	Maximum Peak Power (W)	Limit (W)
0	2.402	0.002	1
39	2.441	0.002	1
78	2.480	0.002	1

Tested by: LCH

Notes :

- Environmental Conditions

Temperature	24°C
Relative Humidity	60%
Atmospheric Pressure	1030mbar
- Power analyser of Universal Radio Communication Tester was used for power measurement with peak detection as mode of measurement. The power analyser mode supports a wideband power measurement ranging from 100kHz to 2700MHz.



Maximum Peak Power Measurement Test Setup

FCC Part 15C (15.247(c)) RF Conducted Spurious Emissions & Band Edge Compliance at the Transmitter Antenna Results

The EUT shows compliance to the requirements of this section, which states in any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator (EUT) is operating, the RF power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The RF conducted spurious emissions were scanned from 10MHz to 25GHz for Channels 0, 39, and 78 with channel frequency at 2.402GHz, 2.441GHz and 2.480GHz respectively. No significant signal was found and they were below the specified limit. Please refer to the attached Plots 15 – 20 for details.

The conducted spurious at lower and upper band-edges (2.4000GHz and 2.4835GHz) were scanned. The spurious emissions at band-edges were found below the specified limit. Please refer to the attached Plots 21 – 22 for details.

Tested by: LCH


Notes :

1.	<u>Environmental Conditions</u>	Temperature	24°C
		Relative Humidity	60%
		Atmospheric Pressure	1030mbar




RF Conducted Spurious & Band Edge Measurement Test Setup

RF CONDUCTED SPURIOUS EMISSIONS PLOTS

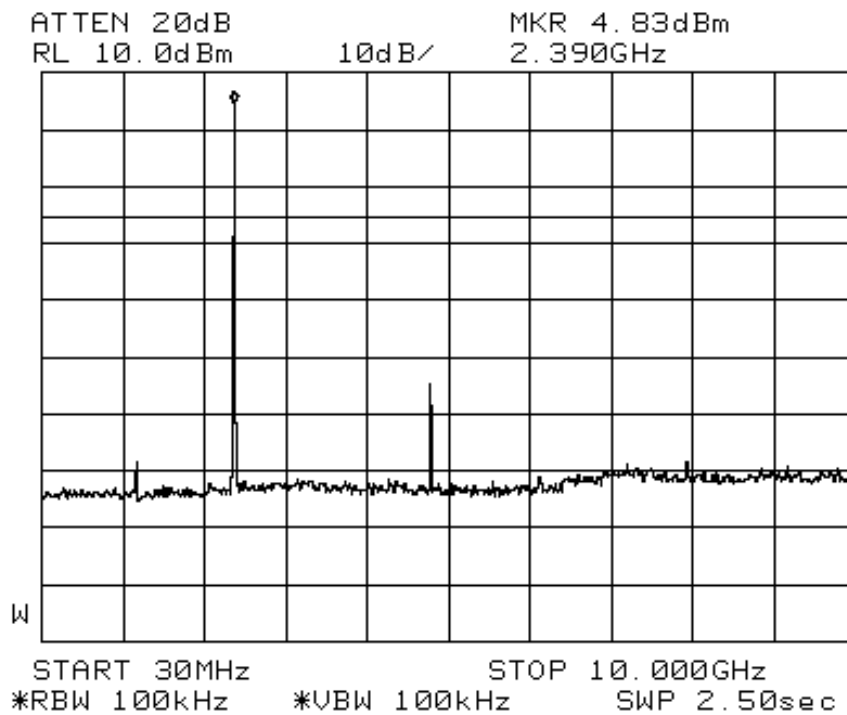


Plot 15 – Channel 0

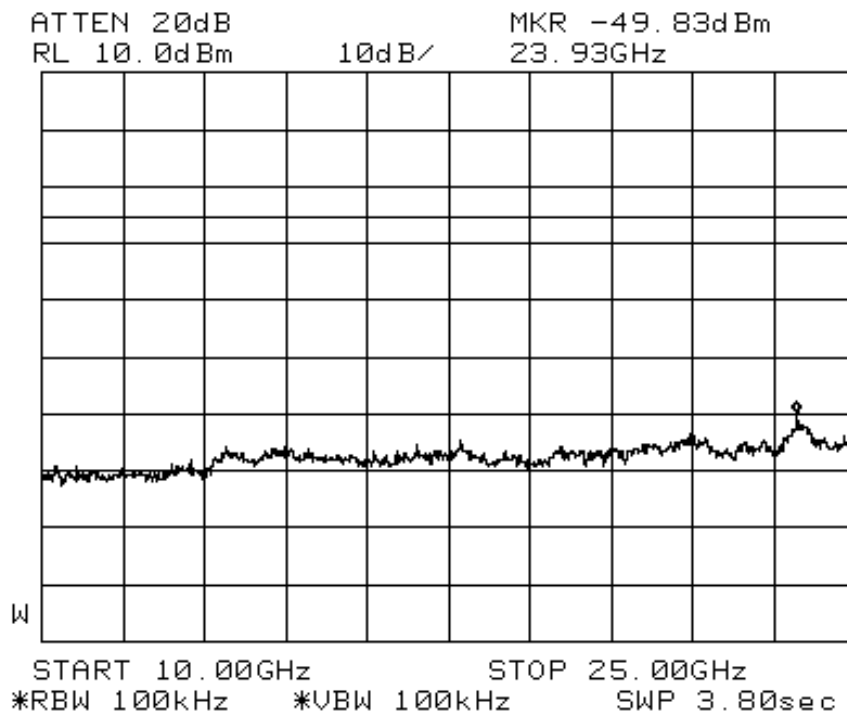


Plot 16 – Channel 0

RF CONDUCTED SPURIOUS EMISSIONS PLOTS

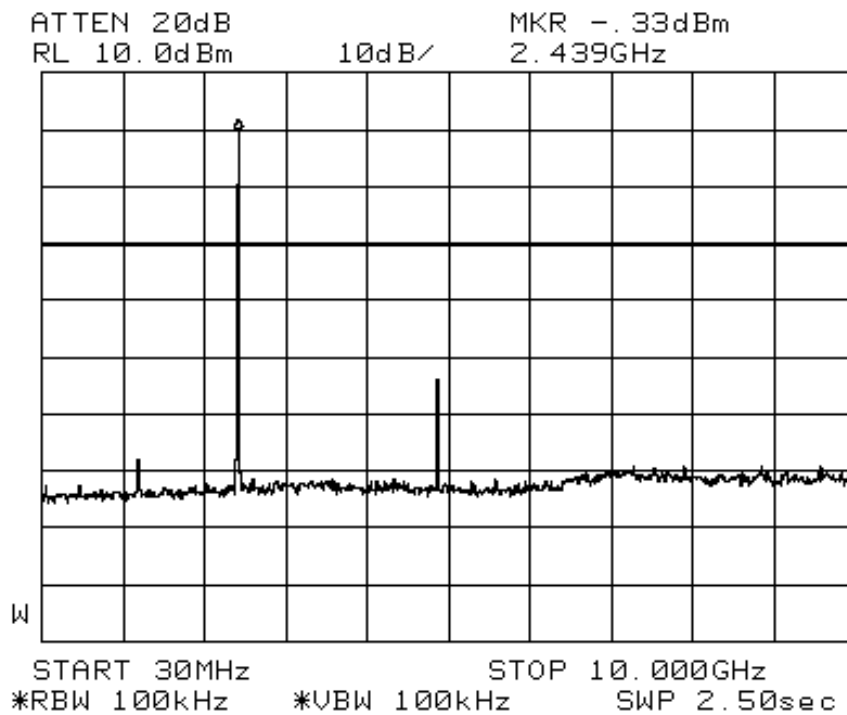


Plot 17 – Channel 39

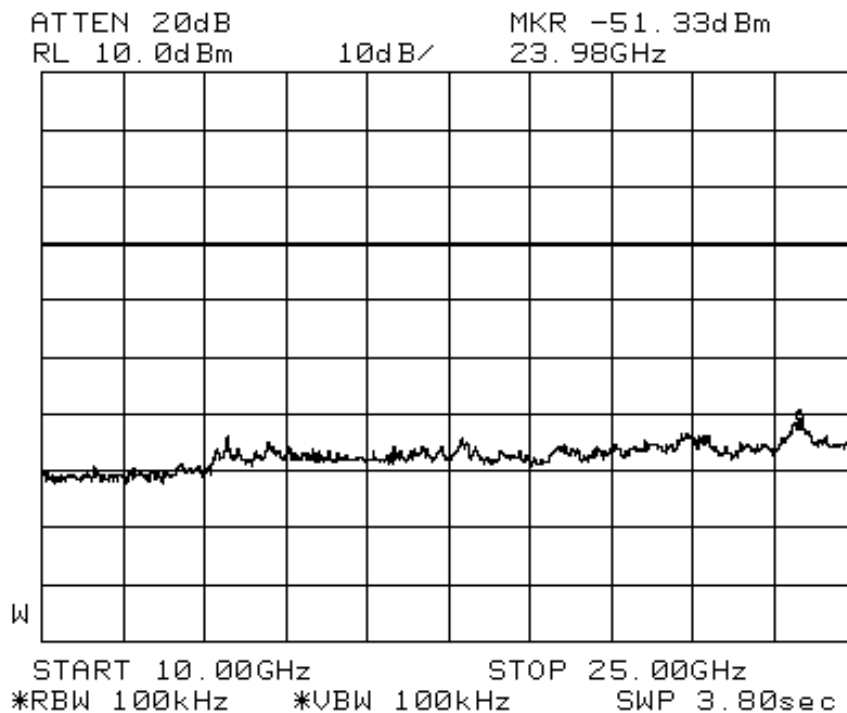


Plot 18 – Channel 39

RF CONDUCTED SPURIOUS EMISSIONS PLOTS

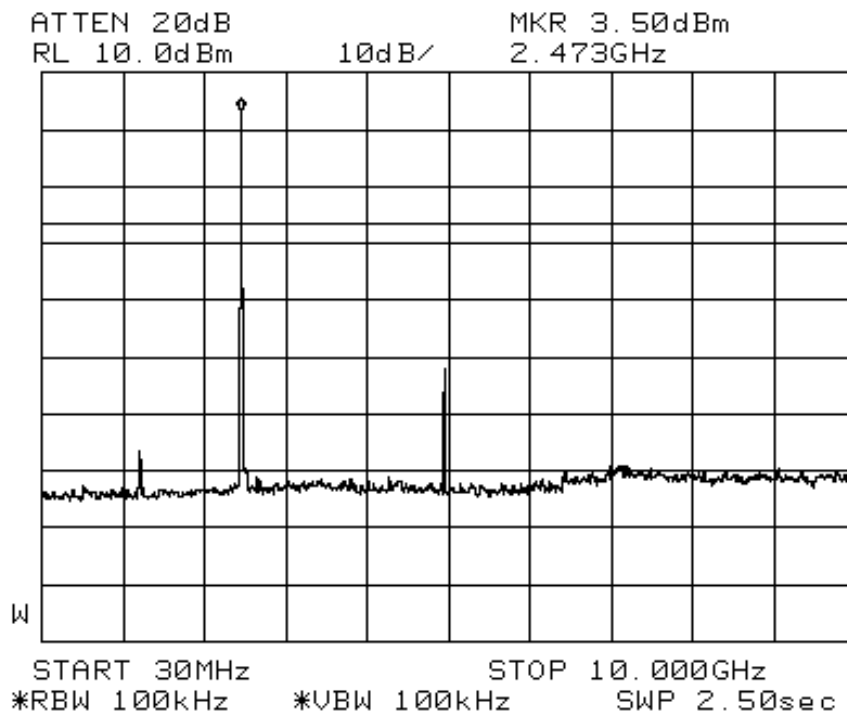


Plot 19 – Channel 78

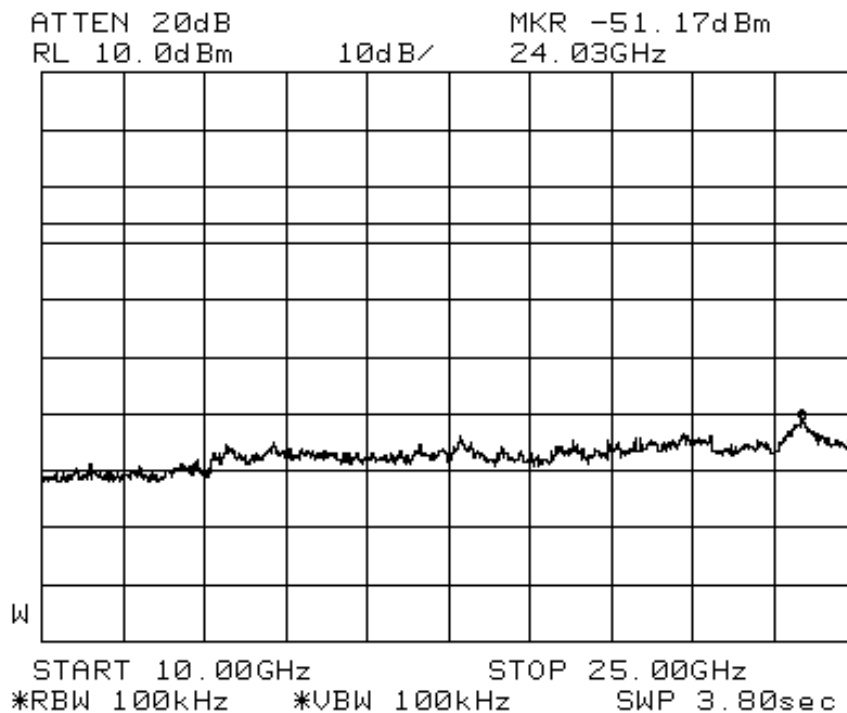


Plot 20 – Channel 78

BAND EDGE COMPLIANCE PLOTS

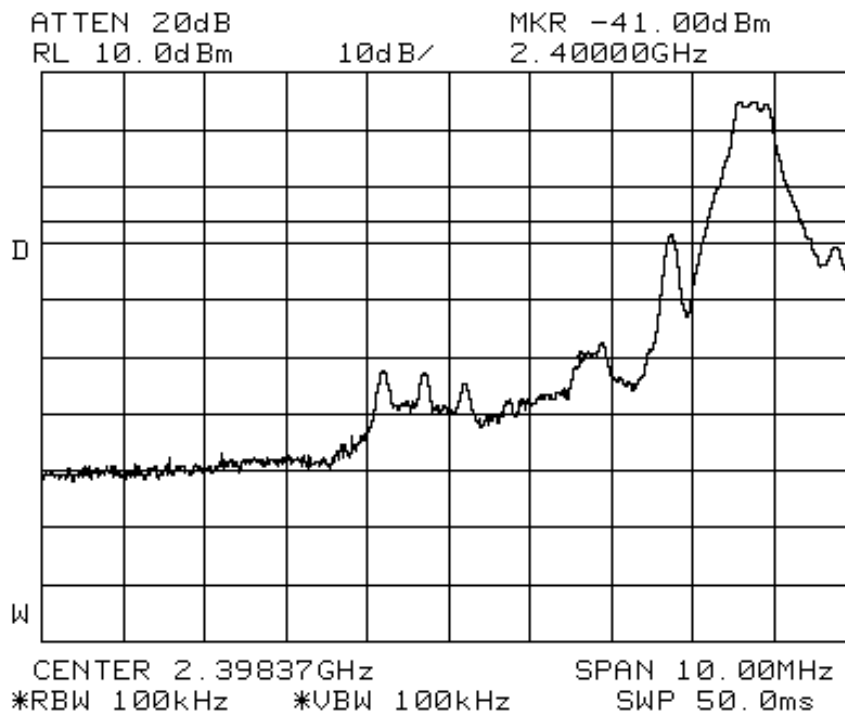

Plot 21 – Lower Band Edge at 2.40GHz

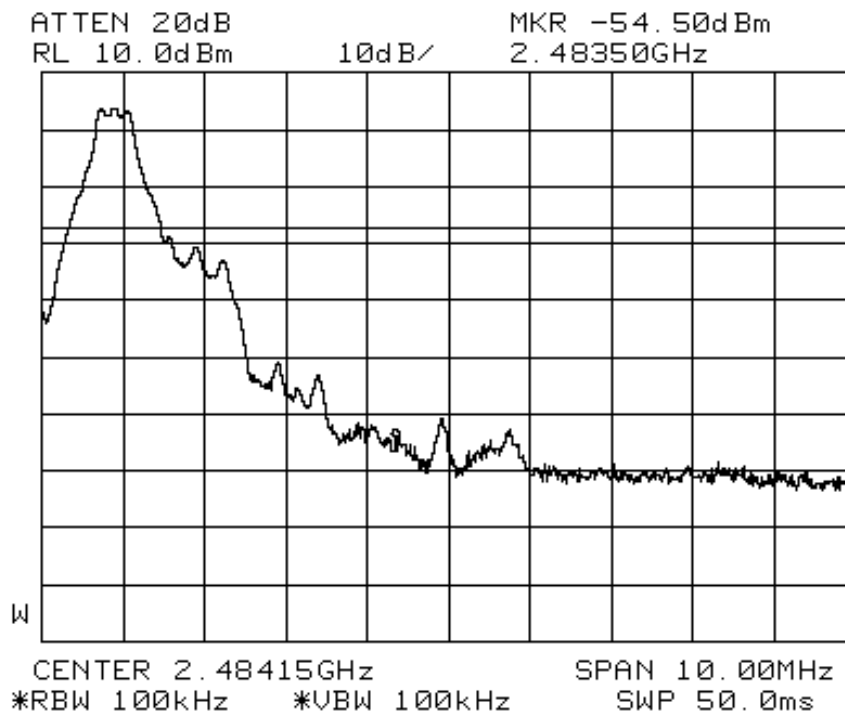

Plot 22 – Upper Band Edge at 2.4835GHz

FCC Part 15C (15.247(d)) Peak Power Spectral Density Results

The EUT shows compliance to the requirements of this section, which states the peak power spectral density of an intentional radiator (EUT) to the antenna shall not be greater than 8dBm (6.3mW) in any 3kHz band during any time interval of continuous transmission.

Operating Mode: 802.11b

Channel	Channel Frequency (GHz)	Peak Power Spectral Density (mW)	Limit (mW)
0	2.402	0.282	6.3
39	2.441	0.341	6.3
78	2.480	0.271	6.3

Please refer to the attached Plots 23 – 25 for details.

Tested by: LCH

Notes :


- Environmental Conditions

Temperature	24°C
Relative Humidity	60%
Atmospheric Pressure	1030mbar




Peak Power Spectral Density Measurement Test Setup

PEAK POWER SPECTRAL DENSITY PLOTS

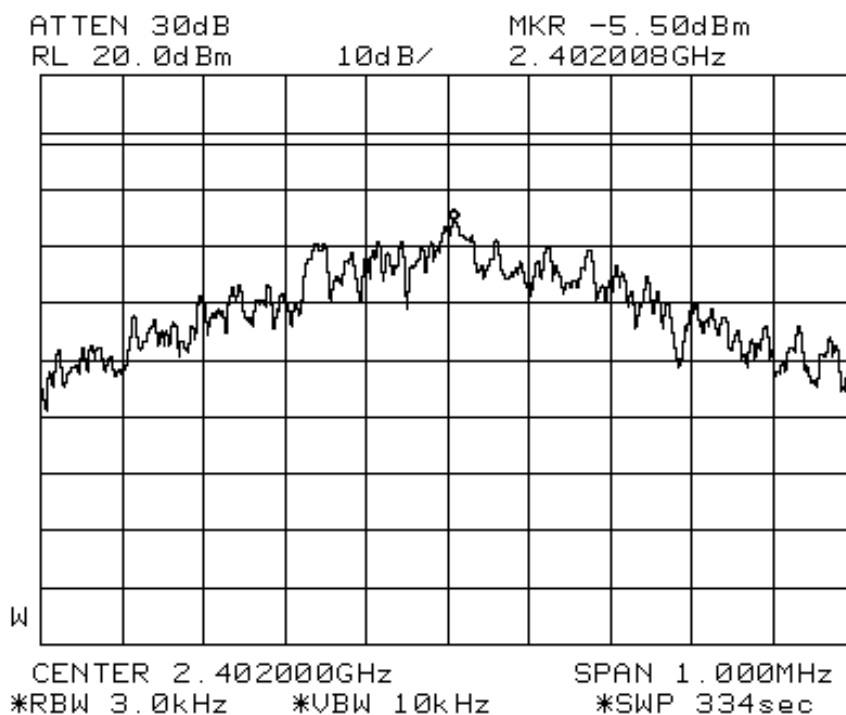


Plot 23 - Channel 0

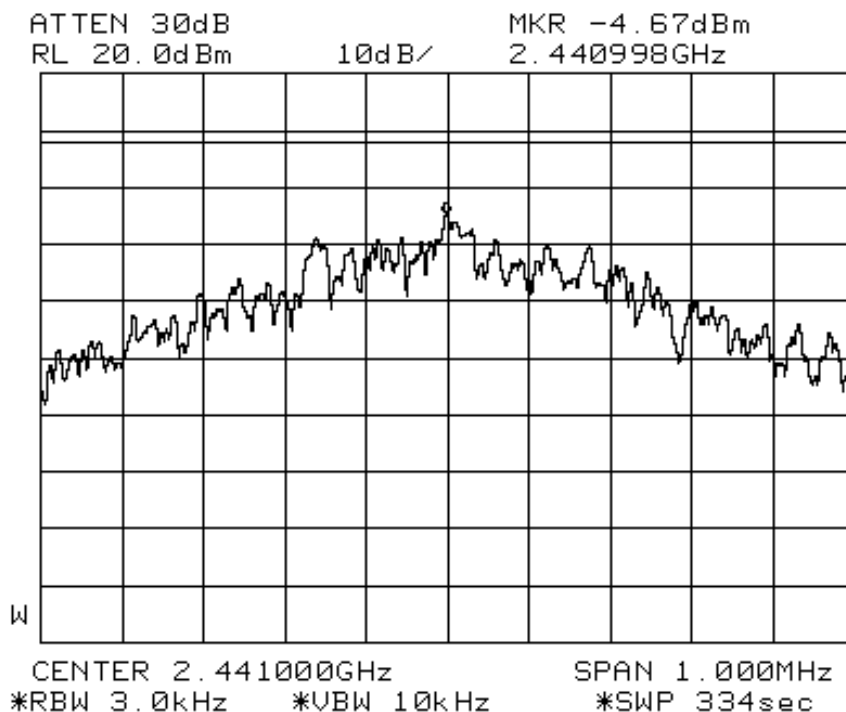

Plot 24 - Channel 39

PEAK POWER SPECTRAL DENSITY PLOTS

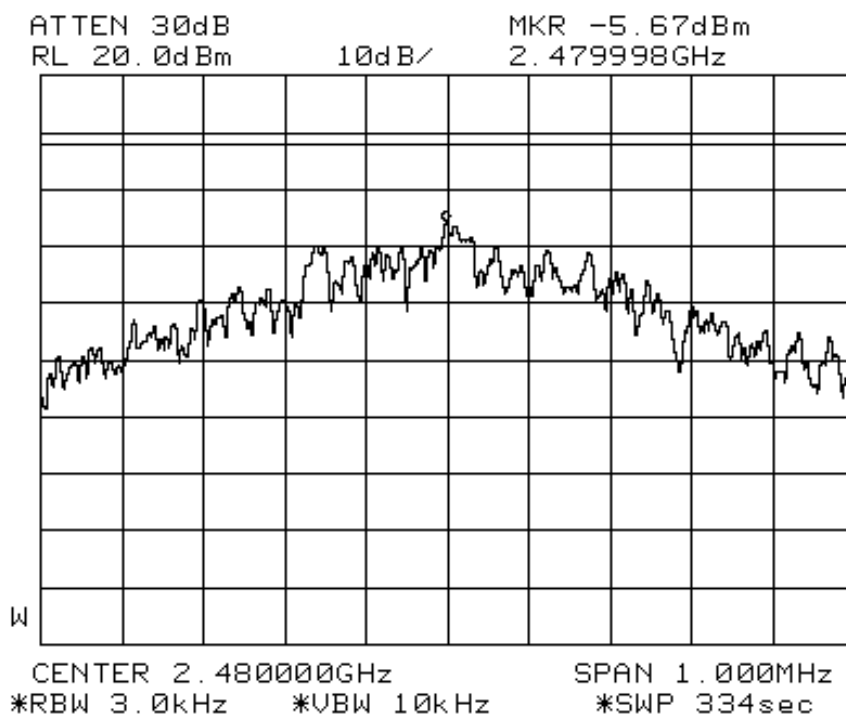

Plot 25 - Channel 78

This Report is issued under the following conditions:

1. Results of the testing/calibration in the form of a report will be issued immediately after the service has been completed or terminated.
2. Unless otherwise requested, a report shall contain only technical results. Analysis and interpretation of the results and professional opinion and recommendations expressed thereupon, if required, shall be clearly indicated and additional fee paid for, by the Client.
3. This report applies to the sample of the specific product/equipment given at the time of its testing/calibration. The results are not used to indicate or imply that they are applicable to other similar items. In addition, such results must not be used to indicate or imply that PSB Corporation approves, recommends or endorses the manufacturer, supplier or user of such product/equipment, or that PSB Corporation in any way "guarantees" the later performance of the product/equipment.
4. The sample/s mentioned in this report is/are submitted/supplied/manufactured by the Client. PSB Corporation therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture, consignment or any information supplied.
5. Additional copies of the report are available to the Client at an additional fee. No third party can obtain a copy of this report through PSB Corporation, unless the Client has authorised PSB Corporation in writing to do so.
6. PSB Corporation may at its sole discretion add to or amend the conditions of the report at the time of issue of the report and such report and such additions or amendments shall be binding on the Client.
7. All copyright in the report shall remain with PSB Corporation and the Client shall, upon payment of PSB Corporation's fees for the carrying out of the tests/calibrations, be granted a license to use or publish the report to the third parties subject to the terms and conditions herein, provided always that PSB Corporation may at its absolute discretion be entitled to impose such conditions on the license as it sees fit.
8. Nothing in this report shall be interpreted to mean that PSB Corporation has verified or ascertained any endorsement or marks from any other testing authority or bodies that may be found on that sample.
9. This report shall not be reproduced wholly or in parts and no reference shall be made by the Client to PSB Corporation or to the report or results furnished by PSB Corporation in any advertisements or sales promotion.

August 2003

ANNEX A

TEST INSTRUMENTATION & GENERAL PROCEDURES

TEST INSTRUMENTATION & GENERAL PROCEDURES

ANNEX A

3m Anechoic Chamber Test Instrumentation (Radiated Emissions)

<u>Instrument</u>	<u>Model</u>	<u>S/No</u>	<u>Cal Due Date</u>	
R&S Test Receiver (20Hz-26.5GHz) – ESMI3	ESMI	829214/005 829550/004	25 Jul 2004	x
HP Preamplifier (for ESMI3, 0.01-3GHz) – PA6	87405A	3950M00353	1 Apr 2005	x
MITEQ Preamplifier (0.1-26.5GHz) – PA11	NSP2650-N	728231	1 Apr 2005	x
Schaffner Bilog Antenna – BL5	CBL6143	5041	18 May 2005	x
EMCO Horn Antenna – H14	3115	0003-6087	22 May 2005	x
Micro-tronics Band-Stop Filter	BRM50701	017	1 Apr 2005	x

Room 3 Test Instrumentation

(Carrier Frequency Separation, Number Of Hopping Frequencies, Spectrum Bandwidth (20dB Bandwidth Measurement), Average Frequency Dwell Time, Maximum Peak Power, RF Conducted Spurious Emissions at the Transmitter Antenna Terminal, Band Edge Compliance at the Transmitter Antenna Terminal, Peak Power Density)

<u>Instrument</u>	<u>Model</u>	<u>S/No</u>	<u>Cal Due Date</u>	
HP Spectrum Analyzer	8563E	3846A09953	16 Dec 2004	x
R&S Universal Radio Communication Tester	CMU 200	837587/068	22 Mar 2005	x

TEST INSTRUMENTATION & GENERAL PROCEDURES

ANNEX A

RADIATED EMISSIONS TEST DESCRIPTION (5m ANC)

Test Set-up

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A prescan was carried out to find out the EUT highest emissions relative to the limit by rotating the EUT through three orthogonal axes to determine which attitude and equipment arrangement produces such emissions.
3. The final measurement was then carried out at the selected frequency points based on the highest emissions arrangement found from step 2. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
 - a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
 - b. The EUT was then rotated to the direction that gave the maximum emission.
 - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
4. A Quasi-peak measurement was made for that frequency point if it was less than or equal to 1GHz. For frequency point that above 1GHz, both Peak and Average measurements were carried out.
5. Steps 3 and 4 were repeated for the next frequency point, until all selected frequency points were measured.
6. The frequency range covered was from 30MHz to 25GHz, using the Bi-log antenna for frequencies from 30MHz up to 3GHz, and the Horn antenna above 3GHz.

Sample Calculation Example

At 300 MHz	limit = 200 μ V/m = 46 dB μ V/m
Log-periodic antenna factor & cable loss at 300 MHz = 18.511 dB	
Q-P reading obtained directly from EMI Receiver = 40 dB μ V/m (Calibrated level including antenna factors & cable losses)	
Therefore, Q-P margin = 40 - 46 = -6	i.e. 6 dB below limit

TEST INSTRUMENTATION & GENERAL PROCEDURES**ANNEX A****CARRIER FREQUENCY SEPARATION TEST DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 100kHz.
5. All other supporting equipment were powered separately from another filtered mains.

Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the Bluetooth test mode with hopping sequence on.
2. The start and stop frequencies of the spectrum analyser were set to 2.401GHz and 2.404GHz with frequency sweeping set to 50ms.
3. The spectrum analyser was set to max hold to capture the two adjacent transmitting frequencies within the span. The signal capturing was continuous until no further signals were detected.
4. The carrier frequency separation of the two adjacent transmitting / operating frequency was measured by finding the carrier frequency difference between the two adjacent channels.
5. The steps 2 to 4 were repeated with the following start and stop frequencies settings:
 - a. 2.439GHz to 2.442GHz
 - b. 2.440GHz to 2.443GHz
 - c. 2.478GHz to 2.481GHz

TEST INSTRUMENTATION & GENERAL PROCEDURES**ANNEX A****SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) TEST DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 10kHz and 30kHz.
5. All other supporting equipment were powered separately from another filtered mains.

Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the Bluetooth test mode, non-hopping with transmitting frequency at Channel 0 (2.402GHz).
 2. The center frequency of the spectrum analyser was set to the transmitting frequency with the frequency span wide enough to capture the 20dB bandwidth of the transmitting frequency.
 3. The spectrum analyser was set to max hold to capture the transmitting frequency. The signal capturing was continuous until no further changes were observed.
 4. The peak of the transmitting frequency was detected with the marker peak function of the spectrum analyser. The frequencies below the 20dB peak frequency at lower (f_L) and upper (f_H) sides of the transmitting frequency were marked and measured by using the marker-delta function of the spectrum analyser.
1. The 20dB bandwidth of the transmitting frequency is the frequency difference between the marked lower and upper frequencies, $|f_H - f_L|$.
 2. The steps 2 to 5 were repeated with the transmitting frequency was set to Channel 39 (2.441GHz) and Channel 78 (2.480GHz) respectively.

TEST INSTRUMENTATION & GENERAL PROCEDURES**ANNEX A****NUMBER OF HOPPING FREQUENCIES TEST DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
4. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 300kHz and 1000MHz.
5. All other supporting equipment were powered separately from another filtered mains.

Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the Bluetooth test mode with hopping sequence on.
2. The start and stop frequencies of the spectrum analyser were set to 2.40GHz and 2.421GHz with frequency sweeping set to 50ms.
3. The spectrum analyser was set to max hold to capture all the transmitting frequencies within the span. The signal capturing was continuous until all the transmitting frequencies were captured and no further signals were detected.
4. The numbers of transmitting frequencies were counted and recorded.
5. The steps 2 to 5 were repeated with the following start and stop frequencies settings:
 - a. 2.420GHz to 2.441GHz
 - b. 2.440GHz to 2.461GHz
 - c. 2.460GHz to 2.4835GHz
6. The total number of hopping frequencies is the sum of the number of the hopping frequencies found for each span.

TEST INSTRUMENTATION & GENERAL PROCEDURES

ANNEX A

AVERAGE FREQUENCY DWELL TIME TEST DESCRIPTION

Test Set-up

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 1MHz and 1MHz.
5. All other supporting equipment were powered separately from another filtered mains.

Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the Bluetooth test mode, hopping sequence on.
2. The center frequency of the spectrum analyser was set to 2.402GHz with zero frequency span (spectrum analyser acts as an oscilloscope).
3. The sweep time of the spectrum analyser was adjusted until a stable signal can be seen on the spectrum analyser.
4. The duration (dwell time) of a packet was measured using the marker-delta function of the spectrum analyser. The average dwell time of the transmitting frequency was computed as below:

$$\text{Average Frequency Dwell Time} = \frac{\text{measured time slot length (l)} \times \text{hopping rate (h)}}{\text{number of hopping frequencies} \times 30 \text{ seconds period}}$$

$$\begin{aligned} \text{where EUT hopping rate} &= 1600 \text{ hops/s} \\ \text{Number of EUT hopping frequencies} &= 79 \text{ hops} \end{aligned}$$

5. The steps 2 to 4 were repeated with the center frequency of the spectrum analyser were set to 2.441GHz and 2.480GHz respectively.

MAXIMUM PEAK POWER TEST DESCRIPTION**Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo..
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the Universal Radio Communication Tester, which set into power analyser mode via a low-loss coaxial cable.
4. All other supporting equipment were powered separately from another filtered mains.

Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the Bluetooth test mode, non-hopping with transmitting frequency at Channel 0 (2.402GHz).
2. The maximum peak power of the transmitting frequency was detected and recorded.
3. The step 2 was repeated with the transmitting frequency was set to Channel 39 (2.441GHz) and Channel 78 (2.480GHz) respectively.

TEST INSTRUMENTATION & GENERAL PROCEDURES**ANNEX A****RF CONDUCTED SPURIOUS EMISSIONS AT THE TRANSMITTER ANTENNA TERMINAL TEST DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 100kHz.
5. All other supporting equipment were powered separately from another filtered mains.

Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the Bluetooth test mode, non-hopping with transmitting frequency at Channel 0 (2.402GHz).
2. The start and stop frequencies of the spectrum analyser were set to 30MHz and 10GHz.
3. The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected.
4. The steps 2 to 3 were repeated with frequency span was set from 10GHz to 25GHz.
5. The steps 2 to 4 were repeated with the transmitting frequency was set to Channel 39 (2.441GHz) and Channel 78 (2.480GHz) respectively.

TEST INSTRUMENTATION & GENERAL PROCEDURES**ANNEX A****BAND EDGE COMPLIANCE AT THE TRANSMITTER ANTENNA TERMINAL TEST DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 100kHz.
5. All other supporting equipment were powered separately from another filtered mains.

Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the Bluetooth test mode, hopping sequence on.
2. The frequency span of the spectrum analyser was set to wide enough to capture the lower band edge of the Bluetooth band, 2.40GHz and any spurious emissions at the band edge.
3. The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected.
4. The steps 2 to 3 were repeated with the frequency span of the spectrum analyser was set to wide enough to capture the upper band edge frequency of the Bluetooth band, 2.4835GHz and the any spurious emissions at the band-edge.

PEAK POWER SPECTRAL DENSITY TEST DESCRIPTION**Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 3kHz and 10kHz.
5. All other supporting equipment were powered separately from another filtered mains.

Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the Bluetooth test mode, non-hopping with transmitting frequency at Channel 0 (2.402GHz).
2. The sweep time of the spectrum analyser was set to the value of the ratio of the frequency span divided by the RBW.
3. The peak power density of the transmitting frequency was detected and recorded.
4. The step 3 was repeated with the transmitting frequency was set to Channel 39 (2.441GHz) and Channel 78 (2.480GHz) respectively.

ANNEX B

TEST PHOTOGRAPHS / DIAGRAMS

EUT PHOTOGRAPHS




Front View



Rear View

EUT PHOTOGRAPHS

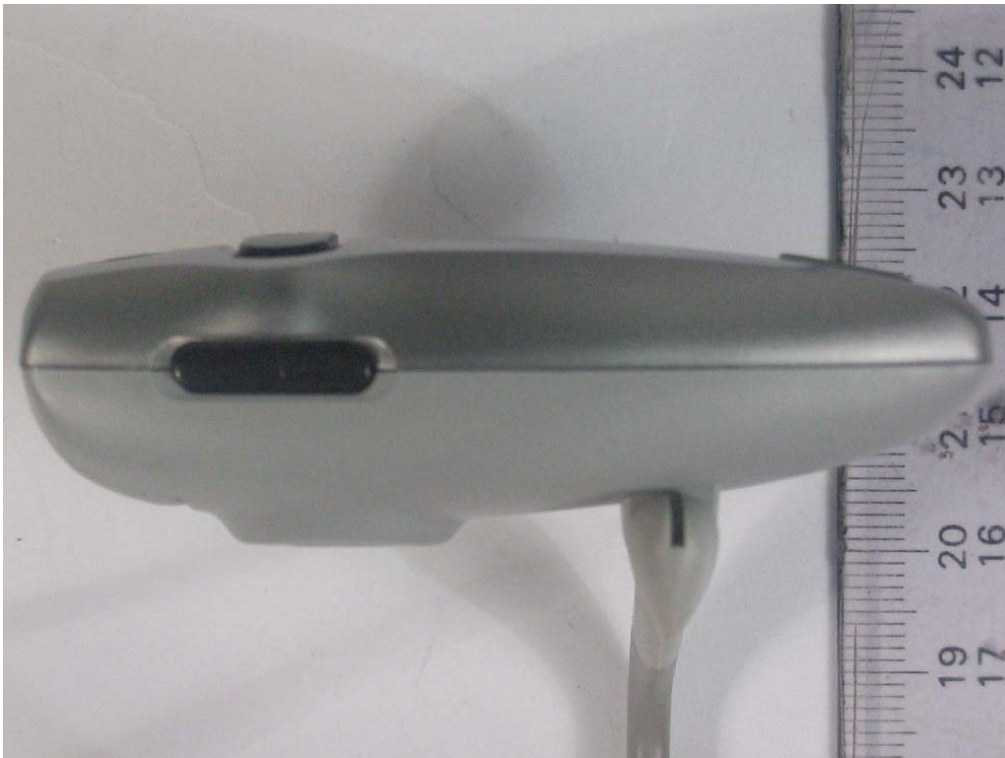

Left View



Right View

EUT PHOTOGRAPHS



Top View




Bottom View

EUT PHOTOGRAPHS



EUT Top Housing External View

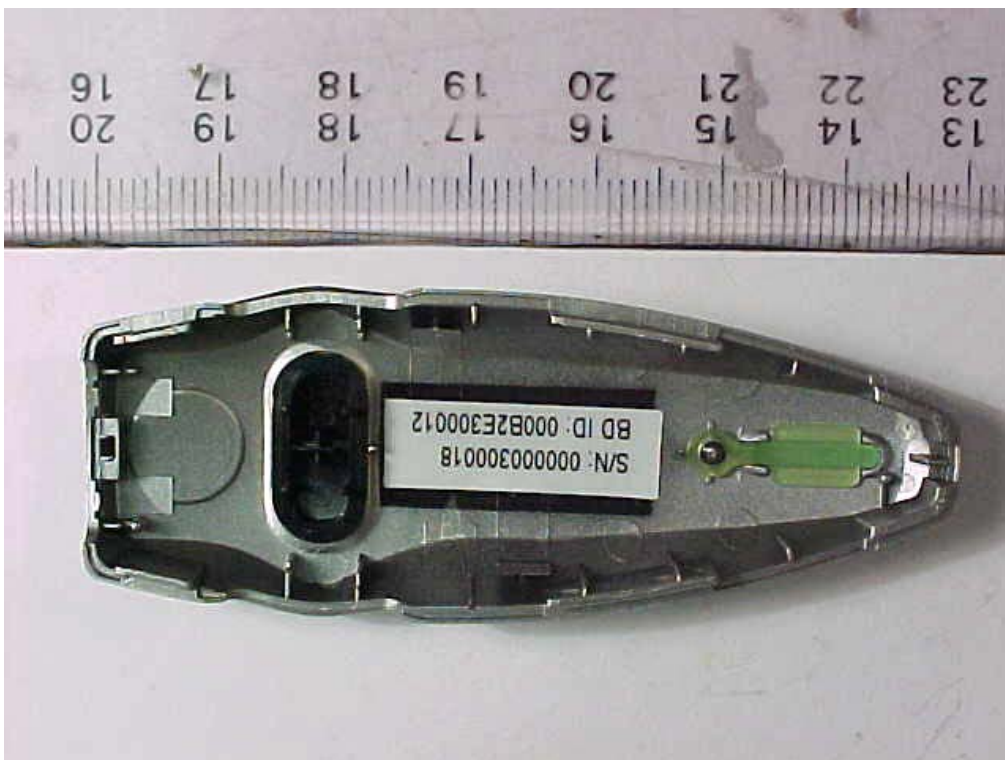


EUT Top Housing Internal View

EUT PHOTOGRAPHS




EUT Bottom Housing External View

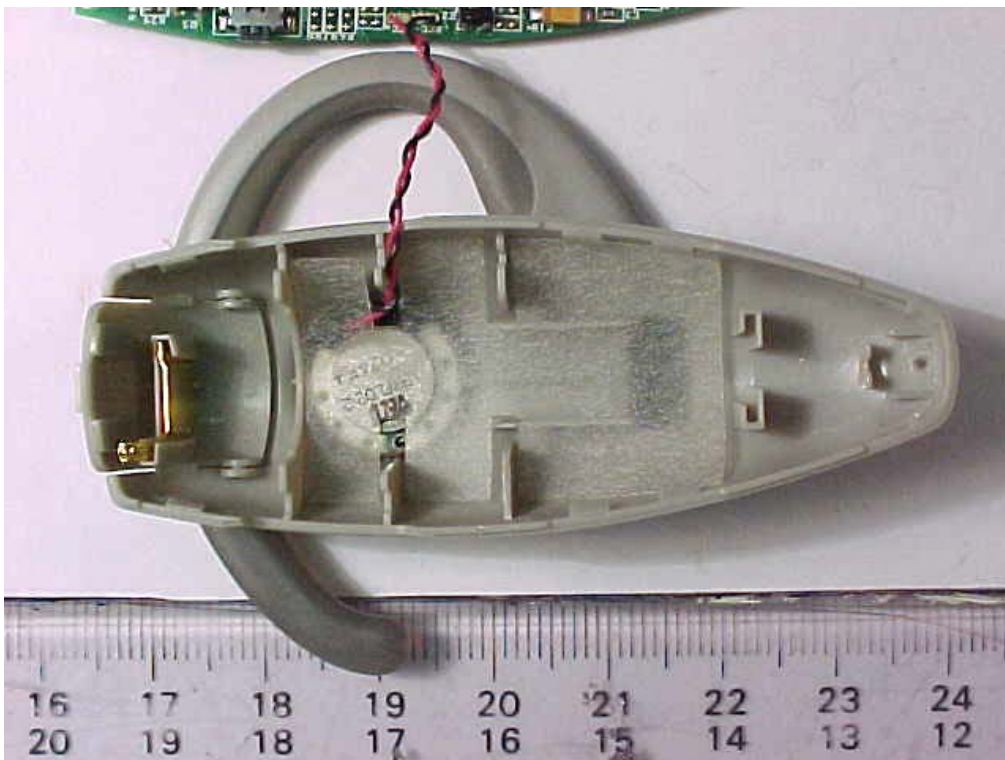


EUT Bottom Housing Internal View

EUT PHOTOGRAPHS

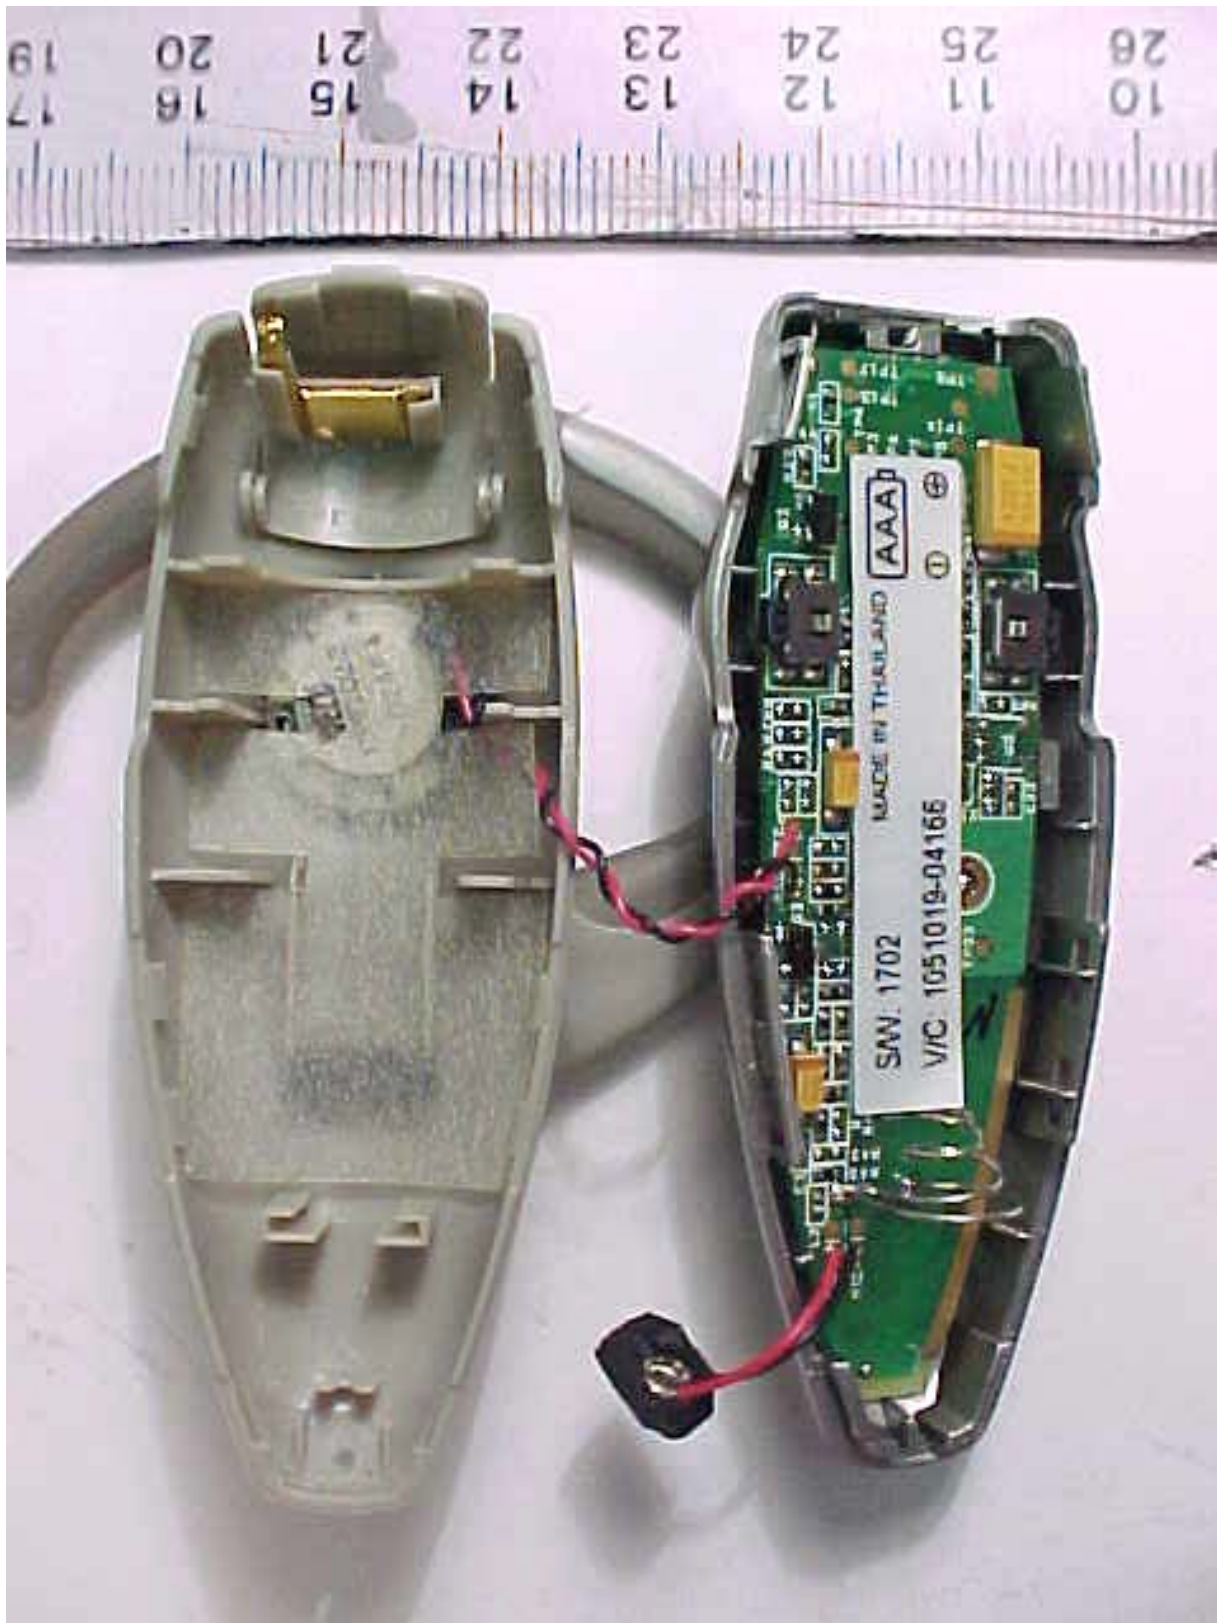


EUT Internal View

EUT PHOTOGRAPHS

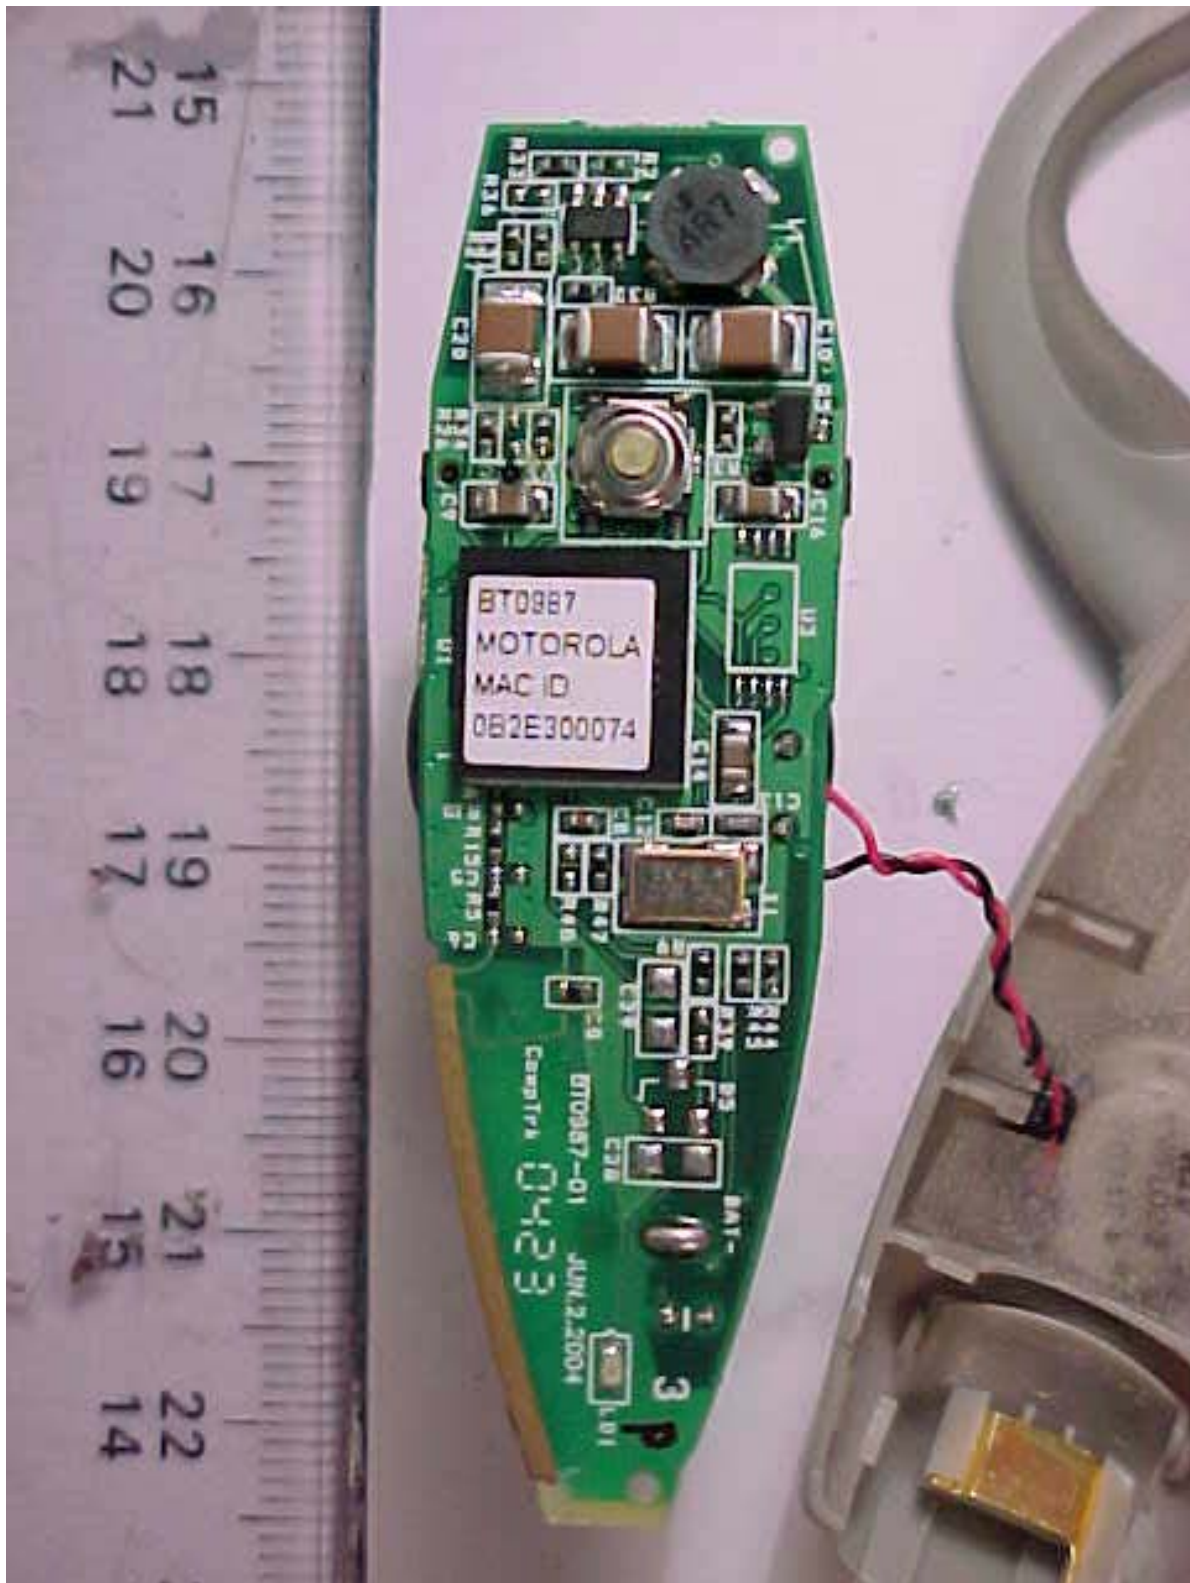

EUT PCB Top View

EUT PHOTOGRAPHS

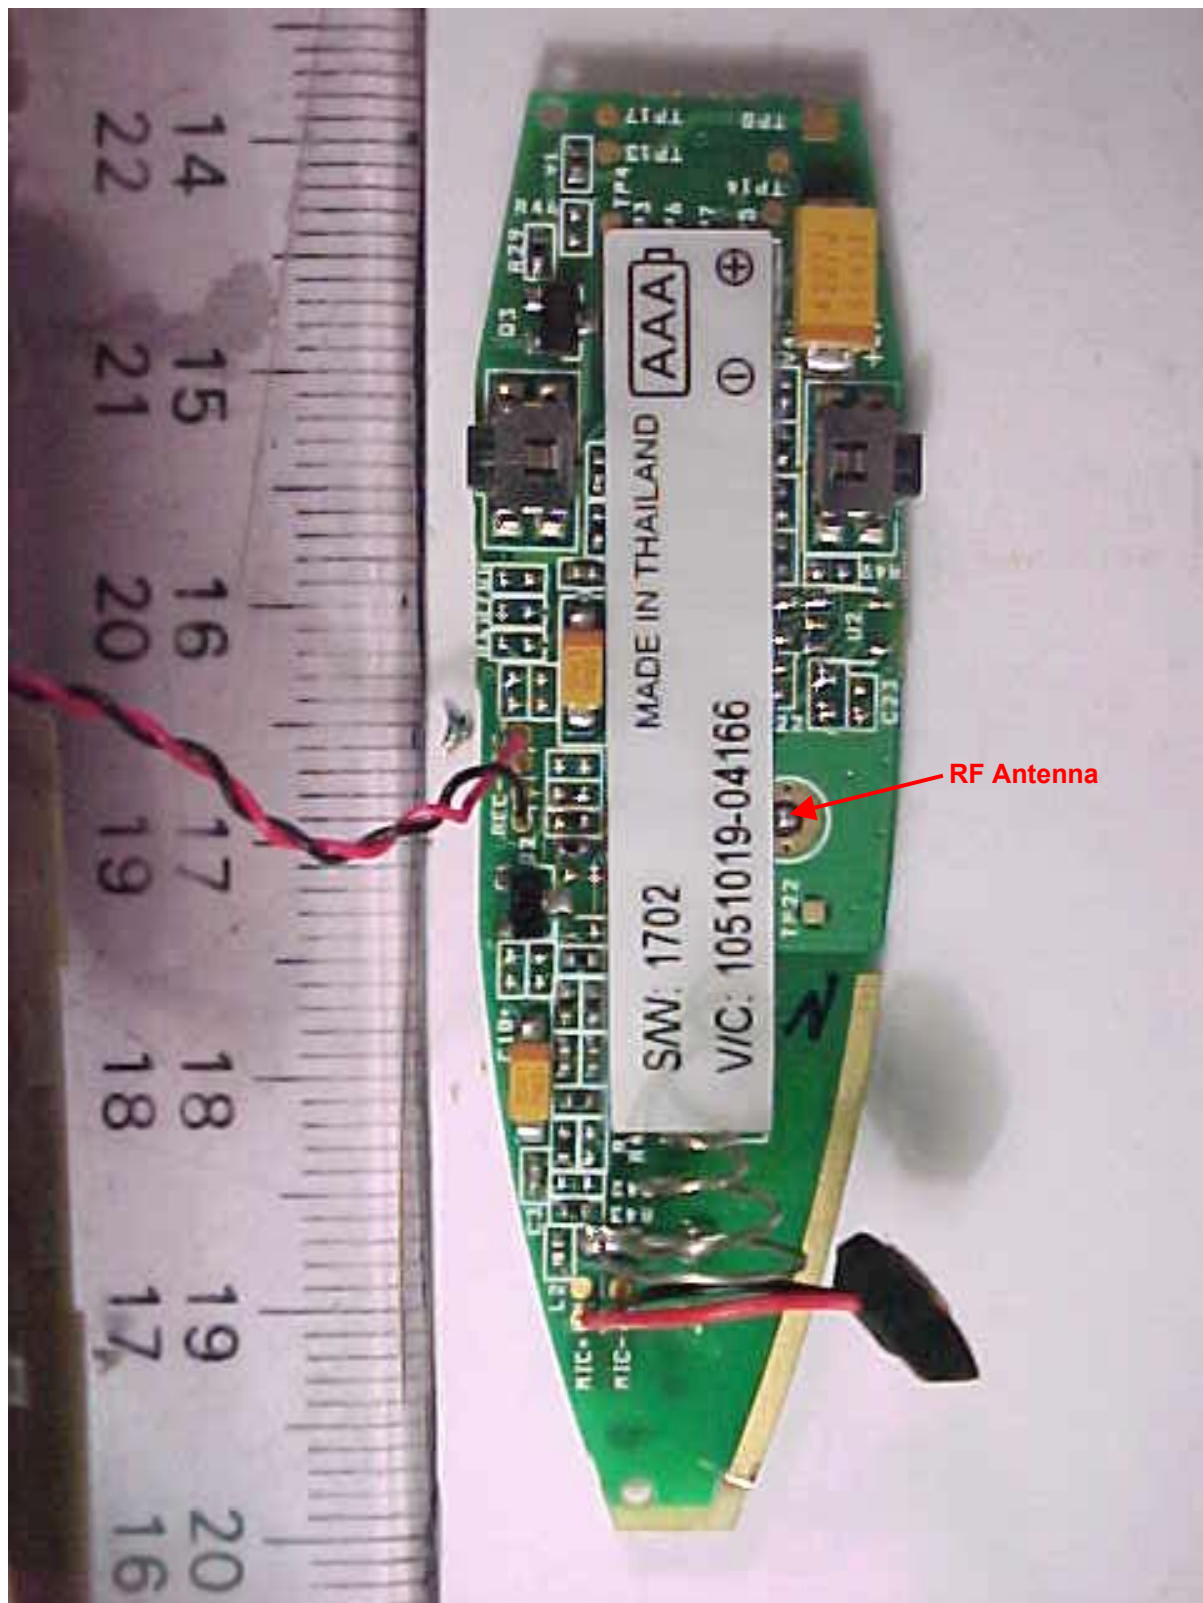

EUT PCB Bottom View

ANNEX C

**USER MANUAL
TECHNICAL DESCRIPTION
BLOCK & CIRCUIT DIAGRAMS**


(Please refer to attached copy)

ANNEX D

FCC LABEL & POSITION

Labelling requirements per Section 2.925 & 15.19

The label shown will be permanently affixed at a conspicuous location on the device and be readily visible to the user at the time of purchase.

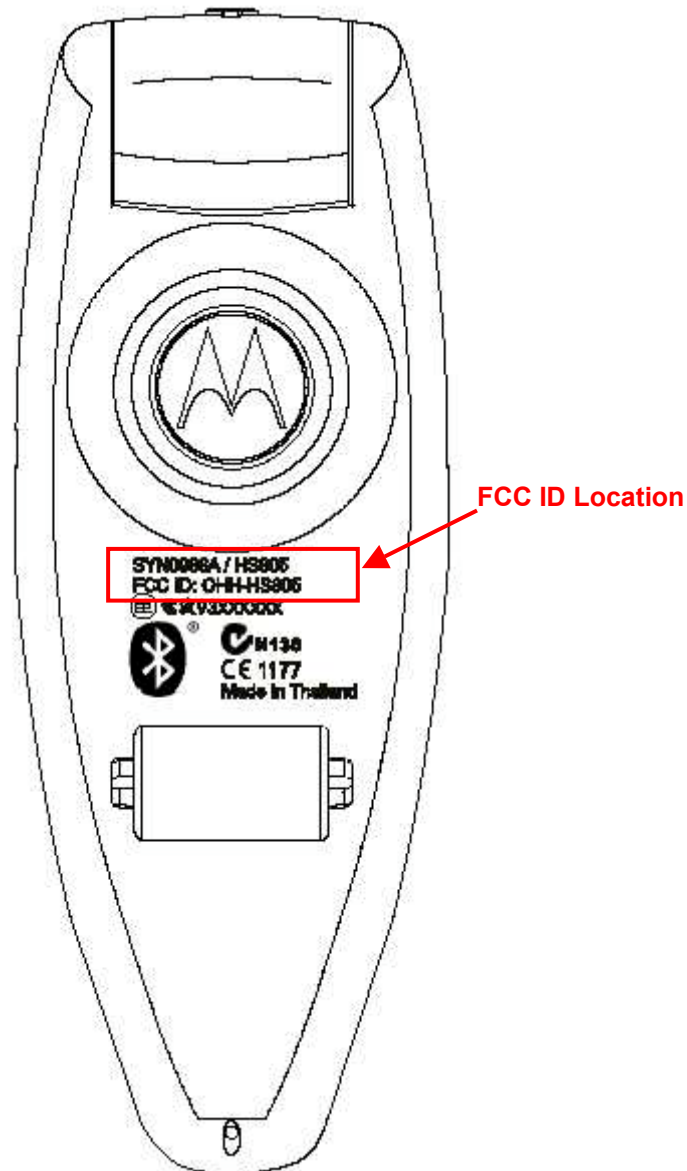

Sample Label and Physical Location of FCC Label on EUT