

Intertek Testing Services

RF VOLTAGE


EUT: KWL-220
Manuf: Kai-Link
Op Cond: AMN-L
Operator: Kaysi
Test Spec: FCC Class B
Comment: EMI Receiver SN:835418/012
120V 60Hz 22C 59%RH TX at low channel
Date: 07. Feb 02 09:59

Scan Settings (1 Range)

----- Frequencies -----			----- Receiver Settings -----				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
450k	30M	8k	9k	PK	20ms	AUTO LN	OFF

Final Measurement: x QP

Meas Time: 1 s

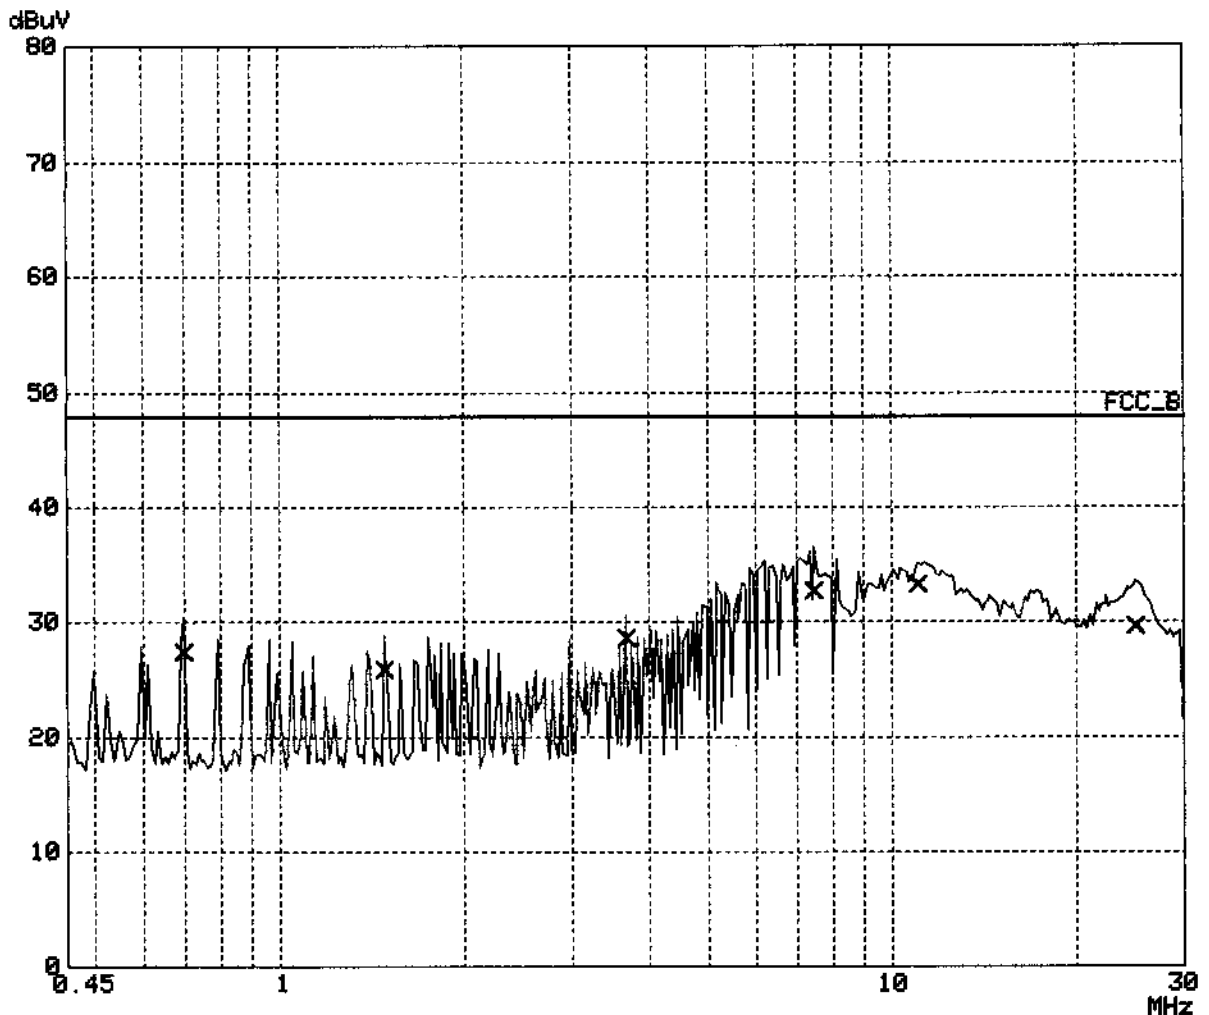

Intertek Testing Services


RF VOLTAGE

EUT: KWL-220
Manuf: Kai-Link
Op Cond: AMN-N
Operator: Kaysi
Test Spec: FCC Class B
Comment: EMI Receiver SN:835418/012
120V 60Hz 22C 59%RH TX at low channel
Date: 07. Feb 02 09:53

Scan Settings (1 Range)

----- Frequencies -----			----- Receiver Settings -----				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
450k	30M	8k	9k	PK	20ms	AUTO	LN OFF

Final Measurement: x QP
Meas Time: 1 s

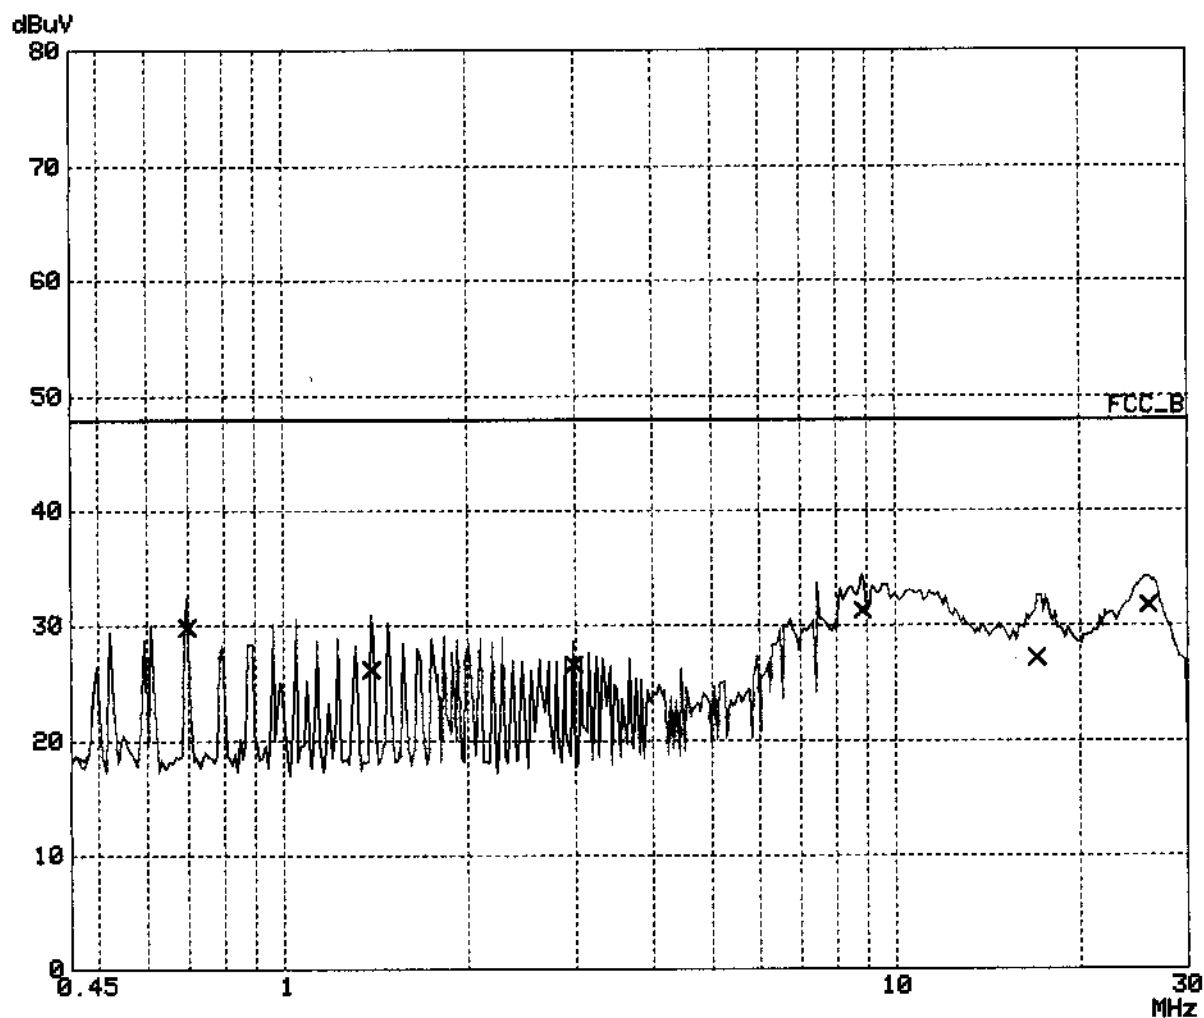

Intertek Testing Services


RF VOLTAGE

EUT: KWL-220
Manuf: Kai-Link
Op Cond: AMN-L
Operator: Kaysi
Test Spec: FCC Class B
Comment: EMI Receiver SN:835418/012
120V 60Hz 22C 59%RH TX at middle channel
Date: 07. Feb 02 10:11

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
450k	30M	8k	9k	PK	20ms AUTO	LN	OFF

Final Measurement: x QP
Meas Time: 1 s

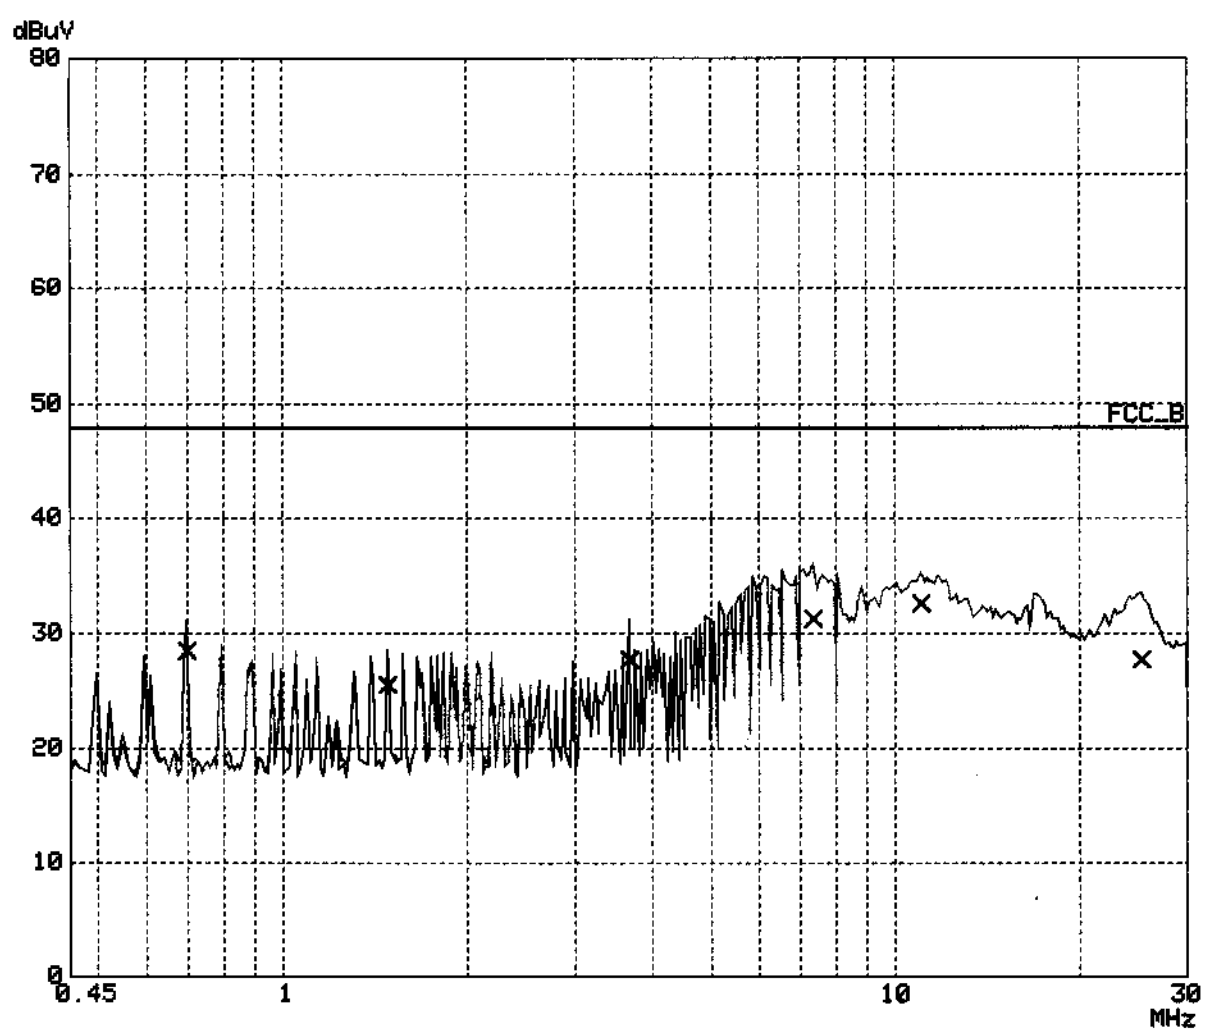

Intertek Testing Services


RF VOLTAGE

EUT: KWL-220
Manuf: Kai-Link
Op Cond: AMN-N
Operator: Kaysi
Test Spec: FCC Class B
Comment: EMI Receiver SN:835418/012
120V 60Hz 22C 59%RH TX at middle channel
Date: 07. Feb 02 10:19

Scan Settings (1 Range)

----- Frequencies -----			----- Receiver Settings -----				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
450k	30M	8k	9k	PK	20ms	AUTO LN	OFF

Final Measurement: x QP
Meas Time: 1 s

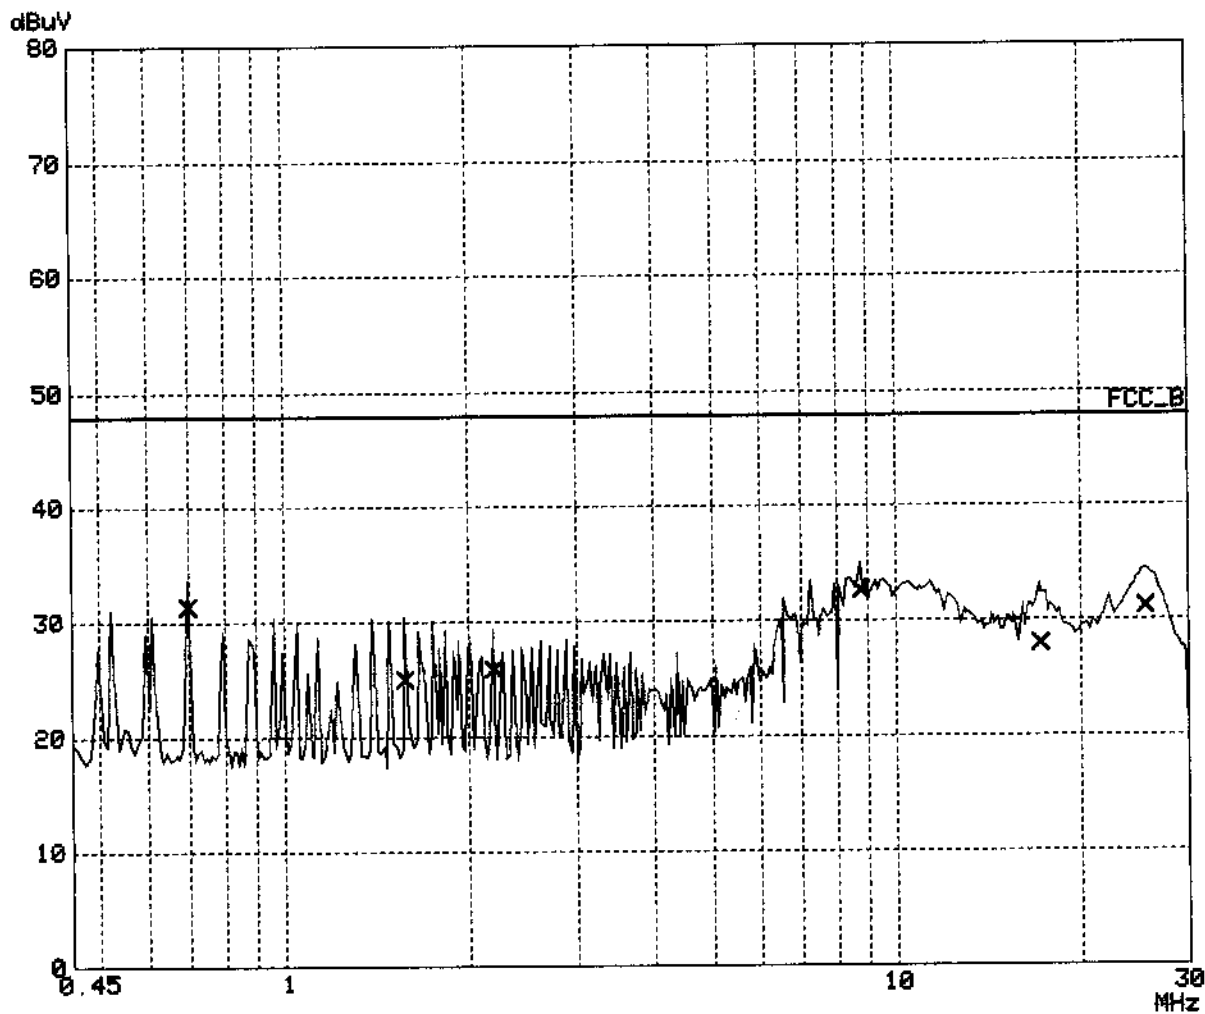

Intertek Testing Services

RF VOLTAGE


EUT: KWL-220
Manuf: Kai-Link
Op Cond: AMN-L
Operator: Kaysi
Test Spec: FCC Class B
Comment: EMI Receiver SN:835418/012
120V 60Hz 22C 59%RH TX at high channel
Date: 07. Feb 02 10:32

Scan Settings (1 Range)

----- Frequencies -----			----- Receiver Settings -----				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
450k	30M	8k	9k	PK	20ms	AUTO	LN OFF

Final Measurement: x QP

Meas Time: 1 s

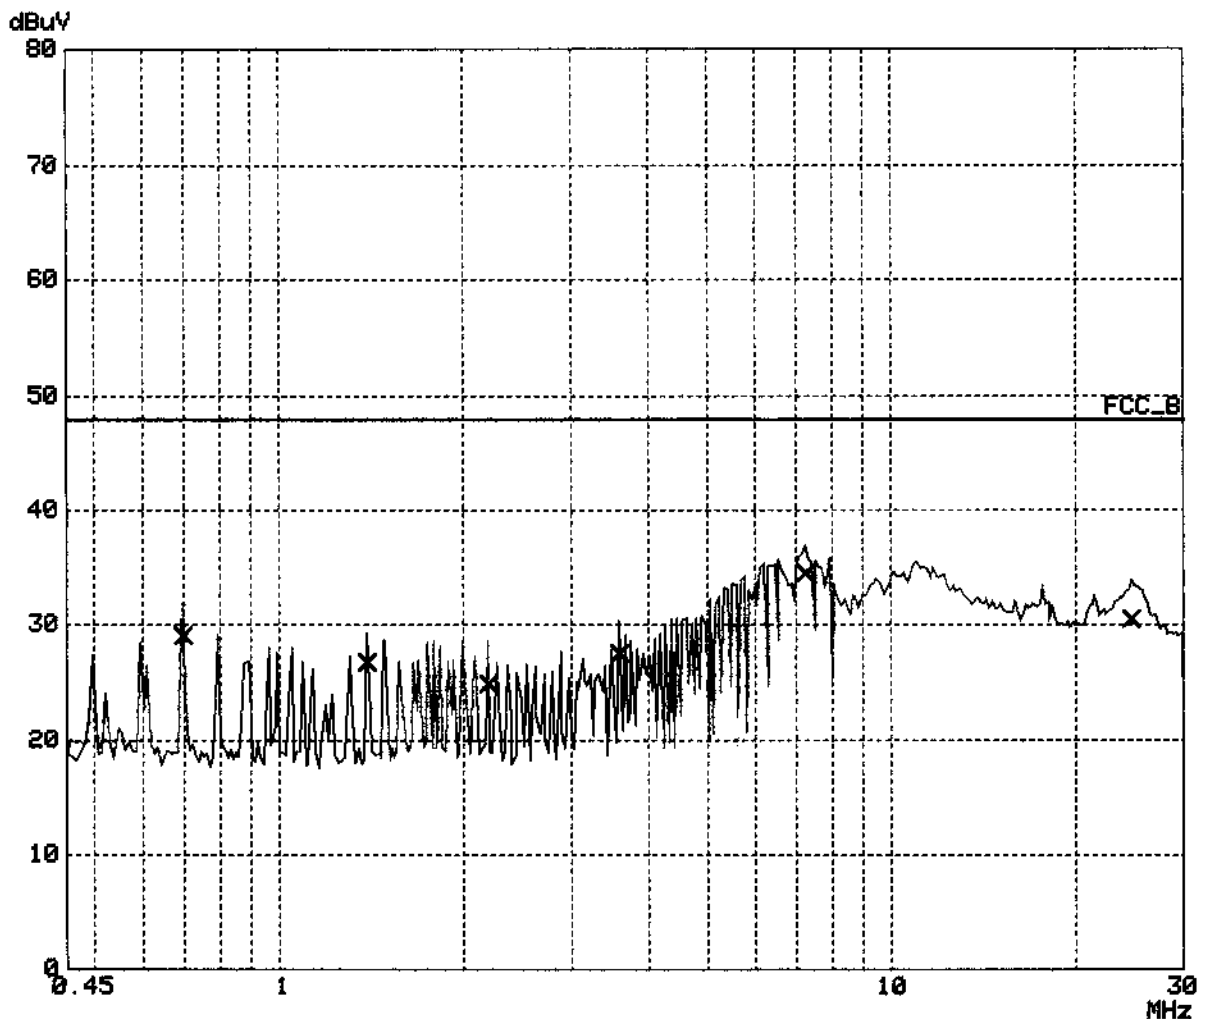

Intertek Testing Services

RF VOLTAGE

EUT: KWL-220
Manuf: Kai-Link
Op Cond: AMN-N
Operator: Kaysi
Test Spec: FCC Class B
Comment: EMI Receiver SN:835418/012
120V 60Hz 22C 59%RH TX at high channel
Date: 07. Feb 02 10:25

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
450k	30M	8k	9k	PK	20ms	AUTO LN	OFF

Final Measurement: x QP
Meas Time: 1 s

