



Shenzhen CTL Testing Technology Co., Ltd.  
Tel: +86-755-89486194 Fax: +86-755-26636041

## FCC PART 15 SUBPART C TEST REPORT

### Part 15.247

Report Reference No.: CTL1501220210-WF

Compiled by:  
( position+printed name+signature)

Happy Guo  
(File administrators)

Happy Guo

Tested by:  
( position+printed name+signature)

Nice Nong  
(Test Engineer)

Nice Nong

Approved by:  
( position+printed name+signature)

Tracy Qi  
(Manager)

Tracy Qi

Product Name.....: IP Camera

Model/Type reference.....: JM83910-H2V

List Model(s).....: JM83913-H2M

Trade Mark.....: LBtech

FCC ID.....: OIE-JM83910-H2V

Applicant's name.....: LB Technology Co., Ltd.

Address of applicant.....: No. 5 of Xiaoyang Rd, First Industrial Park, Tanzhou Town, Zhongshan City, Guangdong, China

Test Firm.....: Shenzhen CTL Testing Technology Co., Ltd.

Address of Test Firm.....: Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

Test specification.....:

Standard.....: FCC Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz

TRF Originator.....: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF.....: Dated 2011-01

Date of Receipt.....: June 15, 2015

Date of Test Date.....: June 15, 2015 - July 22, 2015

Data of Issue.....: July 22, 2015

Result.....: Positive

**Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**TEST REPORT**

|                                           |                                |
|-------------------------------------------|--------------------------------|
| <b>Test Report No. :</b> CTL1501220210-WF | July 22, 2015<br>Date of issue |
|-------------------------------------------|--------------------------------|

**Equipment under Test** : IP Camera

**Model /Type** : JM83910-H2V

Listed Models JM83913-H2M

Difference Description Only the color and model's name is different

**Applicant** : **LB Technology Co., Ltd.**

**Address** : No. 5 of Xiaoyang Rd, First Industrial Park, Tanzhou Town,  
Zhongshan City, Guangdong, China

**Manufacturer** **LB Technology Co., Ltd.**

Address No. 5 of Xiaoyang Rd, First Industrial Park, Tanzhou Town,  
Zhongshan City, Guangdong, China

**Test Result** according to the  
standards on page 4:

**Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

|           |                                                             |                  |
|-----------|-------------------------------------------------------------|------------------|
| <b>1.</b> | <b><u>TEST STANDARDS .....</u></b>                          | <b><u>4</u></b>  |
| <b>2.</b> | <b><u>SUMMARY .....</u></b>                                 | <b><u>5</u></b>  |
| 2.1.      | Equipment Under Test                                        | 5                |
| 2.2.      | Description of the Equipment under Test (EUT)               | 5                |
| 2.3.      | EUT operation mode                                          | 6                |
| 2.4.      | EUT configuration                                           | 6                |
| 2.5.      | NOTE                                                        | 6                |
| 2.6.      | Related Submittal(s) / Grant (s)                            | 6                |
| 2.7.      | Modifications                                               | 6                |
| <b>3.</b> | <b><u>TEST ENVIRONMENT .....</u></b>                        | <b><u>7</u></b>  |
| 3.1.      | Address of the test laboratory                              | 7                |
| 3.2.      | Test Facility                                               | 7                |
| 3.3.      | Environmental conditions                                    | 7                |
| 3.4.      | Configuration of Tested System                              | 7                |
| 3.5.      | Duty Cycle                                                  | 8                |
| 3.6.      | Statement of the measurement uncertainty                    | 8                |
| 3.7.      | Equipments Used during the Test                             | 9                |
| 3.8.      | Summary of Test Result                                      | 10               |
| <b>4.</b> | <b><u>TEST CONDITIONS AND RESULTS .....</u></b>             | <b><u>11</u></b> |
| 4.1.      | Conducted Emissions Test                                    | 11               |
| 4.2.      | Radiated Emission Test and Band Edge                        | 14               |
| 4.3.      | 6dB Bandwidth Measurement                                   | 22               |
| 4.4.      | Maximum Peak Output Power                                   | 30               |
| 4.5.      | Power Spectral Density Measurement                          | 32               |
| 4.6.      | Spurious RF Conducted Emission and Bandedge                 | 40               |
| 4.8.      | Antenna Requirement                                         | 56               |
| <b>5.</b> | <b><u>TEST SETUP PHOTOS OF THE EUT .....</u></b>            | <b><u>57</u></b> |
| <b>6.</b> | <b><u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT .....</u></b> | <b><u>59</u></b> |

## **1. TEST STANDARDS**

The tests were performed according to following standards:

**FCC Part 15.247:** Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz

**ANSI C63.10-2013:** American National Standard for Testing Unlicensed Wireless Devices.

**KDB Publication No. 558074 D01 v03r02 Guidance on Measurements for Digital Transmission Systems**

**ANSI C63.4-2014**



| Channel | Frequency(MHz) | Channel | Frequency(MHz) |
|---------|----------------|---------|----------------|
| 3       | 2422           | 8       | 2447           |
| 4       | 2427           | 9       | 2452           |
| 5       | 2432           |         |                |
| 6       | 2437           |         |                |
| 7       | 2442           |         |                |

### 2.3. EUT operation mode

Test Mode:

1. The EUT has been tested under normal operating condition.
2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed. Channel low (2412MHz), mid (2437MHz) and high (2462MHz) for 802.11b/g/n(HT20) and Channel low (2422MHz), mid (2437MHz) and high (2452MHz) for 802.11 n HT40 with highest data rate are chosen for full testing.
3. Test Mode:

| Test Mode(TM) | Description  | Remark                                     |
|---------------|--------------|--------------------------------------------|
| 1             | Transmitting | 802.11 b<br>2412MHz, 2437MHz, 2462MHz      |
| 2             | Transmitting | 802.11 g<br>2412MHz, 2437MHz, 2462MHz      |
| 3             | Transmitting | 802.11 n HT20<br>2412MHz, 2437MHz, 2462MHz |
| 4             | Transmitting | 802.11 n HT40<br>2422MHz, 2437MHz, 2452MHz |

### 2.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

○ - supplied by the manufacturer

● - supplied by the lab

o AC Adapter

Manufacturer: I.T.E.

Model No.: FJ-SW0502000DU

### 2.5. NOTE

1. The frequency bands used in this EUT are listed as follows:

| Frequency Band(MHz) | 2400-2483.5 | 5150-5350 | 5470-5725 | 5725-5850 |
|---------------------|-------------|-----------|-----------|-----------|
| 802.11b             | √           | —         | —         | —         |
| 802.11g             | √           | —         | —         | —         |
| 802.11n(20MHz)      | √           | —         | —         | —         |
| 802.11n(40MHz)      | √           | —         | —         | —         |

2. The EUT incorporates a SISO function, Physically, the EUT provides one completed transmitter and one completed receiver.

| Modulation Mode | TX Function |
|-----------------|-------------|
| 802.11b         | 1TX         |
| 802.11g         | 1TX         |
| 802.11n (20MHz) | 1TX         |
| 802.11n (40MHz) | 1TX         |

### 2.6. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCCID: **OIE-JM83910-H2V** filing to comply with of the FCC part15.247 Rules.

### 2.7. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.  
Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 (2013) and CISPR Publication 22.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.


3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

|                       |              |
|-----------------------|--------------|
| Temperature:          | 15-35 ° C    |
| Humidity:             | 30-60 %      |
| Atmospheric pressure: | 950-1050mbar |

3.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System

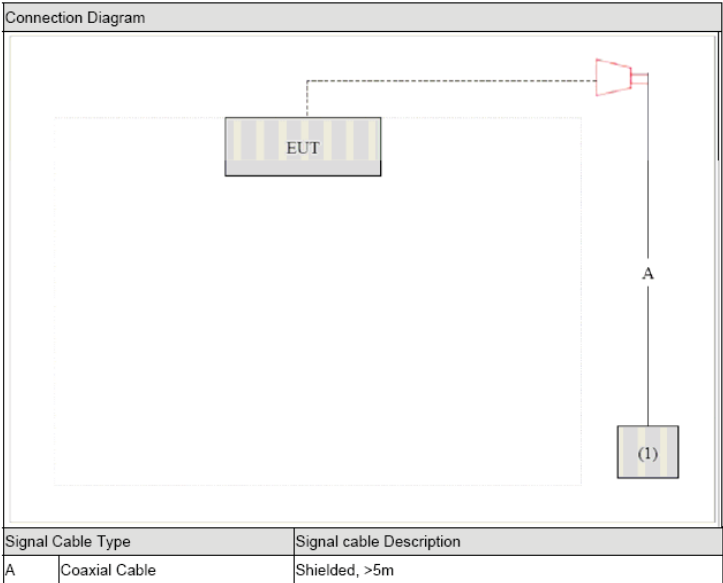

### 3.5. Duty Cycle

| Operated Mode for Worst Duty Cycle                                          |                |                  |
|-----------------------------------------------------------------------------|----------------|------------------|
| <input type="checkbox"/> Operated normally mode for worst duty cycle        |                |                  |
| <input checked="" type="checkbox"/> Operated test mode for worst duty cycle |                |                  |
| Mode                                                                        | Duty Cycle (%) | Duty Factor (dB) |
| 11b                                                                         | 100            | 0                |
| 11g                                                                         | 100            | 0                |
| 11n HT20                                                                    | 100            | 0                |
| 11n HT40                                                                    | 100            | 0                |

### 3.6. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

| Test                  | Range           | Measurement Uncertainty | Notes |
|-----------------------|-----------------|-------------------------|-------|
| Radiated Emission     | 30~1000MHz      | 4.10dB                  | (1)   |
| Radiated Emission     | 1~12.75GHz      | 4.32dB                  | (1)   |
| Radiated Emission     | 12.75GHz-25 GHz | 4.68dB                  | (1)   |
| Conducted Disturbance | 0.15~30MHz      | 3.20dB                  | (1)   |

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 3.7. Equipments Used during the Test

| Test Equipment             | Manufacturer         | Model No.             | Serial No.   | Calibration Date | Calibration Due Date |
|----------------------------|----------------------|-----------------------|--------------|------------------|----------------------|
| ULTRA-ROADBAND ANTENNA     | Sunol Sciences Corp. | JB1                   | A061713      | 2015/06/02       | 2016/06/01           |
| EMI Test Receiver          | R&S                  | ESCI                  | 103710       | 2015/06/02       | 2016/06/01           |
| Spectrum Analyzer          | Agilent              | E4407B                | MY41440676   | 2015/05/21       | 2016/05/20           |
| Controller                 | EM Electronics       | Controller EM 1000    | N/A          | 2015/05/21       | 2016/05/20           |
| Horn Antenna               | Sunol Sciences Corp. | DRH-118               | A062013      | 2015/05/19       | 2016/05/18           |
| Active Loop Antenna        | Daze                 | ZN30900A              | N/A          | 2015/05/19       | 2016/05/18           |
| LISN                       | R&S                  | ENV216                | 3560.6550.12 | 2015/06/02       | 2016/06/01           |
| LISN                       | R&S                  | ESH2-Z5               | 860014/010   | 2015/06/02       | 2016/06/01           |
| Power Sensor               | Anritsu              | MA2411B               | 0738552      | 2015/05/19       | 2016/05/18           |
| Amplifier                  | Agilent              | 8349B                 | 3008A02306   | 2015/05/19       | 2016/05/18           |
| Amplifier                  | Agilent              | 8447D                 | 2944A10176   | 2015/05/19       | 2016/05/18           |
| Transient Limiter          | SCHWARZCECK          | VTSD 9561F            | 9666         | 2015/06/02       | 2016/06/01           |
| Radio Communication Tester | R&S                  | CMU200                | 115419       | 2015/05/22       | 2016/05/21           |
| Temperature/Humidity Meter | Gangxing             | CTH-608               | 02           | 2015/05/20       | 2016/05/19           |
| SIGNAL GENERATOR           | Agilent              | E4421B                | US40051744   | 2015/05/20       | 2016/05/19           |
| Wideband Peak Power Meter  | Anritsu              | ML2495A               | 220.23.35    | 2015/05/20       | 2016/05/19           |
| Climate Chamber            | ESPEC                | EL-10KA               | A20120523    | 2015/05/20       | 2016/05/19           |
| High-Pass Filter           | K&L                  | 9SH10-2700/X12750-O/O | N/A          | 2015/05/20       | 2016/05/19           |
| High-Pass Filter           | K&L                  | 41H10-1375/U12750-O/O | N/A          | 2015/05/20       | 2016/05/19           |
| RF Cable                   | HUBER+SUHNER         | RG214                 | N/A          | 2015/05/20       | 2016/05/19           |

### 3.8. Summary of Test Result

| FCC PART 15                     |                                     |      |
|---------------------------------|-------------------------------------|------|
| FCC Part 15.207                 | AC Power Conducted Emission         | PASS |
| FCC Part 15.247(a)(2)           | 6dB Bandwidth                       | PASS |
| FCC Part 15.247(d)              | Spurious RF Conducted Emission      | PASS |
| FCC Part 15.247(b)              | Maximum Peak Output Power           | PASS |
| FCC Part 15.247(e)              | Power Spectral Density              | PASS |
| FCC Part 15.109/ 15.205/ 15.209 | Radiated Emissions                  | PASS |
| FCC Part 15.247(d)              | Band Edge Compliance of RF Emission | PASS |
| FCC Part 15.203/15.247 (b)      | Antenna Requirement                 | PASS |

Remark: The measurement uncertainty is not included in the test result.

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.


| Test Items                                                                                                       | Mode            | Data Rate | Channel |
|------------------------------------------------------------------------------------------------------------------|-----------------|-----------|---------|
| AC Power Conducted Emission                                                                                      | Normal Link     | 11 Mbps   | 1       |
| Maximum Peak Conducted Output Power<br>Power Spectral Density<br>6dB Bandwidth<br>Spurious RF conducted emission | 11b/DSSS        | 11 Mbps   | 1/6/11  |
|                                                                                                                  | 11g/OFDM        | 54 Mbps   | 1/6/11  |
|                                                                                                                  | 11n(20MHz)/OFDM | 65Mbps    | 1/6/11  |
|                                                                                                                  | 11n(40MHz)/OFDM | 150Mbps   | 3/6/9   |
| Radiated Emission 30MHz~1GHz                                                                                     | 11b/DSSS        | 11 Mbps   | 1/6/11  |
|                                                                                                                  | 11g/OFDM        | 54 Mbps   | 1/6/11  |
|                                                                                                                  | 11n(20MHz)/OFDM | 65Mbps    | 1/6/11  |
|                                                                                                                  | 11n(40MHz)/OFDM | 150Mbps   | 3/6/9   |
| Radiated Emission 1GHz~10th Harmonic                                                                             | 11b/DSSS        | 11 Mbps   | 1/6/11  |
|                                                                                                                  | 11g/OFDM        | 54 Mbps   | 1/6/11  |
|                                                                                                                  | 11n(20MHz)/OFDM | 65Mbps    | 1/6/11  |
|                                                                                                                  | 11n(40MHz)/OFDM | 150Mbps   | 3/6/9   |
| Band Edge Compliance of RF Emission                                                                              | 11b/DSSS        | 11 Mbps   | 1/11    |
|                                                                                                                  | 11g/OFDM        | 54 Mbps   | 1/11    |
|                                                                                                                  | 11n(20MHz)/OFDM | 65Mbps    | 1/11    |
|                                                                                                                  | 11n(40MHz)/OFDM | 150Mbps   | 3/9     |

Note1: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

## 4. TEST CONDITIONS AND RESULTS

### 4.1. Conducted Emissions Test

#### TEST CONFIGURATION

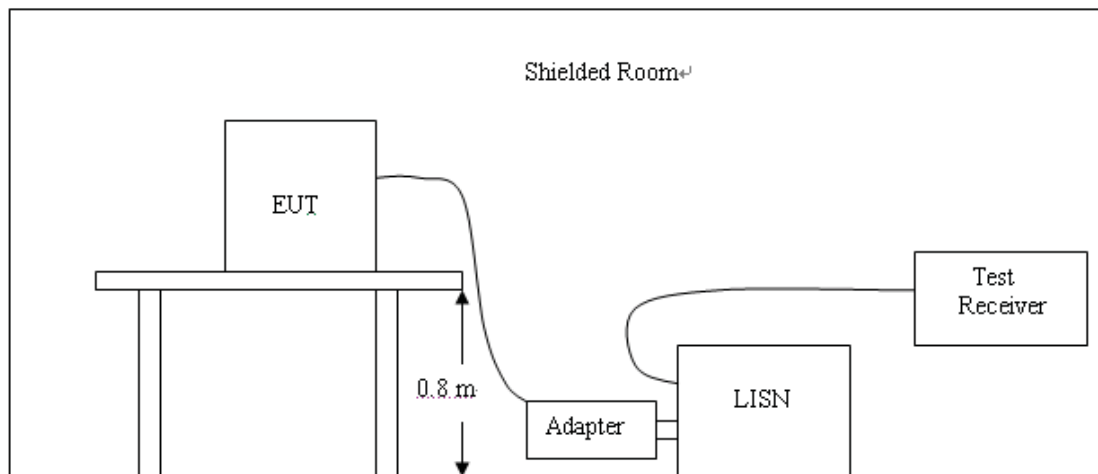

#### TEST PROCEDURE

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following:

| Frequency<br>(MHz) | Maximum RF Line Voltage (dBμV) |      |         |        |
|--------------------|--------------------------------|------|---------|--------|
|                    | CLASS A                        |      | CLASS B |        |
|                    | Q.P.                           | Ave. | Q.P.    | Ave.   |
| 0.15 - 0.50        | 79                             | 66   | 66-56*  | 56-46* |
| 0.50 - 5.00        | 73                             | 60   | 56      | 46     |
| 5.00 - 30.0        | 73                             | 60   | 60      | 50     |

\* Decreasing linearly with the logarithm of the frequency


For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

1. Please follow the guidelines in ANSI C63.4-2014.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

**The RBW/VBW for 150KHz to 30MHz: 9KHz**

**TEST RESULTS****SCAN TABLE: "Voltage (9K-30M)FIN"**

Short Description: 150K-30M Voltage

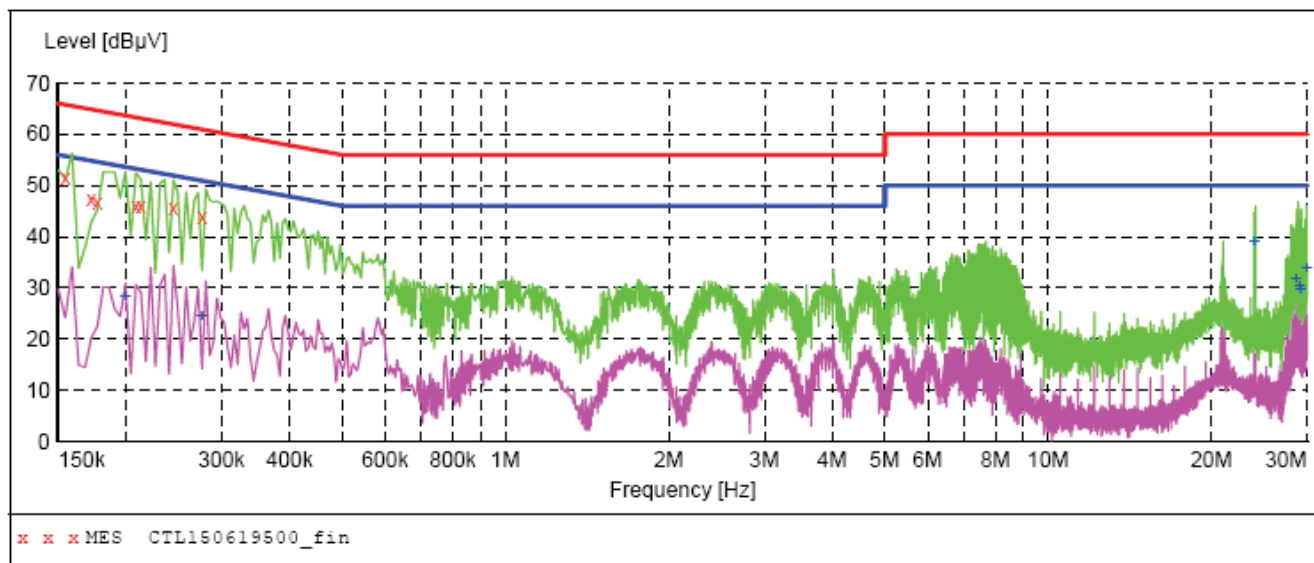**MEASUREMENT RESULT: "CTL150619500\_fin"**

6/19/2015 8:46AM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.154500         | 51.50         | 10.2         | 66            | 14.3         | QP       | N    | GND |
| 0.172500         | 47.20         | 10.2         | 65            | 17.6         | QP       | N    | GND |
| 0.177000         | 46.70         | 10.2         | 65            | 17.9         | QP       | N    | GND |
| 0.208500         | 46.10         | 10.2         | 63            | 17.2         | QP       | N    | GND |
| 0.213000         | 45.80         | 10.2         | 63            | 17.3         | QP       | N    | GND |
| 0.244500         | 45.60         | 10.2         | 62            | 16.3         | QP       | N    | GND |


**MEASUREMENT RESULT: "CTL150619500\_fin2"**

6/19/2015 8:46AM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.199500         | 28.30         | 10.2         | 54            | 25.3         | AV       | N    | GND |
| 0.276000         | 24.60         | 10.2         | 51            | 26.3         | AV       | N    | GND |
| 24.000000        | 39.20         | 11.1         | 50            | 10.8         | AV       | N    | GND |
| 28.639500        | 31.60         | 11.2         | 50            | 18.4         | AV       | N    | GND |
| 29.058000        | 30.50         | 11.2         | 50            | 19.5         | AV       | N    | GND |
| 29.179500        | 29.70         | 11.2         | 50            | 20.3         | AV       | N    | GND |

**SCAN TABLE: "Voltage (9K-30M) FIN"**

Short Description: 150K-30M Voltage

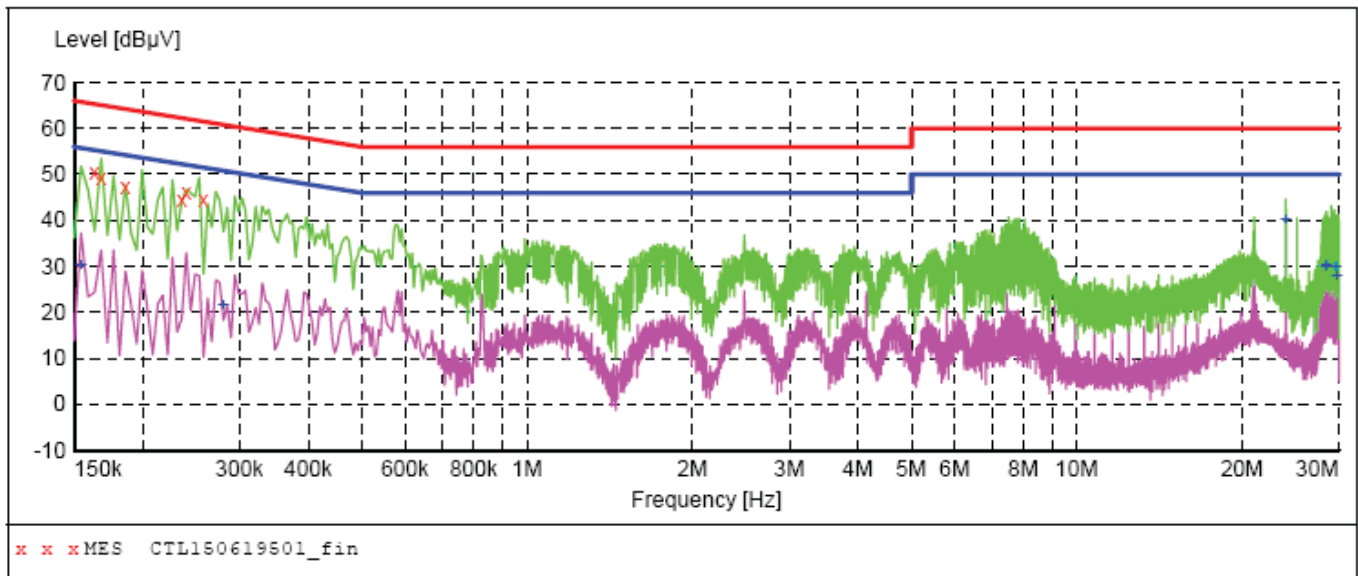**MEASUREMENT RESULT: "CTL150619501\_fin"**

6/19/2015 8:49AM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.163500         | 50.60         | 10.2         | 65            | 14.7         | QP       | L1   | GND |
| 0.168000         | 49.10         | 10.2         | 65            | 16.0         | QP       | L1   | GND |
| 0.186000         | 47.30         | 10.2         | 64            | 16.9         | QP       | L1   | GND |
| 0.235500         | 44.30         | 10.2         | 62            | 18.0         | QP       | L1   | GND |
| 0.240000         | 46.00         | 10.2         | 62            | 16.1         | QP       | L1   | GND |
| 0.258000         | 44.30         | 10.2         | 62            | 17.2         | QP       | L1   | GND |

**MEASUREMENT RESULT: "CTL150619501\_fin2"**


6/19/2015 8:49AM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.154500         | 30.20         | 10.2         | 56            | 25.6         | AV       | L1   | GND |
| 0.280500         | 21.60         | 10.2         | 51            | 29.2         | AV       | L1   | GND |
| 24.000000        | 40.20         | 11.1         | 50            | 9.8          | AV       | L1   | GND |
| 28.396500        | 29.90         | 11.2         | 50            | 20.1         | AV       | L1   | GND |
| 28.459500        | 30.20         | 11.2         | 50            | 19.8         | AV       | L1   | GND |
| 29.661000        | 29.80         | 11.3         | 50            | 20.2         | AV       | L1   | GND |


## 4.2. Radiated Emission Test and Band Edge

### TEST CONFIGURATION


#### (A) Radiated Emission Test Set-Up, Frequency Below 30MHz

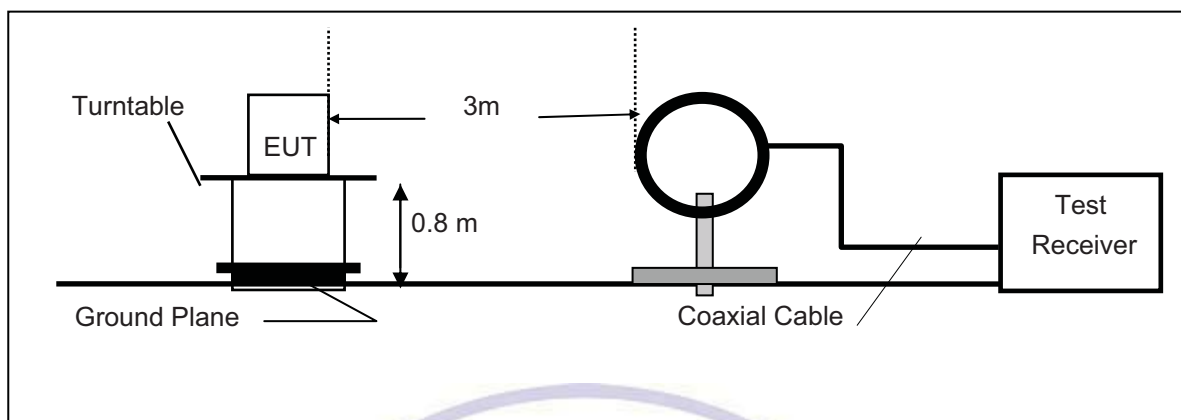

#### (B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

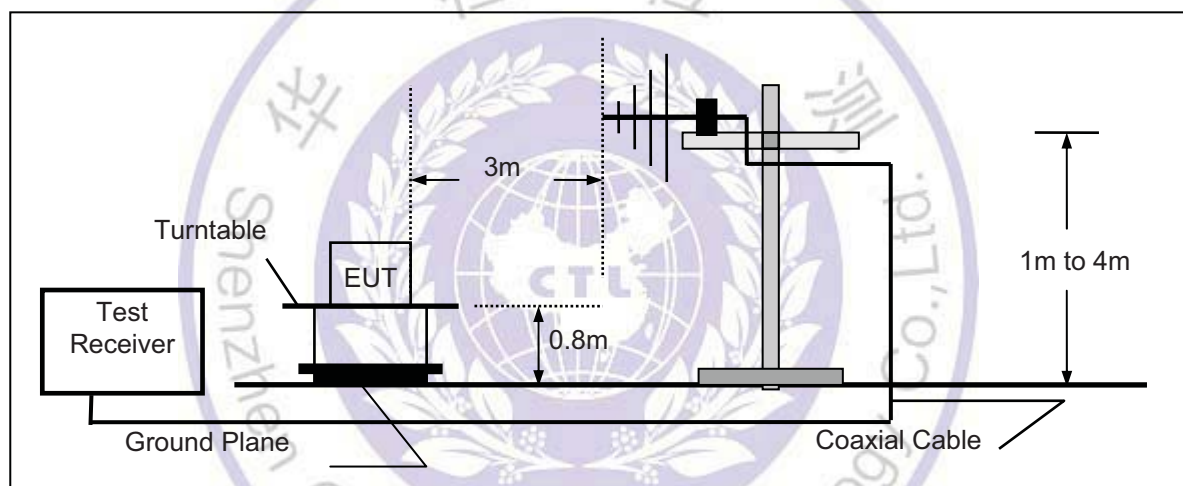

#### (C) Radiated Emission Test Set-Up, Frequency above 1000MHz

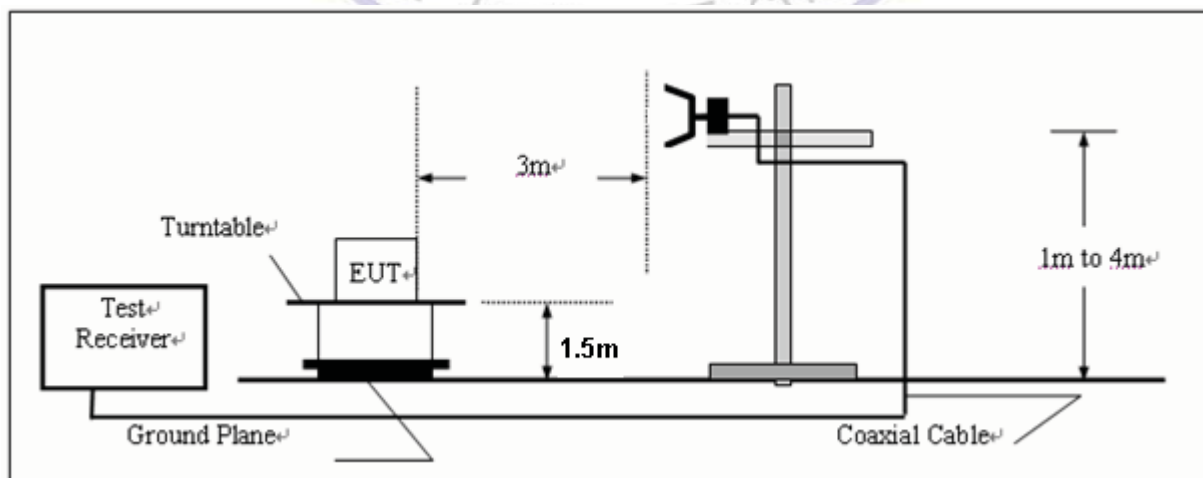

## **FIELD STRENGTH CALCULATION**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

|                           |                                            |
|---------------------------|--------------------------------------------|
| Where FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| RA = Reading Amplitude    | AG = Amplifier Gain                        |
| AF = Antenna Factor       |                                            |

## **TEST PROCEDURE**

1. The testing follows FCC KDB Publication No. 558074 D01 v03r02 (Measurement Guidelines of DTS).
2. The EUT was placed on a turn table which is 0.8m above ground plane(1.5m for above 1GHz).
3. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
4. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for  $f > 1$  GHz, 100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Repeat above procedures until all frequency measurements have been completed.

### **Note:**

When doing emission measurement above 1GHz, the horn antenna will be bended down a little (as horn antenna has the narrow beamwidth) in order to keeping the antenna in the “cone of radiation” of EUT. The 3dB beamwidth is 60 degrees for H-plane and 90 degrees for E-plane.

## **LIMIT**

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

| Frequency<br>(MHz) | Distance<br>(Meters) | Radiated<br>(dBμV/m) | Radiated<br>(μV/m) |
|--------------------|----------------------|----------------------|--------------------|
| 30-88              | 3                    | 40.0                 | 100                |
| 88-216             | 3                    | 43.5                 | 150                |
| 216-960            | 3                    | 46.0                 | 200                |
| Above 960          | 3                    | 54.0                 | 500                |

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

**TEST RESULTS****9KHz-30MHz:**

| Freq.<br>(MHz) | Level<br>(dBuV) | Over Limit<br>(dB) | Limit Line<br>(dBuV) | Remark   |
|----------------|-----------------|--------------------|----------------------|----------|
| -              | -               | -                  | -                    | See Note |

Note: The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor= 40 log (specific distance/ test distance) (dB);


Limit line= specific limits (dBuV) + distance extrapolation factor.

**Below 1GHz:**

The radiated measurement are performed the each test mode (b/g/n) and channel (low/mid/high), the datum recorded below (802.11b mode, the middle channel) is the worst case for all the test mode and channel.

***SWEEP TABLE: "test (30M-1G)"***

|                    |           |                |          |         |            |
|--------------------|-----------|----------------|----------|---------|------------|
| Short Description: |           | Field Strength |          |         |            |
| Start              | Stop      | Detector       | Meas.    | IF      | Transducer |
| Frequency          | Frequency |                | Time     | Bandw.  |            |
| 30.0 MHz           | 1.0 GHz   | MaxPeak        | 300.0 ms | 120 kHz | JB1        |

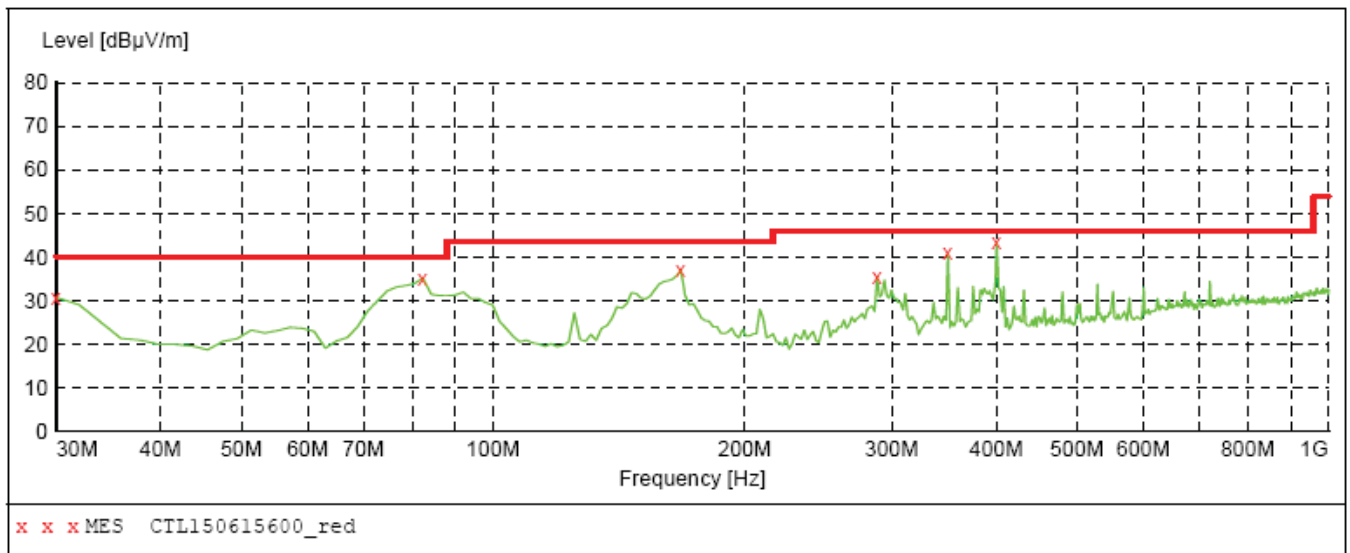
***MEASUREMENT RESULT: "CTL150615600\_red"***

6/15/2015 9:04AM

| Frequency<br>MHz | Level<br>dBuV/m | Transd<br>dB | Limit<br>dBuV/m | Margin<br>dB | Det. | Height<br>cm | Azimuth<br>deg | Polarization |
|------------------|-----------------|--------------|-----------------|--------------|------|--------------|----------------|--------------|
| 30.000000        | 30.70           | 21.1         | 40.0            | 9.3          | ---  | 0.0          | 0.00           | VERTICAL     |
| 82.380000        | 35.10           | 9.0          | 40.0            | 4.9          | ---  | 0.0          | 0.00           | VERTICAL     |
| 167.740000       | 36.90           | 13.7         | 43.5            | 6.6          | ---  | 0.0          | 0.00           | VERTICAL     |
| 288.020000       | 35.50           | 15.4         | 46.0            | 10.5         | ---  | 0.0          | 0.00           | VERTICAL     |
| 350.100000       | 40.80           | 16.9         | 46.0            | 5.2          | ---  | 0.0          | 0.00           | VERTICAL     |
| 400.540000       | 43.30           | 18.1         | 46.0            | 2.7          | ---  | 0.0          | 0.00           | VERTICAL     |

***SWEEP TABLE: "test (30M-1G)"***

| Short Description: |           | Field Strength |          |         |            |
|--------------------|-----------|----------------|----------|---------|------------|
| Start              | Stop      | Detector       | Meas.    | IF      | Transducer |
| Frequency          | Frequency |                | Time     | Bandw.  |            |
| 30.0 MHz           | 1.0 GHz   | MaxPeak        | 300.0 ms | 120 kHz | JB1        |

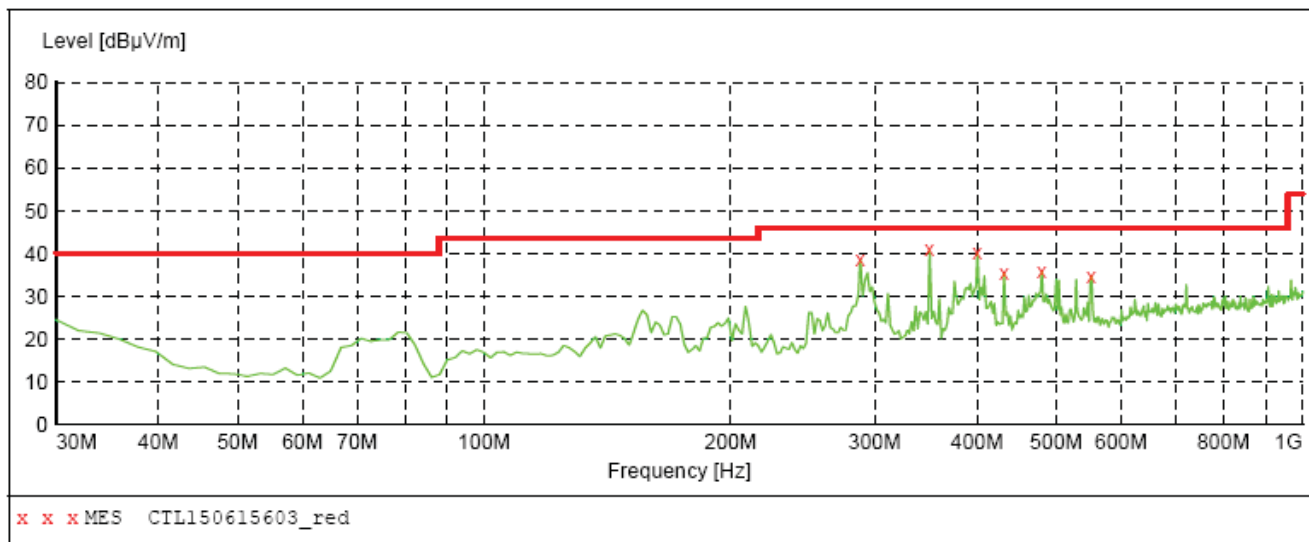***MEASUREMENT RESULT: "CTL150615603\_red"***

6/15/2015 9:06AM

| Frequency<br>MHz | Level<br>dBuV/m | Transd<br>dB | Limit<br>dBuV/m | Margin<br>dB | Det. | Height<br>cm | Azimuth<br>deg | Polarization |
|------------------|-----------------|--------------|-----------------|--------------|------|--------------|----------------|--------------|
| 288.020000       | 38.50           | 15.4         | 46.0            | 7.5          | ---  | 0.0          | 0.00           | HORIZONTAL   |
| 350.100000       | 40.80           | 16.9         | 46.0            | 5.2          | ---  | 0.0          | 0.00           | HORIZONTAL   |
| 400.540000       | 40.10           | 18.1         | 46.0            | 5.9          | ---  | 0.0          | 0.00           | HORIZONTAL   |
| 431.580000       | 35.30           | 18.9         | 46.0            | 10.7         | ---  | 0.0          | 0.00           | HORIZONTAL   |
| 480.080000       | 35.90           | 20.1         | 46.0            | 10.1         | ---  | 0.0          | 0.00           | HORIZONTAL   |
| 551.860000       | 34.80           | 21.1         | 46.0            | 11.2         | ---  | 0.0          | 0.00           | HORIZONTAL   |



## Above 1GHz:

802.11b

| CH | Antenna | Frequency (MHz) | Reading Level (dBuV/m) | Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|----|---------|-----------------|------------------------|-------------|------------------------|----------------|-------------|----------|
| 1  | V       | 2411.9          | 83.0                   | 30.8        | 113.8                  | Fundamental    | /           | PK       |
|    | V       | 3200            | 41.7                   | -0.6        | 41.1                   | 54(note3)      | 12.9        | PK       |
|    | V       | 2390            | 36.4                   | 32.2        | 68.6                   | 74             | 5.4         | PK       |
|    | V       | 2390            | 17.2                   | 32.2        | 49.4                   | 54             | 4.6         | AV       |
|    | V       | 2400            | 39.1                   | 32.1        | 71.2                   | 74             | 2.8         | PK       |
|    | V       | 2400            | 20.2                   | 32.1        | 52.3                   | 54             | 1.7         | AV       |
|    | V       | 4824            | 48.1                   | 2.6         | 50.7                   | 54(note3)      | 3.3         | PK       |
|    | V       | 7236            | 59.1                   | 8.1         | 67.2                   | 74             | 6.8         | PK       |
|    | V       | 7236            | 40.0                   | 8.9         | 48.9                   | 54             | 5.1         | AV       |
|    | H       | 24000           | 61.5                   | -8.9        | 52.6                   | 54             | 1.4         | PK       |
| 6  | V       | 2437            | 81.9                   | 31.2        | 113.1                  | Fundamental    | /           | PK       |
|    | V       | 3200            | 43.4                   | -0.6        | 42.8                   | 54(note3)      | 11.2        | PK       |
|    | V       | 4876            | 47.3                   | 2.8         | 50.1                   | 54(note3)      | 3.9         | PK       |
|    | V       | 7298.5          | 59.4                   | 8.8         | 68.2                   | 74             | 5.8         | PK       |
|    | V       | 7298.5          | 42.5                   | 8.1         | 50.6                   | 54             | 3.4         | AV       |
|    | H       | 24000           | 61.5                   | -8.9        | 52.6                   | 54             | 1.4         | PK       |
| 11 | V       | 2462.3          | 81.8                   | 30.9        | 112.7                  | Fundamental    | /           | PK       |
|    | V       | 2483.5          | 33.3                   | 30.2        | 63.5                   | 74             | 10.5        | PK       |
|    | V       | 2483.5          | 17.4                   | 30.2        | 47.6                   | 54             | 6.4         | AV       |
|    | V       | 3200            | 46.0                   | -0.6        | 45.4                   | 54(note3)      | 8.6         | PK       |
|    | V       | 4924            | 47.7                   | 3.0         | 50.7                   | 54(note3)      | 3.3         | PK       |
|    | V       | 7386            | 58.2                   | 8.9         | 67.1                   | 74             | 6.9         | PK       |
|    | V       | 7386            | 41.0                   | 8.9         | 49.9                   | 54             | 4.1         | AV       |
|    | H       | 24000           | 61.5                   | -8.9        | 52.6                   | 54             | 1.4         | PK       |

Note: 1. Measure Level = Reading Level + Factor.

2. The test results which are attenuated more than 20 dB below the permissible value limit (the test frequency range: 9kHz~30MHz, 18GHz~25GHz), therefore no data appear in the report.

3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

Remark: RBW 1MHz VBW 3MHz peak detector for PK value, RMS detector for AV value

802.11g

| CH | Antenna | Frequency (MHz) | Reading Level (dBuV/m) | Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|----|---------|-----------------|------------------------|-------------|------------------------|----------------|-------------|----------|
| 1  | V       | 2412.1          | 78.3                   | 31.9        | 110.2                  | Fundamental    | /           | PK       |
|    | V       | 2390            | 37.1                   | 32.2        | 69.3                   | 74             | 4.7         | PK       |
|    | V       | 2390            | 17.2                   | 32.2        | 49.4                   | 54             | 4.6         | AV       |
|    | V       | 2400            | 39.5                   | 32.1        | 71.6                   | 74             | 2.4         | PK       |
|    | V       | 2400            | 20.6                   | 32.1        | 52.7                   | 54             | 1.3         | AV       |
|    | V       | 3200            | 48.7                   | -0.6        | 48.1                   | 54(note3)      | 5.9         | PK       |
|    | V       | 4824            | 46.2                   | 2.6         | 48.8                   | 54(note3)      | 5.2         | PK       |
|    | V       | 7236            | 60.6                   | 8.9         | 69.5                   | 74             | 4.5         | PK       |
|    | V       | 7236            | 41.4                   | 8.9         | 50.3                   | 54             | 3.7         | AV       |
|    | H       | 24000           | 61.5                   | -8.9        | 52.6                   | 54             | 1.4         | PK       |
| 6  | V       | 2437            | 78.5                   | 31.2        | 109.7                  | Fundamental    | /           | PK       |
|    | V       | 3200            | 43.8                   | -0.6        | 43.2                   | 54(note3)      | 10.8        | PK       |
|    | V       | 4876            | 46.3                   | 2.8         | 49.1                   | 54(note3)      | 4.9         | PK       |
|    | V       | 7298.5          | 59.4                   | 8.8         | 68.2                   | 74             | 5.8         | PK       |
|    | V       | 7298.5          | 40.8                   | 8.8         | 49.6                   | 54             | 4.4         | AV       |
|    | H       | 24000           | 61.5                   | -8.9        | 52.6                   | 54             | 1.4         | PK       |
| 11 | V       | 2462.3          | 79.6                   | 30.9        | 110.5                  | Fundamental    | /           | PK       |
|    | V       | 2483.5          | 34.0                   | 30.2        | 64.2                   | 74             | 9.8         | PK       |
|    | V       | 2483.5          | 16.6                   | 30.2        | 46.8                   | 54             | 7.2         | AV       |
|    | V       | 3200            | 44.7                   | -0.6        | 44.1                   | 54(note3)      | 9.9         | PK       |
|    | V       | 4927            | 45.4                   | 3.0         | 48.4                   | 54(note3)      | 5.6         | PK       |
|    | V       | 7386            | 58.4                   | 8.9         | 67.3                   | 74             | 6.7         | PK       |
|    | V       | 7386            | 40.3                   | 8.9         | 49.2                   | 54             | 4.8         | AV       |
|    | H       | 24000           | 61.5                   | -8.9        | 52.6                   | 54             | 1.4         | PK       |

Note: 1. Measure Level = Reading Level + Factor.

2. The test results which are attenuated more than 20 dB below the permissible value limit (the test frequency range: 9kHz~30MHz, 18GHz~25GHz), therefore no data appear in the report.

3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

Remark: RBW 1MHz VBW 3MHz peak detector for PK value, RMS detector for AV value

802.11n(20MHz)

| CH | Antenna | Frequency (MHz) | Reading Level (dBuV/m) | Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|----|---------|-----------------|------------------------|-------------|------------------------|----------------|-------------|----------|
| 1  | V       | 2411.9          | 78.5                   | 30.7        | 109.2                  | Fundamental    | /           | PK       |
|    | V       | 2390            | 35.5                   | 32.2        | 67.7                   | 74             | 6.3         | PK       |
|    | V       | 2390            | 17.4                   | 32.2        | 49.6                   | 54             | 4.4         | AV       |
|    | V       | 2400            | 39.0                   | 32.1        | 71.1                   | 74             | 2.9         | PK       |
|    | V       | 2400            | 19.3                   | 32.1        | 51.4                   | 54             | 2.6         | AV       |
|    | V       | 3200            | 43.2                   | -0.6        | 42.6                   | 54(note3)      | 11.4        | PK       |
|    | V       | 4824            | 48.7                   | 2.6         | 51.3                   | 54(note3)      | 2.7         | PK       |
|    | V       | 7236            | 60.9                   | 8.9         | 69.8                   | 74             | 4.2         | PK       |
|    | V       | 7236            | 40.7                   | 8.9         | 49.6                   | 54             | 4.4         | AV       |
|    | H       | 24000           | 61.5                   | -8.9        | 52.6                   | 54             | 1.4         | PK       |
| 6  | V       | 2437            | 78.5                   | 31.2        | 109.7                  | Fundamental    | /           | PK       |
|    | V       | 3200            | 46.7                   | -0.6        | 46.1                   | 54(note3)      | 7.9         | PK       |
|    | V       | 4876            | 47.8                   | 2.8         | 50.6                   | 54(note3)      | 3.4         | PK       |
|    | V       | 7298.5          | 59.9                   | 8.8         | 68.7                   | 74             | 5.3         | PK       |
|    | V       | 7298.5          | 40.5                   | 8.8         | 49.3                   | 54             | 4.7         | AV       |
|    | H       | 24000           | 61.5                   | -8.9        | 52.6                   | 54             | 1.4         | PK       |
| 11 | V       | 2462.3          | 77.9                   | 30.9        | 108.8                  | Fundamental    | /           | PK       |
|    | V       | 2483.5          | 35.7                   | 30.2        | 65.9                   | 74             | 8.1         | PK       |
|    | V       | 2483.5          | 17.5                   | 30.2        | 47.7                   | 54             | 6.3         | AV       |
|    | V       | 3200            | 45.5                   | -0.6        | 44.9                   | 54(note3)      | 9.1         | PK       |
|    | V       | 4927            | 47.5                   | 3.0         | 50.5                   | 54(note3)      | 3.5         | PK       |
|    | V       | 7386            | 60.7                   | 9.0         | 69.7                   | 74             | 4.3         | PK       |
|    | V       | 7386            | 39.1                   | 9.0         | 48.1                   | 54             | 5.9         | AV       |
|    | H       | 24000           | 61.5                   | -8.9        | 52.6                   | 54             | 1.4         | PK       |

Note: 1. Measure Level = Reading Level + Factor.

2. The test results which are attenuated more than 20 dB below the permissible value limit (the test frequency range: 9kHz~30MHz, 18GHz~25GHz), therefore no data appear in the report.

3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

Remark: RBW 1MHz VBW 3MHz peak detector for PK value, RMS detector for AV value

802.11n(40MHz)

| CH | Antenna | Frequency (MHz) | Reading Level (dBuV/m) | Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|----|---------|-----------------|------------------------|-------------|------------------------|----------------|-------------|----------|
| 3  | V       | 2422.1          | 76.5                   | 30.7        | 107.2                  | Fundamental    | /           | PK       |
|    | V       | 2390            | 35.5                   | 32.2        | 67.7                   | 74             | 6.3         | PK       |
|    | V       | 2390            | 16.9                   | 32.2        | 49.1                   | 54             | 4.9         | AV       |
|    | V       | 2400            | 38.3                   | 32.1        | 70.4                   | 74             | 3.6         | PK       |
|    | V       | 2400            | 20.5                   | 32.1        | 52.6                   | 54             | 1.4         | AV       |
|    | V       | 3200            | 44.5                   | -0.6        | 43.9                   | 54(note3)      | 10.1        | PK       |
|    | V       | 4844.1          | 49.1                   | 2.6         | 51.7                   | 54(note3)      | 2.3         | PK       |
|    | V       | 7266            | 60.3                   | 8.9         | 69.2                   | 74             | 4.8         | PK       |
|    | V       | 7266            | 40.2                   | 8.9         | 49.1                   | 54             | 4.9         | AV       |
|    | H       | 24000           | 61.5                   | -8.9        | 52.6                   | 54             | 1.4         | PK       |
| 6  | V       | 2437            | 75.7                   | 31.2        | 106.9                  | Fundamental    | /           | PK       |
|    | V       | 3200            | 47.1                   | -0.6        | 46.5                   | 54(note3)      | 7.5         | PK       |
|    | V       | 4876            | 48.5                   | 2.8         | 51.3                   | 54(note3)      | 2.7         | PK       |
|    | V       | 7298.5          | 59.8                   | 8.8         | 68.6                   | 74             | 5.4         | PK       |
|    | V       | 7298.5          | 41.6                   | 8.8         | 50.4                   | 54             | 3.6         | AV       |
|    | H       | 24000           | 61.5                   | -8.9        | 52.6                   | 54             | 1.4         | PK       |
| 9  | V       | 2452.1          | 76.5                   | 30.9        | 107.4                  | Fundamental    | /           | PK       |
|    | V       | 2483.5          | 35.6                   | 30.2        | 65.8                   | 74             | 8.2         | PK       |
|    | V       | 2483.5          | 17.7                   | 30.2        | 47.9                   | 54             | 6.1         | AV       |
|    | V       | 3200            | 47.4                   | -0.6        | 46.8                   | 54(note3)      | 7.2         | PK       |
|    | V       | 4904            | 49.6                   | 3.0         | 52.6                   | 54(note3)      | 1.4         | PK       |
|    | V       | 7356.1          | 60.7                   | 9.0         | 69.7                   | 74             | 4.3         | PK       |
|    | V       | 7356.2          | 42.1                   | 9.0         | 51.1                   | 54             | 2.9         | AV       |
|    | H       | 24000           | 61.5                   | -8.9        | 52.6                   | 54             | 1.4         | PK       |

Note: 1. Measure Level = Reading Level + Factor.


2. The test results which are attenuated more than 20 dB below the permissible value limit (the test frequency range: 9kHz~30MHz, 18GHz~25GHz), therefore no data appear in the report.

3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

Remark: RBW 1MHz VBW 3MHz peak detector for PK value, RMS detector for AV value

### 4.3. 6dB Bandwidth Measurement

#### TEST CONFIGURATION



#### TEST PROCEDURE

1. The testing follows FCC KDB Publication No. 558074 D01 v03r02 (Measurement Guidelines of DTS).
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.
4. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

#### LIMIT


For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

#### TEST RESULTS


|           |   |                             |
|-----------|---|-----------------------------|
| Product   | : | IP Camera                   |
| Test Item | : | 6dB Occupied Bandwidth      |
| Test Mode | : | Mode 1: Transmit by 802.11b |

| Channel No. | Frequency (MHz) | Occupied Bandwidth (kHz) | Limit (kHz) | Result |
|-------------|-----------------|--------------------------|-------------|--------|
| 01          | 2412            | 9711                     | 500         | Pass   |
| 06          | 2437            | 9233                     | 500         | Pass   |
| 11          | 2462            | 9725                     | 500         | Pass   |


Channel 01 (2412MHz)

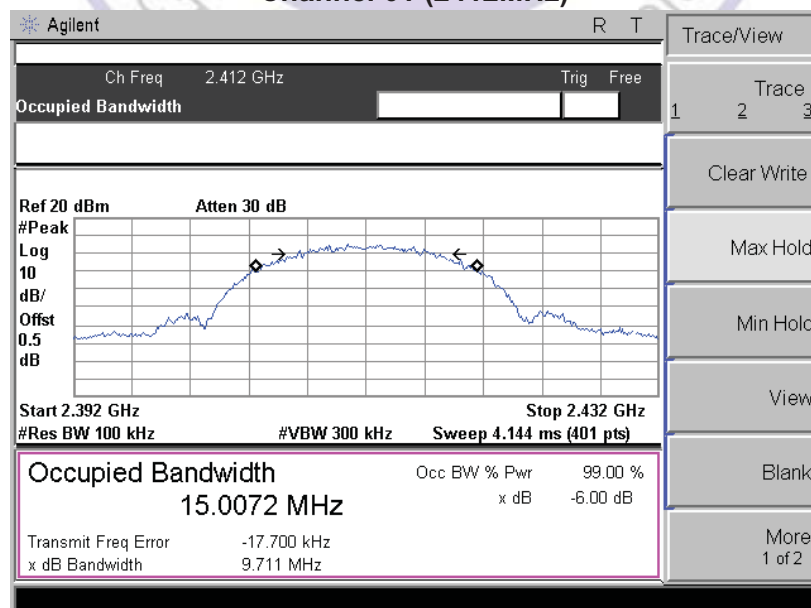

Channel 06 (2437MHz)

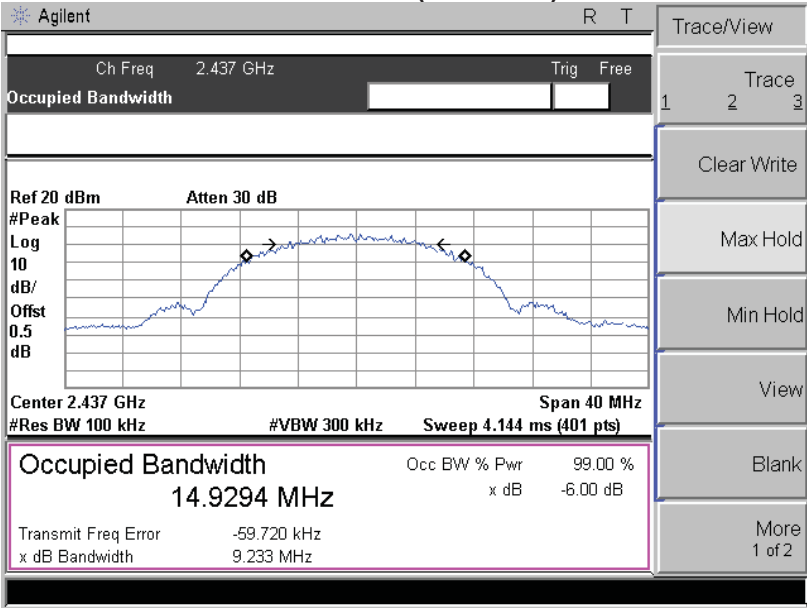


Channel 11 (2462MHz)

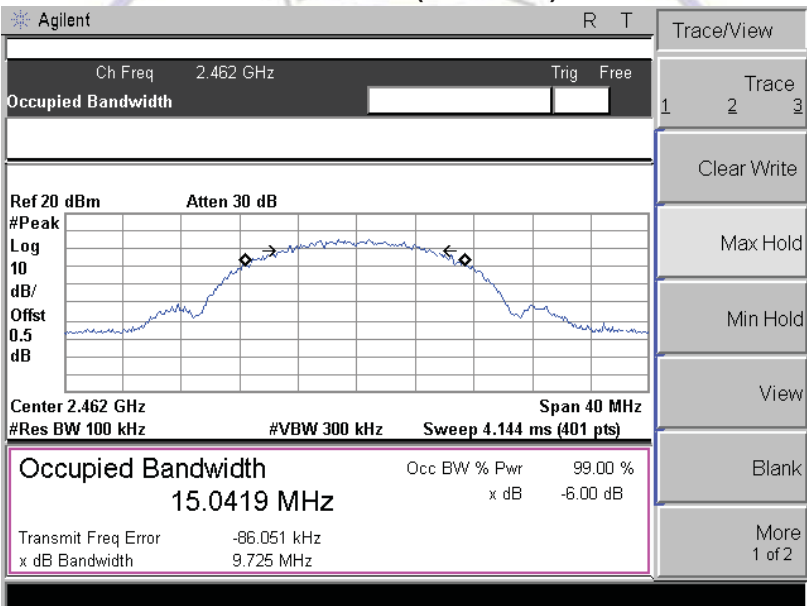


|           |   |                             |
|-----------|---|-----------------------------|
| Product   | : | IP Camera                   |
| Test Item | : | 6dB Occupied Bandwidth      |
| Test Mode | : | Mode 2: Transmit by 802.11g |

| Channel No. | Frequency (MHz) | Occupied Bandwidth (kHz) | Limit (kHz) | Result |
|-------------|-----------------|--------------------------|-------------|--------|
| 01          | 2412            | 16477                    | 500         | Pass   |
| 06          | 2437            | 16550                    | 500         | Pass   |
| 11          | 2462            | 16543                    | 500         | Pass   |


Channel 01 (2412MHz)

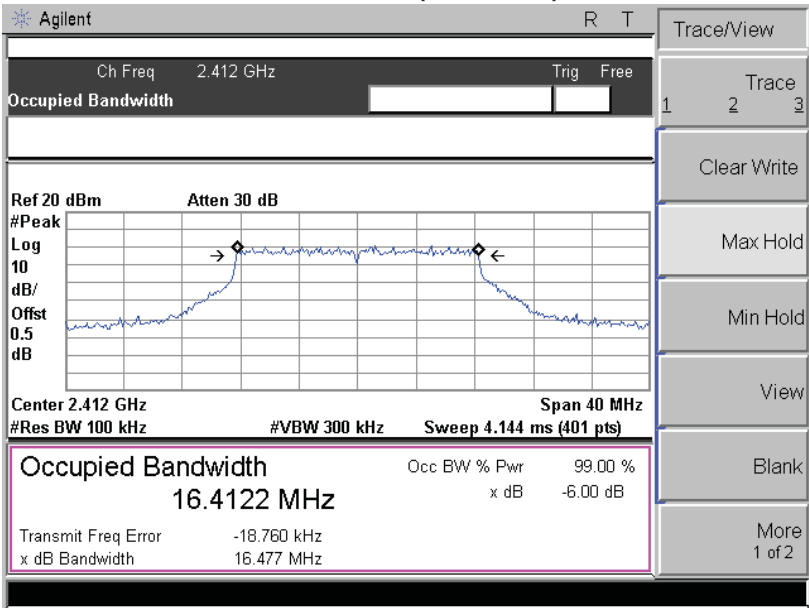

Channel 06 (2437MHz)

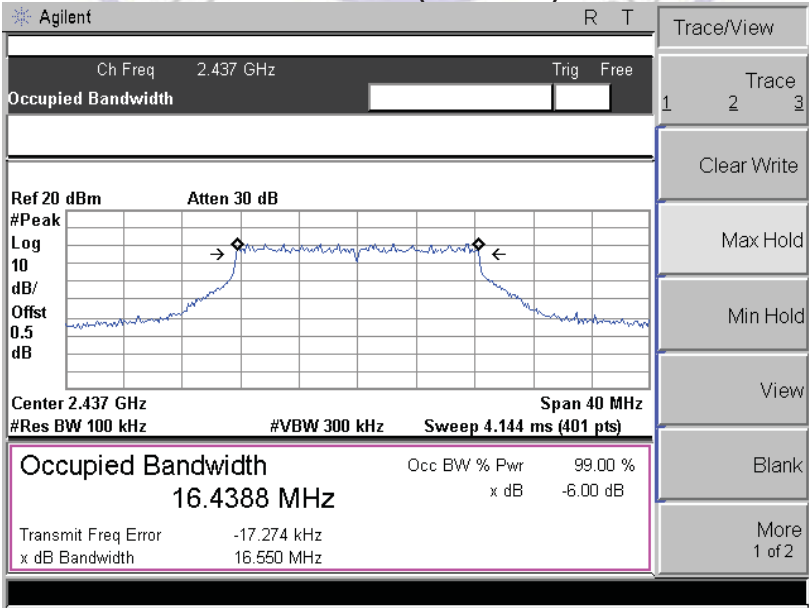


Channel 11 (2462MHz)

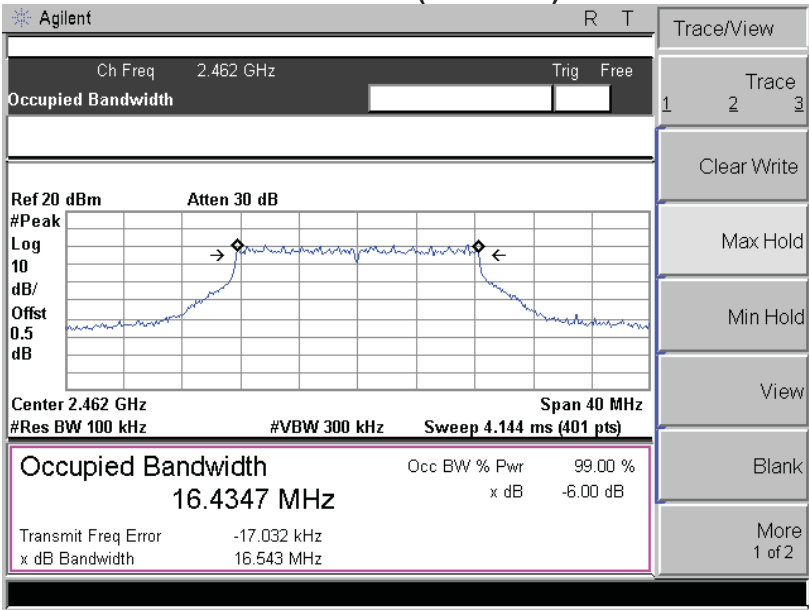


|           |   |                                     |
|-----------|---|-------------------------------------|
| Product   | : | IP Camera                           |
| Test Item | : | 6dB Occupied Bandwidth              |
| Test Mode | : | Mode 3: Transmit by 802.11n (20MHz) |

| Channel No. | Frequency (MHz) | Occupied Bandwidth (kHz) | Limit (kHz) | Result |
|-------------|-----------------|--------------------------|-------------|--------|
| 01          | 2412            | 17642                    | 500         | Pass   |
| 06          | 2437            | 17707                    | 500         | Pass   |
| 11          | 2462            | 17723                    | 500         | Pass   |


Channel 01 (2412MHz)

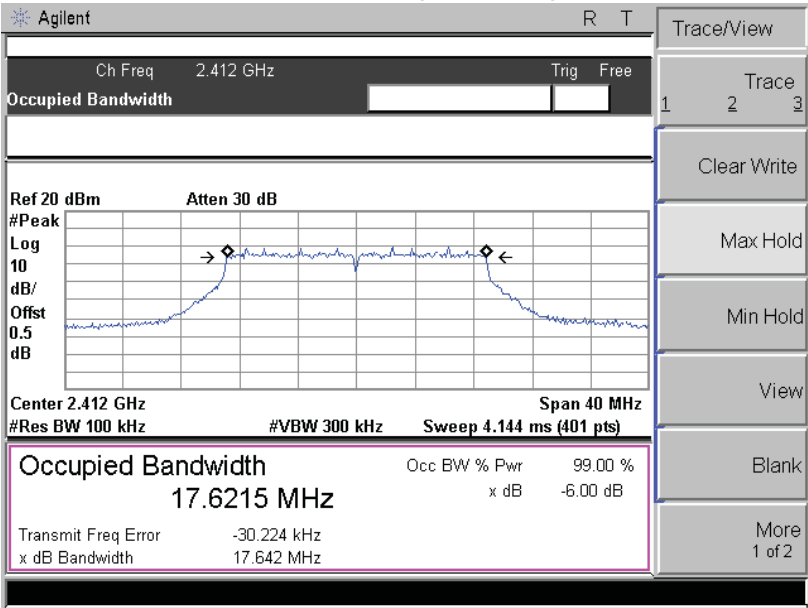

Channel 06 (2437MHz)

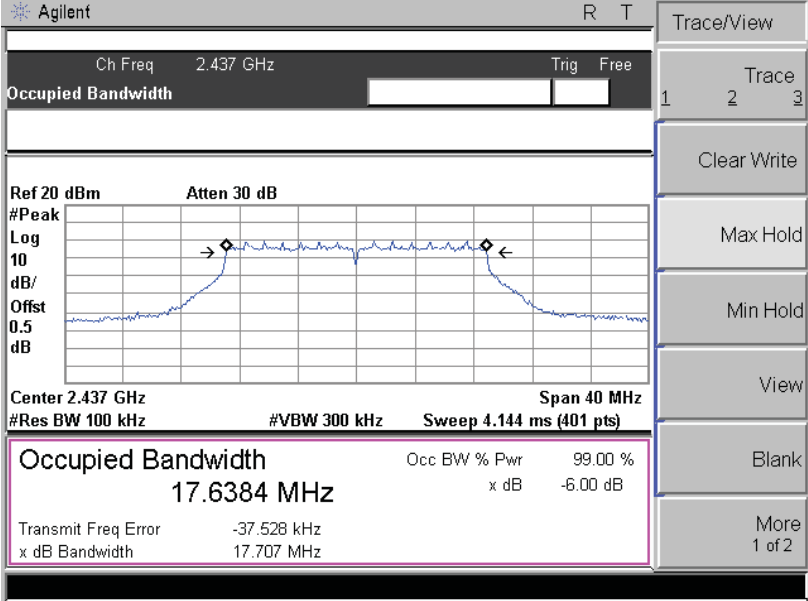


Channel 11 (2462MHz)

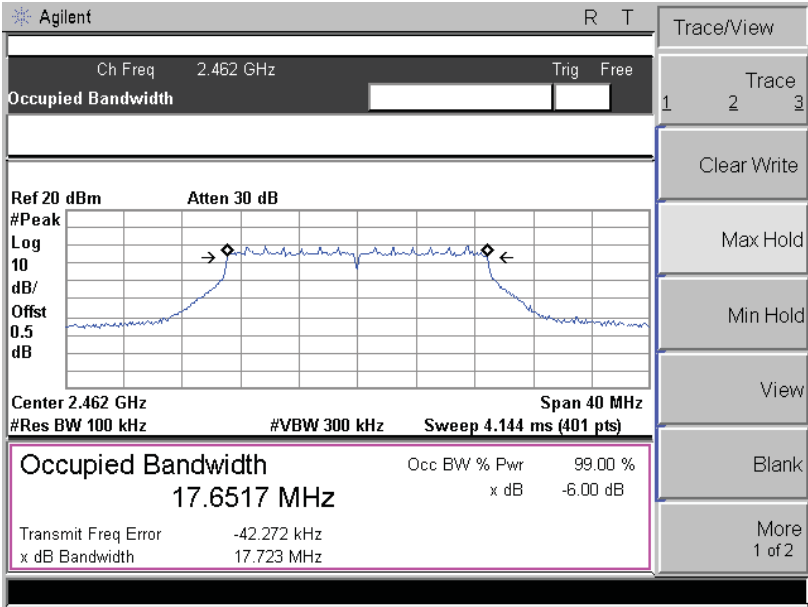


|           |   |                                     |
|-----------|---|-------------------------------------|
| Product   | : | IP Camera                           |
| Test Item | : | 6dB Occupied Bandwidth              |
| Test Mode | : | Mode 4: Transmit by 802.11n (40MHz) |

| Channel No. | Frequency (MHz) | Occupied Bandwidth (kHz) | Limit (kHz) | Result |
|-------------|-----------------|--------------------------|-------------|--------|
| 03          | 2422            | 35728                    | 500         | Pass   |
| 06          | 2437            | 35695                    | 500         | Pass   |
| 09          | 2452            | 35703                    | 500         | Pass   |


Channel 03 (2422MHz)

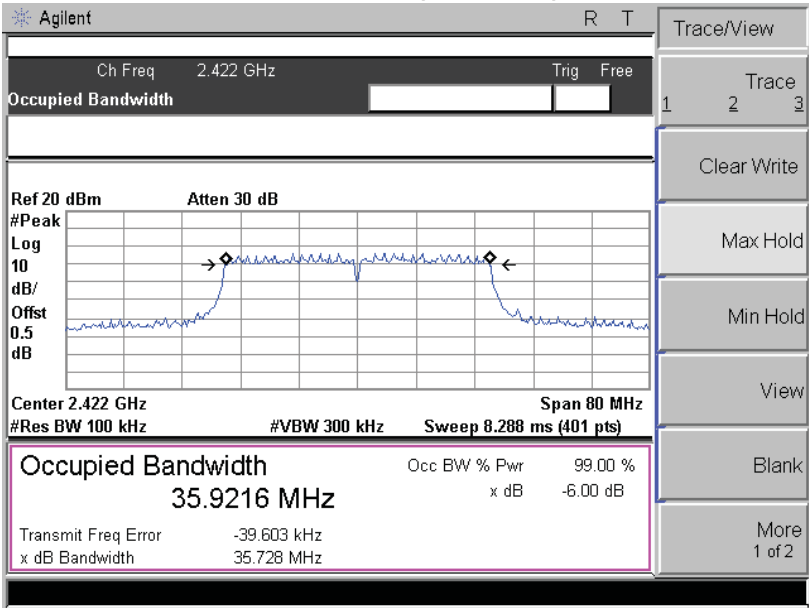

Channel 06 (2437MHz)

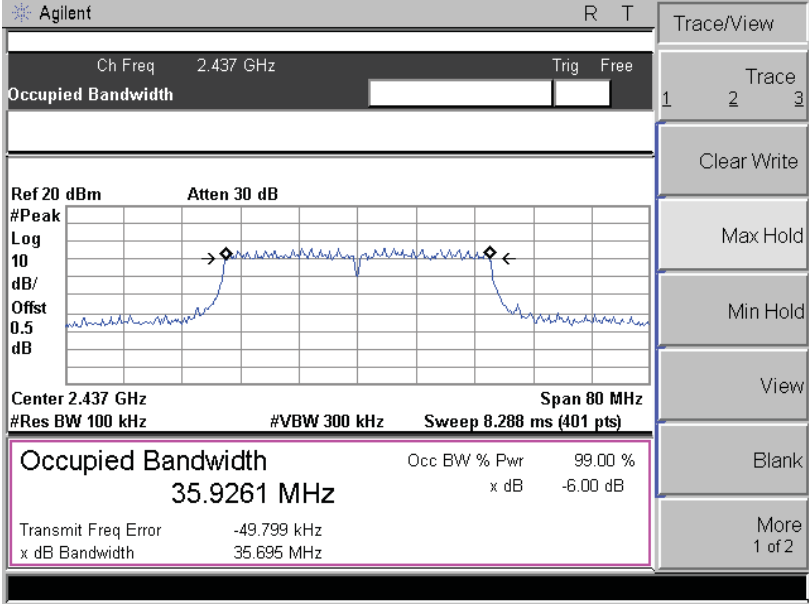


Channel 09 (2452MHz)

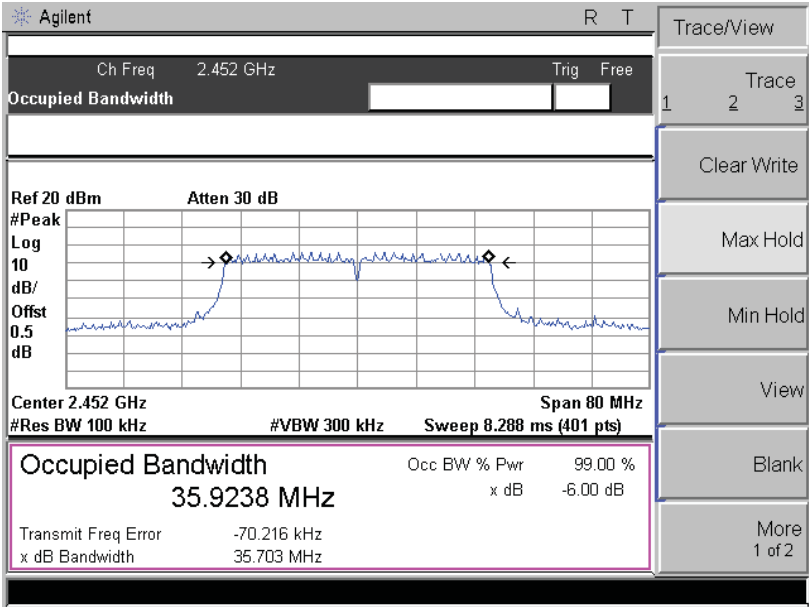

#### 4.4. Maximum Peak Output Power

##### TEST CONFIGURATION



##### TEST PROCEDURE

According to C63.10 -2013 and KDB558074 D01 v03r02, The EUT was directly connected to the power meter / spectrum analyzer and antenna output port as show in the block diagram as TEST CONFIGURATION shows.

Use the wideband power meter to test peak power and record the result.

##### LIMIT

The Peak Output Power Measurement limits are 30dBm.

##### TEST RESULTS

|           |   |                             |
|-----------|---|-----------------------------|
| Product   | : | IP Camera                   |
| Test Item | : | Power Output                |
| Test Mode | : | Mode 1: Transmit by 802.11b |

| Channel No. | Frequency (MHz) | Measurement Power Output (dBm) | Limit (dBm) | Result |
|-------------|-----------------|--------------------------------|-------------|--------|
| 1           | 2412            | 18.10                          | 30.00       | Pass   |
| 6           | 2437            | 18.14                          | 30.00       | Pass   |
| 11          | 2462            | 18.04                          | 30.00       | Pass   |

|           |   |                             |
|-----------|---|-----------------------------|
| Product   | : | IP Camera                   |
| Test Item | : | Power Output                |
| Test Mode | : | Mode 2: Transmit by 802.11g |

| Channel No. | Frequency (MHz) | Measurement Power Output (dBm) | Limit (dBm) | Result |
|-------------|-----------------|--------------------------------|-------------|--------|
| 1           | 2412            | 15.03                          | 30.00       | Pass   |
| 6           | 2437            | 15.53                          | 30.00       | Pass   |
| 11          | 2462            | 15.72                          | 30.00       | Pass   |

|           |   |                                    |
|-----------|---|------------------------------------|
| Product   | : | IP Camera                          |
| Test Item | : | Power Output                       |
| Test Mode | : | Mode 3: Transmit by 802.11n(20MHz) |

| Channel No. | Frequency<br>(MHz) | Measurement Power Output<br>(dBm) | Limit<br>(dBm) | Result |
|-------------|--------------------|-----------------------------------|----------------|--------|
| 1           | 2412               | 14.10                             | 30.00          | Pass   |
| 6           | 2437               | 14.92                             | 30.00          | Pass   |
| 11          | 2462               | 14.86                             | 30.00          | Pass   |


|           |   |                                    |
|-----------|---|------------------------------------|
| Product   | : | IP Camera                          |
| Test Item | : | Power Output                       |
| Test Mode | : | Mode 4: Transmit by 802.11n(40MHz) |

| Channel No. | Frequency<br>(MHz) | Measurement Power Output<br>(dBm) | Limit<br>(dBm) | Result |
|-------------|--------------------|-----------------------------------|----------------|--------|
| 3           | 2422               | 11.82                             | 30.00          | Pass   |
| 6           | 2437               | 12.04                             | 30.00          | Pass   |
| 9           | 2452               | 12.07                             | 30.00          | Pass   |

**Note: The test results including the cable lose.**

4.5. Power Spectral Density Measurement

TEST CONFIGURATION



TEST PROCEDURE

The EUT was tested according to KDB558074 D01 v03r02 for compliance to FCC 47CFR 15.247 and requirements. Set RBW= 3 kHz, VBW $\geq$ 10KHz, SPAN to 1.5 times greater than the EBW,.


LIMIT

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


TEST RESULTS

|           |   |                             |
|-----------|---|-----------------------------|
| Product   | : | IP Camera                   |
| Test Item | : | Power Spectral Density      |
| Test Mode | : | Mode 1: Transmit by 802.11b |


| Channel No. | Frequency (MHz) | Measurement PPSD (dBm/3KHz) | Limit (dBm/3KHz) | Result |
|-------------|-----------------|-----------------------------|------------------|--------|
| 01          | 2412            | -8.459                      | 8                | Pass   |
| 06          | 2437            | -8.398                      | 8                | Pass   |
| 11          | 2462            | -8.587                      | 8                | Pass   |

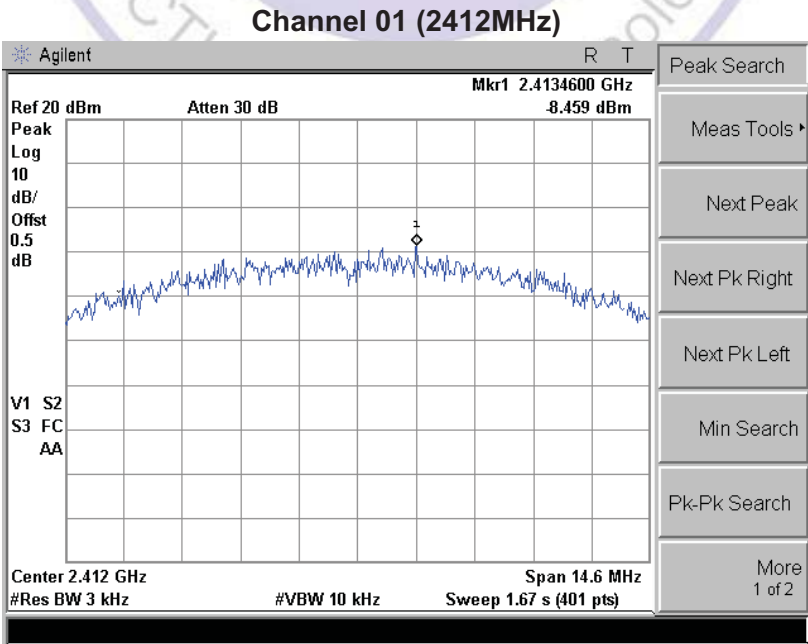

Channel 06 (2437MHz)

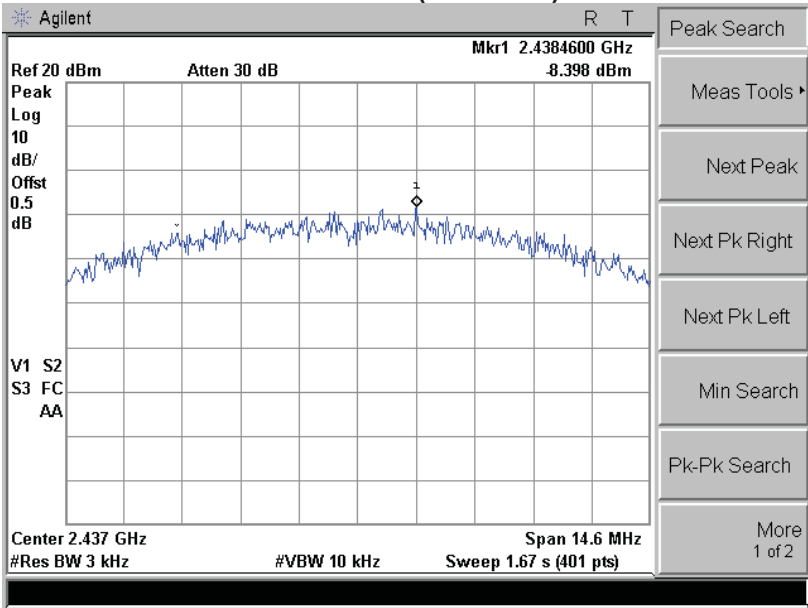


Channel 11 (2462MHz)

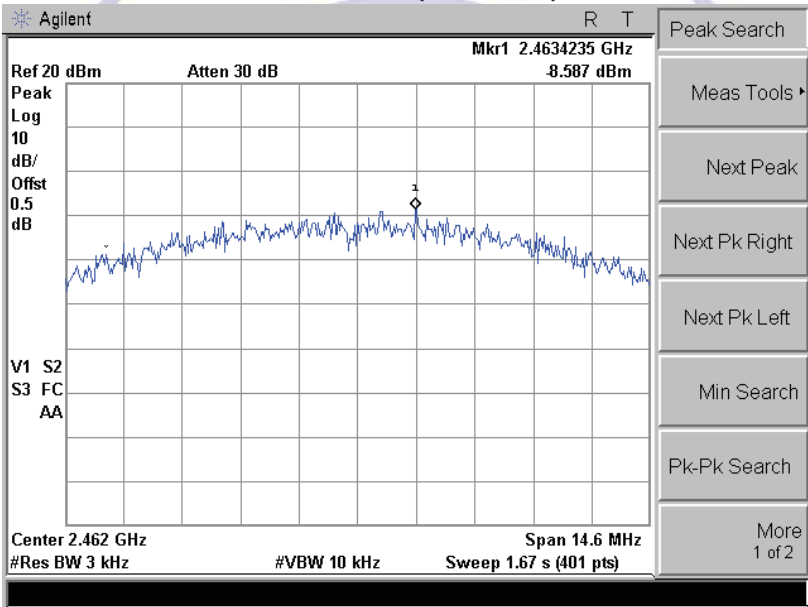


|           |   |                             |
|-----------|---|-----------------------------|
| Product   | : | IP Camera                   |
| Test Item | : | Power Spectral Density      |
| Test Mode | : | Mode 2: Transmit by 802.11g |

| Channel No. | Frequency (MHz) | Measurement<br>PPSD<br>(dBm/3KHz) | Limit<br>(dBm/3KHz) | Result |
|-------------|-----------------|-----------------------------------|---------------------|--------|
| 01          | 2412            | -15.40                            | 8                   | Pass   |
| 06          | 2437            | -14.61                            | 8                   | Pass   |
| 11          | 2462            | -14.79                            | 8                   | Pass   |


Channel 01 (2412MHz)

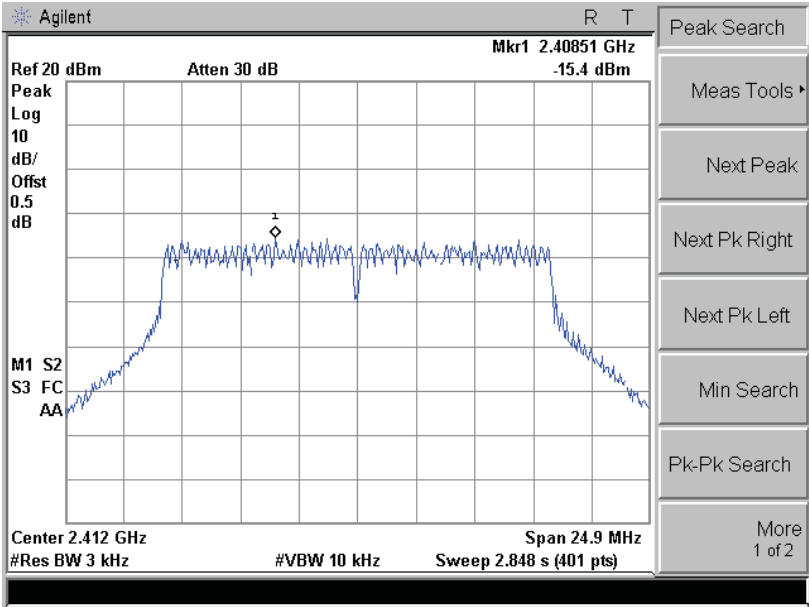

Channel 06 (2437MHz)

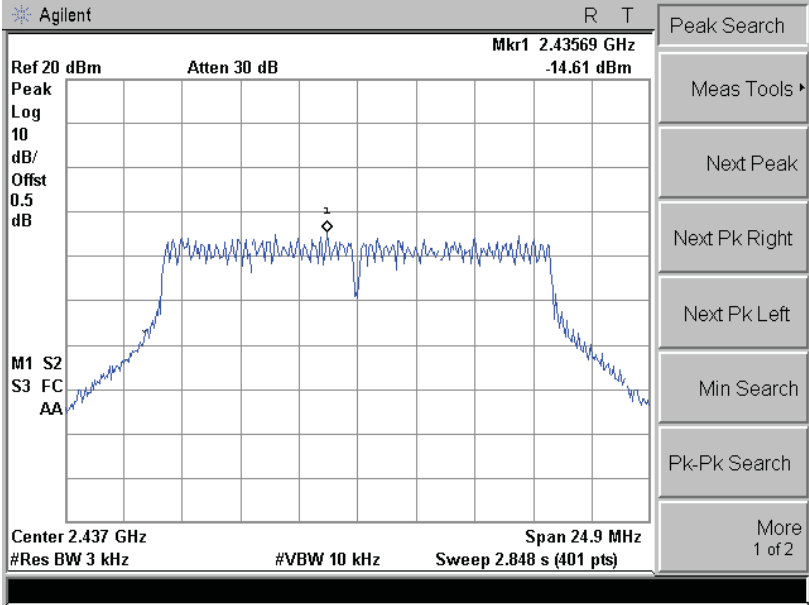


Channel 11 (2462MHz)

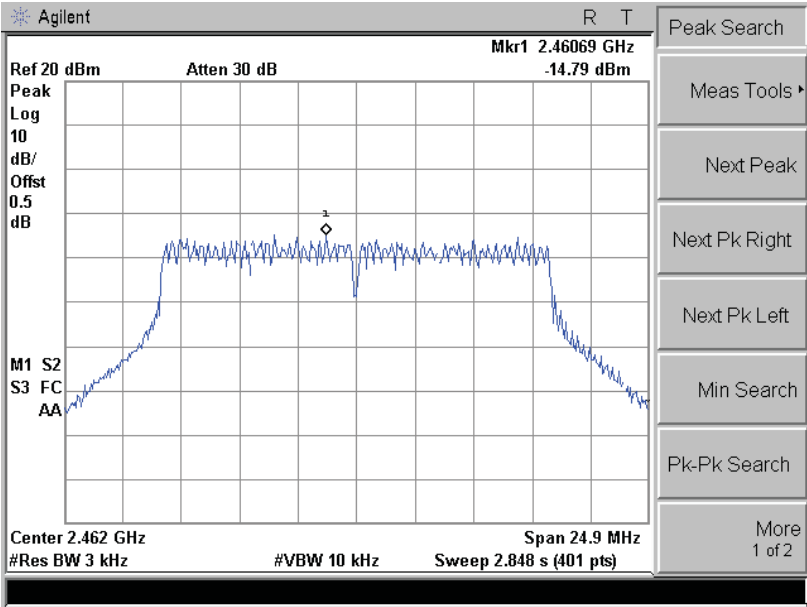


|           |   |                                     |
|-----------|---|-------------------------------------|
| Product   | : | IP Camera                           |
| Test Item | : | Power Spectral Density              |
| Test Mode | : | Mode 3: Transmit by 802.11n (20MHz) |

| Channel No. | Frequency (MHz) | Measurement<br>PPSD<br>(dBm/3KHz) | Limit<br>(dBm/3KHz) | Result |
|-------------|-----------------|-----------------------------------|---------------------|--------|
| 01          | 2412            | -16.34                            | 8                   | Pass   |
| 06          | 2437            | -16.66                            | 8                   | Pass   |
| 11          | 2462            | -15.98                            | 8                   | Pass   |


Channel 01 (2412MHz)

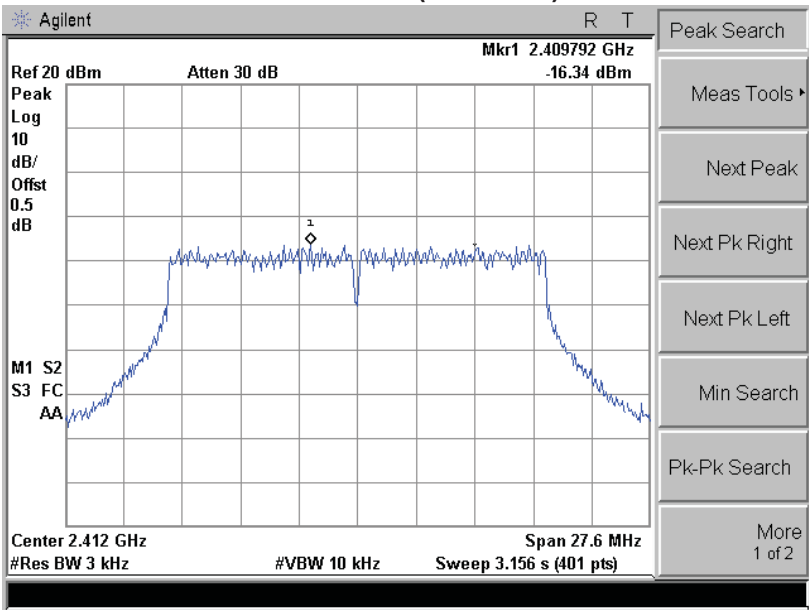

Channel 06 (2437MHz)

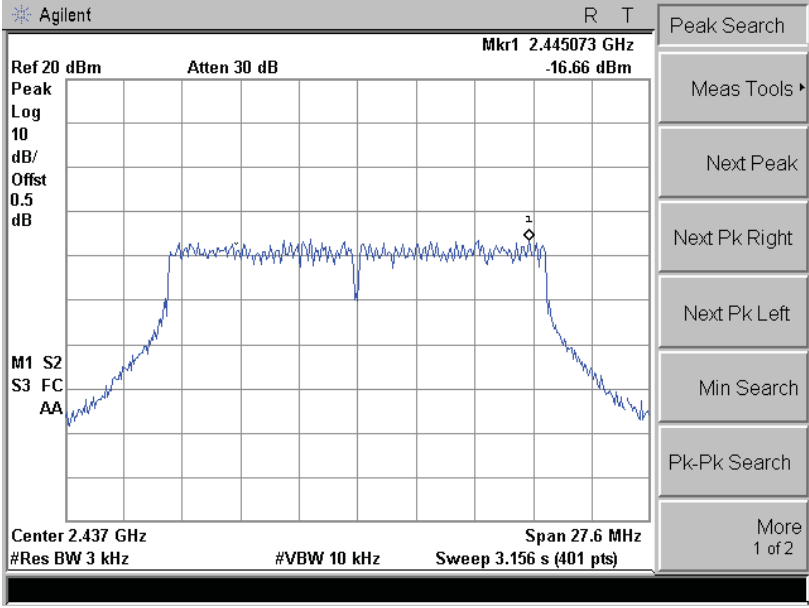


Channel 11 (2462MHz)

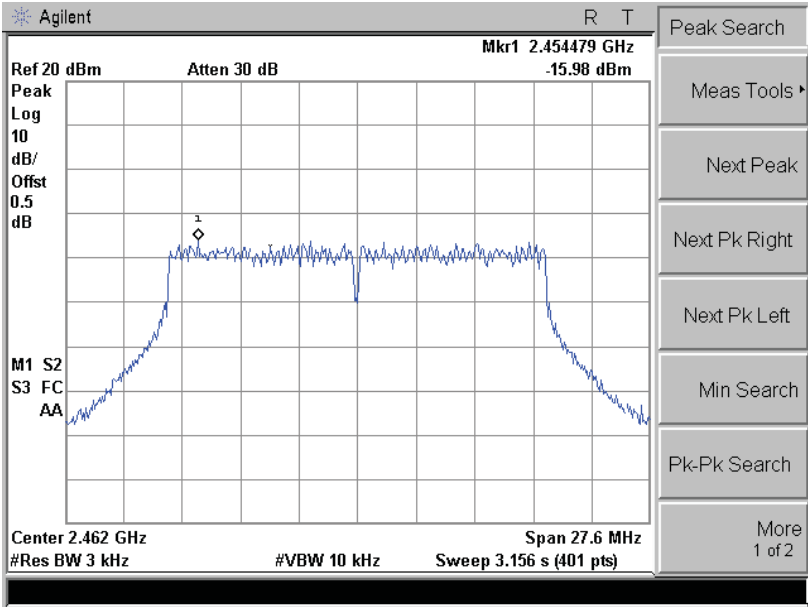


|           |   |                                     |
|-----------|---|-------------------------------------|
| Product   | : | IP Camera                           |
| Test Item | : | Power Spectral Density              |
| Test Mode | : | Mode 4: Transmit by 802.11n (40MHz) |

| Channel No. | Frequency (MHz) | Measurement<br>PPSD<br>(dBm/3KHz) | Limit<br>(dBm/3KHz) | Result |
|-------------|-----------------|-----------------------------------|---------------------|--------|
| 03          | 2422            | -19.83                            | 8                   | Pass   |
| 06          | 2437            | -20.25                            | 8                   | Pass   |
| 09          | 2452            | -19.61                            | 8                   | Pass   |


Channel 03 (2422MHz)

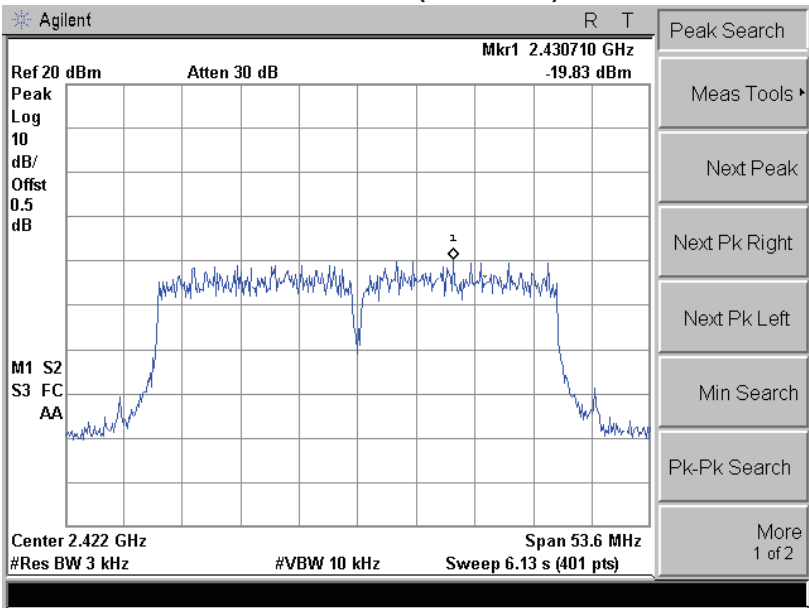

Channel 06 (2437MHz)

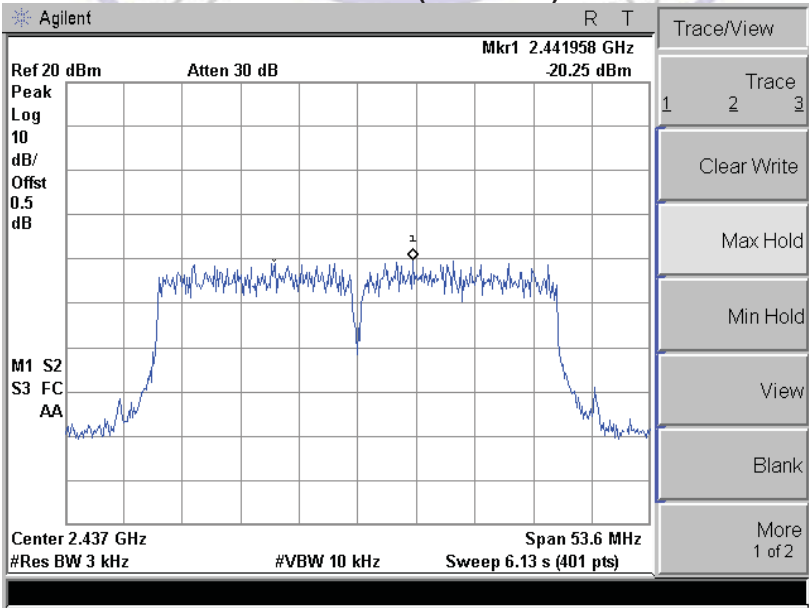


Channel 09 (2452MHz)

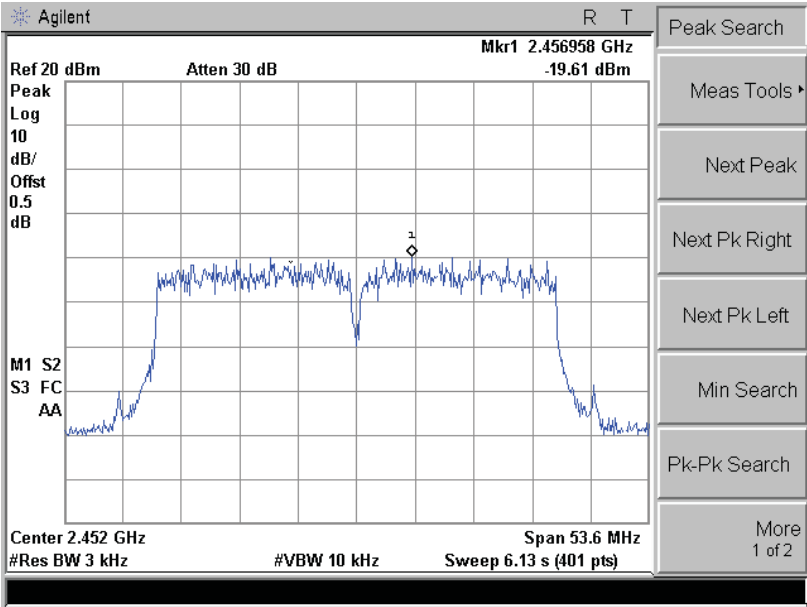

## 4.6. Spurious RF Conducted Emission and Bandedge

### TEST CONFIGURATION



### TEST PROCEDURE

The EUT was tested according to KDB558074 D01 v03r02 for compliance to FCC 47CFR 15.247 requirements.

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBM= 300KHz to measure the peak field strength, and measure frequency range from 30MHz to 26.5GHz.


### LIMIT



In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

### TEST RESULTS



|           |   |                               |
|-----------|---|-------------------------------|
| Product   | : | IP Camera                     |
| Test Item | : | RF Antenna Conducted Spurious |
| Test Mode | : | Mode 1: Transmit by 802.11b   |

#### Channel 01 (2412MHz)



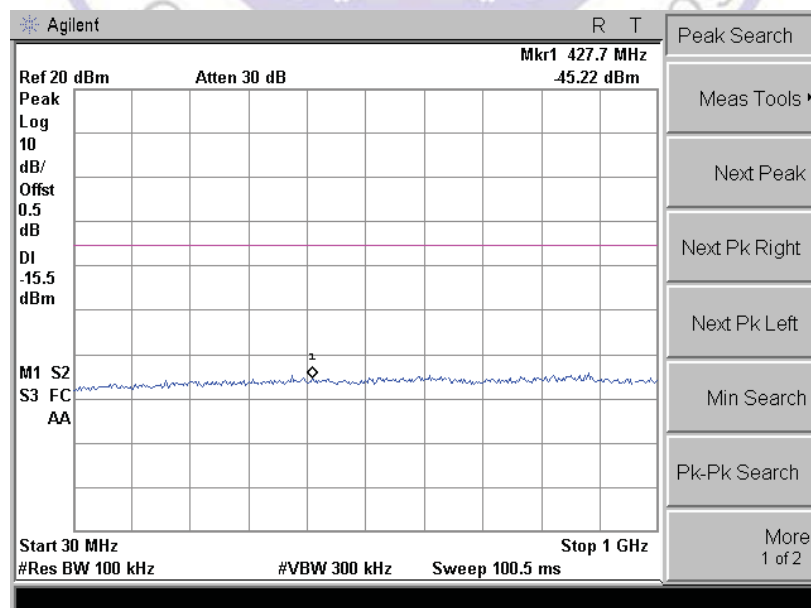


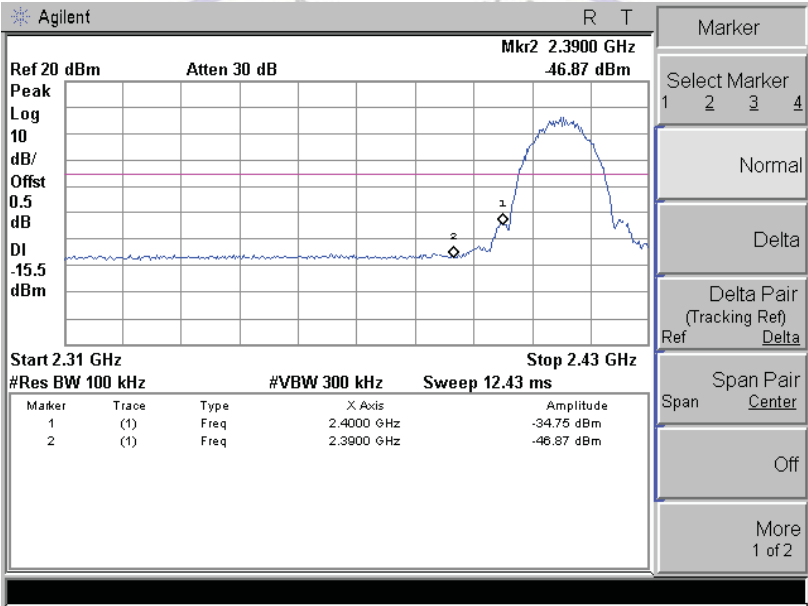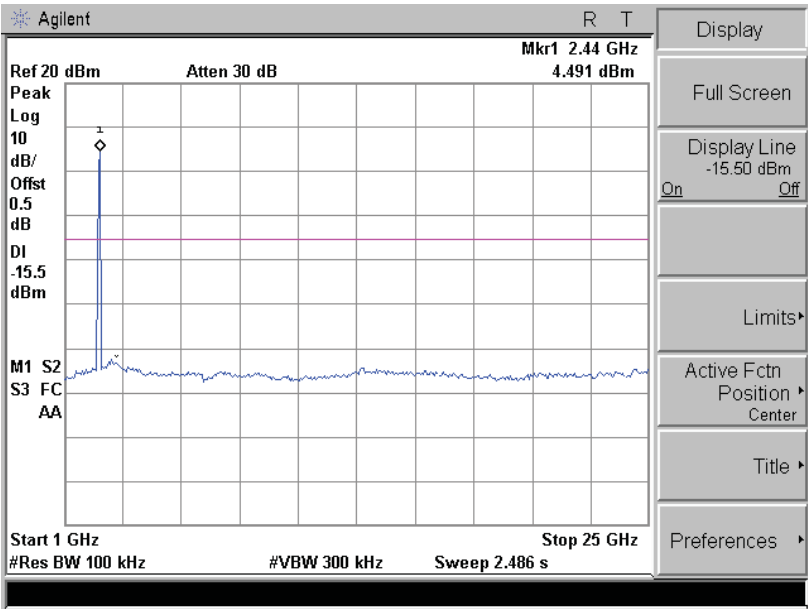

Channel 06 (2437MHz)

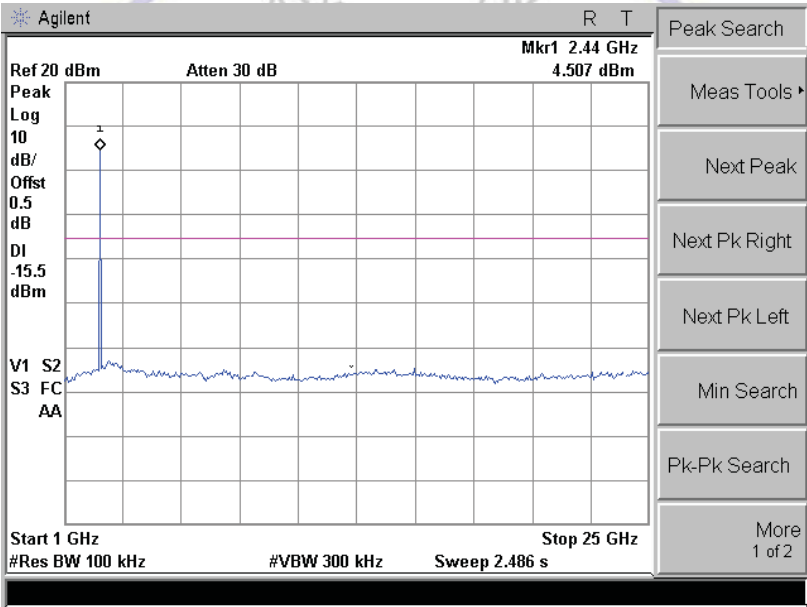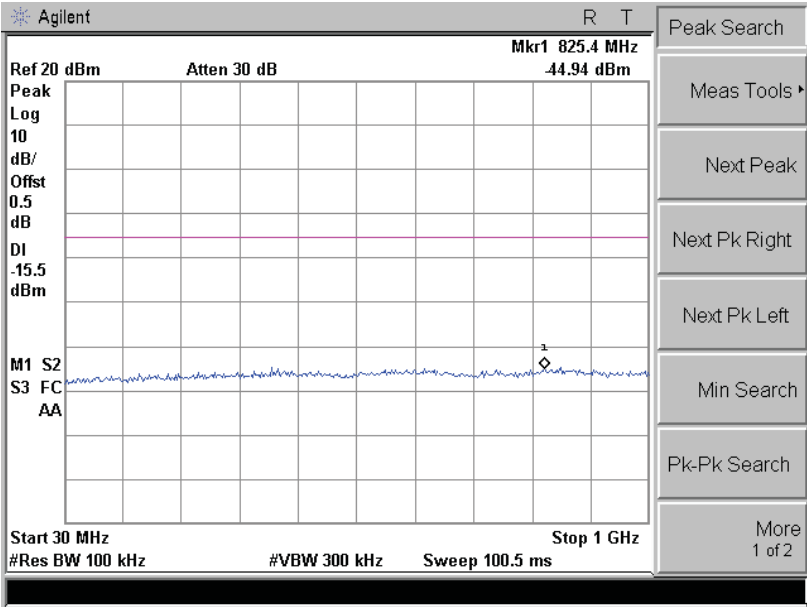



Channel 11 (2462MHz)

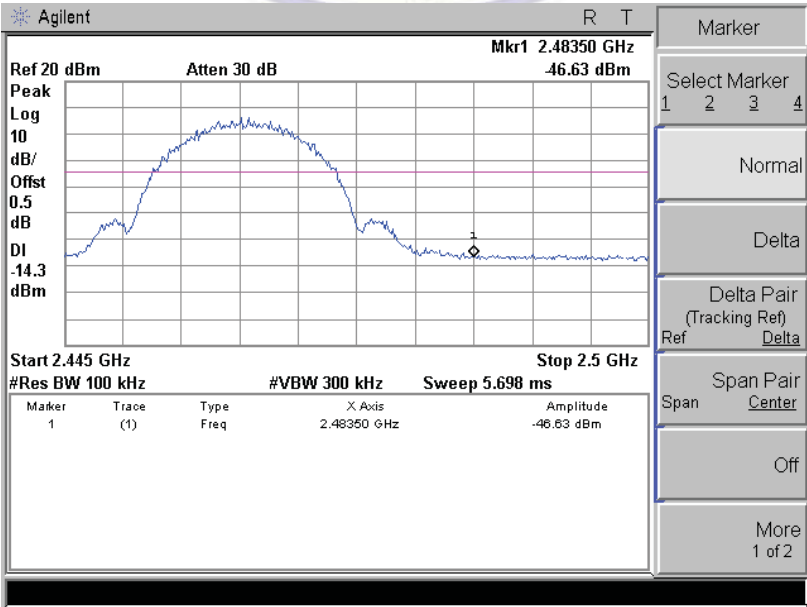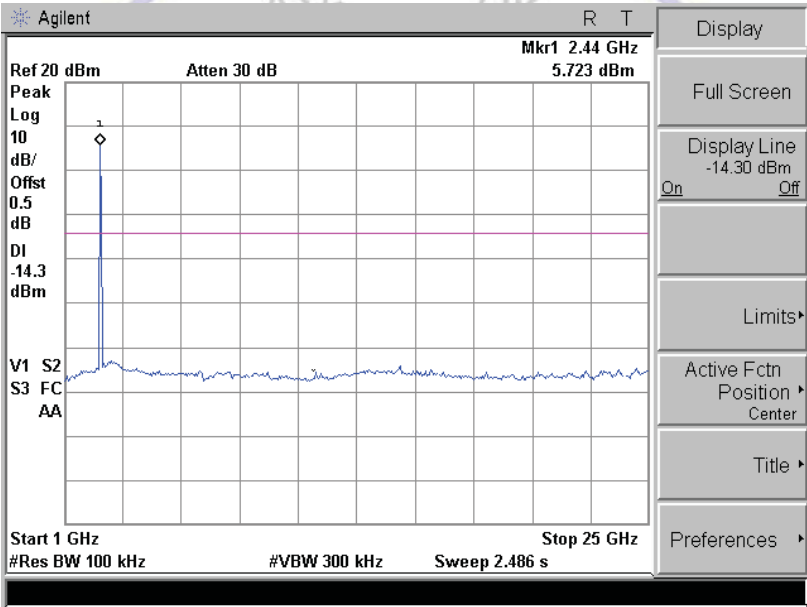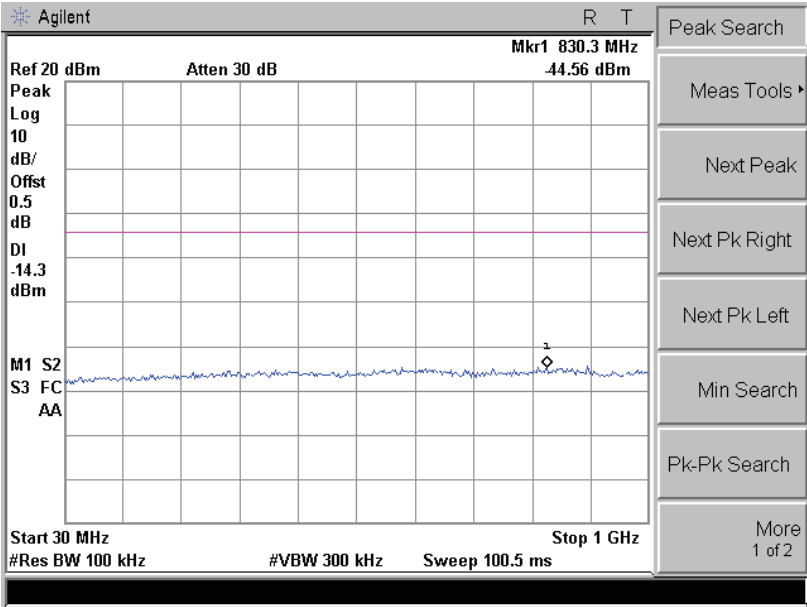



|           |   |                               |
|-----------|---|-------------------------------|
| Product   | : | IP Camera                     |
| Test Item | : | RF Antenna Conducted Spurious |
| Test Mode | : | Mode 2: Transmit by 802.11g   |

Channel 01 (2412MHz)



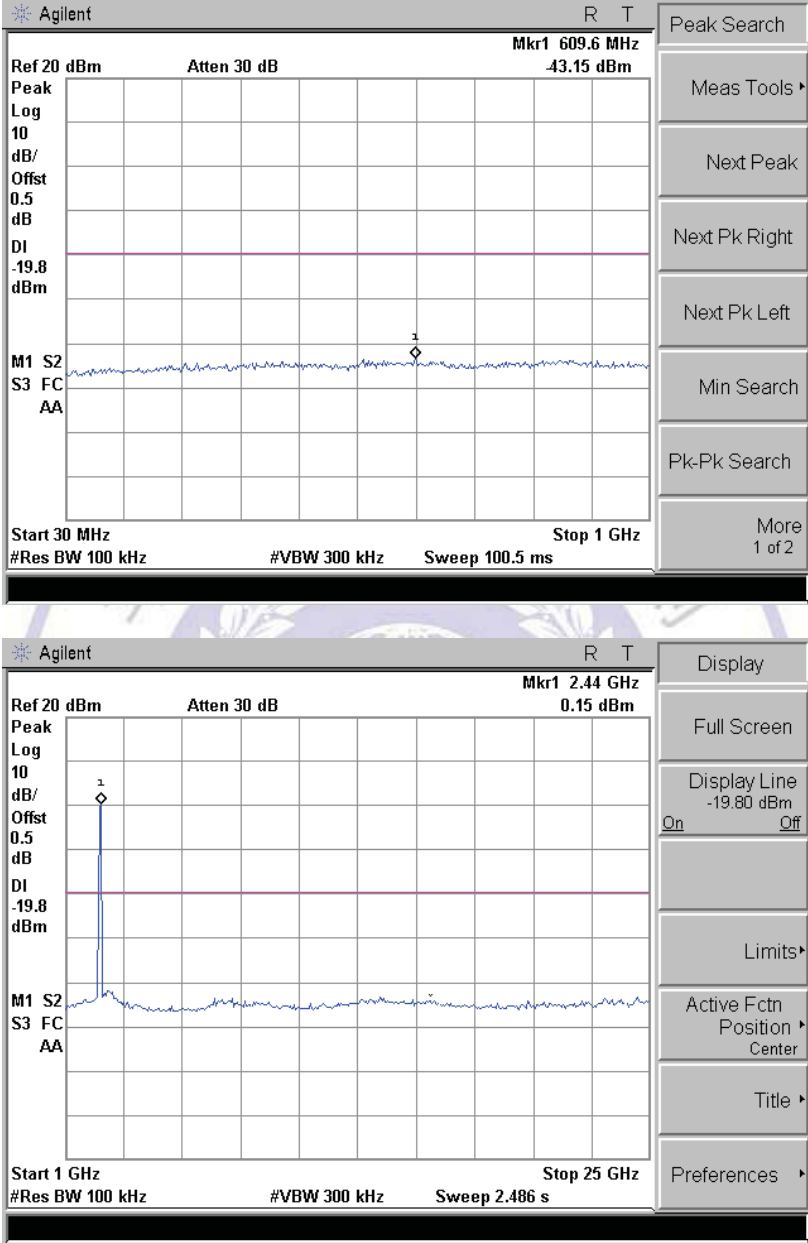


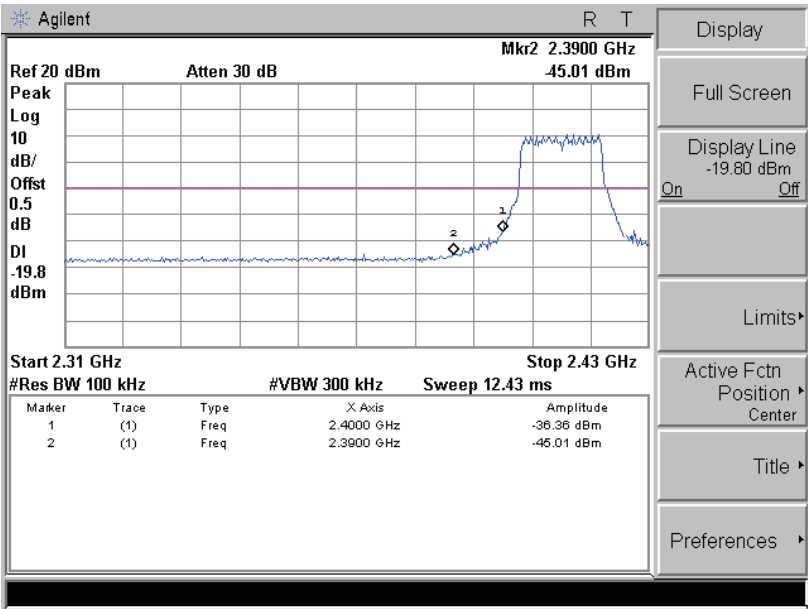

Channel 06 (2437MHz)

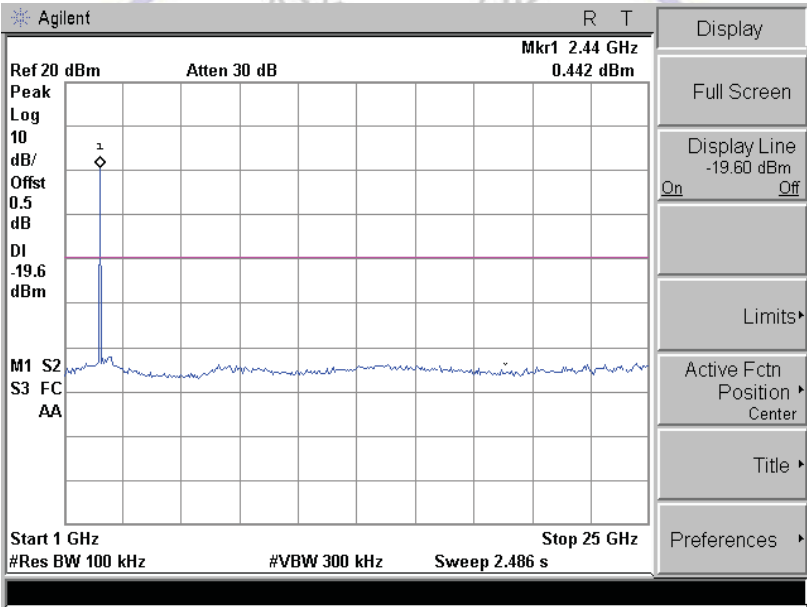
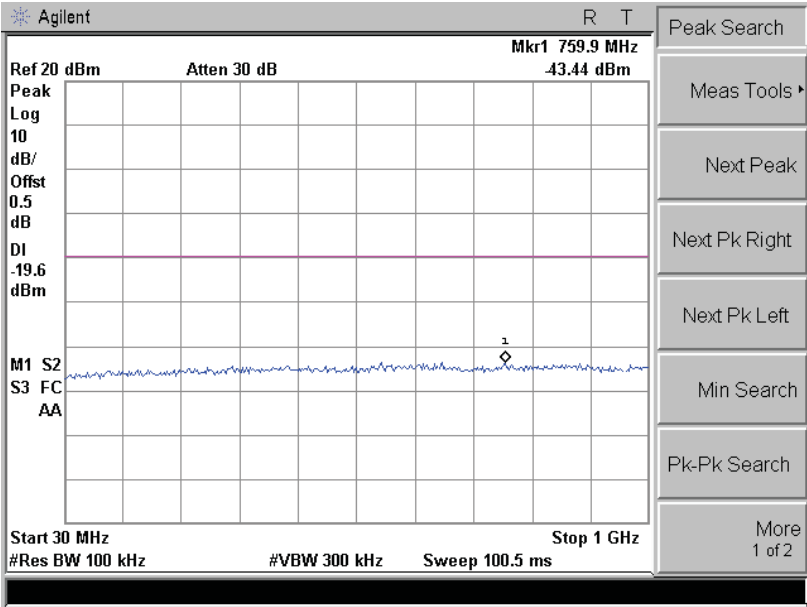



Channel 11 (2462MHz)

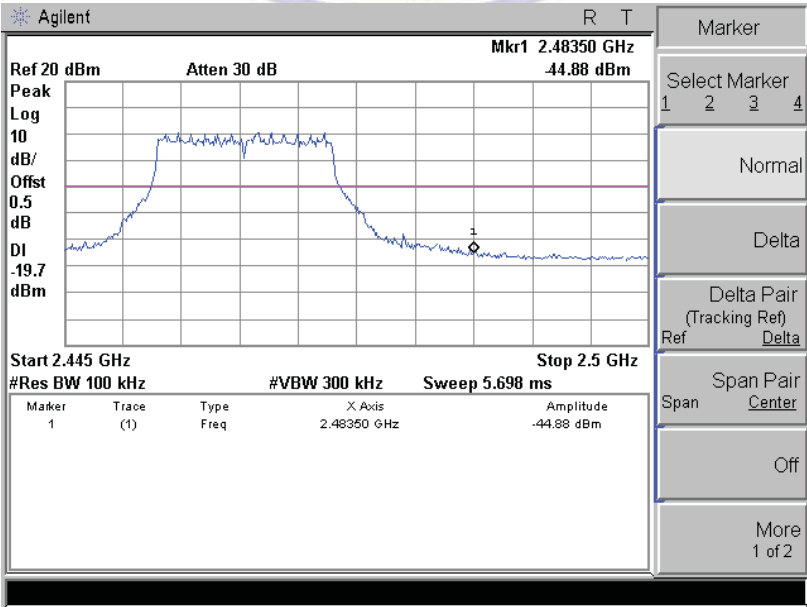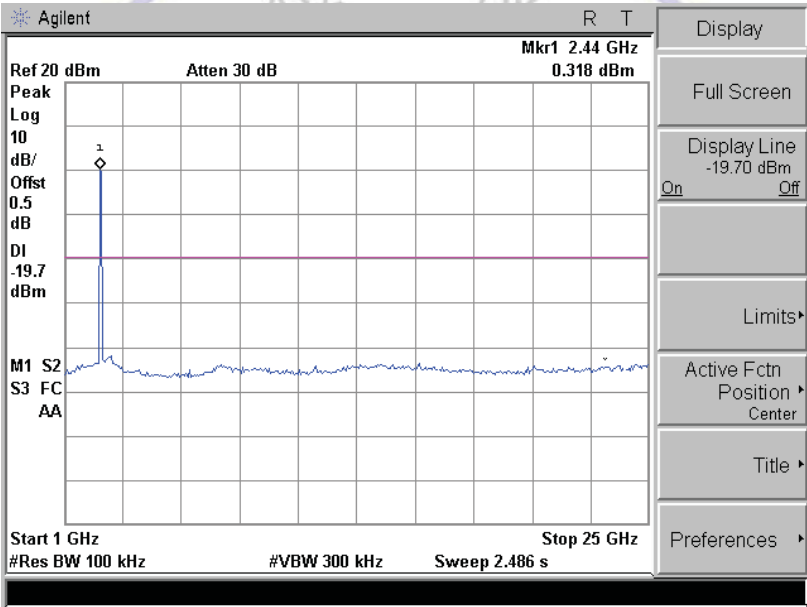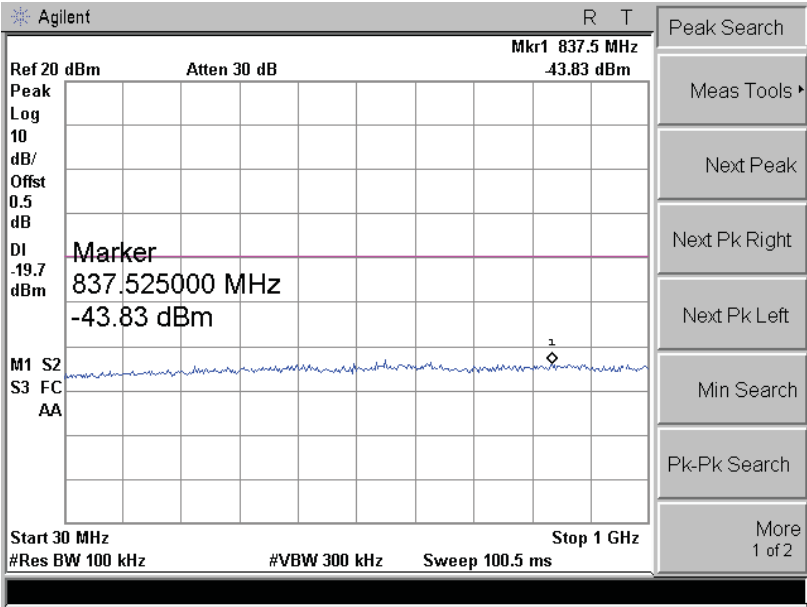



|           |   |                                     |
|-----------|---|-------------------------------------|
| Product   | : | IP Camera                           |
| Test Item | : | RF Antenna Conducted Spurious       |
| Test Mode | : | Mode 3: Transmit by 802.11n (20MHz) |

Channel 01 (2412MHz)


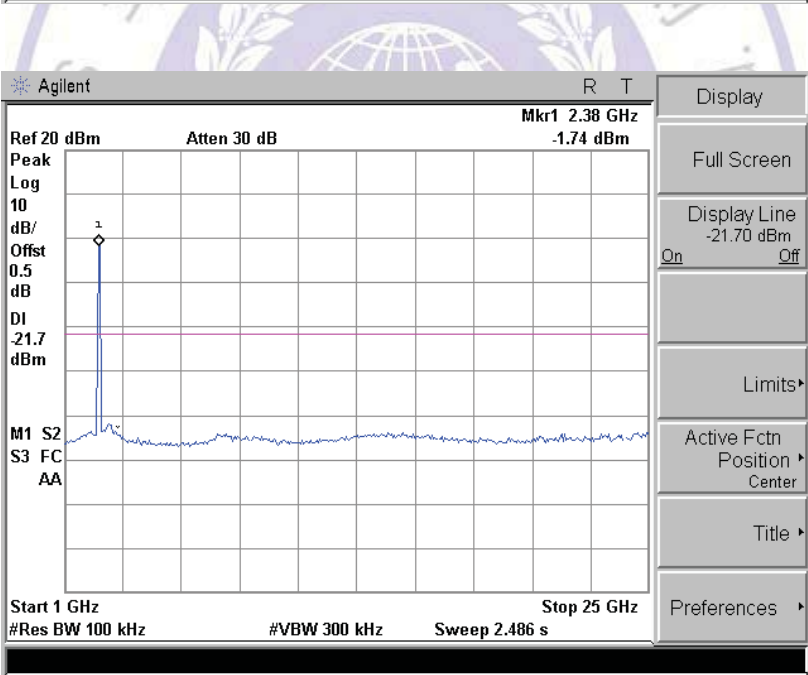
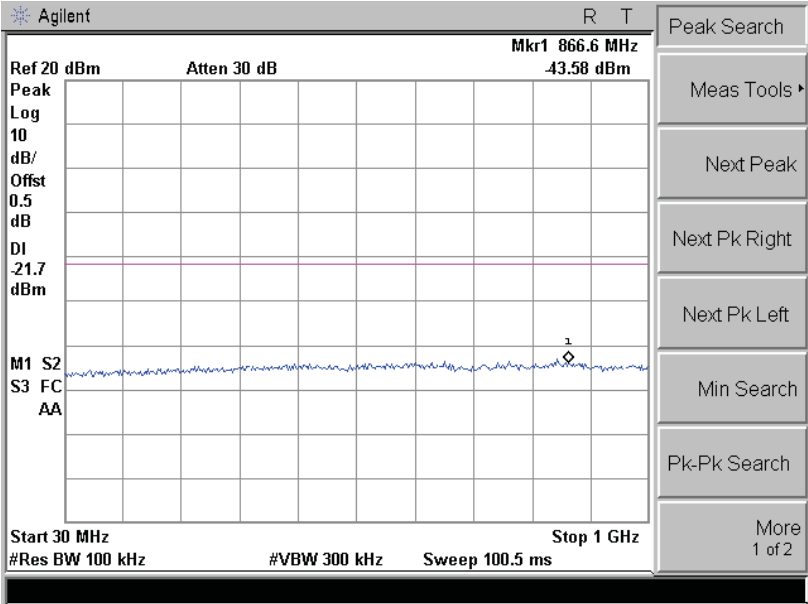


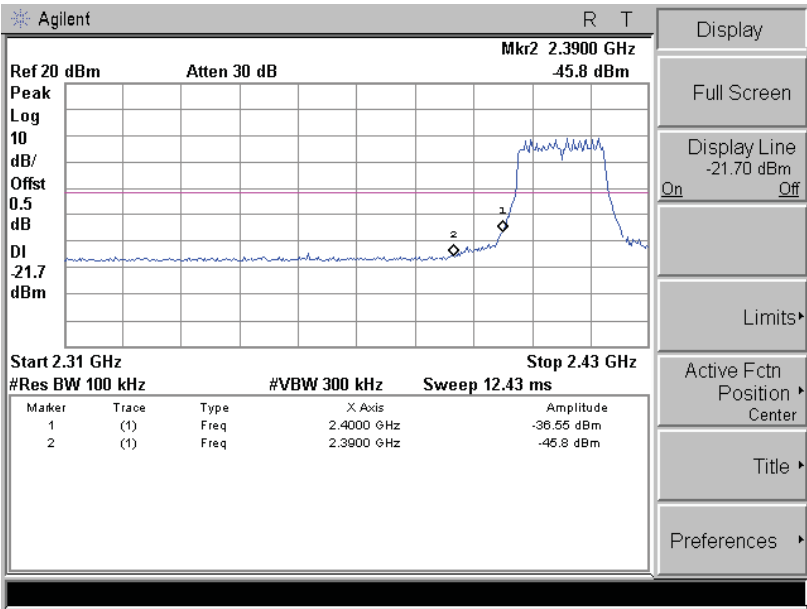


Channel 06 (2437MHz)

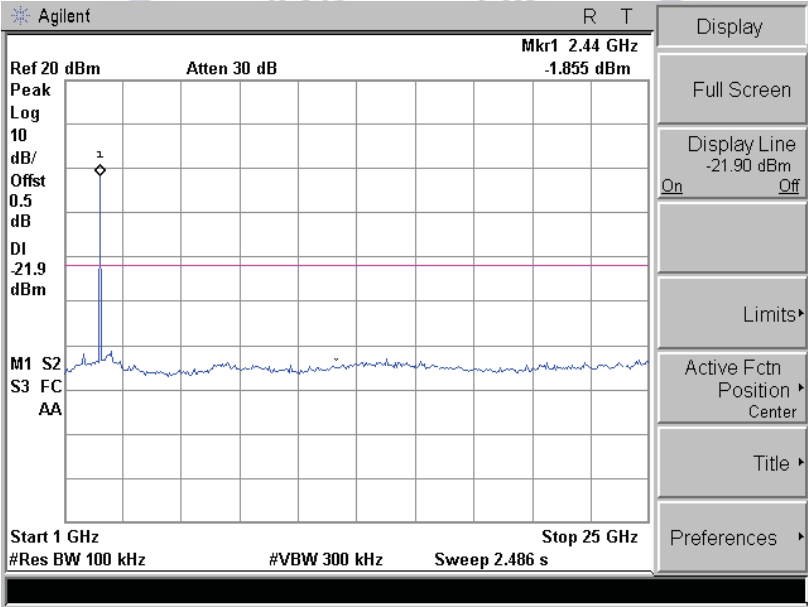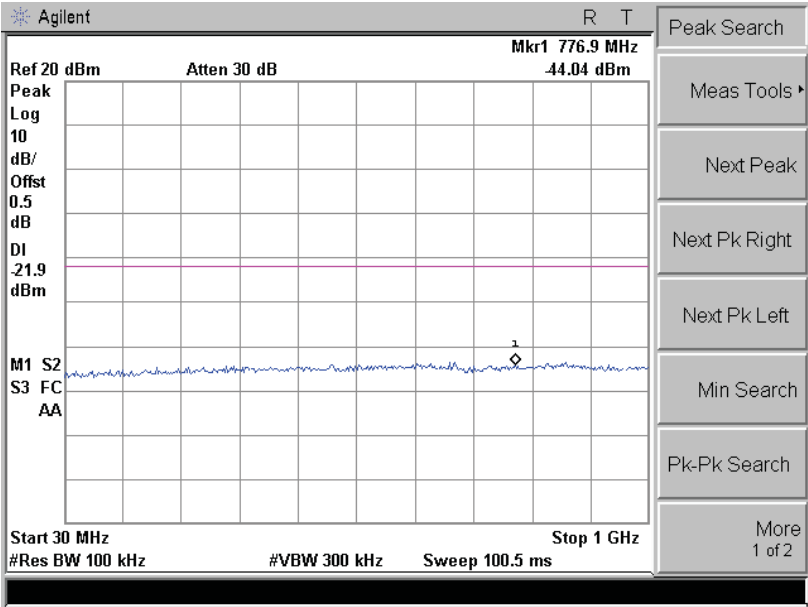


Channel 11 (2462MHz)

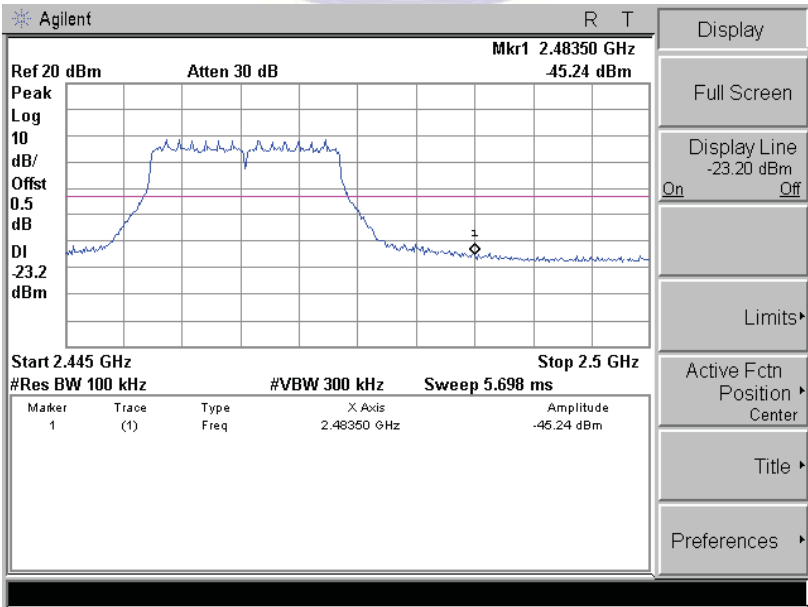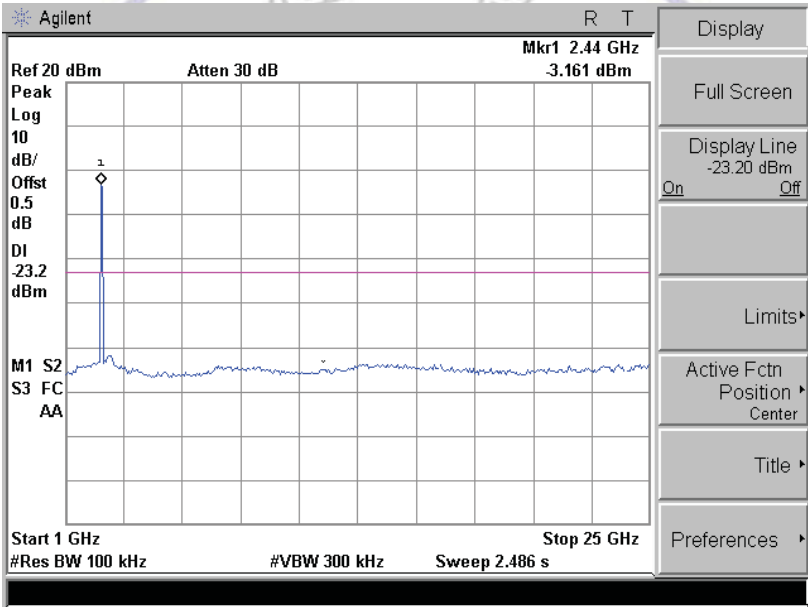
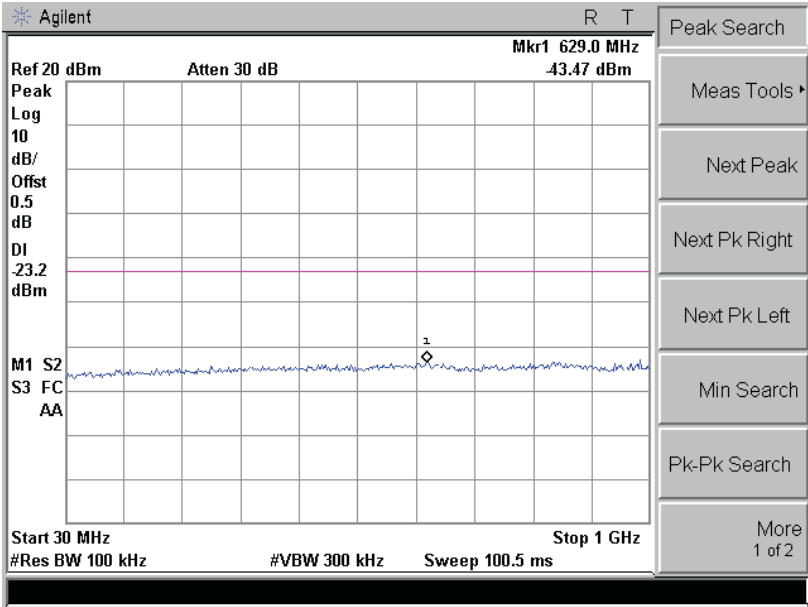


|           |   |                                     |
|-----------|---|-------------------------------------|
| Product   | : | IP Camera                           |
| Test Item | : | RF Antenna Conducted Spurious       |
| Test Mode | : | Mode 4: Transmit by 802.11n (40MHz) |



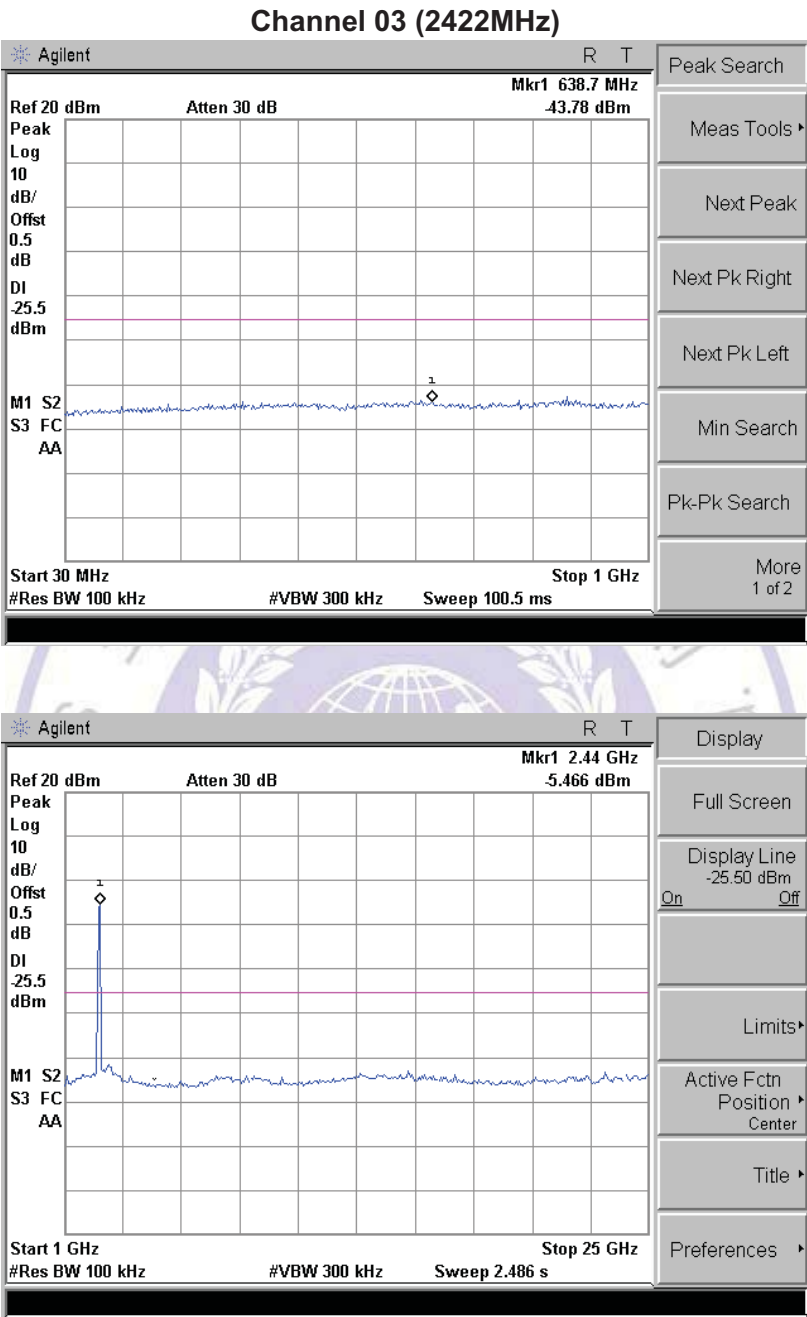


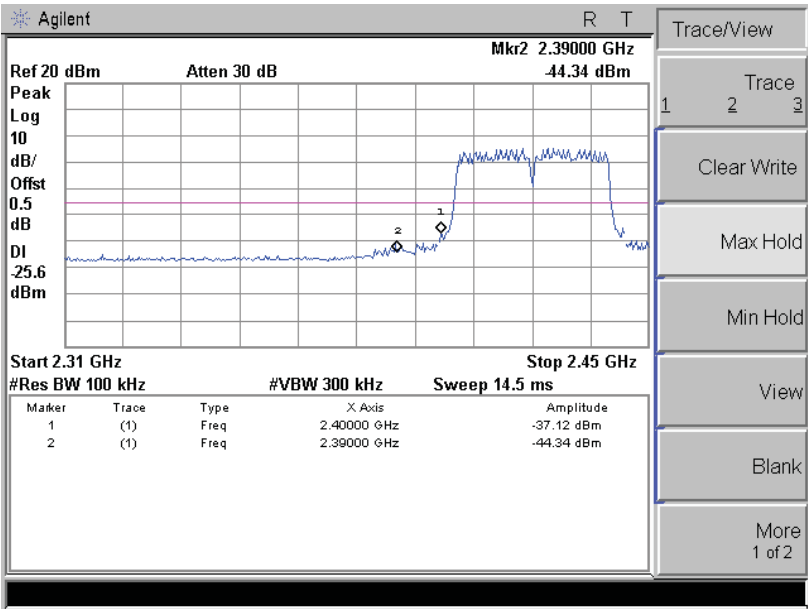

Channel 06 (2437MHz)

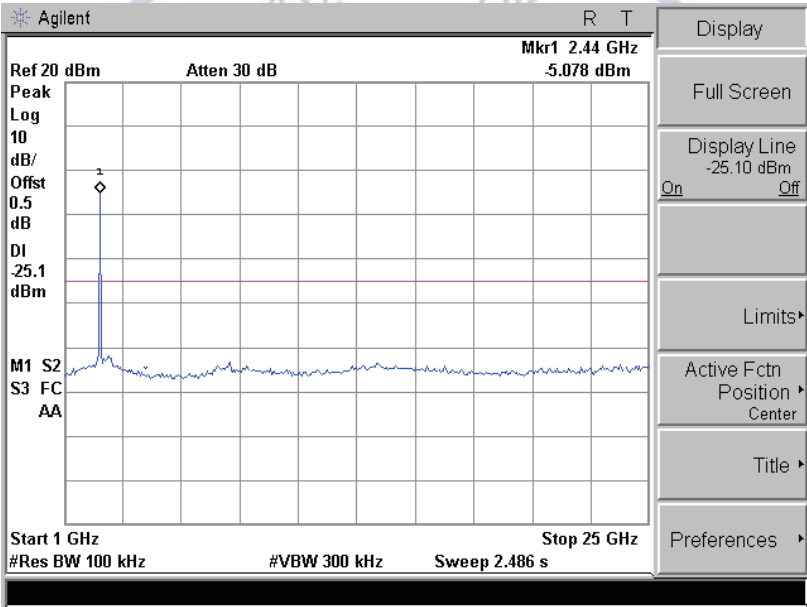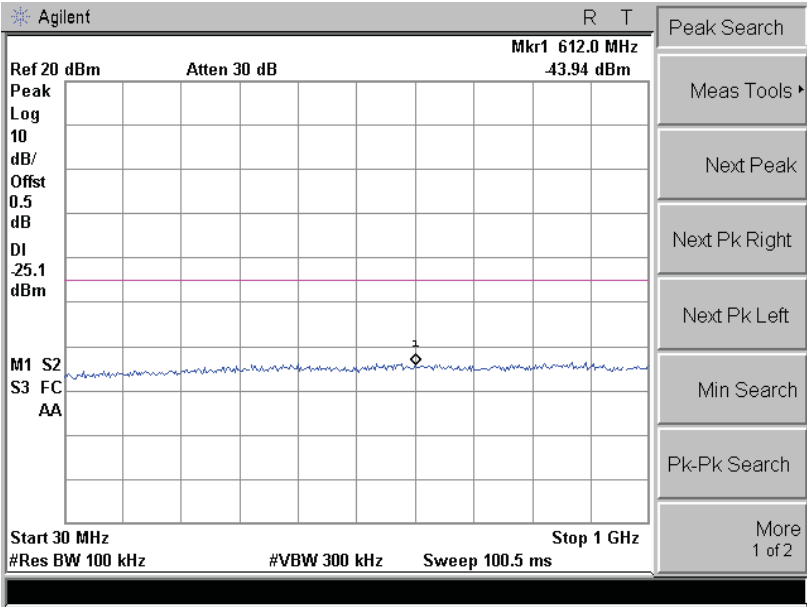

Channel 09 (2452MHz)

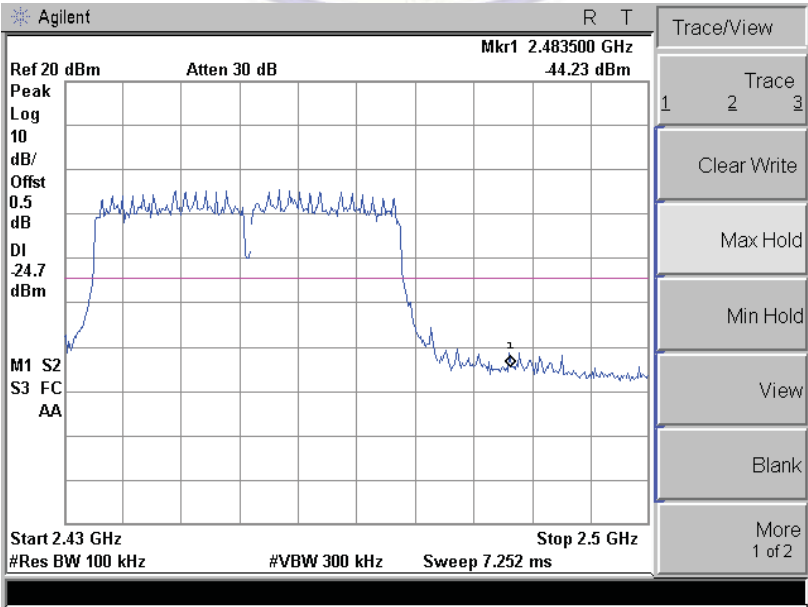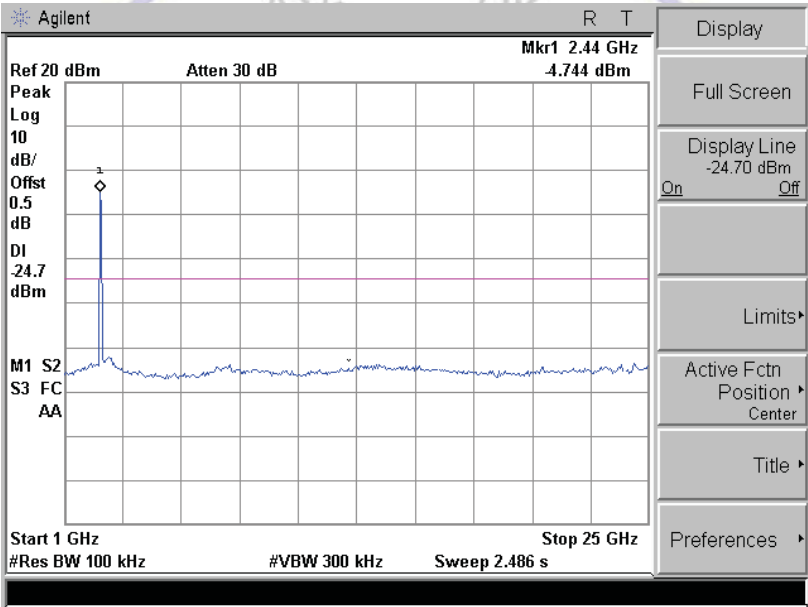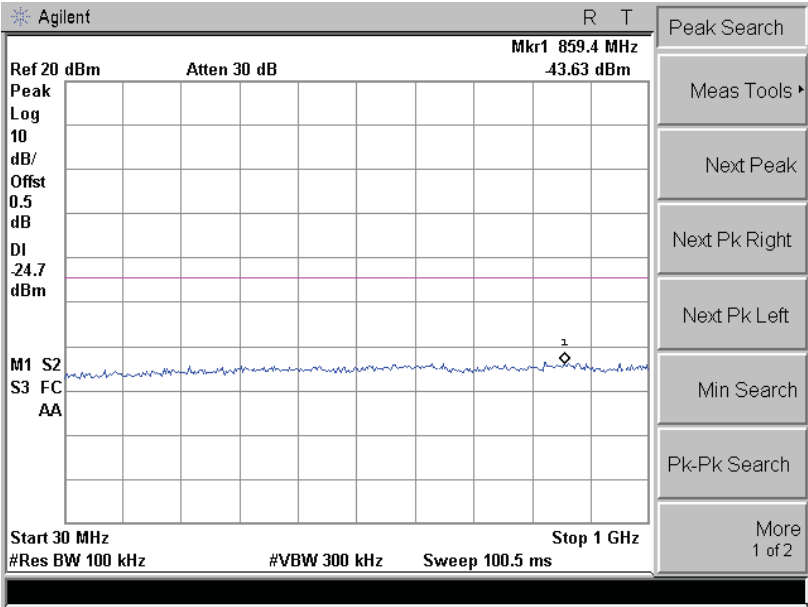

#### 4.8. Antenna Requirement

##### **STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

**Refer to statement below for compliance.**



The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

##### **ANTENNA CONNECTED CONSTRUCTION**

The directional gains of antenna used for transmitting is 2 dBi, and the antenna connector is non-standard and designed with permanent attachment . Please see EUT photo for details.

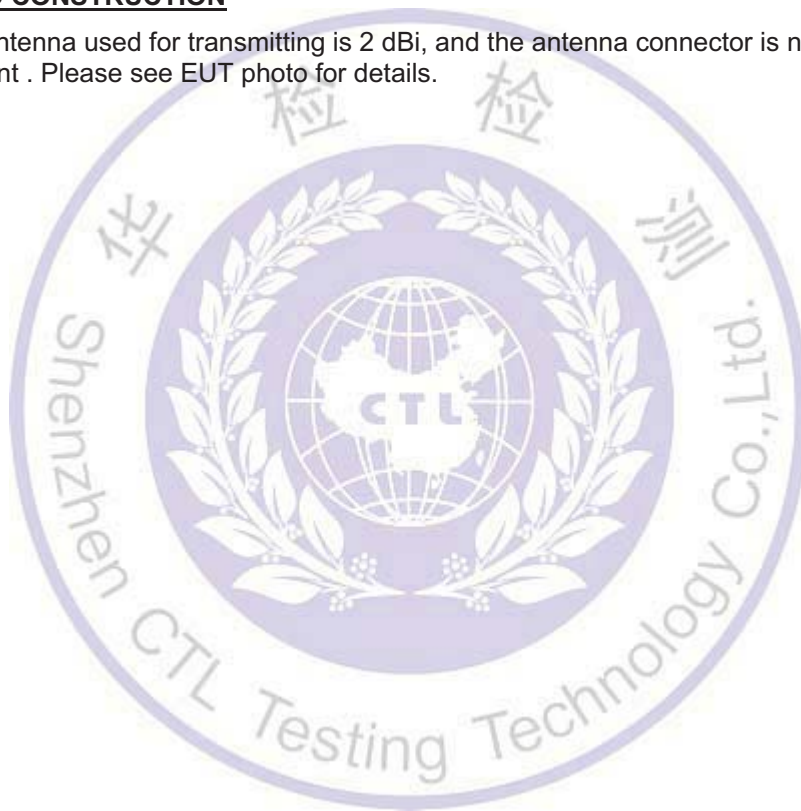

## 5. Test Setup Photos of the EUT

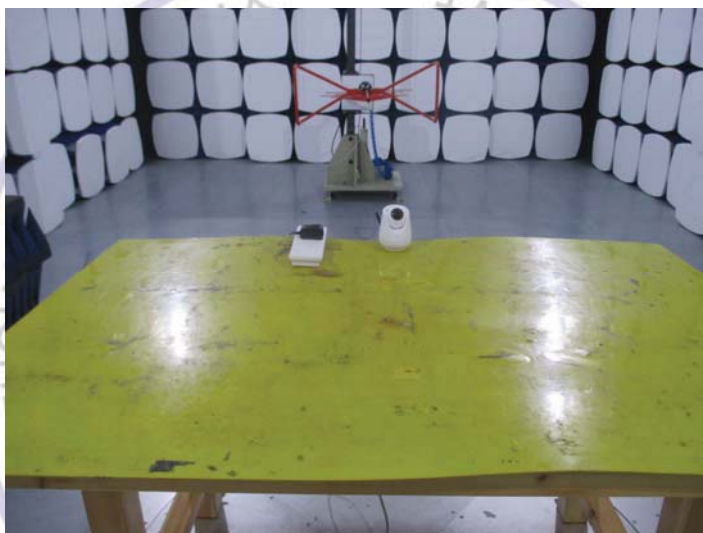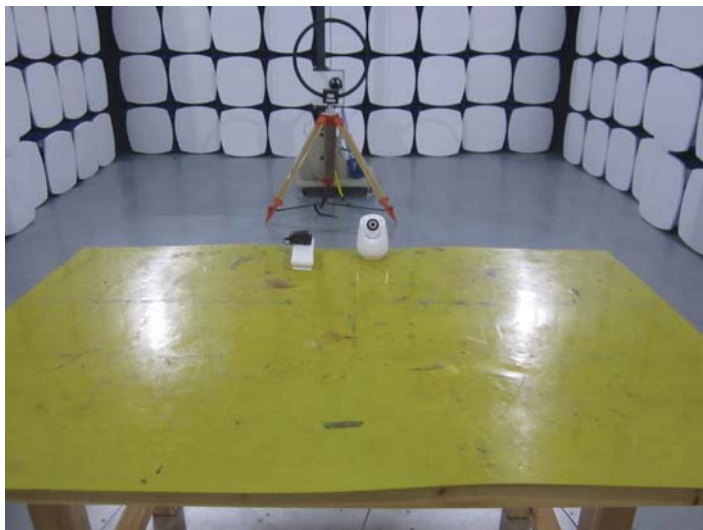



## 6. External and Internal Photos of the EUT



### External Photos of EUT

















Internal Photos of EUT

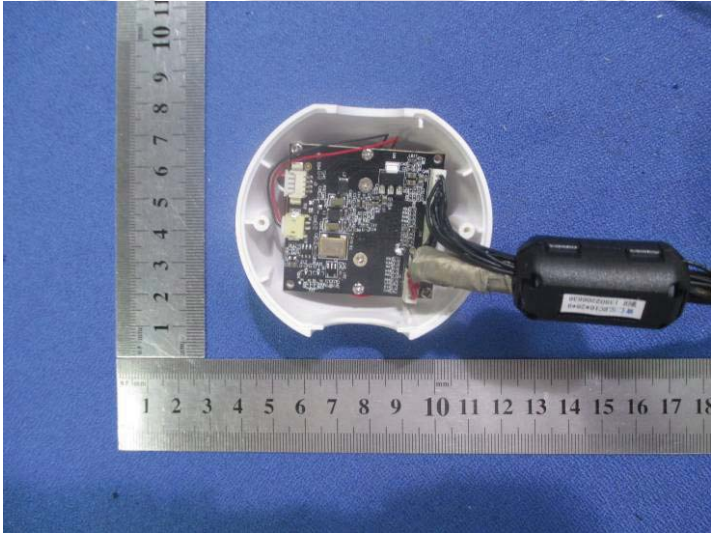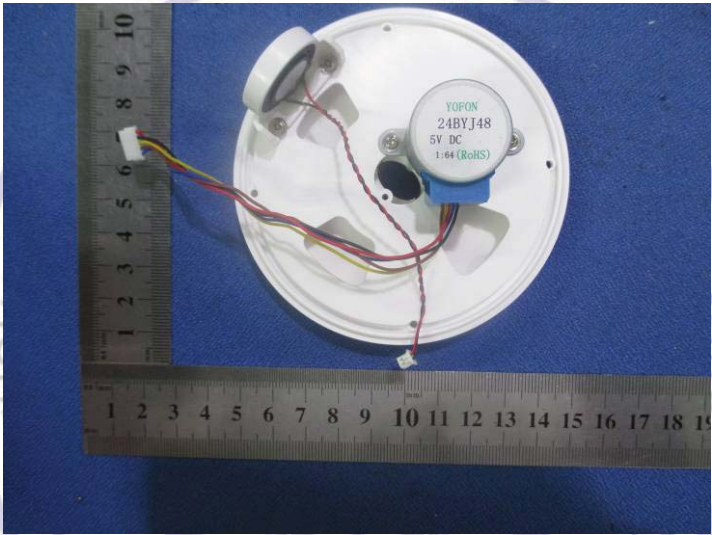

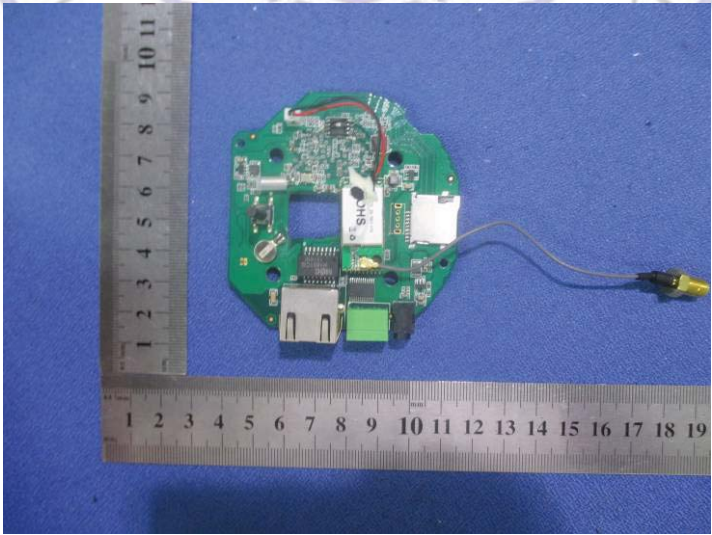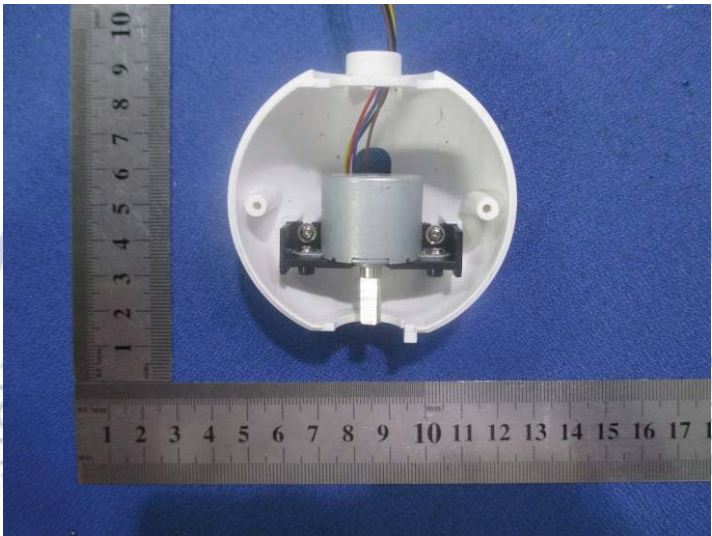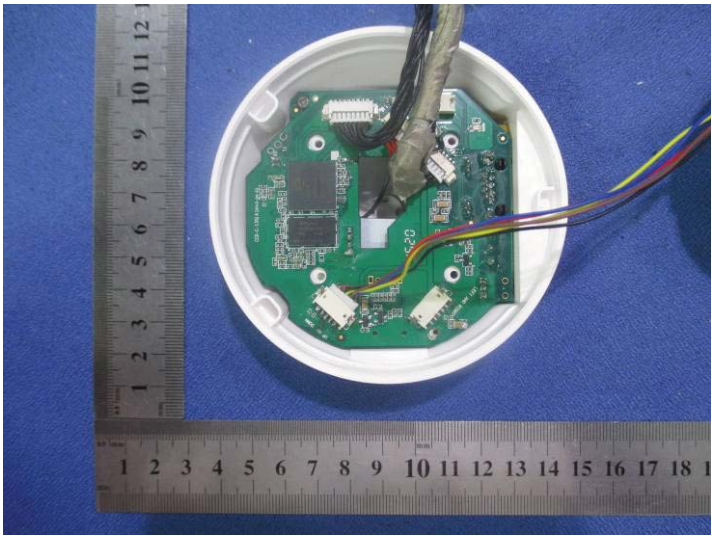

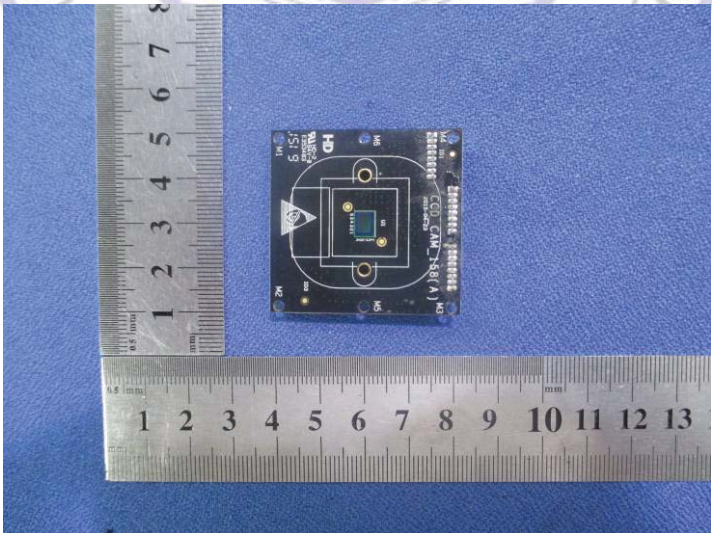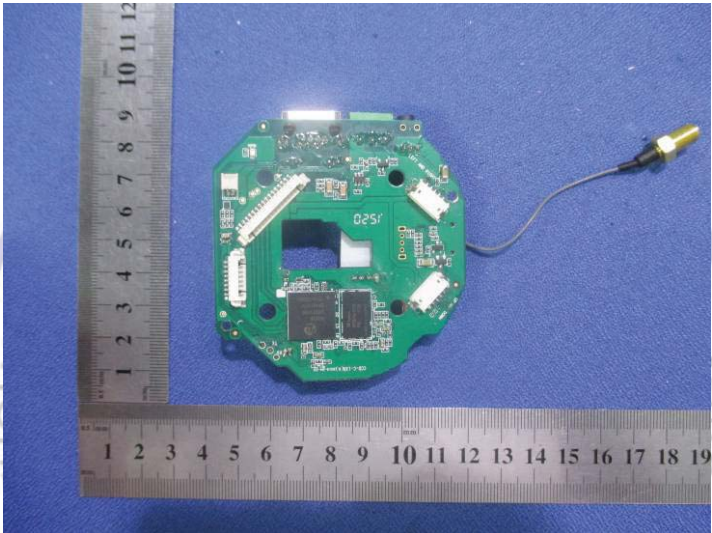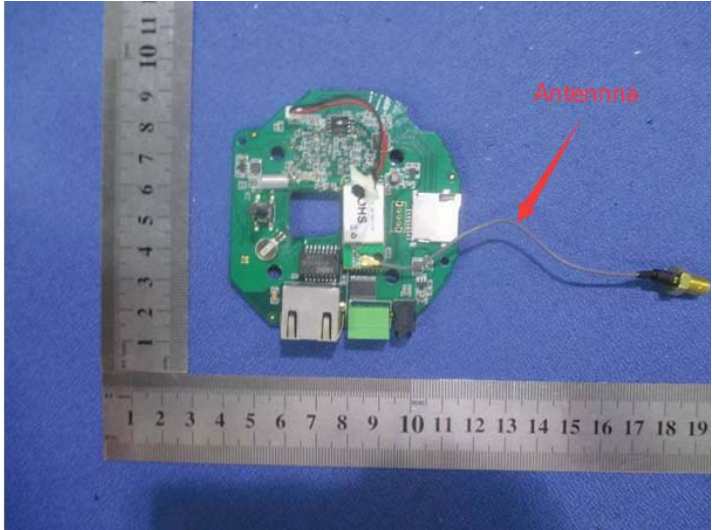

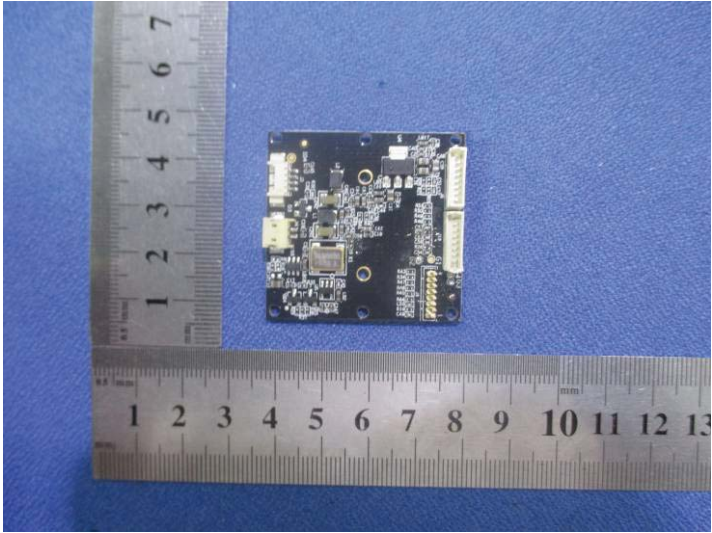

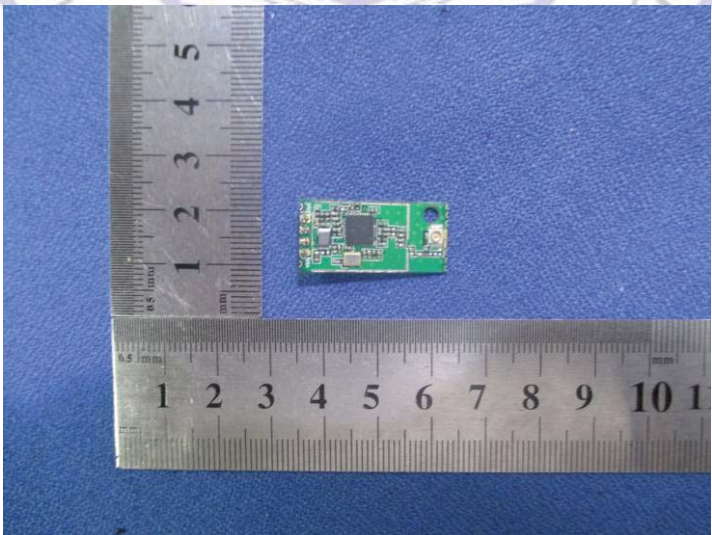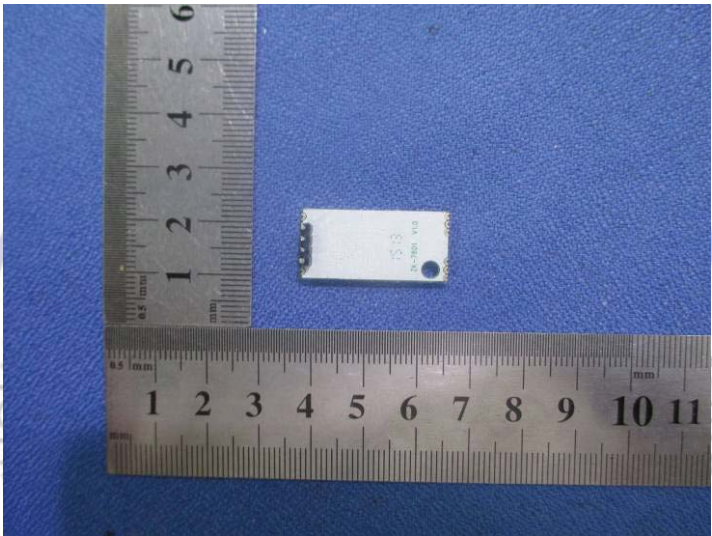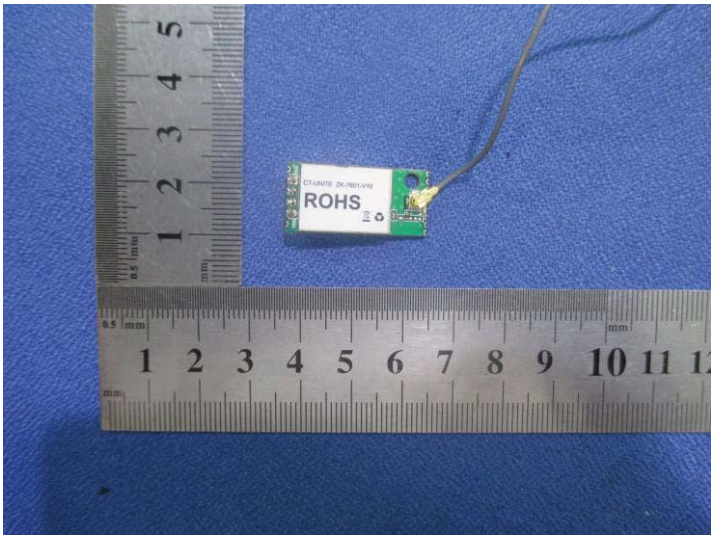

.....End of Report.....