

FCC Part 15B

Measurement and Test Report

For

LB Technology Co., Ltd.

No.5 of Xiaoyang Rd, First Industrial Park, Tanzhou Town,

Zhongshan City, Guangdong, P.R. China

FCC ID: OIE96243W-CP

Test Rule(s):	<u>FCC Part 15 Subpart B</u>
Product Description:	<u>IP VIDEO DOOR PHONE</u>
Tested Model:	<u>96243W-CP</u>
Report No.:	<u>STR15018032I-1</u>
Tested Date:	<u>2015-01-07 to 2015-01-19</u>
Issued Date:	<u>2015-01-20</u>
Tested By:	<u>Vigoss Liang / Engineer</u>
Reviewed By:	<u>Lahm Peng / EMC Manager</u>
Approved & Authorized By:	<u>Jandy so / PSQ Manager</u>
Prepared By:	

Shenzhen SEM.Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....3

1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....3

1.2 TEST STANDARDS.....4

1.3 TEST METHODOLOGY4

1.4 TEST FACILITY4

1.5 EUT SETUP AND OPERATION MODE5

2. SUMMARY OF TEST RESULTS6

3. CONDUCTED EMISSIONS7

3.1 MEASUREMENT UNCERTAINTY7

3.2 TEST EQUIPMENT LIST AND DETAILS7

3.3 TEST PROCEDURE.....7

3.4 BASIC TEST SETUP BLOCK DIAGRAM.....7

3.5 ENVIRONMENTAL CONDITIONS8

3.6 SUMMARY OF TEST RESULTS/PLOTS8

3.7 CONDUCTED EMISSIONS TEST DATA.....8

4. RADIATED EMISSIONS.....11

4.1 MEASUREMENT UNCERTAINTY11

4.2 TEST EQUIPMENT LIST AND DETAILS11

4.3 TEST PROCEDURE.....11

4.4 TEST RECEIVER SETUP12

4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....12

4.6 ENVIRONMENTAL CONDITIONS12

4.7 SUMMARY OF TEST RESULTS/PLOTS12

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: LB Technology Co., Ltd.
Address of applicant: No.5 of Xiaoyang Rd, First Industrial Park, Tanzhou Town, Zhongshan City, Guangdong, P.R. China
Manufacturer: LB Technology Co., Ltd.
Address of manufacturer: No.5 of Xiaoyang Rd, First Industrial Park, Tanzhou Town, Zhongshan City, Guangdong, P.R. China

General Description of EUT	
Product Name:	IP VIDEO DOOR PHONE
Trade Name:	LBtech
Model No.:	96243W-CP
Adding Model(s):	96243-CP, 96243RW-CMS, 96243R-CMS
<i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model 96243W-CP, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Rated Voltage:	DC 12V Adapter
Rated Current:	/
Rated Power:	/
Power Adapter Model:	FJ-SW1200500DU
	INPUT:100-240VAC~50/60Hz; OUTPUT:12VDC,0.5A
Lowest Internal Frequency:	32.768KHz
Highest Internal Frequency:	40MHz
Classification of ITE:	Class B

1.2 Test Standards

The following report is prepared on behalf of the LB Technology Co., Ltd. in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart B, and section 15.205, 15.107, and 15.109 rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

FCC – Registration No.: 934118

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

CNAS Registration No.: L4062

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101).

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark
TM1	Video call	for EMI testing
TM2	/	/

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
Adaptor Cable	1.5	Unshielded	With Core

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	E10	/
Wireless router	/	/	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
Network Cable X 2	10m	Unshielded	Without Core

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.107 (a)	Conducted Emissions	Compliant
§ 15.109 (a)	Radiated Emissions	Compliant

N/A: not applicable

3. Conducted Emissions

3.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is ± 2.88 dB.


3.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2014-05-28	2015-05-27
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2014-05-28	2015-05-27
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2014-05-28	2015-05-27

3.3 Test Procedure

Test is conducting under the description of ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

3.4 Basic Test Setup Block Diagram

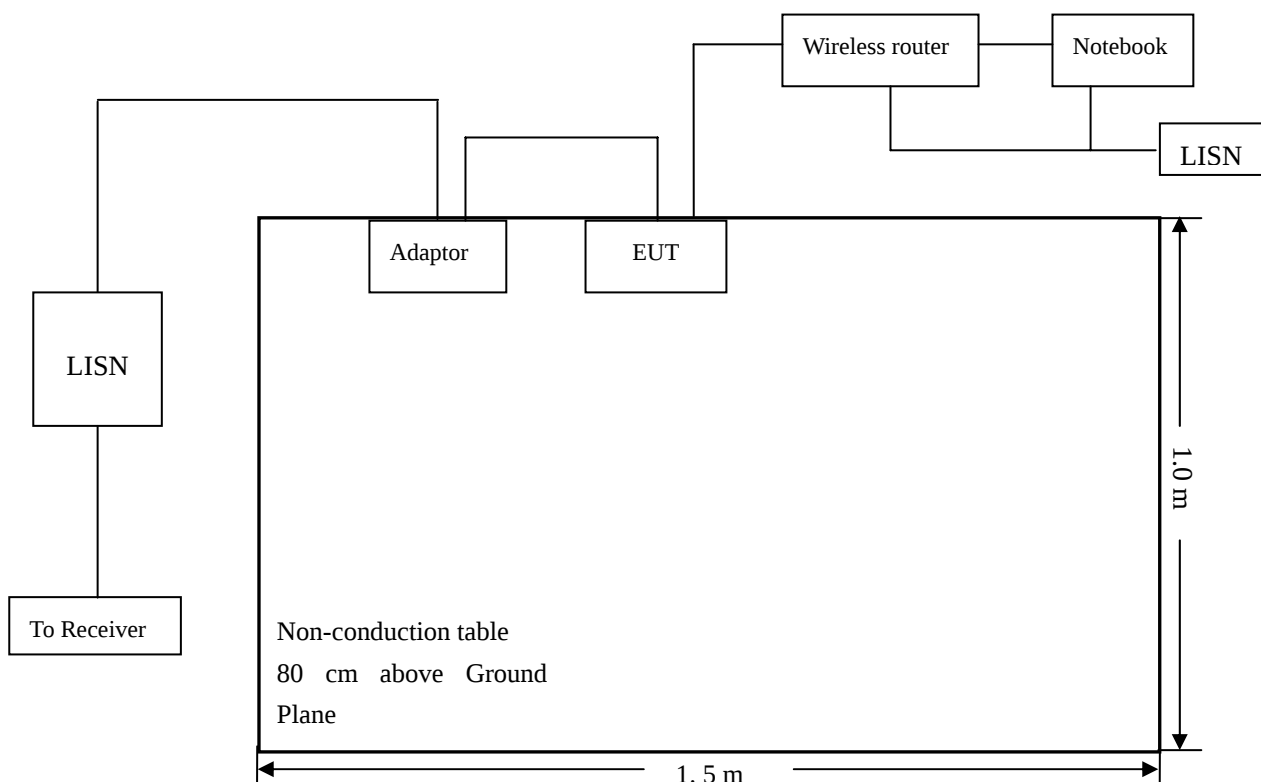

3.5 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

3.6 Summary of Test Results/Plots

According to the data in section 3.7, the EUT complied with the FCC Part 15.107(a) Conducted margin for a Class B device, with the *worst* margin reading of:

-15.4 dB at 0.3180 MHz in the Neutral, AVG detector, 0.15-30MHz

3.7 Conducted Emissions Test Data

Plot of Conducted Emissions Test Data


EUT: IP VIDEO DOOR PHONE

Tested Model: 96243W-CP

Operating Condition: Video call


Comment: AC120V/60Hz Adapter: DV12V-500mA

Test Specification: Neutral

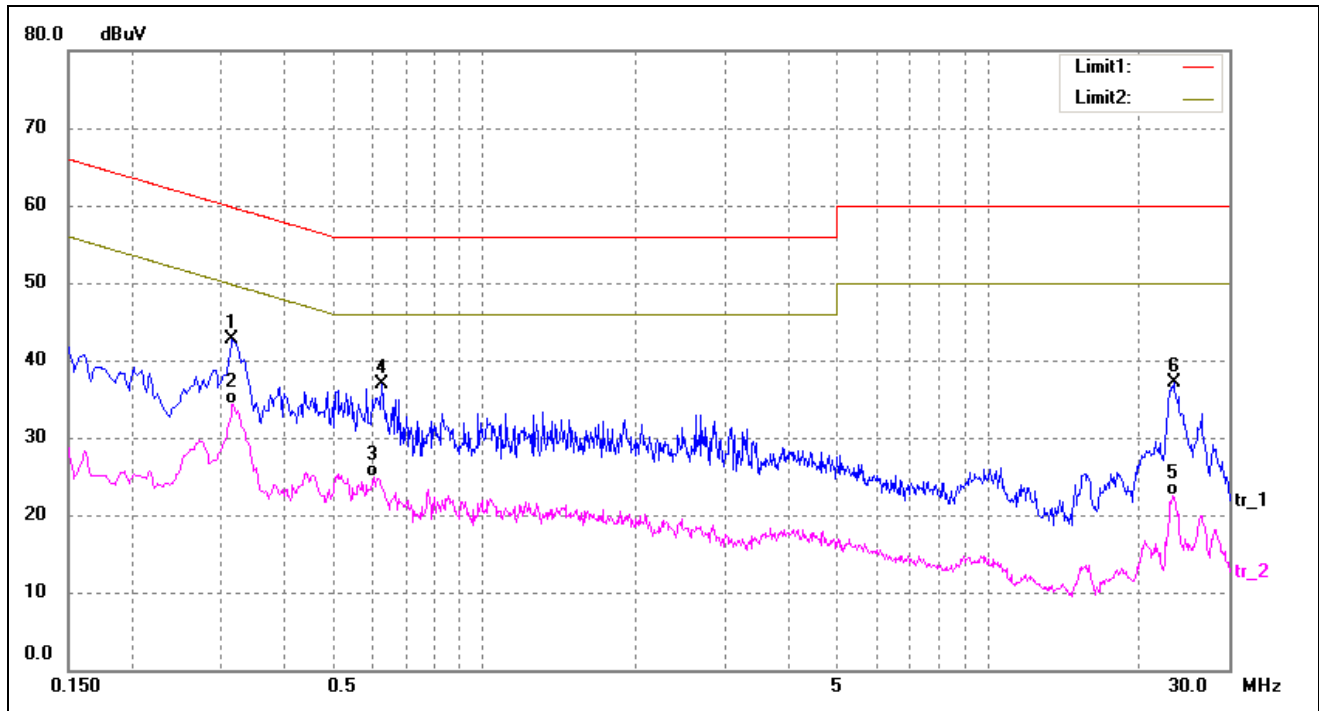

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3180	33.21	9.50	42.71	59.76	-17.05	peak
2	0.3180	24.86	9.50	34.36	49.76	-15.40	AVG
3	0.6060	15.25	9.61	24.86	46.00	-21.14	AVG
4	0.6300	27.25	9.63	36.88	56.00	-19.12	peak
5	23.1980	10.12	12.40	22.52	50.00	-27.48	AVG
6	23.3700	24.68	12.46	37.14	60.00	-22.86	peak

Test Specification: Line

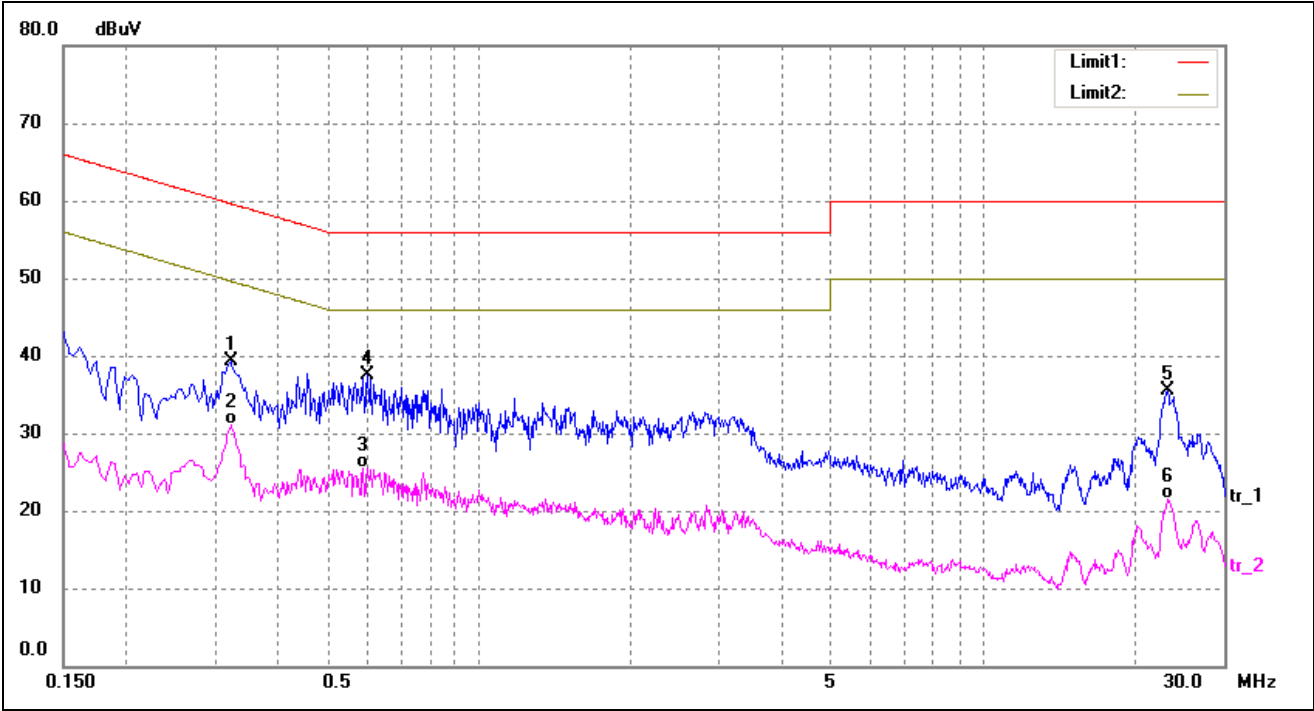

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3220	29.86	9.50	39.36	59.66	-20.30	peak
2	0.3220	21.62	9.50	31.12	49.66	-18.54	AVG
3	0.5900	15.83	9.59	25.42	46.00	-20.58	AVG
4	0.6020	27.94	9.60	37.54	56.00	-18.46	peak
5	23.2220	23.13	12.41	35.54	60.00	-24.46	peak
6	23.2220	9.10	12.41	21.51	50.00	-28.49	AVG

4. Radiated Emissions

4.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any radiation emissions measurement is ± 5.10 dB.

4.2 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2014-05-28	2015-05-27
EMI Test Receiver	R&S	ESVB	825471/005	2014-05-28	2015-05-27
Pre-amplifier	Agilent	8447F	3113A06717	2014-05-28	2015-05-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2014-05-28	2015-05-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2014-05-24	2015-05-23
Horn Antenna	ETS	3117	00086197	2014-05-24	2015-05-23
Loop Antenna	SCHWARZECK	HFRA 5165	9365	2014-05-24	2015-05-23

4.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

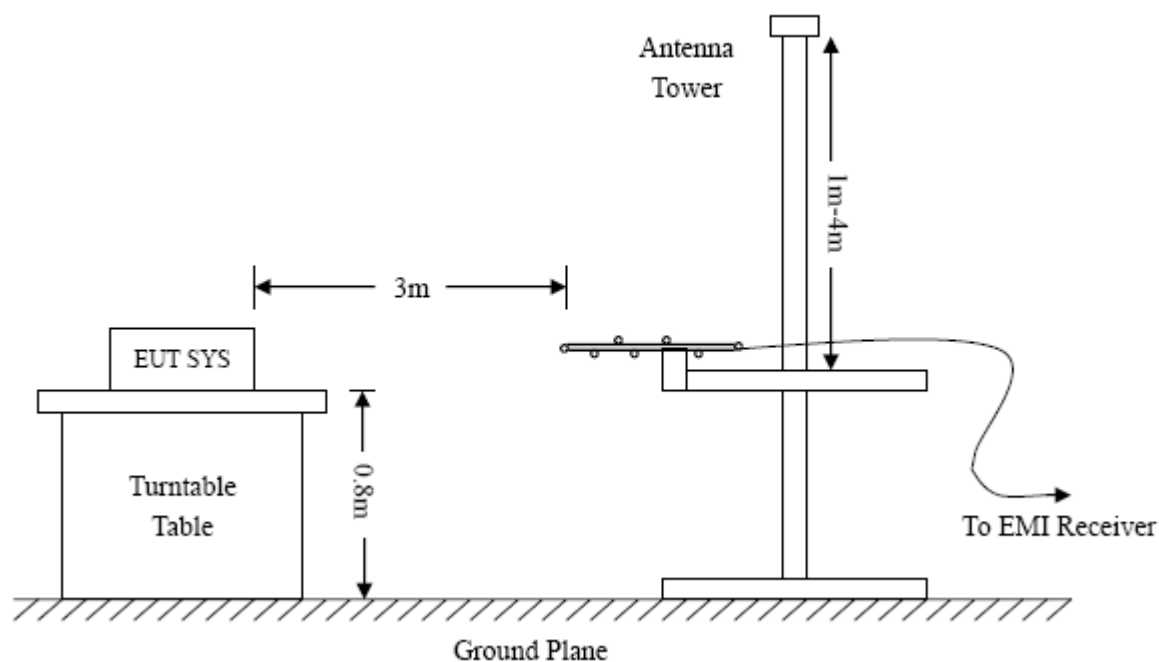

4.4 Test Receiver Setup

Frequency :9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.109(a) Limit}$$

4.6 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	55 %
ATM Pressure:	1011 mbar

4.7 Summary of Test Results/Plots


According to the data, the EUT complied with the FCC Part 15.109(a) rule, and had the worst margin of:

-2.72 dB at 827.4932MHz in the Vertical polarization, 9 kHz to 1 GHz, 3Meters

Plot of Radiated Emissions Test Data


EUT: IP VIDEO DOOR PHONE
 Tested Model: 96243W-CP
 Operating Condition: Video call
 Comment: AC120V/60Hz Adapter: DV12V-500mA

Test Specification: Horizontal

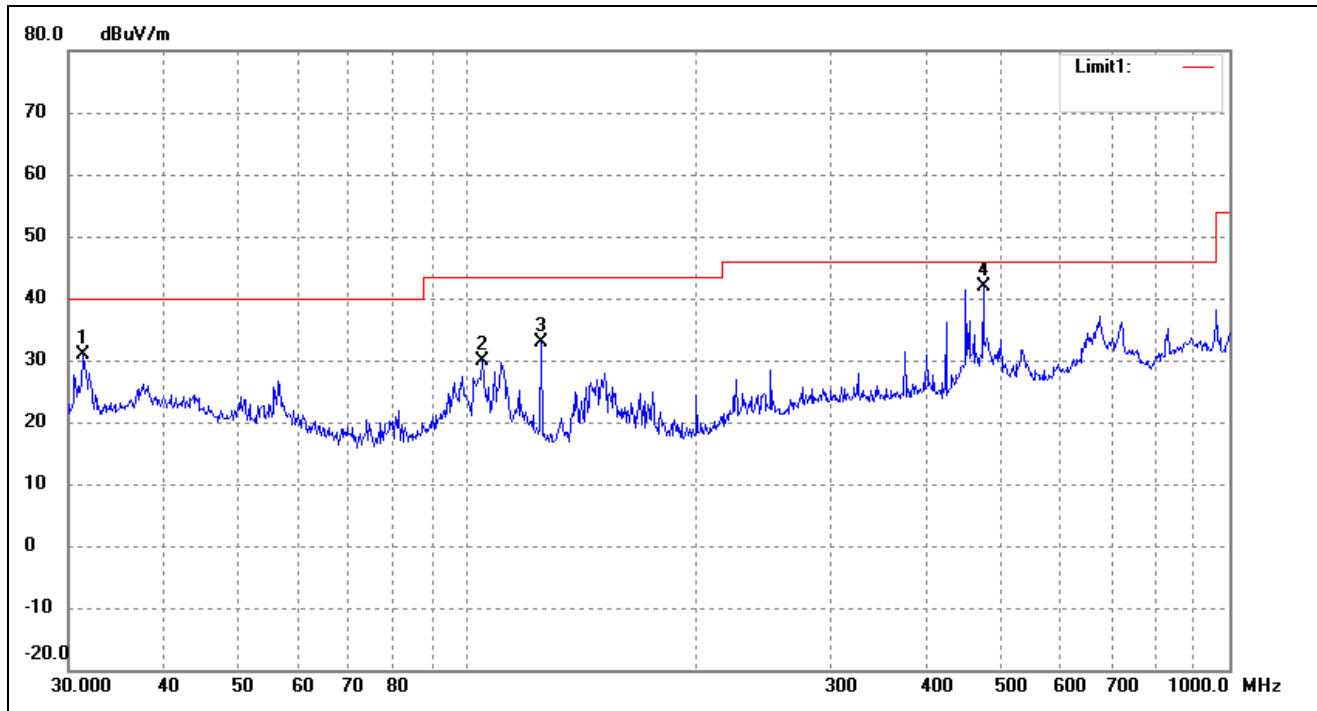

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	31.3992	25.99	4.99	30.98	40.00	-9.02	110	150	peak
2	104.9033	24.28	5.61	29.89	43.50	-13.61	0	100	peak
3	125.0066	29.16	3.61	32.77	43.50	-10.73	0	120	peak
4	475.4991	31.72	10.21	41.93	46.00	-4.07	230	100	peak

Test Specification: Vertical

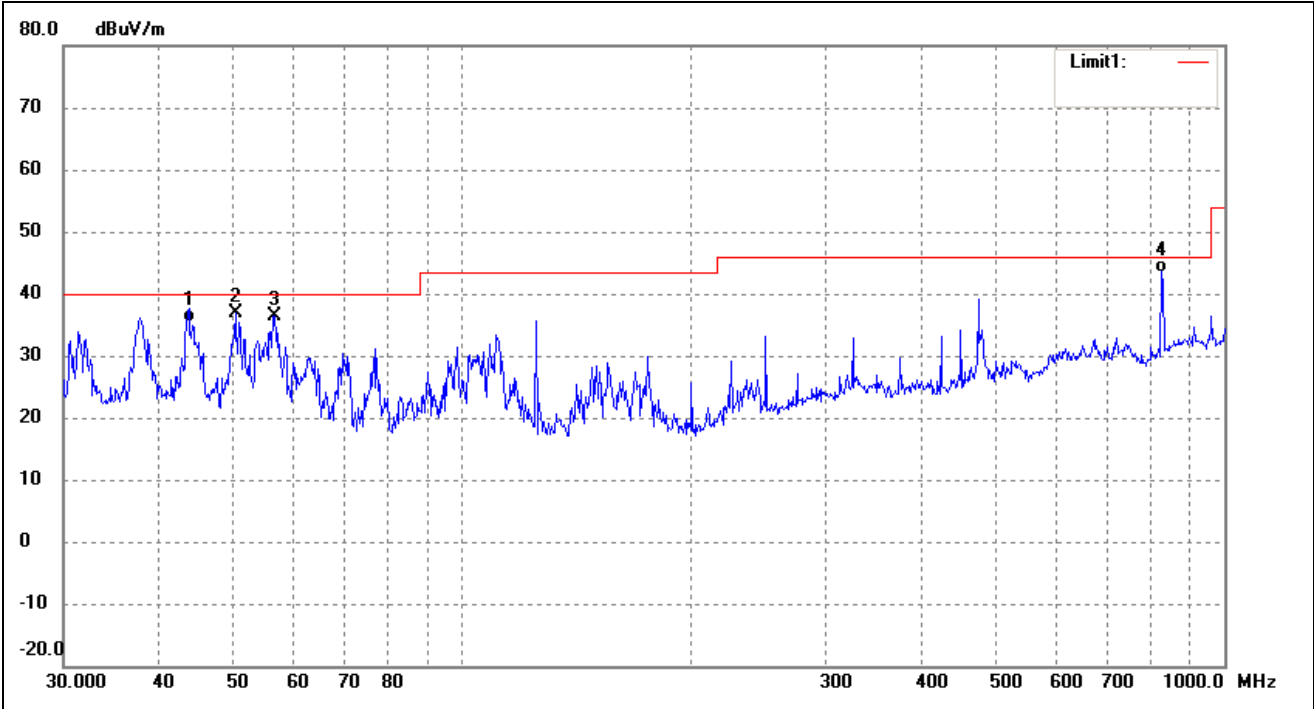

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	43.8119	27.35	8.12	35.47	40.00	-4.53	171	100	QP
2	50.4089	30.72	6.22	36.94	40.00	-3.06	170	100	peak
3	56.7917	30.65	5.66	36.31	40.00	-3.69	164	100	QP
4	827.4932	28.12	15.16	43.28	46.00	-2.72	240	100	QP

Note: Testing is carried out with frequency rang 9kHz to the 1GHz, which above 1GHz is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4.
The measurements greater than 20dB below the limit from 9kHz to 30MHz and test data are not provided.

***** END OF REPORT *****