

## Electromagnetic Emission

# FCC MEASUREMENT REPORT

### CERTIFICATION OF COMPLIANCE

#### FCC Part 15 Certification Measurement

**PRODUCT** : LCD Monitor  
**MODEL/TYPE NO** : DS-1700S  
**FCC ID** : OIOELM-1700S  
**APPLICANT** : Erae Electronics Industry Co., Ltd.  
#371-51, Kasan-Dong, Keumcheon-Ku, Seoul, 153-803, Korea  
Attn.: Woon Seok, Yu / Deputy General Manager  
**MANUFACTURER** : Erae Electronics Industry Co., Ltd.  
#371-51, Kasan-Dong, Keumcheon-Ku, Seoul, 153-803, Korea  
**FCC CLASSIFICATION** : Class B personal computers and peripherals  
**FCC RULE PART(S)** : FCC Part 15 Subpart B  
**FCC PROCEDURE** : Certification  
**TRADE NAME** : ERAE  
**TEST REPORT No.** : ETLE060529.239  
**DATES OF TEST** : June 02, 2006  
**REPORT ISSUE DATE** : June 12, 2006  
**TEST LABORATORY** : ETL Inc. ( FCC Registration Number : 95422)

This LCD Monitor, Model DS-1700S has been tested in accordance with the measurement procedures specified in ANSI C63.4-2003 at the ETL/EMC Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part15 Subpart B:

I attest to the accuracy of data. All measurement herein was performed by me or was made under my supervision and is correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

  
Chon Sik, Kim / Chief Engineer

**ETL Inc.**

#584 Sangwhal-ri, Ganam-myeon, Yaju-gun, Gyeonggi-do, 469-885, Korea  
Tel : 82-31-885-0072 Fax : 82-31-885-0074

## Table of Contents

### FCC Measurement Report

- 1. Introduction**
- 2. Product Information**
- 3. Description of Tests**
- 4. Test Condition**
- 5. Test Results**
  - 5.1 Summary of Test Results**
  - 5.2 Conducted Emissions Measurement**
  - 5.3 Radiated Emissions Measurement**
  - 5.4 Antenna Power Conduction Measurement**
  - 5.5 Picture Sensitivity**
  - 5.6 Noise figure measurement**
- 6. Sample Calculation**
- 7. List of test Equipment used for Measurement**

**Appendix A. FCC ID Label and Location**

**Appendix B. Test Setup Photographs**

**Appendix C. External Photographs**

**Appendix D. Internal Photographs**

**Appendix E. Block Diagram**

**Appendix F. User Manual**

## FCC MEASUREMENT REPORT

**Scope** – Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)

### General Information

**Applicant Name** : Erae Electronics Industry Co., Ltd.

**Address** : 371-51,Kasan-Dong,Keumcheon-Ku,Seoul,  
153-803, Korea

**Attention** : Woon Seok, Yu / Deputy General Manager

- **EUT Type** : LCD Monitor
- **Model Number** : DS-1700S
- **FCC ID** : OIOELM-1700S
- **S/N** : N/A
- **FCC Rule Part(s)** : FCC Part 15 Subpart B
- **Test Procedure** : ANSI C63.4-2003
- **FCC Classification** : Class B personal computers and peripherals
- **Dates of Tests** : June 02, 2006
- **Place of Tests** : ETL Inc.  
EMC Testing Lab. (FCC Registration Number : 95422)  
#584, Sangwhal-ri, Ganam-myeon, Yoju-gun,  
Gyeonggi-do, 469-885, Korea  
Tel : 82-31-885-0072 Fax : 82-31-885-0074
- **Test Report No.** : ETLE060529.239

## 1. INTRODUCTION

The measurement test for radiated and conducted emission test were conducted at the open area test site of E-RAE Testing Laboratory Inc. facility located at #584, Sangwhal-ri, Ganam-myeon, Yoju-gun, Gyeonggi-do, 469-885, Korea. The site is constructed in conformance with the requirements of the ANSI C63.4-2003 and CISPR Publication 16. The ETL has site descriptions on file with the FCC for 3 and 10 meter site configurations. Detailed description of test facility was found to be in compliance with the requirements of Section 2.948 FCC Rules according to the ANSI C63.4-2003 and registered to the Federal Communications Commission (Registration Number : 95422 ).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2003) was used in determining radiated and conducted emissions from the Erae Electronics Industry Co., Ltd., Model: DS-1700S.

## 2. PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the Erae Electronics Industry Co., Ltd., Model: DS-1700S.

### 2.2 General Specification

| Model Name             |                        | DS-1700S                                          |
|------------------------|------------------------|---------------------------------------------------|
| LCD                    | Visible Screen Area    | 337.92(H) × 270.336(V) 17.0 inch                  |
|                        | Pixel Pitch            | 0.264(H) × 0.264(W)                               |
|                        | Maximum Visible Angle  | 75 °/ 60 °/ 75 °/ 75 °<br>(Top/Bottom/Left/Right) |
|                        | Displayed Color        | 16.2 M                                            |
|                        | Response Time          | 8 msec                                            |
|                        | Brightness             | 300 cd/m <sup>2</sup>                             |
|                        | Contrast Rate          | 700:1                                             |
|                        | Recommended Resolution | 1280 × 1024 (60 Hz)                               |
| Video Signal           | Horizontal Frequency   | 31 KHz ~ 81 KHz                                   |
|                        | Vertical Frequency     | 56 Hz ~ 75 Hz                                     |
| Power                  | AC (Adapter)           | 110 – 240 V, 50/60 Hz                             |
|                        | DC (Monitor)           | (12 V, 3.5 A) × 2                                 |
|                        | Power Consumption      | Max. 70 W, Power Save Mode 3 W                    |
| Stand angle adjustment |                        | Upward + 20 °, Downward -5 °                      |
| Characteristics        |                        | Graphic OSD, Auto adjustment                      |

## 3. DESCRIPTION OF TESTS

### 3.1 Conducted Emission Measurement

Conducted emissions measurements were made in accordance with section 11, "Measurement of Information Technology Equipment" of ANSI C63.4-2003. The measurements were performed over the frequency range of 0.15MHz to 30MHz using a 50Ω/50uH LISN as the input transducer to a Spectrum Analyzer or a Test Receiver. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 9 kHz or for "quasi-peak" within a bandwidth of 9 kHz.

The line-conducted emission test is conducted inside a shielded anechoic chamber room with 1 m x 1.5 m x 0.8m wooden table which is placed 40 cm away from the vertical wall and 1.5 m away from the side wall of the chamber room. Two LISN are bonded to the shielded room. The EUT is powered from the LISN and the support equipment is powered from the other LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner  $\phi$  1.2cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the LISN. Non-inductive bundling to a 1m length shortened all interconnecting cables more than 1m. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the EMI Test Receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using to set Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.15 to 30 MHz. The bandwidth of the spectrum analyzer was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission.

Photographs of the worst-case emission can be seen in photographs of conducted emission test setup in Appendix B.

## 3.2 Radiated Emission Measurement

Radiated emission measurements were made in accordance with section 11, "Measurement of Information Technology Equipment" of ANSI C63.4-2003. The measurements were performed over the frequency range of 30 MHz to 1 GHz using antenna as the input transducer to a spectrum analyzer or a field intensity meter. The measurements were made with the detector set for "Quasi-peak" within a bandwidth of 120 kHz.

Preliminary measurements were made at 10 meter using broadband antennas, and spectrum analyzer to determine the frequency producing the maximum emission in shielded room. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 to 1000 MHz using Log-Bicon antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used. Final measurements were made open site at 10-meters. The test equipment was placed on a wooden turn-table. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR Quasi-peak mode and the bandwidth of the receiver was set to 120 kHz or 1MHz depending on the frequency of type of signal. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high nonmetallic 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation to the EUT and/or support equipment and changing the polarity of the antenna, whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

## 4. TEST CONDITION

### 4.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the EUT and the supported equipments were installed to meet FCC requirement and operated in a manner and which tends to maximize its emission level in a typical application.

### 4.2 EUT operation

| Operating Mode                                        | The worst operating condition |
|-------------------------------------------------------|-------------------------------|
| Stand-by mode                                         | X                             |
| 640 * 480 Vf = 75 Hz, Full "H" pattern display mode   | X                             |
| 800 * 600 Vf = 75 Hz, Full "H" pattern display mode   | X                             |
| 1024 * 768 Vf = 75 Hz, Full "H" pattern display mode  | X                             |
| 1280 * 1024 Vf = 75 Hz, Full "H" pattern display mode | ◎                             |

◎ : Worst case investigated during the test.

### 4.3 Support Equipment Used

#### EUT – LCD Monitor

FCC ID : OIOELM-1700S  
Model Name : DS-1700S  
Serial No. : N/A  
Manufacturer : Erae Electronics Industry Co., Ltd.  
Power Supply Type : Power Supply from DC 12V of AC/DC Adapter  
Power Cord : Shielded, Detachable : 1.2m (2 EA)  
Data Cable : D-SUB 1.5 m (2 EA), DVI 1.5 m (2 EA)

#### Support Unit 1 – Personal computer (DELL)

FCC ID : N/A (DoC)  
Model Name : DHM  
Serial No. : G9MB71S  
Manufacturer : DELL Asia Pacific Sdn.  
Power Supply Type : Switching  
Power Cord : Non-Shielded, Detachable: 1.2m  
Data Port : RGB out:1, DVI out:1, Parallel:1, RS-232:1, PS/2: 2, USB: 4, RJ-45:1  
Audio in:1, Audio out:1, MIC in:1

#### Support Unit 2 – Personal computer (DELL)

FCC ID : N/A (DoC)  
Model Name : DHM  
Serial No. : H9MB71S  
Manufacturer : DELL Asia Pacific Sdn.  
Power Supply Type : Switching  
Power Cord : Non-Shielded, Detachable: 1.2m  
Data Port : RGB out:1, DVI out:1, Parallel:1, RS-232:1, PS/2: 2, USB: 4, RJ-45:1  
Audio in:1, Audio out:1, MIC in:1

**Support Unit 3 – Keyboard**

FCC ID : N/A (DoC)  
Model Name : KB-9963  
Serial No. : B26960GBUKO13F  
Manufacturer : Chicony Elec.  
Power Supply Type : N/A  
Power Cord : N/A  
Data Cable : Shielded, 1.5m

**Support Unit 4 – Keyboard**

FCC ID : N/A (DoC)  
Model Name : KB-9963  
Serial No. : B26960LGML00X  
Manufacturer : Chicony Elec.  
Power Supply Type : N/A  
Power Cord : N/A  
Data Cable : Shielded, 1.5m

**Support Unit 5 – Mouse**

FCC ID : N/A (DoC)  
Model Name : M-S34  
Serial No. : LNA10212779  
Manufacturer : Logitech  
Power Supply Type : N/A  
Power Cord : N/A  
Data Cable : None-Shielded, 1.2m

**Support Unit 6 – Mouse**

FCC ID : N/A (DoC)  
Model Name : M-S34  
Serial No. : LNA10212746  
Manufacturer : Logitech  
Power Supply Type : N/A  
Power Cord : N/A  
Data Cable : None-Shielded, 1.2m

## 5. TEST RESULTS

### 5.1 Summary of Test Results

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

| FCC Rule | Measurement Required           | Result                  |
|----------|--------------------------------|-------------------------|
| 15.107   | Conducted Emission Measurement | <b>Passed by 9.2 dB</b> |
| 15.109   | Radiated Emission Measurement  | <b>Passed by 3.1 dB</b> |

The data collected shows that the **Erae Electronics Industry Co., Ltd. / LCD Monitor / DS-1700S** complied with technical requirements of above rules part 15.107 and 15.109 Class B Limits and CISPR Publication 22.

The equipment is not modified anything, mechanical or circuits to improve EMI status during a measurement. No EMI suppression device(s) was added and/or modified during testing.

## 5.2 Conducted Emissions Measurement

|                       |                                                      |
|-----------------------|------------------------------------------------------|
| EUT                   | LCD Monitor / DS-1700S (SN :N/A)                     |
| Limit apply to        | FCC Part 15. 107(CISPR Pub.22 Class B)               |
| Test Date             | June 02, 2006                                        |
| Operating Condition   | 1280 * 1024 Vf = 75Hz, Full "H" pattern display mode |
| Environment Condition | Humidity Level : 53 % R.H., Temperature : 24 °C      |
| Result                | Passed by 9.2 dB                                     |

### Conducted Emission Test Data

The following table shows the highest levels of conducted emissions on both polarizations of hot and neutral line.

Detector mode: CISPR Quasi-Peak mode ( 6dB Bandwidth : 9 kHz )

| Frequency<br>[MHz] | Result<br>[dB $\mu$ V] |         | Phase<br>(*H/**N) | Limit<br>[dB $\mu$ V] |         | Margin<br>[dB] |         |
|--------------------|------------------------|---------|-------------------|-----------------------|---------|----------------|---------|
|                    | Quasi-peak             | Average |                   | Quasi-peak            | Average | Quasi-peak     | Average |
| 0.185              | 37.8                   | 31.8    | N                 | 64.3                  | 54.3    | 26.5           | 22.5    |
| 0.378              | 40.1                   | 39.1    | H                 | 58.3                  | 48.3    | 18.2           | 9.2     |
| 0.427              | 33.3                   | 30.0    | H                 | 57.3                  | 47.3    | 24.0           | 17.3    |
| 0.489              | 37.0                   | 32.0    | H                 | 56.2                  | 46.2    | 19.2           | 14.2    |
| 0.541              | 33.6                   | 29.6    | N                 | 56.0                  | 46.0    | 22.4           | 16.4    |
| 1.110              | 37.8                   | 35.0    | N                 | 56.0                  | 46.0    | 18.2           | 11.0    |
| 1.351              | 29.9                   | 24.5    | H                 | 56.0                  | 46.0    | 26.1           | 21.5    |
| 14.752             | 30.7                   | 26.1    | N                 | 60.0                  | 50.0    | 29.3           | 23.9    |
| 17.884             | 35.7                   | 30.0    | H                 | 60.0                  | 50.0    | 24.3           | 20.0    |
| 21.077             | 34.3                   | 27.8    | H                 | 60.0                  | 50.0    | 25.7           | 22.2    |

NOTES: 1. \* H: HOT Line , \*\*N: Neutral Line

2. Margin value = Limit – Result


3. Measurement were performed at the AC Power Inlet in the frequency band of 150 kHz ~ 30 MHz according to the FCC Part 15 and CISPR 22 Class B




Test Engineer: Jae Young, Kwon

Line: HOT Line

Limit : — Quasi-Peak  
— Average

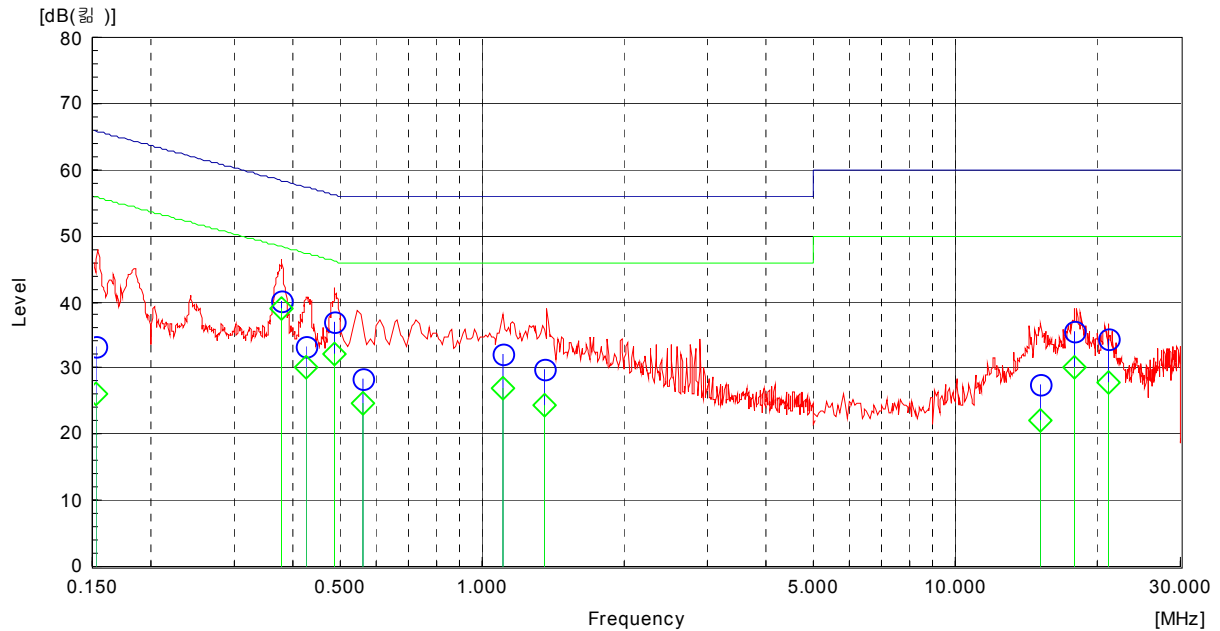

Line: Neutral Line

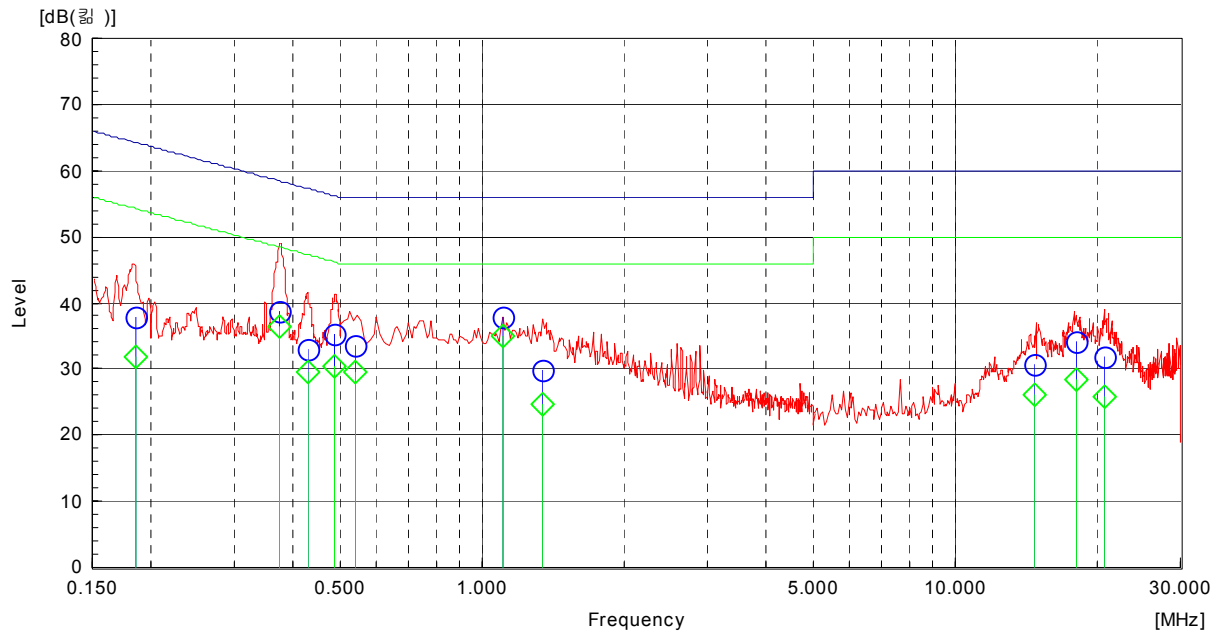

Quasi-peak ○ Average ◇

## 5.3. Radiated Emissions Measurement

|                       |                                                      |
|-----------------------|------------------------------------------------------|
| EUT                   | LCD Monitor / DS-1700S (SN :N/A)                     |
| Limit apply to        | FCC Part 15. 109(CISPR Pub.22 Class B)               |
| Test Date             | June 02, 2006                                        |
| Operating Condition   | 1280 * 1024 Vf = 75Hz, Full "H" pattern display mode |
| Environment Condition | Humidity Level : 53 % R.H., Temperature : 24 °C      |
| Result                | Passed by 3.1 dB                                     |

### Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Detector mode: CISPR Quasi-Peak mode (6dB Bandwidth: 120 kHz)

| Frequency [MHz] | Reading [dB $\mu$ V] | Polarization (*H/**V) | Ant. Factor [dB/m] | Cable Loss [dB $\mu$ V] | Emission Level [dB $\mu$ V/m] | Limit [dB $\mu$ V/m] | Margin [dB] |
|-----------------|----------------------|-----------------------|--------------------|-------------------------|-------------------------------|----------------------|-------------|
| 32.56           | 16.13                | V                     | 8.92               | 1.45                    | 26.50                         | 30.0                 | 3.50        |
| 62.04           | 15.84                | V                     | 8.44               | 2.12                    | 26.40                         | 30.0                 | 3.60        |
| 119.31          | 12.73                | V                     | 10.89              | 3.09                    | 26.70                         | 30.0                 | 3.30        |
| 145.22          | 11.70                | V                     | 11.72              | 3.48                    | 26.90                         | 30.0                 | 3.10        |
| 186.12          | 12.98                | V                     | 9.89               | 3.93                    | 26.80                         | 30.0                 | 3.20        |
| 418.42          | 9.62                 | H                     | 14.96              | 6.82                    | 31.40                         | 37.0                 | 5.60        |
| 459.08          | 8.39                 | H                     | 16.04              | 7.27                    | 31.70                         | 37.0                 | 5.30        |
| 540.38          | 4.60                 | V                     | 17.85              | 8.25                    | 30.70                         | 37.0                 | 6.30        |
| 573.96          | 5.16                 | V                     | 18.30              | 8.64                    | 32.10                         | 37.0                 | 4.90        |
| 688.85          | 4.14                 | V                     | 20.23              | 9.53                    | 33.90                         | 37.0                 | 3.10        |

NOTES : \* H : Horizontal polarization , \*\* V : Vertical polarization

Result = Reading + Antenna factor + Cable loss

Margin value = Limit - Result

The measurement was performed for the frequency range 30 MHz ~ 1 000 MHz according to the CISPR 22 Class B



Test Engineer: Jae Young, Kwon

## 6. SAMPLE CALCULATION

### Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.  
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

$$dB(\mu V) = 20 \log_{10} (\mu V)$$

$$dB\mu V = dBm + 107$$

Example : @ 145.22 MHz

$$\text{Class B Limit} = 31.7 \mu V/m = 30 \text{ dB } \mu V/m$$

$$\text{Reading} = 11.70 \text{ dB } \mu V$$

$$\text{Antenna Factor + Cable Loss} = 11.72 + 3.48 = 15.20 \text{ dB } \mu V/m$$

$$\text{Total} = 26.9 \text{ dB } \mu V/m$$

$$\text{Margin} = 30 - 26.9 = 3.1 \text{ dB}$$

$$= 3.1 \text{ dB below Limit}$$

## 7. List of test equipments used for measurements

| Test Equipment                      |                   | Model    | Mfg.         | Serial No. | Cal. Due Date |
|-------------------------------------|-------------------|----------|--------------|------------|---------------|
| <input checked="" type="checkbox"/> | EMI TEST Receiver | ESVS 10  | R & S        | 835165/001 | 07-04-25      |
| <input checked="" type="checkbox"/> | EMI TEST Receiver | ESPI     | R & S        | 100478     | 06-10-17      |
| <input checked="" type="checkbox"/> | LISN              | 3816-2   | EMCO         | 1002       | 06-10-17      |
| <input checked="" type="checkbox"/> | LISN              | 3825/2   | EMCO         | 9208-1995  | 07-04-06      |
| <input checked="" type="checkbox"/> | LogBicon Antenna  | VULB9165 | Schwarz Beck | 2023       | 06-07-05      |
| <input checked="" type="checkbox"/> | Turn-Table        | DETT-03  | Daeil EMC    | -          | N/A           |
| <input checked="" type="checkbox"/> | Antenna Master    | DEAM-03  | Daeil EMC    | -          | N/A           |

**End of Test Report**