




REVISIONS			
REV	DESCRIPTION	DATE	APPV
A	INITIAL RELEASE OF LINX INTERNAL DRAWING	5-DEC-16	SAH
B	UPDATED IC CERTIFICATION NUMBER TO REMOVE DASH WAS 5840A-HUMA-900 IS 5840A-HUMA900		

ACTUAL SIZE

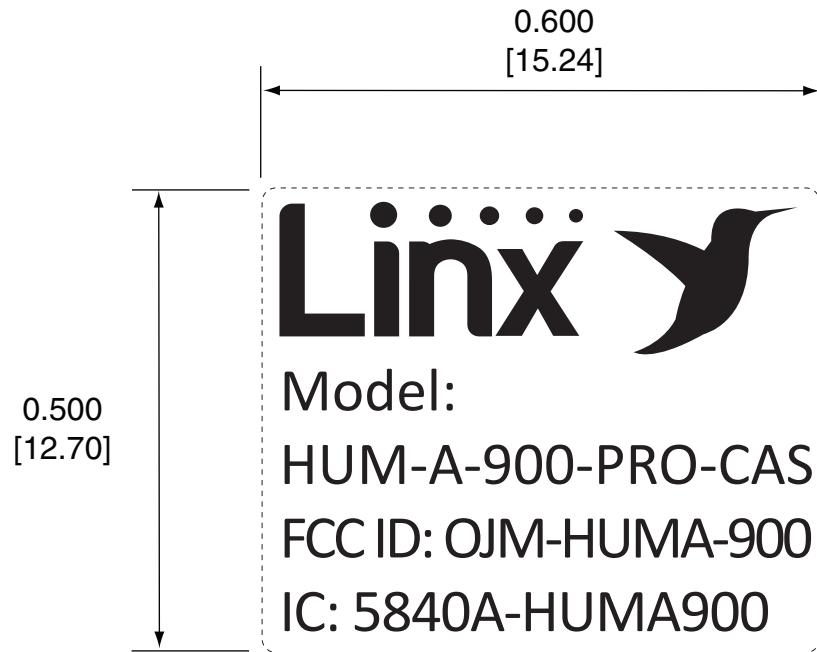

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. ALL DIMENSIONS ARE IN INCHES [mm].
2. DIMENSIONS APPLY AFTER FINISHING.
3. MANUFACTURE TO BE COMPLIANT WITH EU RoHS DIRECTIVE, USE MATERIALS THAT DO NOT CONTAIN REACH SUBSTANCES OF VERY HIGH CONCERN >1000ppm, AND USE DRC CONFLICT-FREE SOURCED MATERIALS.
4. MATERIAL: WHITE KAPTON POLYIMIDE WITH 1 MIL PERMANENT ACRYLIC ADHESIVE BACK.
5. LABEL MUST SURVIVE PROCESSING MULTIPLE REFLOW CYCLES OF 260°C PEAK TEMPERATURE FOR A MINIMUM OF 10-SECONDS.
6. INK MUST REMAIN INTACT AND IMAGE BE LEGIBLE AFTER TYPICAL ELECTRONIC MANUFACTURING CLEANING PROCESSES, INCLUDING:
 - DEIONIZED WATER SPRAY RINSE
 - APPLICATION OF ISOPROPYL ALCOHOL USING MODERATE PRESSURE AND A COTTON TIPPED APPLICATOR
 - APPLICATION OF ISOPROPYL ALCOHOL USING MODERATE PRESSURE AND A CLEAN GAUZE.

WARNING: THIS DRAWING CONTAINS PROPRIETARY INFORMATION THAT IS THE SOLE PROPERTY OF LINX TECHNOLOGIES, AND SHALL BE TREATED AS SUCH. NO DISCLOSURE OR REPRODUCTION OF THIS DOCUMENT IS PERMITTED, IN WHOLE OR IN PART, WITHOUT THE EXPRESS WRITTEN PERMISSION OF LINX TECHNOLOGIES OR ITS DESIGNATED AGENTS.

MATERIAL: SEE NOTE 4	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y 14.5.	PROJECTION:  ANGLES: ±1°
	TOLERANCES: .X ± .1 .XX ± .01 .XXX ± .005	
FINISH:	DRAWN: B.MURPHY	DT: 13-JUN-16
	ENGR: S.HOGAN	DT: 5-DEC-16

		159 ORT LANE MERLIN, OR 97532	
TITLE: LABEL, TRM, AMPLIFIED HUMMINGBIRD CERTIFIED, 900MHz, PRO, CAST. CONN			
SIZE A	DWG. NO. LBL-HUM-A-900-PROCAS		REV B
SCALE: 1:1		DO NOT SCALE DRAWING	SHEET 1 OF 1

Linx 

Model:

HUM-A-900-PRO-UFL

FCC ID: OJM-HUMA-900

IC: 5840A-HUMA900