



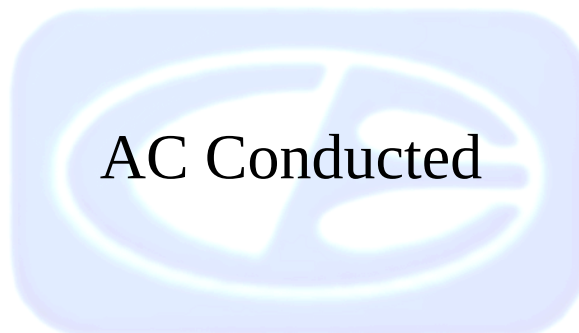

Protocol A
Transmit Mode

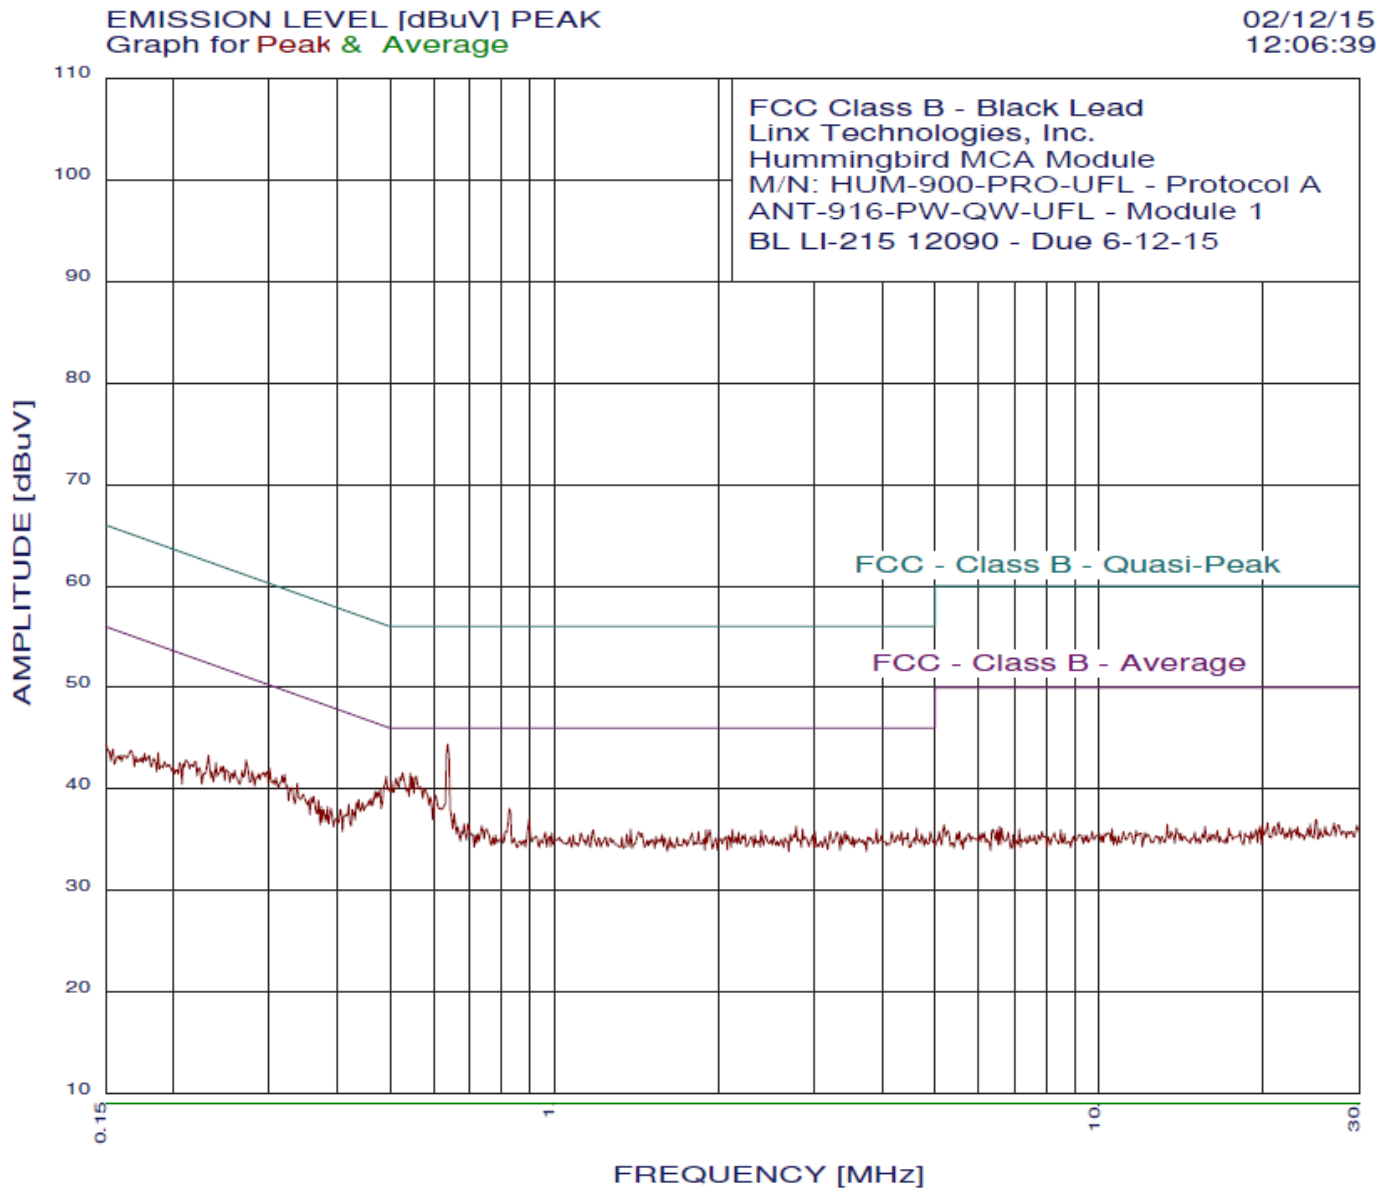

page 1/1


02/12/15 12:06:39

FCC Class B - Black Lead
Linx Technologies, Inc.
HUM-900-PRO-UFL
ANT-916-PW-QW-UFL - Protocol A
115 VAC
BL LI-215 12090 - Due 6-12-15
Test Engineer : Kenneth Lee

50 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 0.01 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.637	44.38	46.00	-1.62
2	0.544	41.57	46.00	-4.43
3	0.527	41.57	46.00	-4.43
4	0.558	41.28	46.00	-4.72
5	0.550	41.17	46.00	-4.83
6	0.521	41.17	46.00	-4.83
7	0.492	41.26	46.14	-4.88
8	0.513	41.06	46.00	-4.94
9	0.502	40.76	46.00	-5.24
10	0.567	40.18	46.00	-5.82
11	0.538	40.07	46.00	-5.93
12	0.577	39.98	46.00	-6.02
13	0.479	39.96	46.36	-6.40
14	0.605	39.39	46.00	-6.61
15	0.469	39.77	46.53	-6.77
16	0.474	39.66	46.45	-6.78
17	0.592	39.19	46.00	-6.81
18	0.461	39.07	46.67	-7.60
19	0.457	38.87	46.76	-7.89
20	0.826	38.05	46.00	-7.95
21	0.438	38.97	47.11	-8.14
22	0.272	42.85	51.07	-8.21
23	0.300	42.00	50.23	-8.23
24	0.320	41.43	49.71	-8.28
25	0.445	38.67	46.98	-8.31
26	0.655	37.58	46.00	-8.42
27	0.317	41.32	49.79	-8.47
28	0.433	38.67	47.19	-8.52
29	0.297	41.70	50.32	-8.62
30	0.338	40.55	49.26	-8.72
31	0.293	41.59	50.45	-8.86
32	0.309	41.11	50.01	-8.90
33	0.899	37.05	46.00	-8.95
34	0.419	38.47	47.46	-8.99
35	0.279	41.77	50.85	-9.08
36	0.232	43.30	52.39	-9.09
37	0.286	41.48	50.63	-9.15
38	0.324	40.33	49.62	-9.29
39	0.305	40.81	50.10	-9.29
40	0.329	40.14	49.48	-9.35
41	0.267	41.85	51.20	-9.35
42	0.426	37.97	47.33	-9.36
43	0.683	36.57	46.00	-9.43
44	0.362	39.26	48.69	-9.43
45	0.694	36.57	46.00	-9.43
46	0.239	42.61	52.12	-9.52
47	0.283	41.17	50.72	-9.54
48	0.347	39.46	49.04	-9.59
49	0.358	39.16	48.78	-9.62
50	0.259	41.83	51.47	-9.63

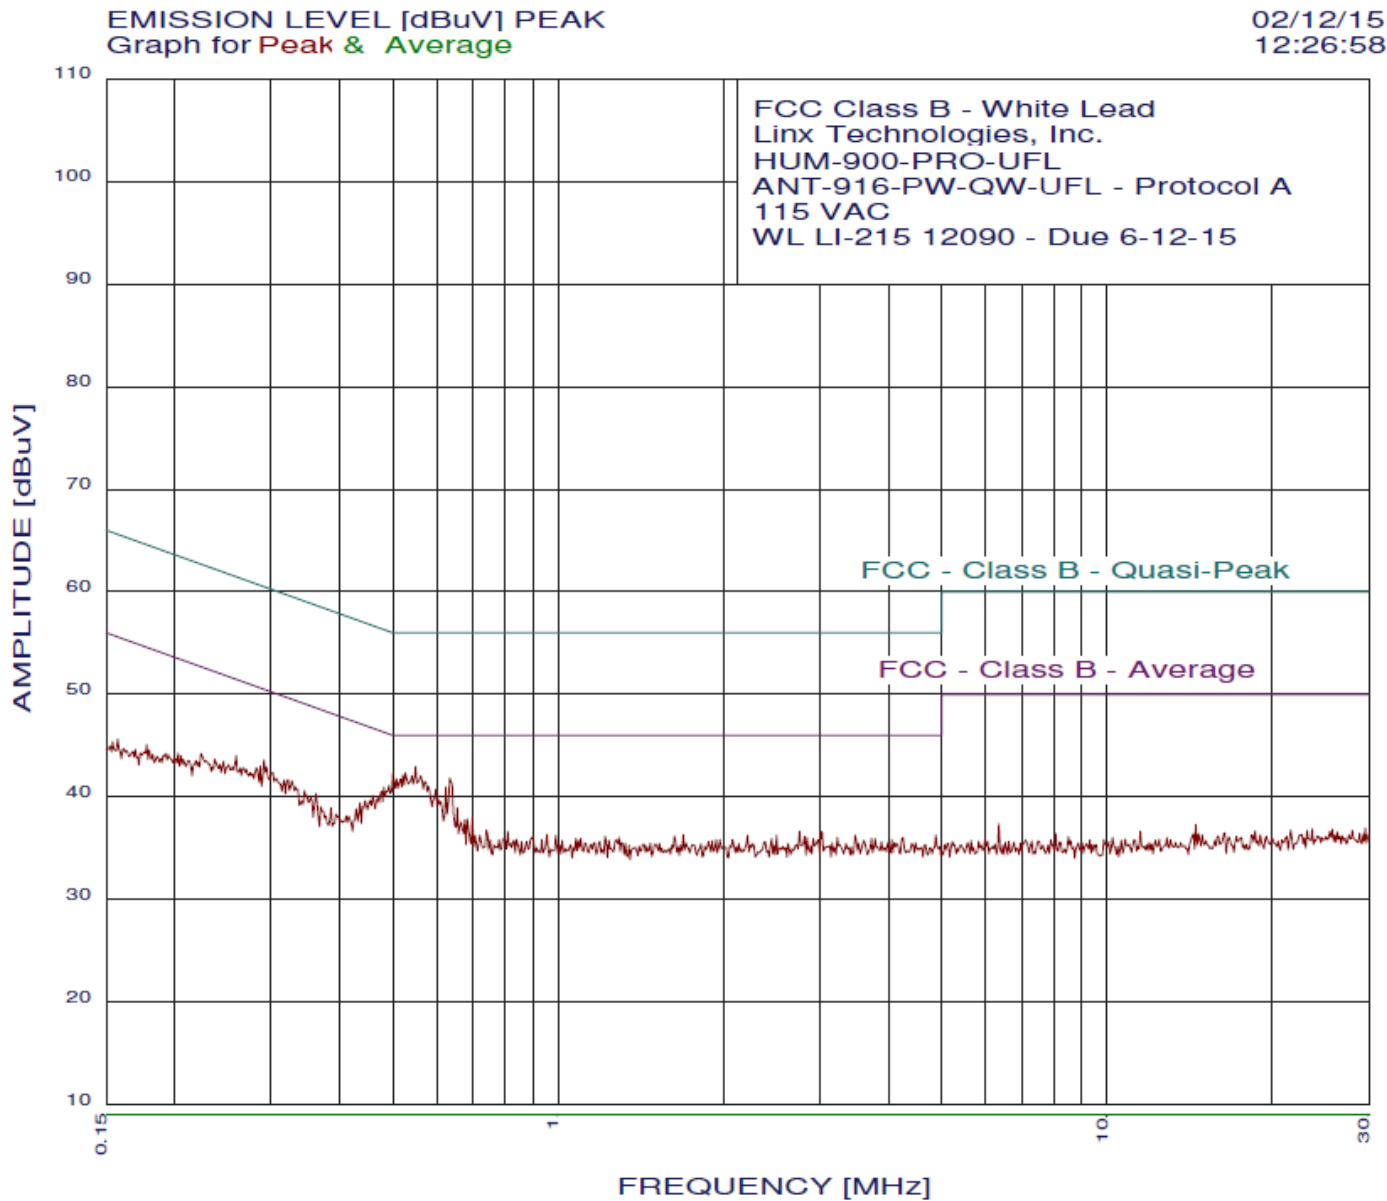

page 1/1


02/12/15 12:26:58

FCC Class B - White Lead
Linx Technologies, Inc.
HUM-900-PRO-UFL
ANT-916-PW-QW-UFL - Protocol A
115 VAC
WL LI-215 12090 - Due 6-12-15
Test Engineer : Kenneth Lee

50 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 0.01 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.550	42.95	46.00	-3.05
2	0.527	42.35	46.00	-3.65
3	0.500	42.35	46.01	-3.66
4	0.521	42.15	46.00	-3.85
5	0.541	42.05	46.00	-3.95
6	0.561	42.04	46.00	-3.96
7	0.634	41.84	46.00	-4.16
8	0.508	41.75	46.00	-4.25
9	0.516	41.75	46.00	-4.25
10	0.570	41.44	46.00	-4.56
11	0.580	41.04	46.00	-4.96
12	0.492	41.15	46.14	-4.99
13	0.624	40.94	46.00	-5.06
14	0.598	40.74	46.00	-5.26
15	0.481	40.94	46.32	-5.37
16	0.476	40.54	46.40	-5.86
17	0.605	39.74	46.00	-6.26
18	0.611	39.54	46.00	-6.46
19	0.459	40.14	46.71	-6.57
20	0.469	39.94	46.53	-6.59
21	0.291	43.60	50.49	-6.89
22	0.655	38.94	46.00	-7.06
23	0.454	39.64	46.80	-7.16
24	0.445	39.63	46.98	-7.34
25	0.259	44.00	51.47	-7.46
26	0.294	42.89	50.41	-7.52
27	0.286	43.02	50.63	-7.61
28	0.435	39.43	47.15	-7.72
29	0.302	42.37	50.19	-7.82
30	0.282	42.83	50.76	-7.93
31	0.327	41.59	49.53	-7.94
32	0.322	41.70	49.66	-7.96
33	0.698	38.04	46.00	-7.96
34	0.440	39.03	47.06	-8.03
35	0.683	37.84	46.00	-8.16
36	0.317	41.62	49.79	-8.17
37	0.676	37.74	46.00	-8.26
38	0.305	41.76	50.10	-8.34
39	0.362	40.31	48.69	-8.38
40	0.332	40.97	49.39	-8.42
41	0.270	42.67	51.11	-8.44
42	0.428	38.83	47.28	-8.45
43	0.246	43.45	51.90	-8.46
44	0.665	37.54	46.00	-8.46
45	0.345	40.63	49.09	-8.46
46	0.266	42.78	51.24	-8.46
47	0.223	44.22	52.70	-8.48
48	0.237	43.67	52.21	-8.54
49	0.263	42.79	51.33	-8.54
50	0.251	43.13	51.73	-8.60

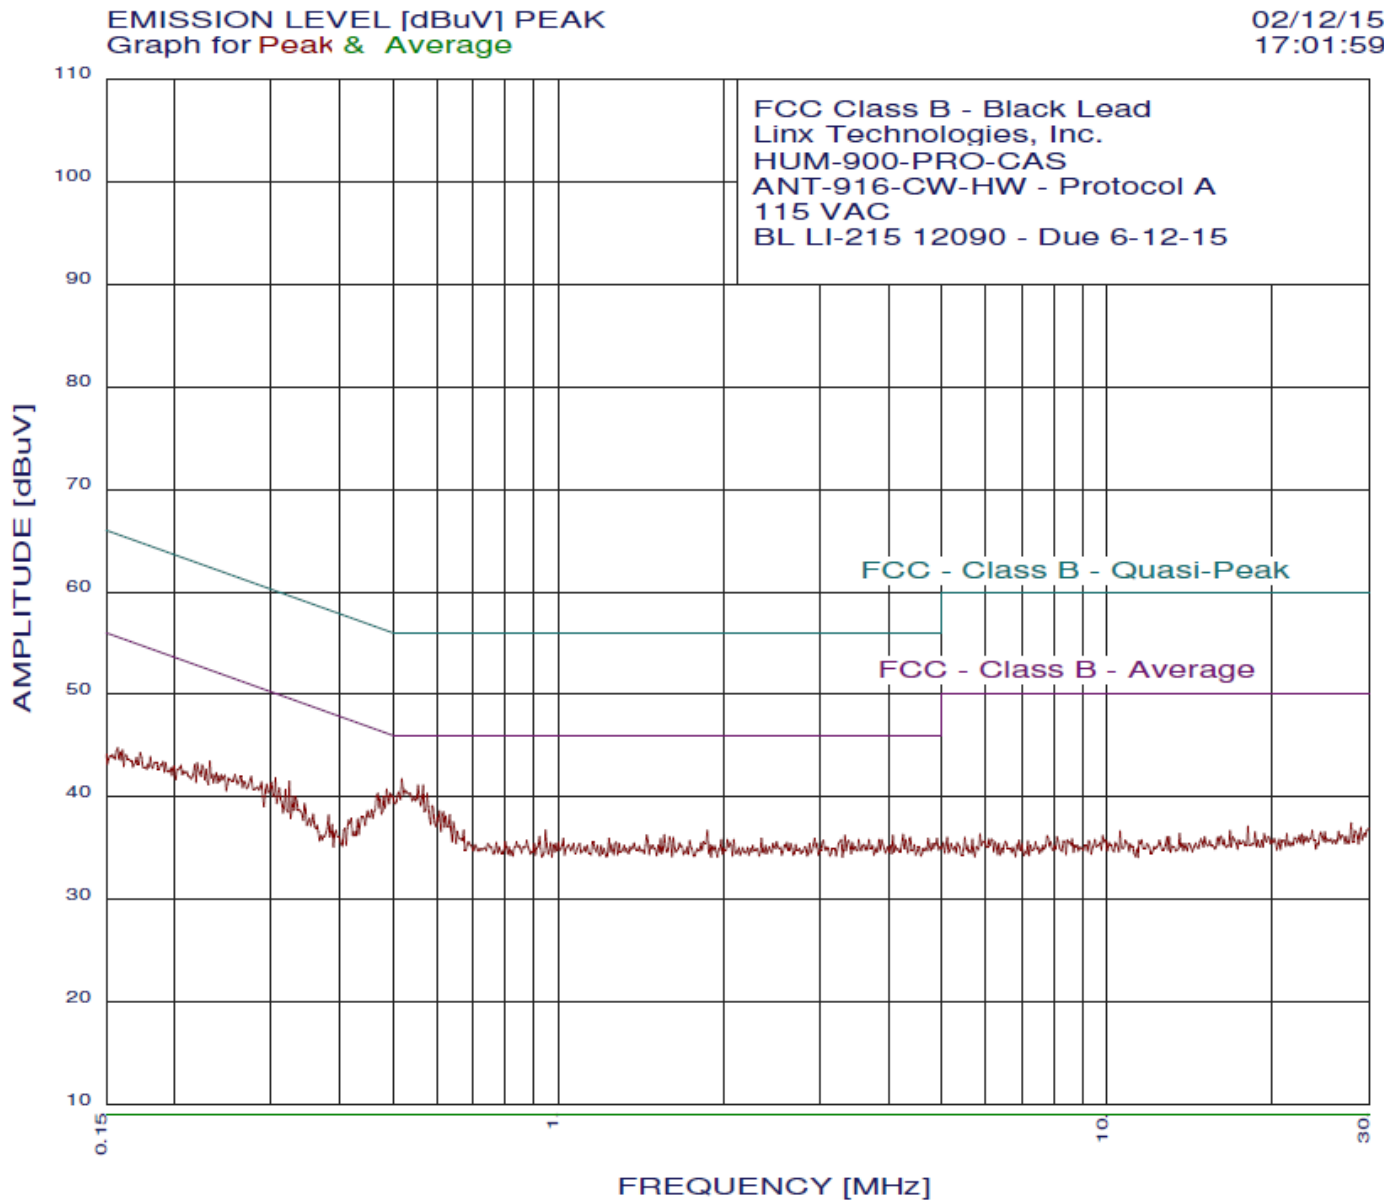

page 1/1


02/12/15 17:01:59

FCC Class B - Black Lead
Linx Technologies, Inc.
HUM-900-PRO-CAS
ANT-916-CW-HW - Protocol A
115 VAC
BL LI-215 12090 - Due 6-12-15
Test Engineer : Kenneth Lee

50 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 0.01 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.518	41.74	46.00	-4.26
2	0.555	41.14	46.00	-4.86
3	0.567	41.14	46.00	-4.86
4	0.527	40.64	46.00	-5.36
5	0.486	40.74	46.23	-5.49
6	0.513	40.44	46.00	-5.56
7	0.538	40.34	46.00	-5.66
8	0.577	40.34	46.00	-5.66
9	0.494	40.34	46.09	-5.75
10	0.547	39.94	46.00	-6.06
11	0.469	40.34	46.53	-6.20
12	0.481	40.04	46.32	-6.28
13	0.474	39.84	46.45	-6.61
14	0.589	39.14	46.00	-6.86
15	0.608	38.64	46.00	-7.36
16	0.618	38.54	46.00	-7.46
17	0.634	38.24	46.00	-7.76
18	0.624	38.14	46.00	-7.86
19	0.457	38.73	46.76	-8.02
20	0.601	37.94	46.00	-8.06
21	0.324	41.51	49.62	-8.11
22	0.305	41.88	50.10	-8.22
23	0.449	38.63	46.89	-8.26
24	0.644	37.54	46.00	-8.46
25	0.300	41.40	50.23	-8.83
26	0.232	43.47	52.39	-8.91
27	0.276	42.00	50.94	-8.94
28	0.318	40.73	49.75	-9.02
29	0.440	38.03	47.06	-9.04
30	0.310	40.86	49.97	-9.10
31	0.288	41.45	50.58	-9.13
32	0.294	41.23	50.41	-9.18
33	0.672	36.74	46.00	-9.26
34	0.948	36.74	46.00	-9.26
35	1.869	36.73	46.00	-9.27
36	0.258	42.17	51.51	-9.34
37	0.655	36.64	46.00	-9.36
38	0.263	41.95	51.33	-9.38
39	0.431	37.82	47.24	-9.41
40	0.332	39.97	49.39	-9.42
41	0.329	39.99	49.48	-9.49
42	0.220	43.32	52.83	-9.51
43	0.419	37.92	47.46	-9.54
44	0.224	43.10	52.65	-9.55
45	4.249	36.35	46.00	-9.65
46	0.267	41.53	51.20	-9.67
47	1.560	36.30	46.00	-9.70
48	1.449	36.28	46.00	-9.72
49	0.247	42.11	51.86	-9.75
50	0.283	40.97	50.72	-9.75

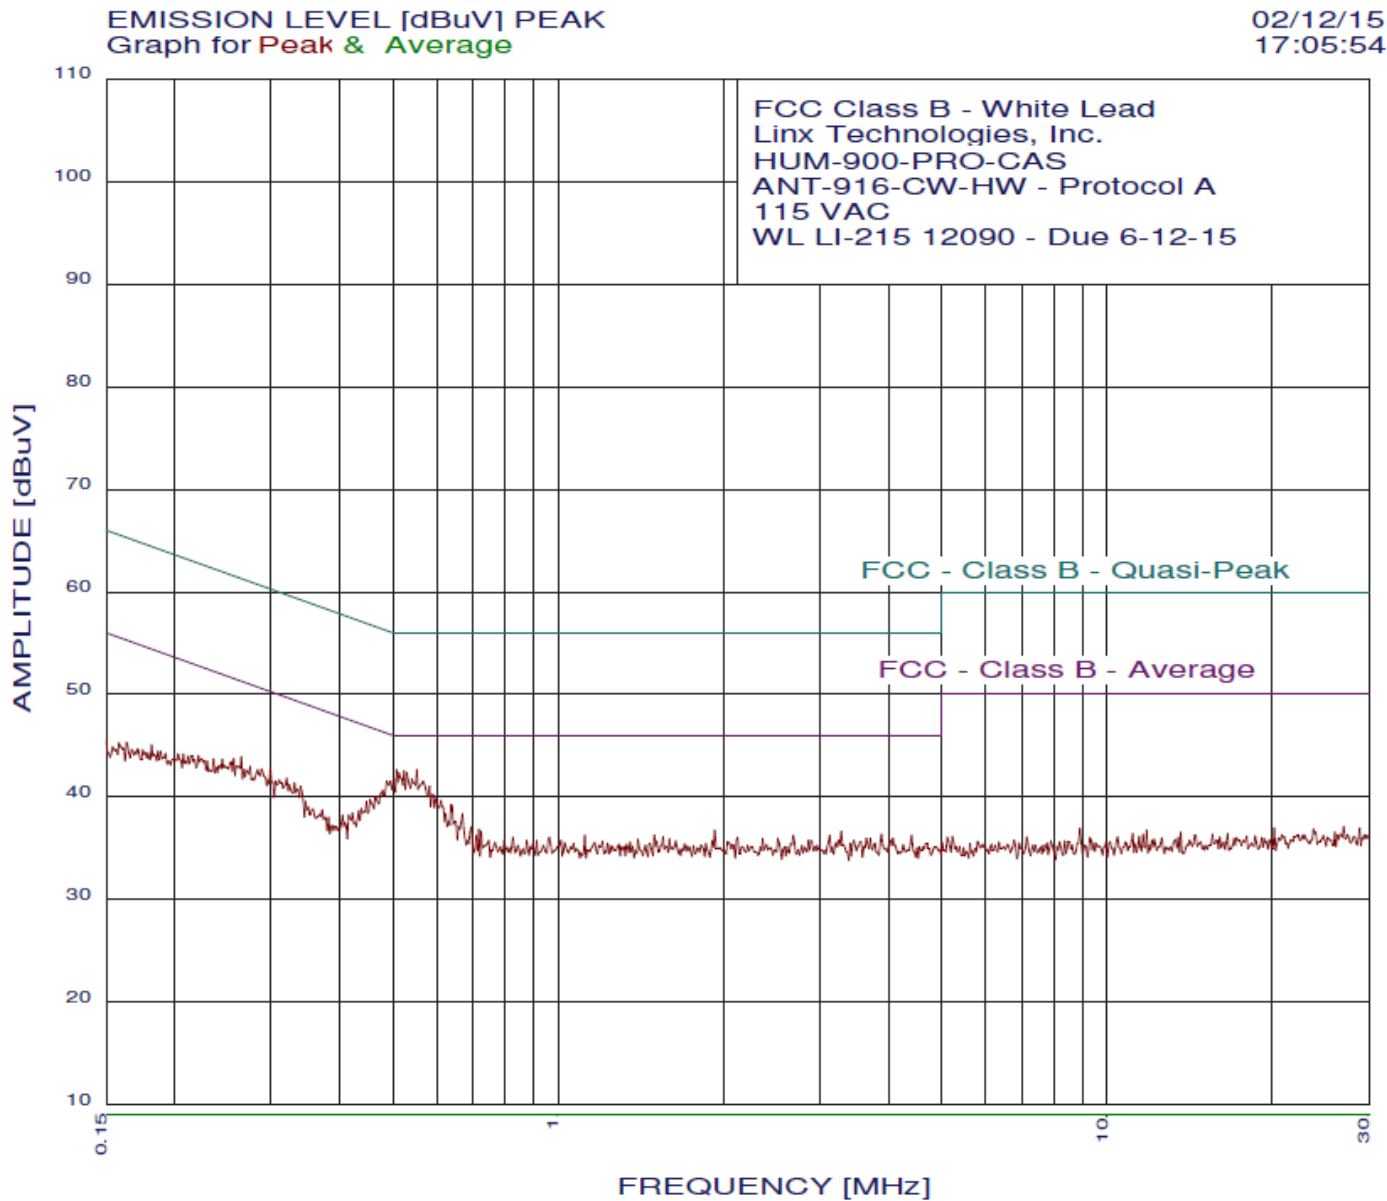

page 1/1


02/12/15 17:05:54

FCC Class B - White Lead
Linx Technologies, Inc.
HUM-900-PRO-CAS
ANT-916-CW-HW - Protocol A
115 VAC
WL LI-215 12090 - Due 6-12-15
Test Engineer : Kenneth Lee


50 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 0.01 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.508	42.65	46.00	-3.35
2	0.552	42.64	46.00	-3.36
3	0.524	42.55	46.00	-3.45
4	0.513	42.35	46.00	-3.65
5	0.530	42.35	46.00	-3.65
6	0.502	41.75	46.00	-4.25
7	0.541	41.75	46.00	-4.25
8	0.567	41.54	46.00	-4.46
9	0.494	41.55	46.09	-4.55
10	0.486	41.54	46.23	-4.69
11	0.583	41.04	46.00	-4.96
12	0.479	40.64	46.36	-5.72
13	0.592	40.24	46.00	-5.76
14	0.598	39.84	46.00	-6.16
15	0.611	39.64	46.00	-6.36
16	0.464	40.04	46.62	-6.58
17	0.637	39.24	46.00	-6.76
18	0.454	39.74	46.80	-7.06
19	0.447	39.53	46.93	-7.40
20	0.265	43.89	51.29	-7.40
21	0.299	42.88	50.28	-7.40
22	0.624	38.34	46.00	-7.66
23	0.669	38.34	46.00	-7.66
24	0.256	43.71	51.55	-7.84
25	0.288	42.71	50.58	-7.87
26	0.320	41.81	49.71	-7.90
27	0.275	42.95	50.98	-8.03
28	0.331	41.38	49.44	-8.06
29	0.283	42.63	50.72	-8.09
30	0.339	41.05	49.22	-8.17
31	0.254	43.42	51.64	-8.22
32	0.438	38.83	47.11	-8.27
33	0.244	43.65	51.95	-8.30
34	0.310	41.64	49.97	-8.33
35	0.631	37.64	46.00	-8.36
36	0.262	43.00	51.38	-8.38
37	0.324	41.20	49.62	-8.42
38	0.648	37.54	46.00	-8.46
39	0.259	43.00	51.47	-8.46
40	0.267	42.68	51.20	-8.52
41	0.270	42.57	51.11	-8.54
42	0.305	41.56	50.10	-8.54
43	0.433	38.63	47.19	-8.56
44	0.235	43.68	52.25	-8.58
45	0.334	40.76	49.35	-8.59
46	0.296	41.69	50.36	-8.68
47	0.221	44.03	52.78	-8.76
48	0.247	43.04	51.86	-8.82
49	0.658	37.14	46.00	-8.86
50	0.694	37.04	46.00	-8.96

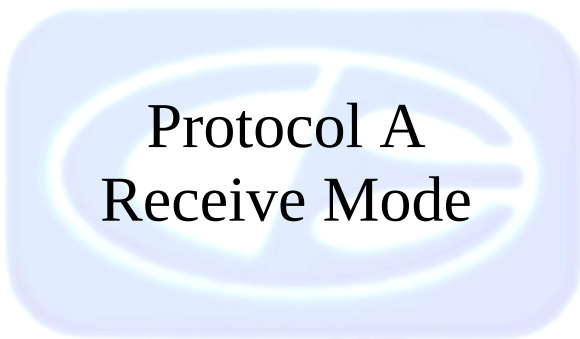

Protocol A
Receive Mode

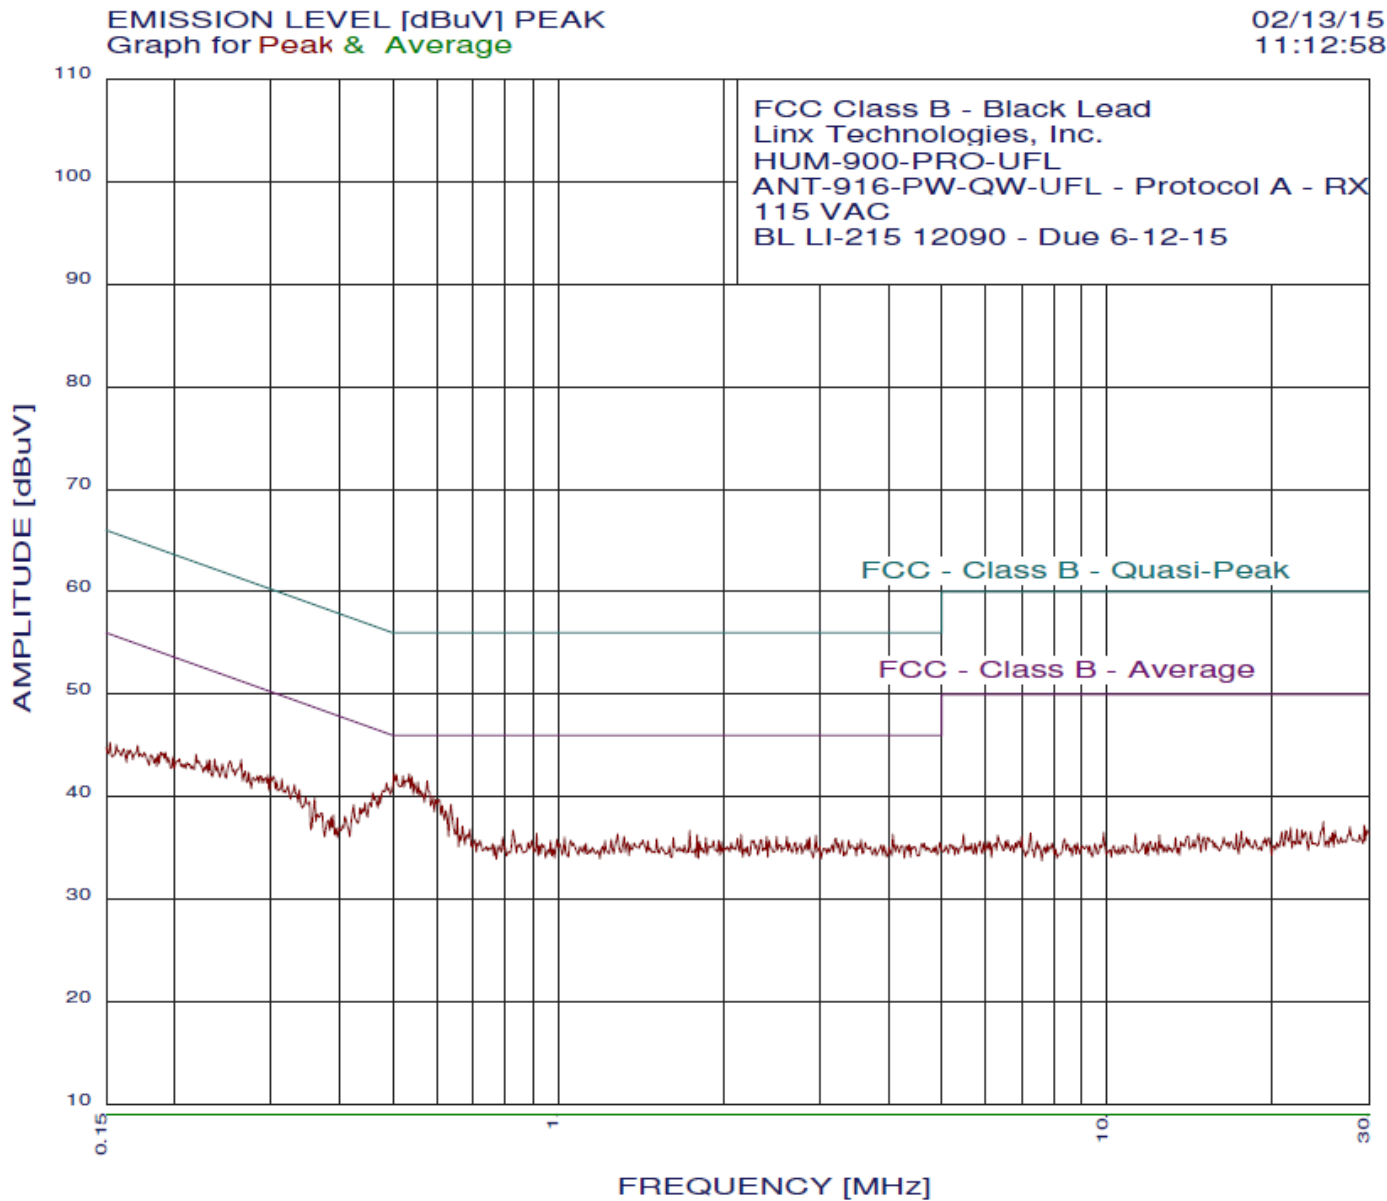

page 1/1


02/13/15 11:12:58

FCC Class B - Black Lead
Linx Technologies, Inc.
HUM-900-PRO-UFL
ANT-916-PW-QW-UFL - Protocol A - RX
115 VAC
BL LI-215 12090 - Due 6-12-15
Test Engineer : Kenneth Lee

50 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 0.01 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.502	42.25	46.00	-3.75
2	0.535	42.24	46.00	-3.76
3	0.508	42.15	46.00	-3.85
4	0.521	42.04	46.00	-3.96
5	0.541	41.94	46.00	-4.06
6	0.530	41.64	46.00	-4.36
7	0.577	41.54	46.00	-4.46
8	0.555	41.44	46.00	-4.56
9	0.547	41.34	46.00	-4.66
10	0.486	41.34	46.23	-4.89
11	0.492	40.84	46.14	-5.30
12	0.561	40.64	46.00	-5.36
13	0.567	40.34	46.00	-5.66
14	0.479	40.64	46.36	-5.72
15	0.592	40.04	46.00	-5.96
16	0.598	39.74	46.00	-6.26
17	0.608	39.74	46.00	-6.26
18	0.459	40.43	46.71	-6.28
19	0.471	40.14	46.49	-6.35
20	0.464	39.93	46.62	-6.69
21	0.637	39.24	46.00	-6.76
22	0.614	39.14	46.00	-6.86
23	0.624	38.64	46.00	-7.36
24	0.454	39.43	46.80	-7.37
25	0.445	39.43	46.98	-7.55
26	0.265	43.64	51.29	-7.64
27	0.655	37.94	46.00	-8.06
28	0.313	41.75	49.88	-8.13
29	0.424	39.22	47.37	-8.15
30	0.252	43.49	51.68	-8.19
31	0.302	41.99	50.19	-8.19
32	0.435	38.92	47.15	-8.22
33	0.440	38.83	47.06	-8.24
34	0.296	42.12	50.36	-8.25
35	0.331	41.18	49.44	-8.26
36	0.299	41.91	50.28	-8.37
37	0.322	41.12	49.66	-8.55
38	0.237	43.65	52.21	-8.56
39	0.286	42.06	50.63	-8.57
40	0.307	41.47	50.05	-8.58
41	0.338	40.65	49.26	-8.61
42	0.273	42.41	51.02	-8.61
43	0.293	41.83	50.45	-8.62
44	0.269	42.53	51.15	-8.63
45	0.283	42.07	50.72	-8.65
46	0.244	43.22	51.95	-8.73
47	0.219	44.13	52.87	-8.74
48	0.232	43.57	52.39	-8.81
49	0.360	39.91	48.73	-8.83
50	0.669	37.14	46.00	-8.86

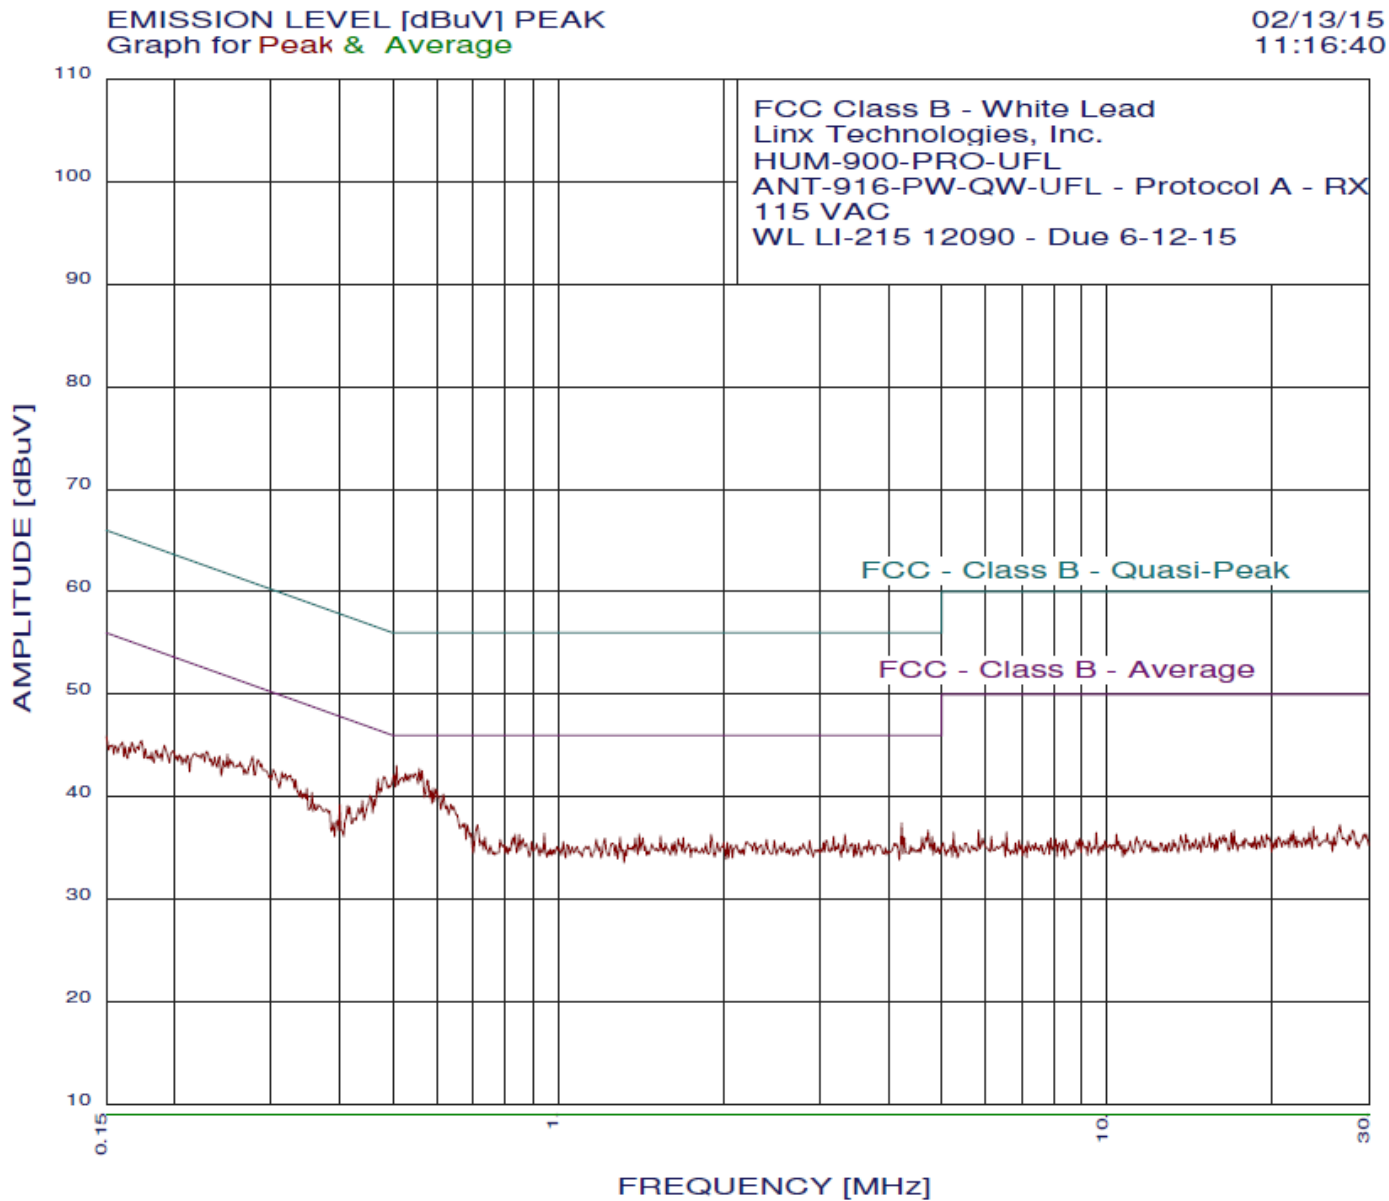

page 1/1


02/13/15 11:16:40

FCC Class B - White Lead
Linx Technologies, Inc.
HUM-900-PRO-UFL
ANT-916-PW-QW-UFL - Protocol A - RX
115 VAC
WL LI-215 12090 - Due 6-12-15
Test Engineer : Kenneth Lee

50 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 0.01 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.508	43.05	46.00	-2.95
2	0.558	42.74	46.00	-3.26
3	0.564	42.54	46.00	-3.46
4	0.527	42.25	46.00	-3.75
5	0.547	42.25	46.00	-3.75
6	0.502	42.15	46.00	-3.85
7	0.532	42.15	46.00	-3.85
8	0.538	42.15	46.00	-3.85
9	0.518	41.85	46.00	-4.15
10	0.577	41.64	46.00	-4.36
11	0.481	41.94	46.32	-4.37
12	0.469	41.74	46.53	-4.79
13	0.492	41.15	46.14	-4.99
14	0.592	40.84	46.00	-5.16
15	0.598	40.74	46.00	-5.26
16	0.586	40.64	46.00	-5.36
17	0.474	40.84	46.45	-5.61
18	0.618	40.24	46.00	-5.76
19	0.454	40.14	46.80	-6.66
20	0.637	39.24	46.00	-6.76
21	0.627	39.14	46.00	-6.86
22	0.461	39.74	46.67	-6.93
23	0.277	43.94	50.89	-6.95
24	0.644	39.04	46.00	-6.96
25	0.283	43.63	50.72	-7.09
26	0.288	43.21	50.58	-7.37
27	0.440	39.63	47.06	-7.43
28	0.313	42.43	49.88	-7.45
29	0.325	42.09	49.57	-7.48
30	0.302	42.67	50.19	-7.52
31	0.318	42.21	49.75	-7.54
32	0.250	44.13	51.77	-7.64
33	0.332	41.67	49.39	-7.72
34	0.329	41.68	49.48	-7.80
35	0.263	43.39	51.33	-7.94
36	0.252	43.63	51.68	-8.06
37	0.242	43.96	52.04	-8.08
38	0.228	44.40	52.52	-8.12
39	0.266	43.08	51.24	-8.16
40	0.255	43.42	51.60	-8.18
41	0.348	40.82	49.00	-8.18
42	0.299	42.08	50.28	-8.20
43	0.433	38.93	47.19	-8.26
44	0.260	43.10	51.42	-8.32
45	0.237	43.87	52.21	-8.34
46	0.246	43.55	51.90	-8.36
47	0.356	40.41	48.82	-8.41
48	0.224	44.21	52.65	-8.44
49	0.413	39.12	47.59	-8.47
50	0.417	39.03	47.50	-8.48

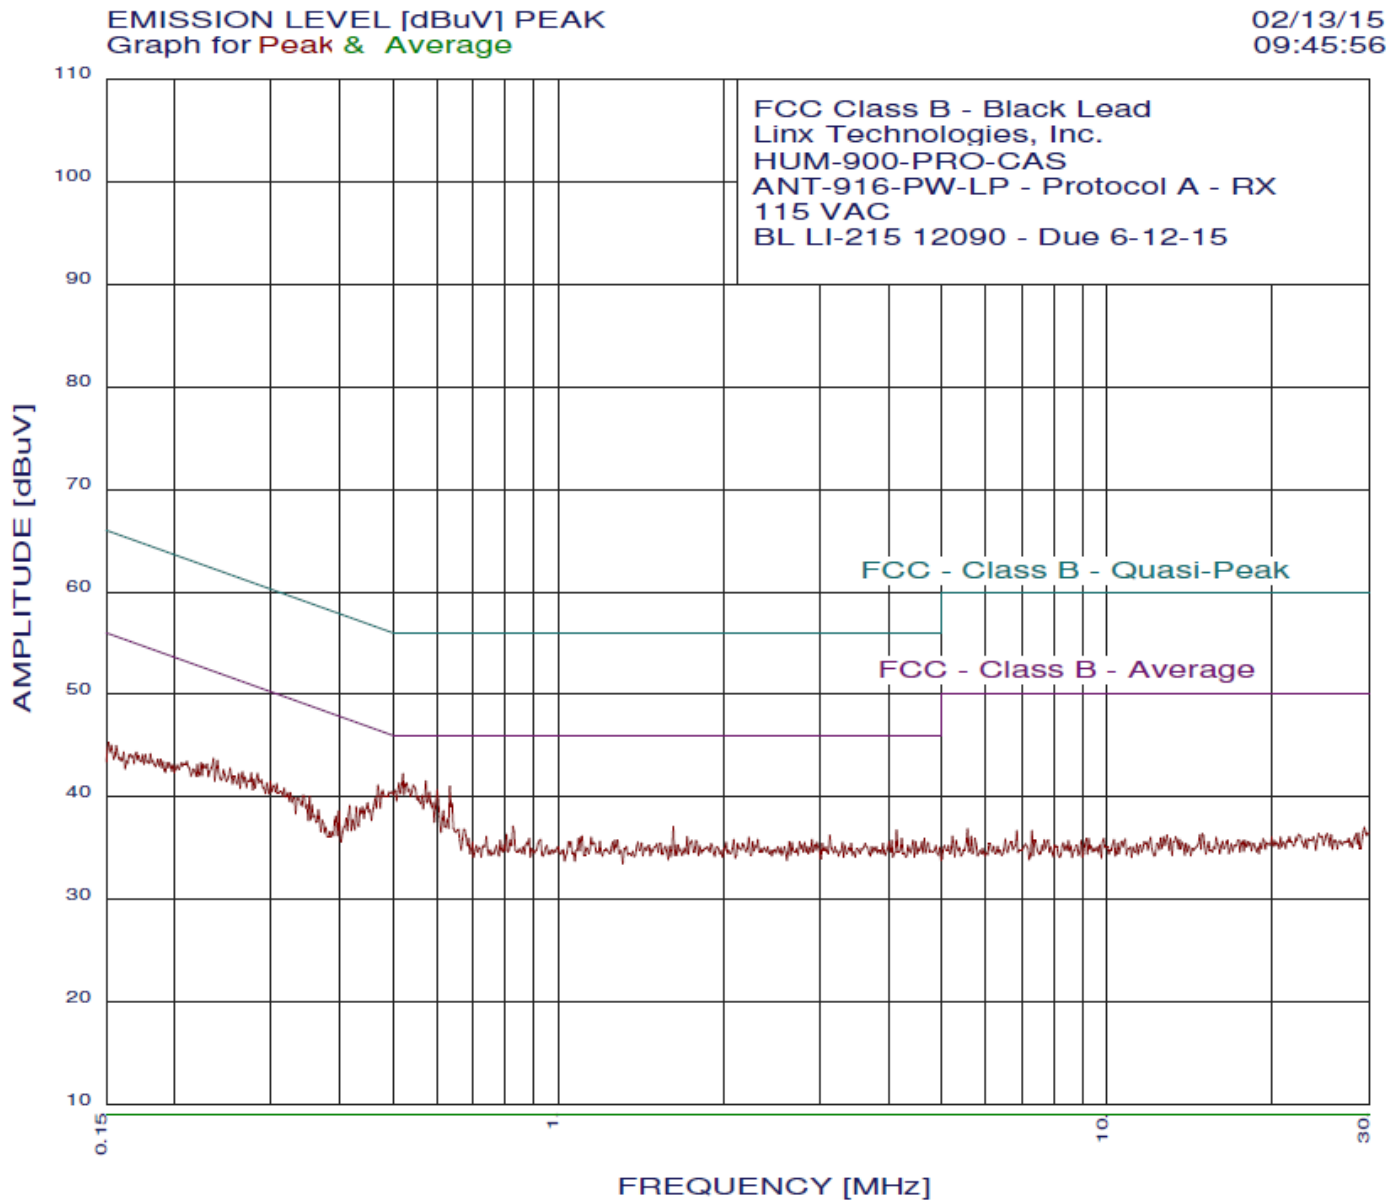

page 1/1


02/13/15 09:45:56

FCC Class B - Black Lead
Linx Technologies, Inc.
HUM-900-PRO-CAS
ANT-916-PW-LP - Protocol A - RX
115 VAC
BL LI-215 12090 - Due 6-12-15
Test Engineer : Kenneth Lee

50 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 0.01 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.521	42.24	46.00	-3.76
2	0.573	41.54	46.00	-4.46
3	0.513	41.34	46.00	-4.66
4	0.530	41.34	46.00	-4.66
5	0.544	41.14	46.00	-4.86
6	0.634	41.04	46.00	-4.96
7	0.535	40.74	46.00	-5.26
8	0.505	40.65	46.00	-5.35
9	0.601	40.64	46.00	-5.36
10	0.469	41.14	46.53	-5.40
11	0.583	40.44	46.00	-5.56
12	0.497	40.44	46.05	-5.61
13	0.492	40.44	46.14	-5.70
14	0.479	40.64	46.36	-5.72
15	0.564	40.14	46.00	-5.86
16	0.555	40.04	46.00	-5.96
17	0.592	39.44	46.00	-6.56
18	0.641	39.34	46.00	-6.66
19	0.464	39.83	46.62	-6.79
20	0.618	38.64	46.00	-7.36
21	0.449	39.43	46.89	-7.46
22	0.440	39.03	47.06	-8.04
23	0.454	38.73	46.80	-8.07
24	0.627	37.84	46.00	-8.16
25	0.428	39.02	47.28	-8.26
26	0.435	38.82	47.15	-8.32
27	0.417	39.12	47.50	-8.38
28	0.283	42.27	50.72	-8.45
29	0.235	43.76	52.25	-8.50
30	0.239	43.54	52.12	-8.58
31	0.276	42.30	50.94	-8.64
32	0.299	41.51	50.28	-8.77
33	0.307	41.27	50.05	-8.78
34	0.266	42.44	51.24	-8.81
35	0.826	37.14	46.00	-8.86
36	0.252	42.79	51.68	-8.89
37	1.620	37.10	46.00	-8.90
38	0.352	40.00	48.91	-8.91
39	0.288	41.65	50.58	-8.93
40	0.317	40.84	49.79	-8.96
41	0.343	40.13	49.13	-9.00
42	0.294	41.33	50.41	-9.08
43	0.302	41.09	50.19	-9.09
44	0.262	42.25	51.38	-9.12
45	0.658	36.84	46.00	-9.16
46	0.672	36.84	46.00	-9.16
47	0.279	41.69	50.85	-9.16
48	0.325	40.40	49.57	-9.17
49	0.269	41.93	51.15	-9.23
50	0.322	40.42	49.66	-9.25

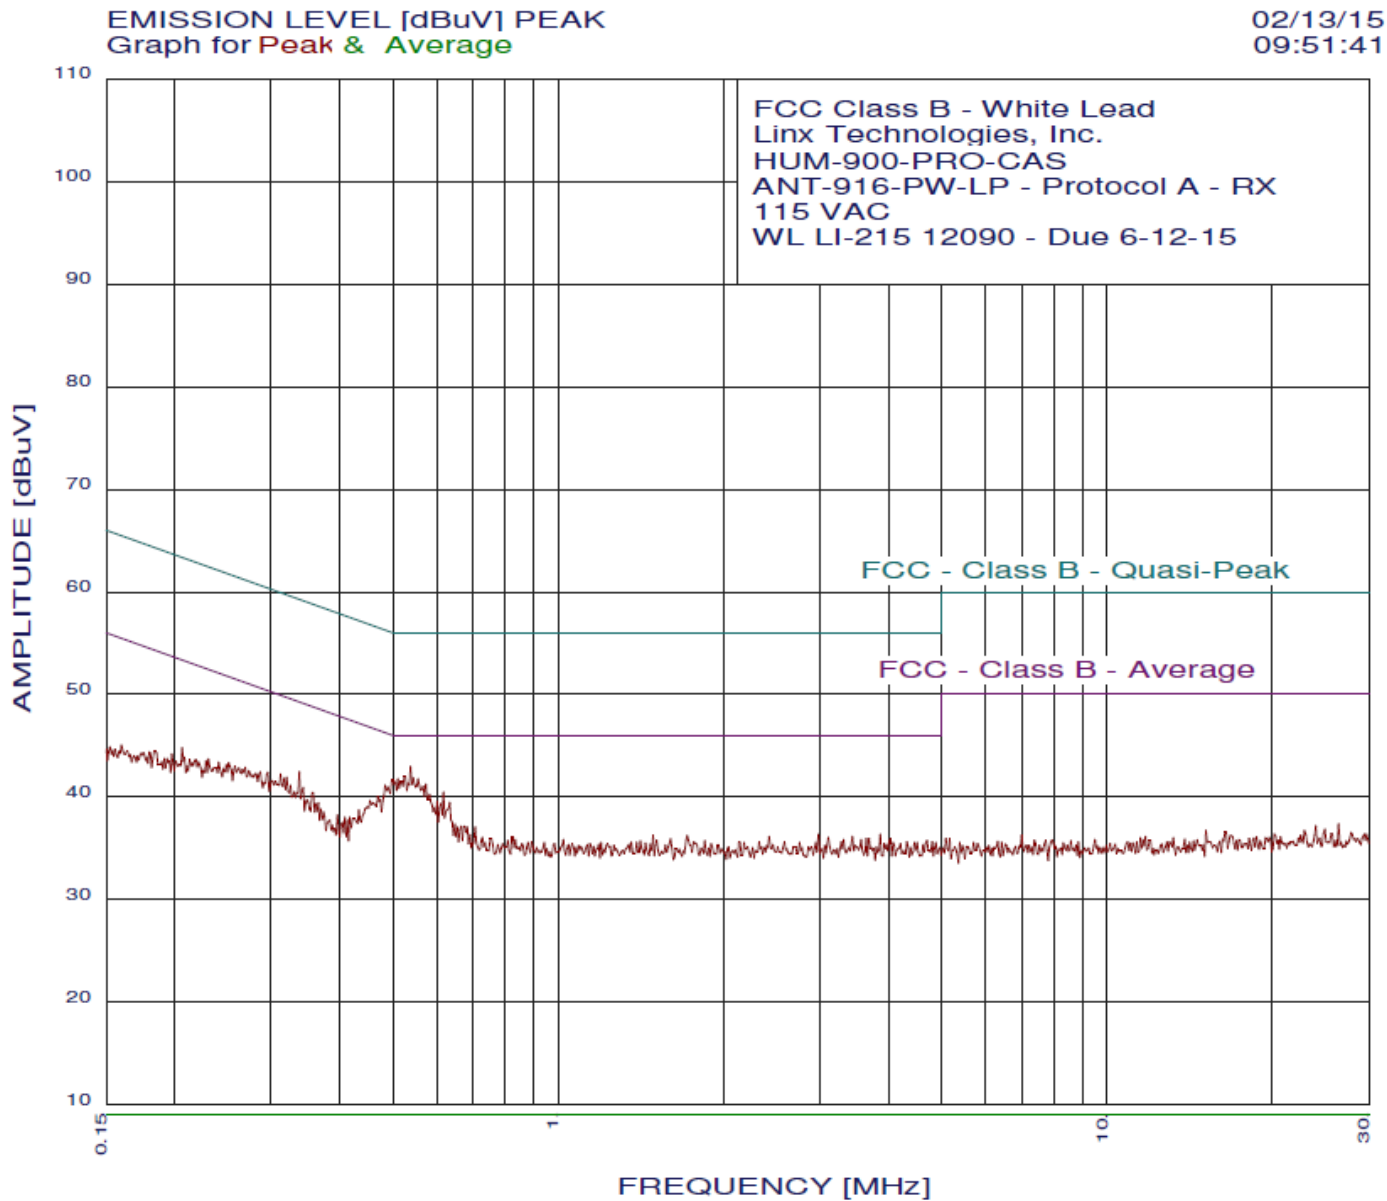

page 1/1

02/13/15 09:51:41


FCC Class B - White Lead
Linx Technologies, Inc.
HUM-900-PRO-CAS
ANT-916-PW-LP - Protocol A - RX
115 VAC
WL LI-215 12090 - Due 6-12-15
Test Engineer : Kenneth Lee

50 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 0.01 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.538	42.95	46.00	-3.05
2	0.524	41.95	46.00	-4.05
3	0.544	41.85	46.00	-4.15
4	0.510	41.75	46.00	-4.25
5	0.555	41.74	46.00	-4.26
6	0.500	41.65	46.01	-4.36
7	0.505	41.45	46.00	-4.55
8	0.516	41.45	46.00	-4.55
9	0.532	41.35	46.00	-4.65
10	0.573	41.24	46.00	-4.76
11	0.567	41.04	46.00	-4.96
12	0.484	41.14	46.27	-5.13
13	0.489	40.94	46.18	-5.24
14	0.618	40.44	46.00	-5.56
15	0.583	40.24	46.00	-5.76
16	0.601	39.54	46.00	-6.46
17	0.469	40.04	46.53	-6.49
18	0.634	39.44	46.00	-6.56
19	0.611	39.34	46.00	-6.66
20	0.474	39.74	46.45	-6.71
21	0.338	42.45	49.26	-6.81
22	0.595	38.94	46.00	-7.06
23	0.454	39.64	46.80	-7.16
24	0.459	39.44	46.71	-7.27
25	0.312	42.23	49.92	-7.69
26	0.320	41.91	49.71	-7.80
27	0.449	39.04	46.89	-7.85
28	0.317	41.82	49.79	-7.97
29	0.296	42.39	50.36	-7.98
30	0.343	40.94	49.13	-8.20
31	0.286	42.42	50.63	-8.21
32	0.269	42.87	51.15	-8.28
33	0.358	40.41	48.78	-8.36
34	0.251	43.33	51.73	-8.40
35	0.433	38.73	47.19	-8.46
36	0.273	42.56	51.02	-8.46
37	0.325	41.09	49.57	-8.48
38	0.258	43.01	51.51	-8.50
39	0.305	41.56	50.10	-8.54
40	0.266	42.68	51.24	-8.56
41	0.280	42.24	50.81	-8.57
42	0.206	44.77	53.35	-8.58
43	0.262	42.80	51.38	-8.58
44	0.648	37.34	46.00	-8.66
45	0.300	41.57	50.23	-8.66
46	0.248	43.14	51.82	-8.68
47	0.240	43.36	52.08	-8.72
48	0.230	43.69	52.43	-8.74
49	0.277	42.14	50.89	-8.75
50	0.665	37.14	46.00	-8.86

Protocol B
Transmit Mode

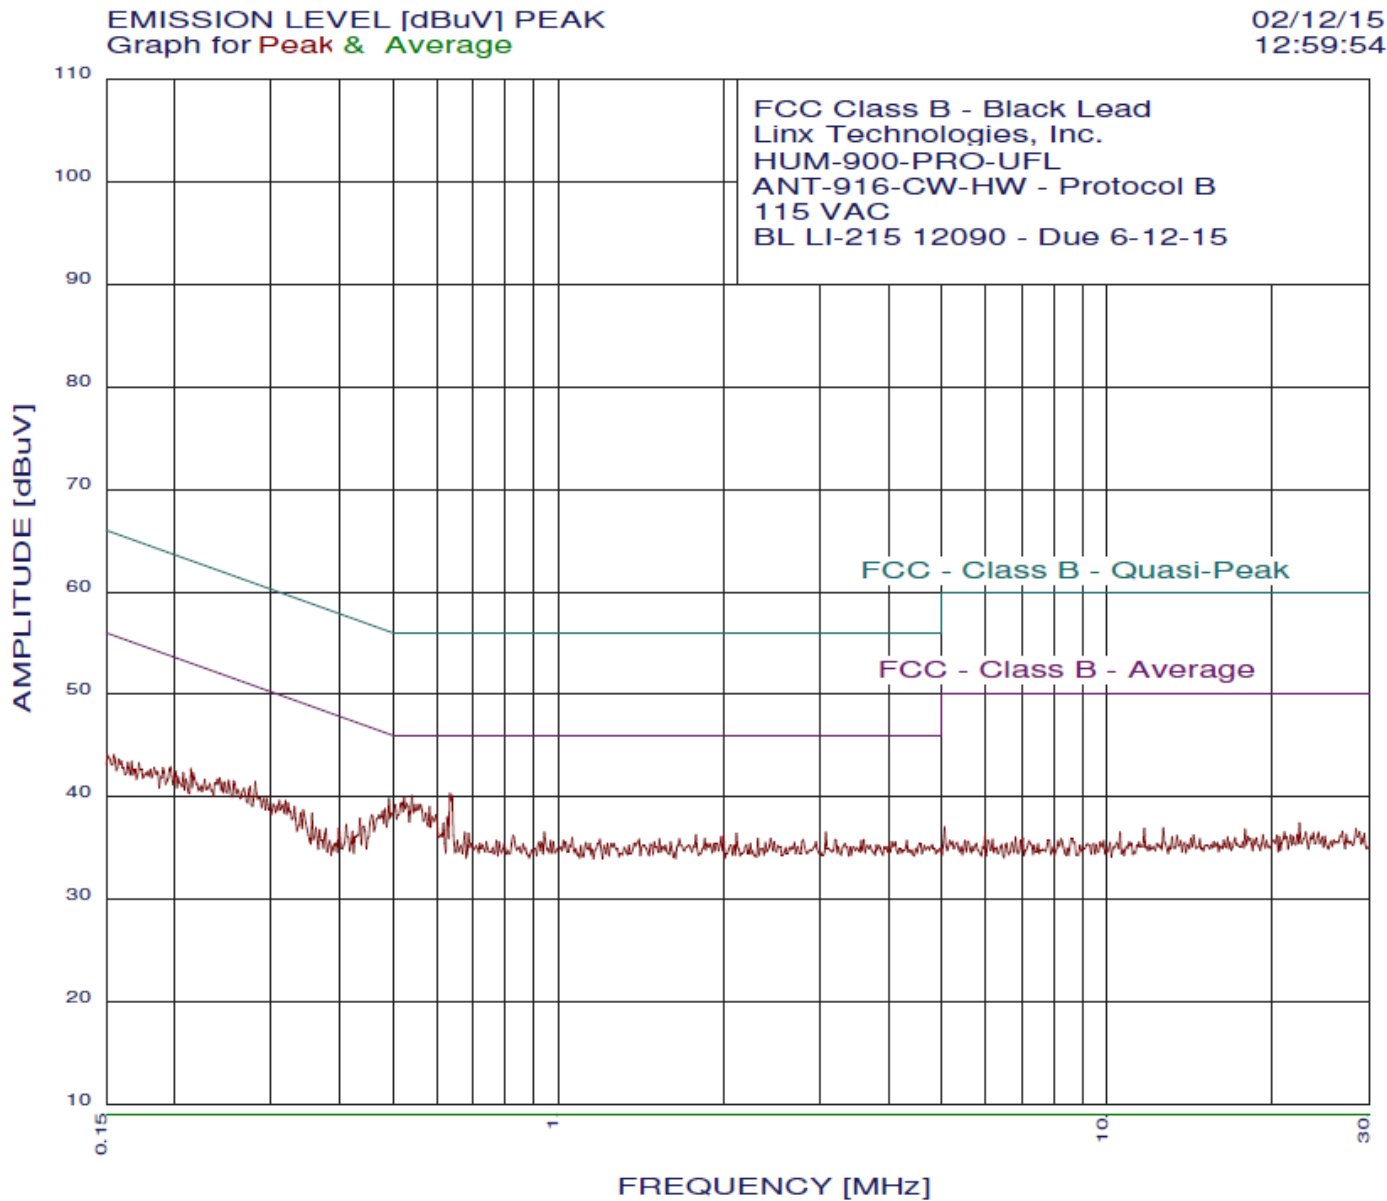

page 1/1


02/12/15 12:59:54

FCC Class B - Black Lead
Linx Technologies, Inc.
HUM-900-PRO-UFL
ANT-916-CW-HW - Protocol B
115 VAC
BL LI-215 12090 - Due 6-12-15
Test Engineer : Kenneth Lee

50 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 0.01 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.634	40.34	46.00	-5.66
2	0.541	40.14	46.00	-5.86
3	0.641	40.14	46.00	-5.86
4	0.524	40.04	46.00	-5.96
5	0.492	39.84	46.14	-6.30
6	0.518	39.44	46.00	-6.56
7	0.530	39.34	46.00	-6.66
8	0.505	39.25	46.00	-6.75
9	0.547	39.24	46.00	-6.76
10	0.555	39.24	46.00	-6.76
11	0.561	39.24	46.00	-6.76
12	0.583	39.04	46.00	-6.96
13	0.484	38.84	46.27	-7.43
14	0.573	38.44	46.00	-7.56
15	0.479	38.64	46.36	-7.72
16	0.598	38.24	46.00	-7.76
17	0.589	38.04	46.00	-7.96
18	0.627	38.04	46.00	-7.96
19	0.471	38.24	46.49	-8.25
20	0.457	38.23	46.76	-8.52
21	0.618	37.44	46.00	-8.56
22	0.435	37.92	47.15	-9.22
23	0.280	41.48	50.81	-9.33
24	3.075	36.54	46.00	-9.46
25	0.676	36.54	46.00	-9.46
26	0.944	36.54	46.00	-9.46
27	0.686	36.44	46.00	-9.56
28	2.111	36.44	46.00	-9.56
29	0.611	36.34	46.00	-9.66
30	1.781	36.32	46.00	-9.68
31	2.002	36.24	46.00	-9.76
32	0.826	36.24	46.00	-9.76
33	1.981	36.14	46.00	-9.86
34	0.442	37.13	47.02	-9.89
35	1.060	36.05	46.00	-9.95
36	0.256	41.58	51.55	-9.98
37	0.275	41.00	50.98	-9.98
38	2.436	35.94	46.00	-10.06
39	2.310	35.94	46.00	-10.06
40	1.849	35.93	46.00	-10.07
41	1.663	35.91	46.00	-10.09
42	1.528	35.89	46.00	-10.11
43	1.404	35.88	46.00	-10.12
44	0.318	39.63	49.75	-10.12
45	0.251	41.60	51.73	-10.13
46	1.191	35.86	46.00	-10.14
47	3.605	35.84	46.00	-10.16
48	3.192	35.84	46.00	-10.16
49	2.796	35.84	46.00	-10.16
50	0.242	41.83	52.04	-10.20

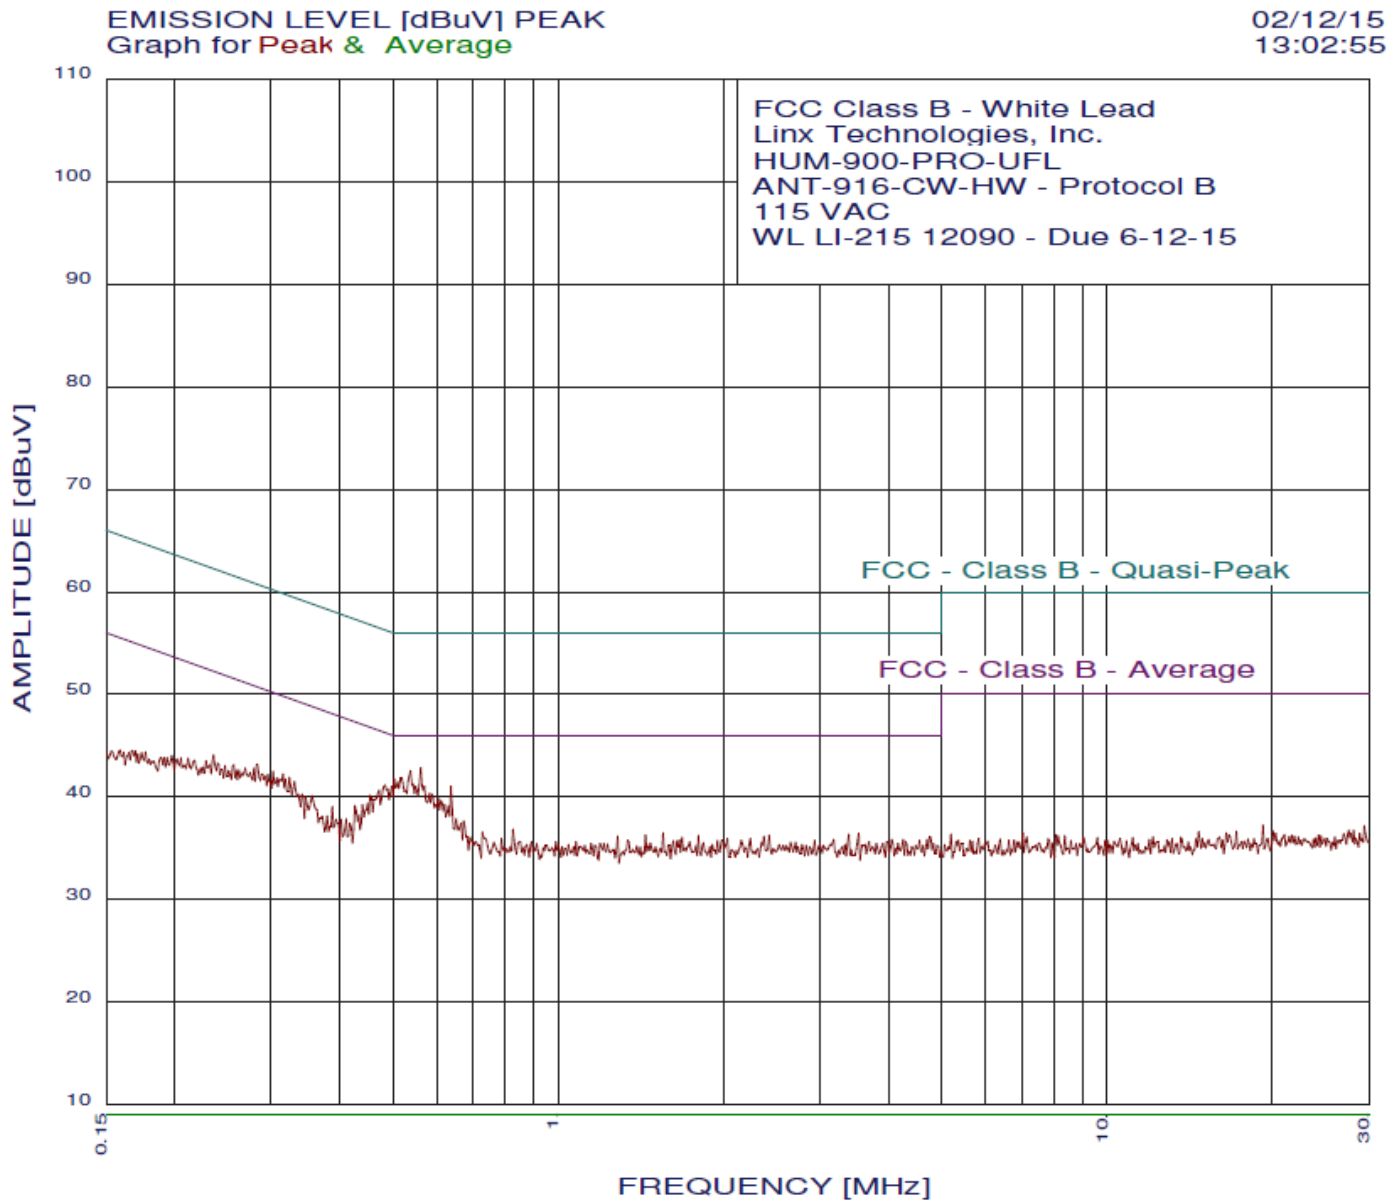

page 1/1


02/12/15 13:02:55

FCC Class B - White Lead
Linx Technologies, Inc.
HUM-900-PRO-UFL
ANT-916-CW-HW - Protocol B
115 VAC
WL LI-215 12090 - Due 6-12-15
Test Engineer : Kenneth Lee

50 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 0.01 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.561	42.84	46.00	-3.16
2	0.538	42.55	46.00	-3.45
3	0.516	41.85	46.00	-4.15
4	0.502	41.75	46.00	-4.25
5	0.510	41.45	46.00	-4.55
6	0.544	41.25	46.00	-4.75
7	0.550	41.05	46.00	-4.95
8	0.570	41.04	46.00	-4.96
9	0.637	41.04	46.00	-4.96
10	0.497	41.05	46.05	-5.00
11	0.484	41.14	46.27	-5.13
12	0.527	40.65	46.00	-5.35
13	0.489	40.74	46.18	-5.44
14	0.583	40.34	46.00	-5.66
15	0.589	40.24	46.00	-5.76
16	0.471	40.64	46.49	-5.85
17	0.605	39.84	46.00	-6.16
18	0.611	39.64	46.00	-6.36
19	0.454	40.14	46.80	-6.66
20	0.598	39.24	46.00	-6.76
21	0.621	39.24	46.00	-6.76
22	0.631	39.14	46.00	-6.86
23	0.449	39.34	46.89	-7.55
24	0.315	42.22	49.84	-7.61
25	0.282	43.13	50.76	-7.63
26	0.324	41.90	49.62	-7.72
27	0.302	42.47	50.19	-7.72
28	0.440	39.23	47.06	-7.83
29	0.331	41.48	49.44	-7.96
30	0.318	41.71	49.75	-8.04
31	0.279	42.74	50.85	-8.11
32	0.651	37.84	46.00	-8.16
33	0.235	44.08	52.25	-8.18
34	0.296	42.19	50.36	-8.18
35	0.426	39.13	47.33	-8.20
36	0.307	41.85	50.05	-8.20
37	0.310	41.74	49.97	-8.23
38	0.672	37.64	46.00	-8.36
39	0.288	42.21	50.58	-8.37
40	0.269	42.77	51.15	-8.38
41	0.256	43.11	51.55	-8.44
42	0.293	42.00	50.45	-8.45
43	0.665	37.44	46.00	-8.56
44	0.275	42.35	50.98	-8.63
45	0.299	41.58	50.28	-8.70
46	0.356	40.11	48.82	-8.71
47	0.262	42.60	51.38	-8.78
48	0.247	43.04	51.86	-8.82
49	0.239	43.27	52.12	-8.86
50	0.259	42.60	51.47	-8.86

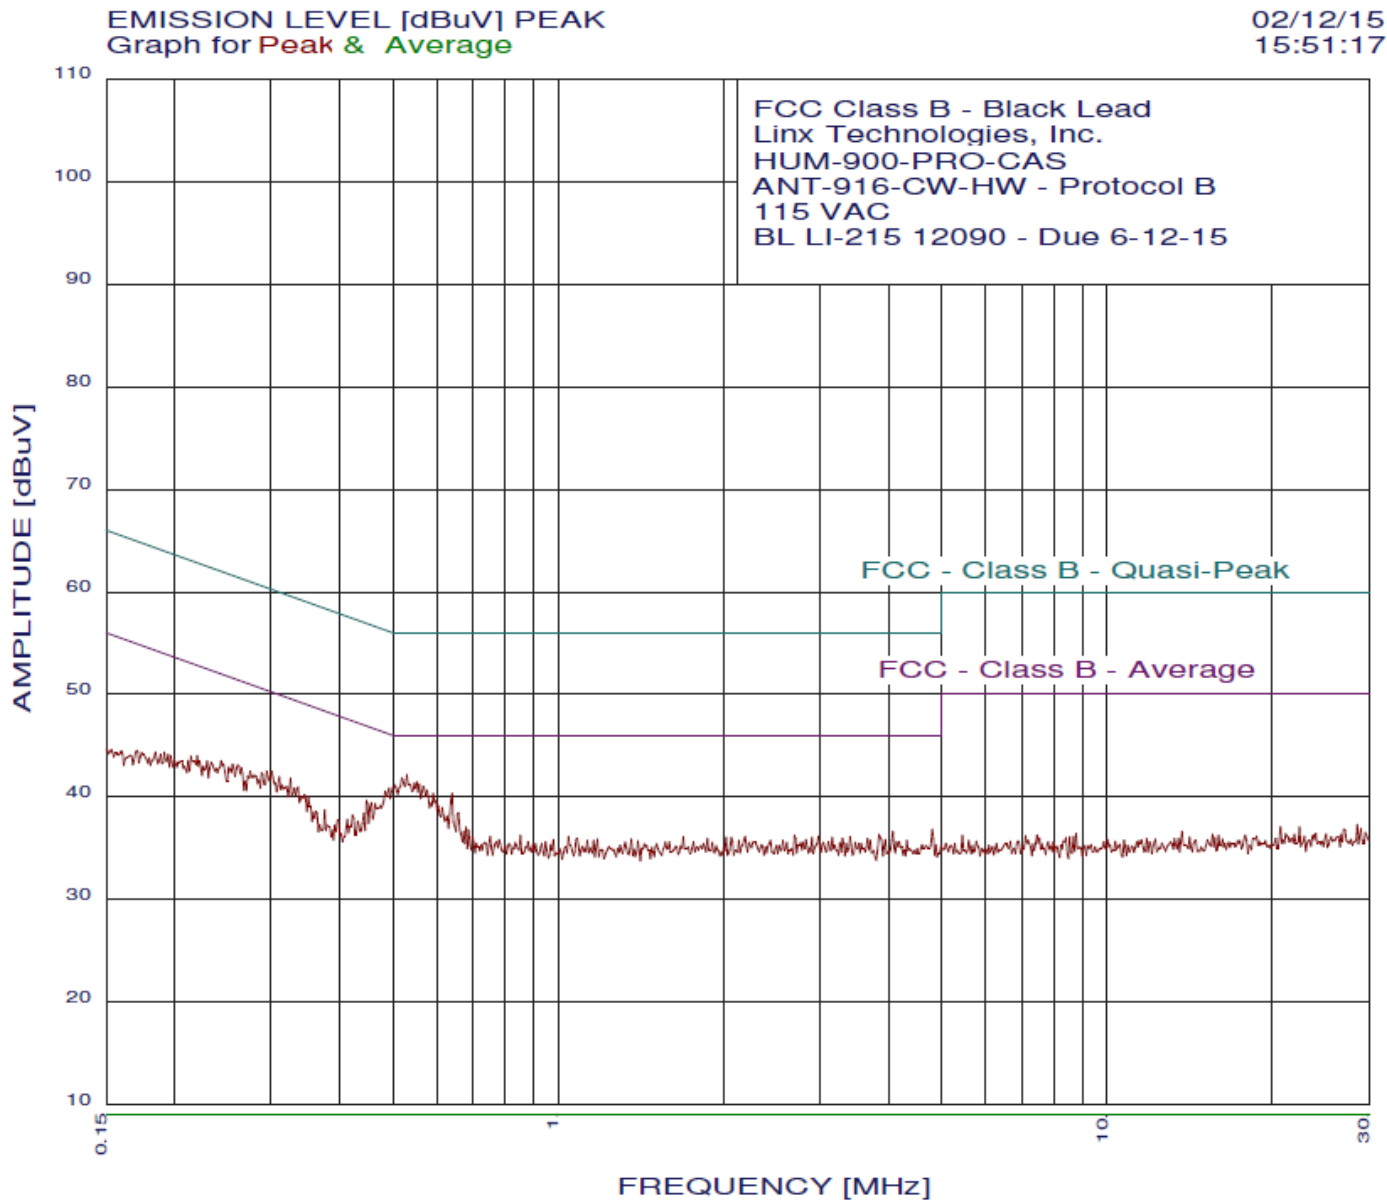

page 1/1


02/12/15 15:51:17

FCC Class B - Black Lead
Linx Technologies, Inc.
HUM-900-PRO-CAS
ANT-916-CW-HW - Protocol B
115 VAC
BL LI-215 12090 - Due 6-12-15
Test Engineer : Kenneth Lee

50 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 0.01 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.530	42.14	46.00	-3.86
2	0.518	41.84	46.00	-4.16
3	0.552	41.44	46.00	-4.56
4	0.547	41.34	46.00	-4.66
5	0.558	41.24	46.00	-4.76
6	0.505	41.15	46.00	-4.85
7	0.567	41.04	46.00	-4.96
8	0.500	40.95	46.01	-5.06
9	0.492	40.84	46.14	-5.30
10	0.577	40.64	46.00	-5.36
11	0.592	40.34	46.00	-5.66
12	0.641	40.34	46.00	-5.66
13	0.484	40.54	46.27	-5.73
14	0.598	39.64	46.00	-6.36
15	0.586	39.34	46.00	-6.66
16	0.605	39.14	46.00	-6.86
17	0.614	38.94	46.00	-7.06
18	0.464	39.33	46.62	-7.29
19	0.447	39.63	46.93	-7.30
20	0.474	39.14	46.45	-7.31
21	0.457	39.43	46.76	-7.32
22	0.658	38.44	46.00	-7.56
23	0.300	42.50	50.23	-7.73
24	0.325	41.80	49.57	-7.77
25	0.627	38.14	46.00	-7.86
26	0.294	42.53	50.41	-7.88
27	0.310	41.96	49.97	-8.00
28	0.288	42.35	50.58	-8.23
29	0.336	40.96	49.31	-8.35
30	0.260	43.06	51.42	-8.36
31	0.255	43.18	51.60	-8.41
32	0.265	42.84	51.29	-8.44
33	0.243	43.53	52.00	-8.47
34	0.275	42.50	50.98	-8.48
35	0.331	40.88	49.44	-8.56
36	0.442	38.43	47.02	-8.59
37	0.320	41.02	49.71	-8.68
38	0.246	43.22	51.90	-8.69
39	0.305	41.38	50.10	-8.72
40	0.280	42.08	50.81	-8.73
41	0.313	41.15	49.88	-8.73
42	0.277	42.09	50.89	-8.80
43	0.220	44.02	52.83	-8.81
44	0.251	42.90	51.73	-8.83
45	0.345	40.22	49.09	-8.87
46	0.350	40.00	48.95	-8.95
47	0.679	37.04	46.00	-8.96
48	0.233	43.37	52.34	-8.97
49	0.229	43.48	52.48	-8.99
50	0.285	41.66	50.67	-9.01

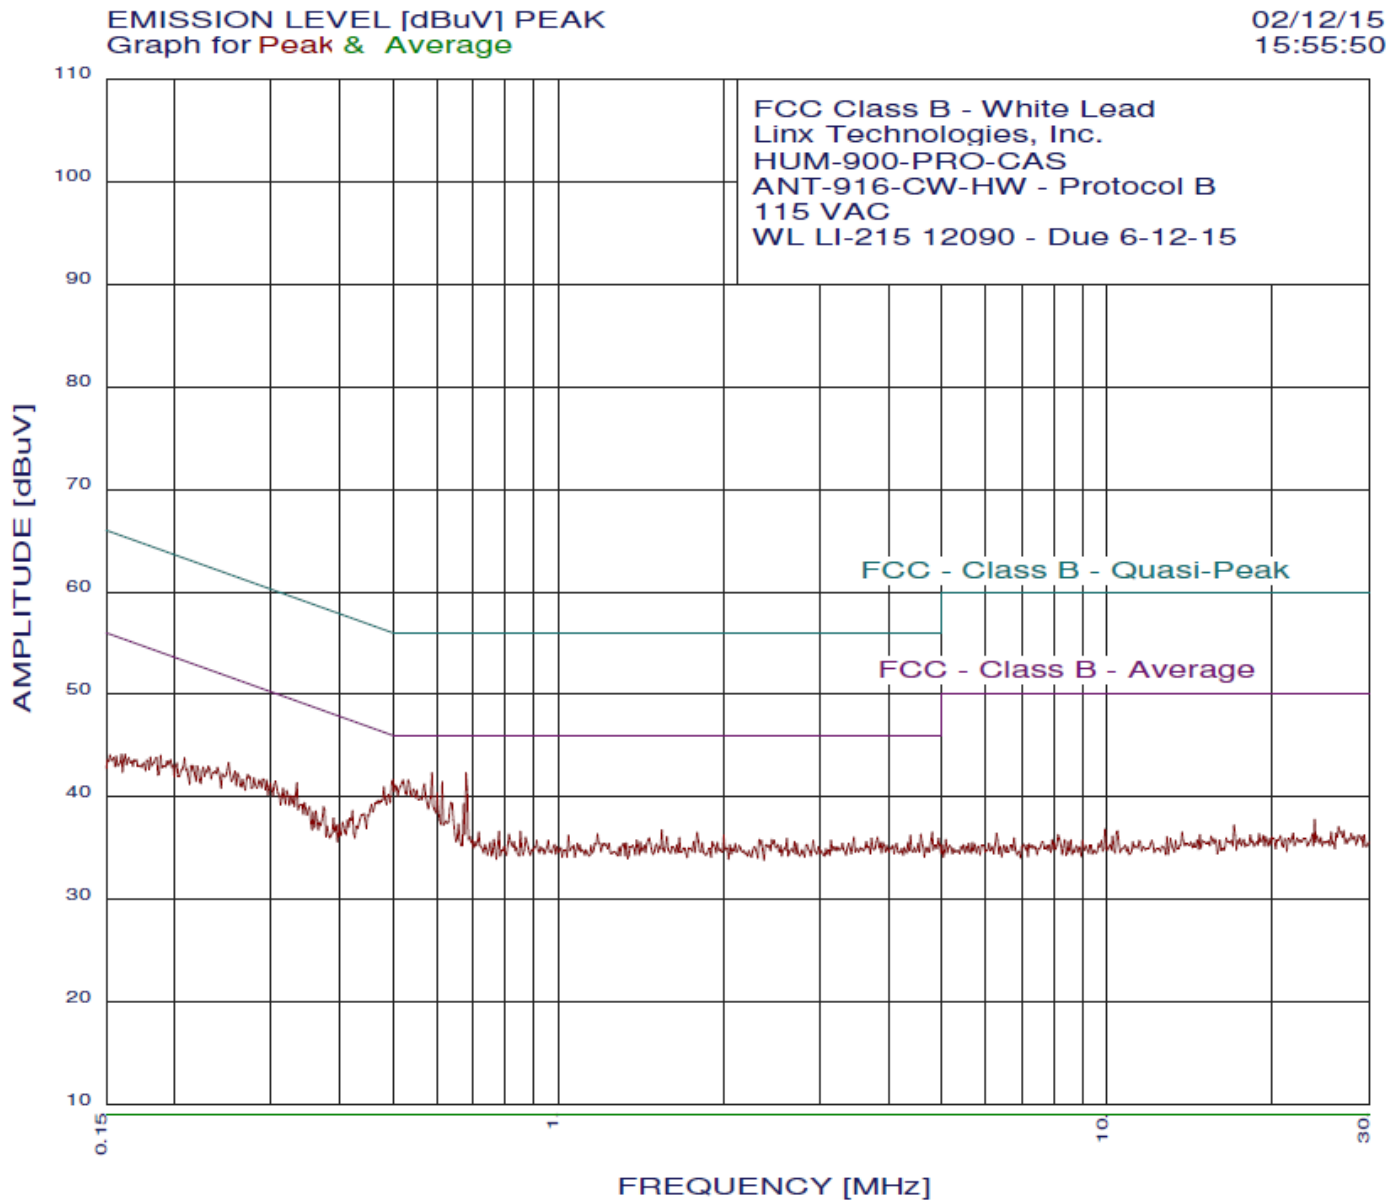

page 1/1


02/12/15 15:55:50

FCC Class B - White Lead
Linx Technologies, Inc.
HUM-900-PRO-CAS
ANT-916-CW-HW - Protocol B
115 VAC
WL LI-215 12090 - Due 6-12-15
Test Engineer : Kenneth Lee


50 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 0.01 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.589	42.34	46.00	-3.66
2	0.679	42.34	46.00	-3.66
3	0.521	41.65	46.00	-4.35
4	0.532	41.65	46.00	-4.35
5	0.500	41.65	46.01	-4.36
6	0.614	41.44	46.00	-4.56
7	0.570	41.24	46.00	-4.76
8	0.505	41.15	46.00	-4.85
9	0.544	40.75	46.00	-5.25
10	0.552	40.64	46.00	-5.36
11	0.481	40.94	46.32	-5.37
12	0.601	40.34	46.00	-5.66
13	0.492	40.15	46.14	-5.99
14	0.561	39.84	46.00	-6.16
15	0.637	39.44	46.00	-6.56
16	0.672	39.34	46.00	-6.66
17	0.469	39.64	46.53	-6.89
18	0.457	39.24	46.76	-7.52
19	0.334	41.36	49.35	-7.99
20	0.624	37.64	46.00	-8.36
21	0.251	43.33	51.73	-8.40
22	0.305	41.56	50.10	-8.54
23	0.449	38.24	46.89	-8.65
24	0.658	37.34	46.00	-8.66
25	0.442	38.33	47.02	-8.69
26	0.421	38.63	47.42	-8.79
27	0.294	41.59	50.41	-8.82
28	0.290	41.71	50.54	-8.83
29	0.272	42.16	51.07	-8.90
30	0.258	42.51	51.51	-9.00
31	0.299	41.28	50.28	-9.00
32	0.279	41.84	50.85	-9.01
33	0.315	40.82	49.84	-9.01
34	0.275	41.95	50.98	-9.03
35	0.285	41.62	50.67	-9.05
36	0.320	40.61	49.71	-9.10
37	0.260	42.30	51.42	-9.12
38	1.544	36.79	46.00	-9.21
39	0.239	42.87	52.12	-9.26
40	0.853	36.64	46.00	-9.36
41	0.779	36.64	46.00	-9.36
42	0.329	40.08	49.48	-9.40
43	0.373	39.02	48.43	-9.41
44	0.230	42.99	52.43	-9.44
45	4.799	36.54	46.00	-9.46
46	0.716	36.54	46.00	-9.46
47	0.325	40.09	49.57	-9.48
48	1.790	36.52	46.00	-9.48
49	0.208	43.77	53.27	-9.50
50	0.266	41.68	51.24	-9.56

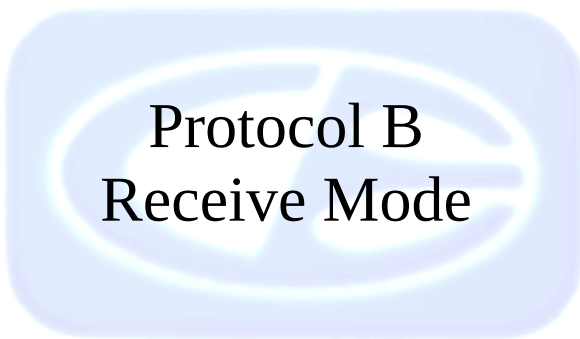

Protocol B
Receive Mode

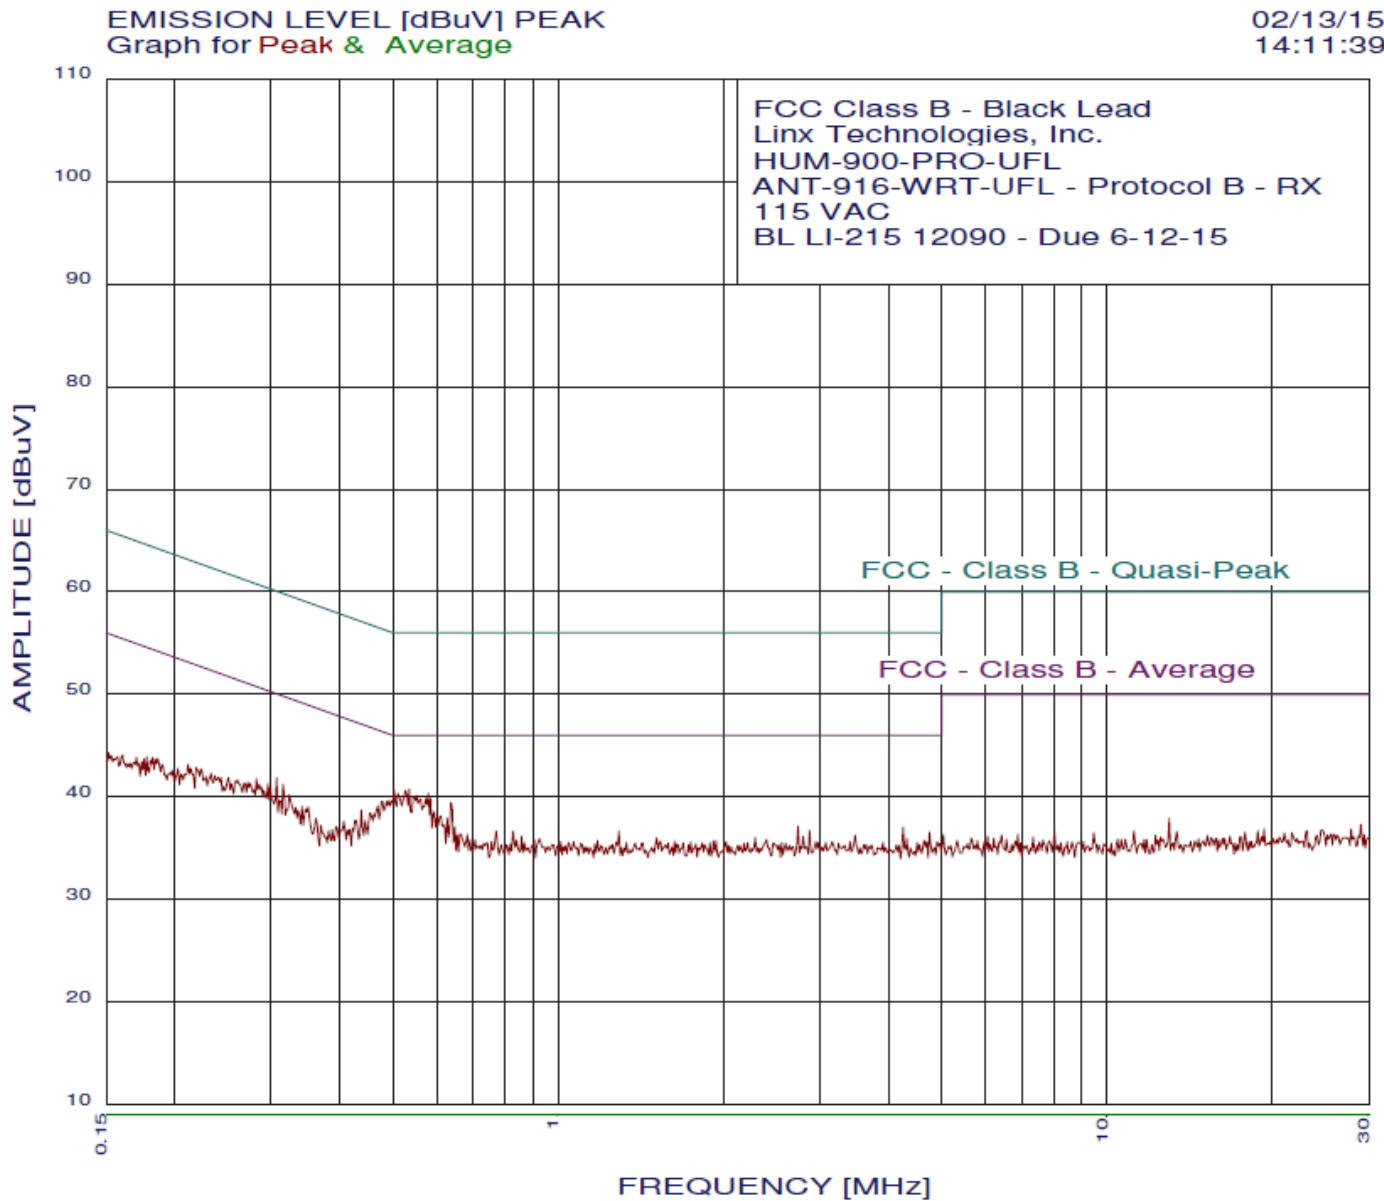

page 1/1


02/13/15 14:11:39

FCC Class B - Black Lead
Linx Technologies, Inc.
HUM-900-PRO-UFL
ANT-916-WRT-UFL - Protocol B - RX
115 VAC
BL LI-215 12090 - Due 6-12-15
Test Engineer : Kenneth Lee

50 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 0.01 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.535	40.74	46.00	-5.26
2	0.502	40.65	46.00	-5.35
3	0.527	40.64	46.00	-5.36
4	0.510	40.34	46.00	-5.66
5	0.580	40.34	46.00	-5.66
6	0.552	40.14	46.00	-5.86
7	0.544	40.04	46.00	-5.96
8	0.573	39.84	46.00	-6.16
9	0.586	39.84	46.00	-6.16
10	0.561	39.74	46.00	-6.26
11	0.497	39.64	46.05	-6.41
12	0.492	39.64	46.14	-6.50
13	0.637	39.44	46.00	-6.56
14	0.486	39.54	46.23	-6.69
15	0.479	39.54	46.36	-6.82
16	0.469	39.14	46.53	-7.40
17	0.595	38.54	46.00	-7.46
18	0.611	38.14	46.00	-7.86
19	0.601	37.94	46.00	-8.06
20	0.627	37.94	46.00	-8.06
21	0.307	41.87	50.05	-8.18
22	0.461	38.33	46.67	-8.33
23	0.454	38.43	46.80	-8.37
24	0.438	38.73	47.11	-8.38
25	0.315	41.24	49.84	-8.59
26	0.618	37.24	46.00	-8.76
27	2.736	37.14	46.00	-8.86
28	4.249	37.05	46.00	-8.95
29	0.648	37.04	46.00	-8.96
30	0.282	41.77	50.76	-8.99
31	0.296	41.32	50.36	-9.05
32	0.445	37.73	46.98	-9.25
33	2.870	36.74	46.00	-9.26
34	0.299	41.01	50.28	-9.27
35	1.290	36.67	46.00	-9.33
36	0.771	36.64	46.00	-9.36
37	0.826	36.64	46.00	-9.36
38	0.324	40.21	49.62	-9.41
39	0.285	41.26	50.67	-9.41
40	4.748	36.55	46.00	-9.45
41	0.428	37.72	47.28	-9.56
42	0.288	40.95	50.58	-9.63
43	0.272	41.41	51.07	-9.65
44	0.662	36.34	46.00	-9.66
45	0.683	36.34	46.00	-9.66
46	0.275	41.30	50.98	-9.68
47	3.474	36.24	46.00	-9.76
48	0.655	36.24	46.00	-9.76
49	0.260	41.66	51.42	-9.76
50	0.251	41.90	51.73	-9.83

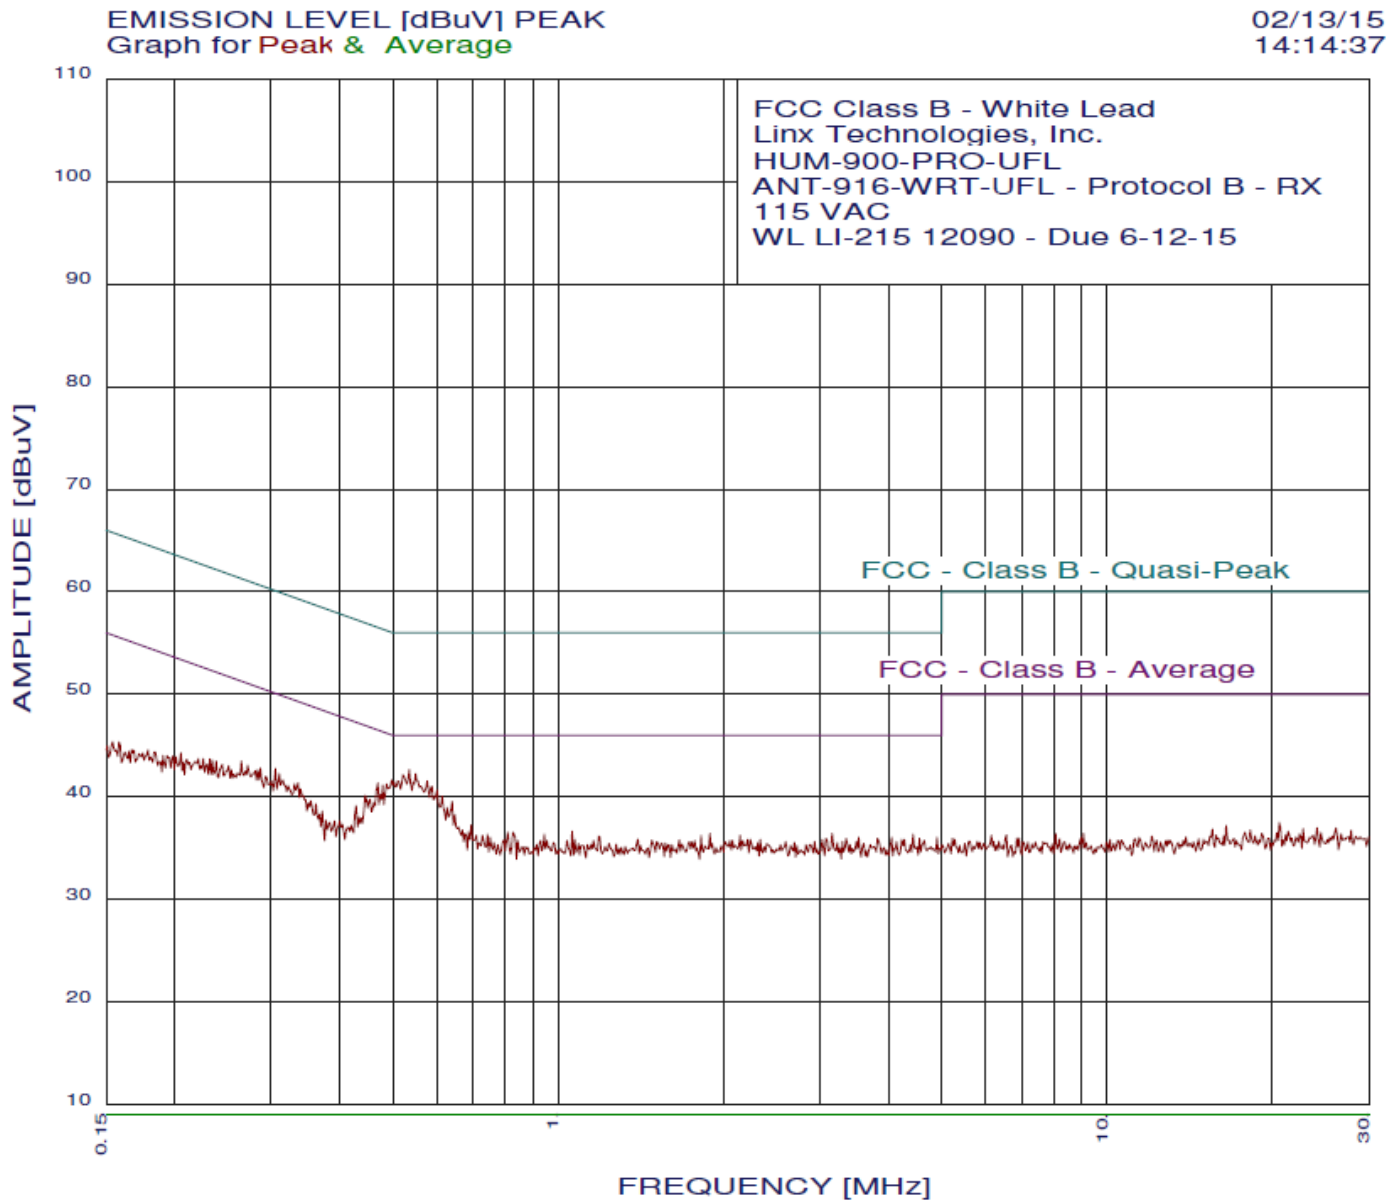

page 1/1


02/13/15 14:14:37

FCC Class B - White Lead
Linx Technologies, Inc.
HUM-900-PRO-UFL
ANT-916-WRT-UFL - Protocol B - RX
115 VAC
WL LI-215 12090 - Due 6-12-15
Test Engineer : Kenneth Lee

50 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 0.01 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.535	42.65	46.00	-3.35
2	0.550	42.25	46.00	-3.75
3	0.521	42.15	46.00	-3.85
4	0.497	41.65	46.05	-4.40
5	0.510	41.55	46.00	-4.45
6	0.577	41.54	46.00	-4.46
7	0.502	41.45	46.00	-4.55
8	0.544	41.45	46.00	-4.55
9	0.561	41.04	46.00	-4.96
10	0.589	41.04	46.00	-4.96
11	0.486	41.24	46.23	-4.99
12	0.469	41.34	46.53	-5.19
13	0.479	41.14	46.36	-5.22
14	0.601	40.64	46.00	-5.36
15	0.614	40.04	46.00	-5.96
16	0.474	40.24	46.45	-6.21
17	0.641	39.54	46.00	-6.46
18	0.445	40.13	46.98	-6.84
19	0.627	38.94	46.00	-7.06
20	0.454	39.74	46.80	-7.06
21	0.461	39.44	46.67	-7.23
22	0.305	42.76	50.10	-7.34
23	0.310	42.24	49.97	-7.73
24	0.648	38.24	46.00	-7.76
25	0.265	43.49	51.29	-7.80
26	0.286	42.82	50.63	-7.81
27	0.336	41.36	49.31	-7.95
28	0.272	43.06	51.07	-8.00
29	0.283	42.63	50.72	-8.09
30	0.428	39.13	47.28	-8.15
31	0.331	41.28	49.44	-8.16
32	0.315	41.62	49.84	-8.21
33	0.280	42.54	50.81	-8.27
34	0.293	42.00	50.45	-8.45
35	0.339	40.75	49.22	-8.47
36	0.322	41.10	49.66	-8.56
37	0.300	41.57	50.23	-8.66
38	0.269	42.47	51.15	-8.68
39	0.238	43.47	52.17	-8.70
40	0.232	43.69	52.39	-8.70
41	0.251	43.03	51.73	-8.70
42	0.234	43.58	52.30	-8.72
43	0.694	37.24	46.00	-8.76
44	0.244	43.15	51.95	-8.80
45	0.226	43.71	52.61	-8.90
46	0.658	37.04	46.00	-8.96
47	0.254	42.62	51.64	-9.02
48	0.297	41.28	50.32	-9.04
49	0.221	43.73	52.78	-9.06
50	0.205	44.28	53.40	-9.12

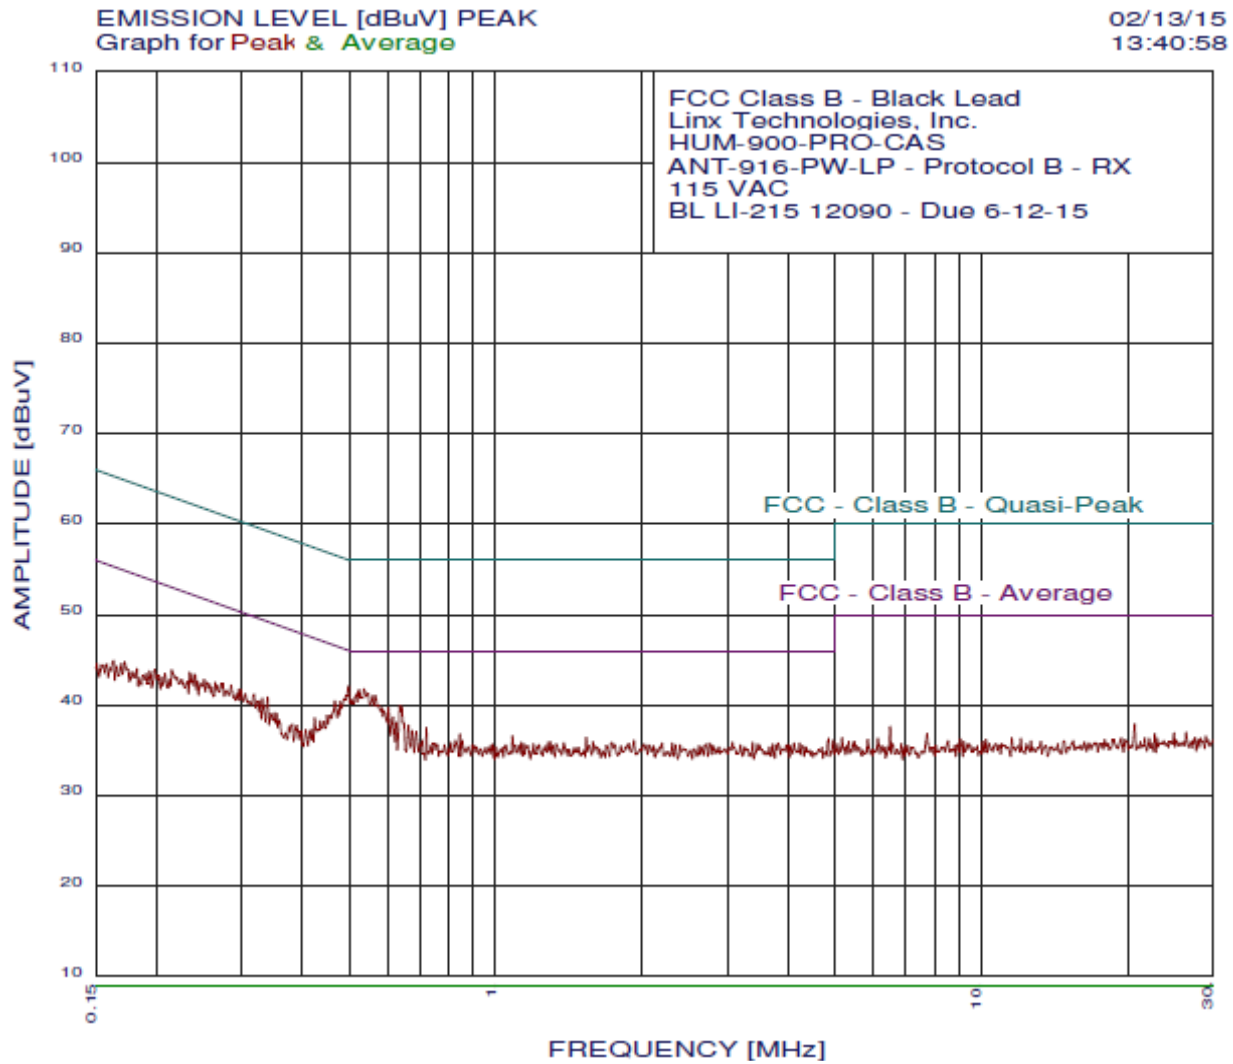

page 1/1


02/13/15 13:40:58

FCC Class B - Black Lead
Linx Technologies, Inc.
HUM-900-PRO-CAS
ANT-916-PW-LP - Protocol B - RX
115 VAC
BL LI-215 12090 - Due 6-12-15
Test Engineer : Kenneth Lee

50 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 0.01 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.497	42.04	46.05	-4.01
2	0.535	41.74	46.00	-4.26
3	0.524	41.64	46.00	-4.36
4	0.547	41.24	46.00	-4.76
5	0.516	41.14	46.00	-4.86
6	0.564	41.04	46.00	-4.96
7	0.558	40.94	46.00	-5.06
8	0.505	40.55	46.00	-5.45
9	0.479	40.34	46.36	-6.02
10	0.573	39.94	46.00	-6.06
11	0.466	40.43	46.58	-6.14
12	0.634	39.84	46.00	-6.16
13	0.641	39.74	46.00	-6.26
14	0.583	39.64	46.00	-6.36
15	0.601	39.64	46.00	-6.36
16	0.589	39.34	46.00	-6.66
17	0.474	39.44	46.45	-7.01
18	0.614	38.64	46.00	-7.36
19	0.457	38.83	46.76	-7.92
20	0.624	38.04	46.00	-7.96
21	0.449	38.83	46.89	-8.06
22	0.662	37.74	46.00	-8.26
23	0.339	40.85	49.22	-8.37
24	0.285	42.16	50.67	-8.51
25	0.720	37.44	46.00	-8.56
26	0.318	41.13	49.75	-8.62
27	0.296	41.72	50.36	-8.65
28	0.299	41.61	50.28	-8.67
29	0.273	42.31	51.02	-8.71
30	0.234	43.56	52.30	-8.73
31	0.240	43.34	52.08	-8.74
32	0.331	40.68	49.44	-8.76
33	0.265	42.44	51.29	-8.84
34	0.424	38.52	47.37	-8.85
35	0.237	43.35	52.21	-8.86
36	0.672	37.14	46.00	-8.86
37	0.442	38.13	47.02	-8.89
38	0.305	41.18	50.10	-8.92
39	0.435	38.22	47.15	-8.92
40	0.251	42.80	51.73	-8.93
41	0.686	37.04	46.00	-8.96
42	0.267	42.13	51.20	-9.07
43	0.327	40.39	49.53	-9.13
44	0.254	42.49	51.64	-9.15
45	0.215	43.84	53.00	-9.16
46	0.324	40.41	49.62	-9.21
47	0.293	41.23	50.45	-9.22
48	0.258	42.27	51.51	-9.24
49	0.844	36.74	46.00	-9.26
50	0.279	41.59	50.85	-9.26

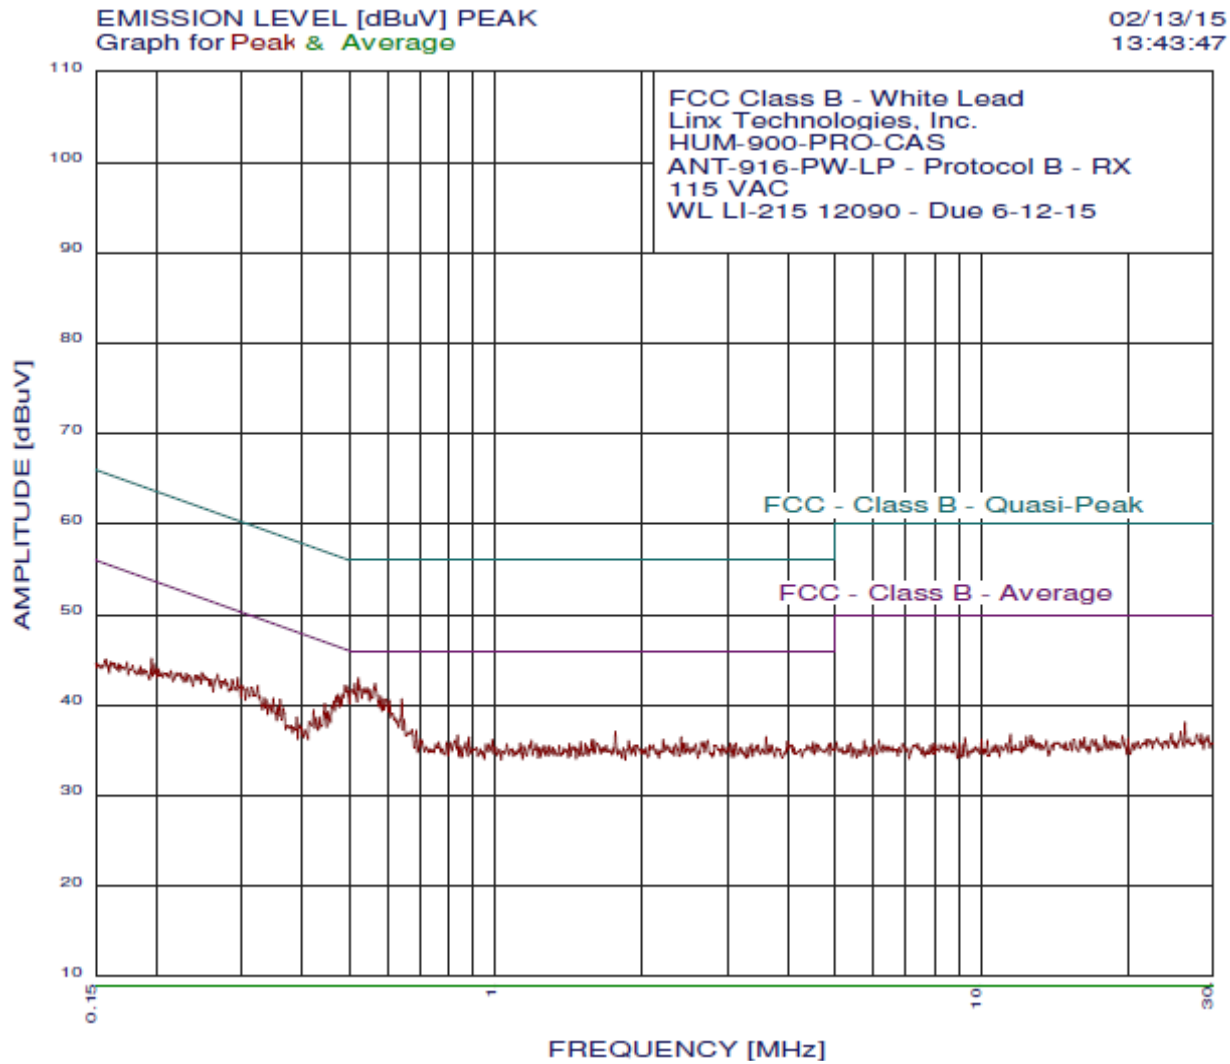

page 1/1


02/13/15 13:43:47

FCC Class B - White Lead
Linx Technologies, Inc.
HUM-900-PRO-CAS
ANT-916-PW-LP - Protocol B - RX
115 VAC
WL LI-215 12090 - Due 6-12-15
Test Engineer : Kenneth Lee


50 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 0.01 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.521	42.95	46.00	-3.05
2	0.513	42.35	46.00	-3.65
3	0.564	42.34	46.00	-3.66
4	0.489	42.14	46.18	-4.04
5	0.494	42.05	46.09	-4.05
6	0.538	41.85	46.00	-4.15
7	0.544	41.85	46.00	-4.15
8	0.532	41.75	46.00	-4.25
9	0.505	41.65	46.00	-4.35
10	0.552	41.64	46.00	-4.36
11	0.580	40.94	46.00	-5.06
12	0.484	41.14	46.27	-5.13
13	0.474	41.14	46.45	-5.31
14	0.586	40.64	46.00	-5.36
15	0.592	40.64	46.00	-5.36
16	0.641	40.64	46.00	-5.36
17	0.479	40.84	46.36	-5.52
18	0.605	40.44	46.00	-5.56
19	0.469	40.94	46.53	-5.59
20	0.464	40.44	46.62	-6.18
21	0.445	40.13	46.98	-6.84
22	0.611	39.04	46.00	-6.96
23	0.459	39.74	46.71	-6.97
24	0.294	42.99	50.41	-7.42
25	0.621	38.54	46.00	-7.46
26	0.324	42.10	49.62	-7.52
27	0.452	39.24	46.85	-7.61
28	0.648	38.34	46.00	-7.66
29	0.627	38.24	46.00	-7.76
30	0.286	42.82	50.63	-7.81
31	0.267	43.38	51.20	-7.82
32	0.313	41.93	49.88	-7.95
33	0.421	39.43	47.42	-7.99
34	0.277	42.84	50.89	-8.05
35	0.300	42.17	50.23	-8.06
36	0.360	40.61	48.73	-8.12
37	0.309	41.85	50.01	-8.16
38	0.248	43.54	51.82	-8.28
39	0.348	40.72	49.00	-8.28
40	0.280	42.44	50.81	-8.37
41	0.273	42.56	51.02	-8.46
42	0.327	40.99	49.53	-8.54
43	0.252	43.13	51.68	-8.56
44	0.433	38.63	47.19	-8.56
45	0.334	40.76	49.35	-8.59
46	0.291	41.90	50.49	-8.59
47	0.260	42.80	51.42	-8.62
48	0.196	45.11	53.80	-8.69
49	0.338	40.55	49.26	-8.71
50	0.243	43.26	52.00	-8.74

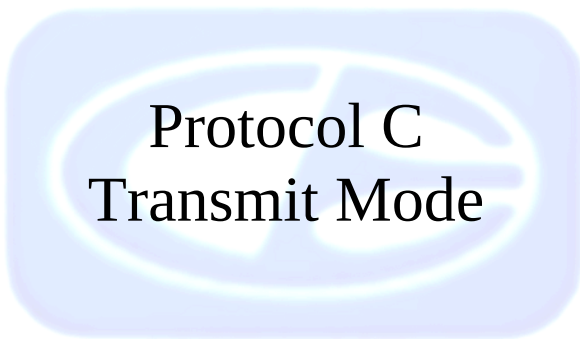

Protocol C
Transmit Mode

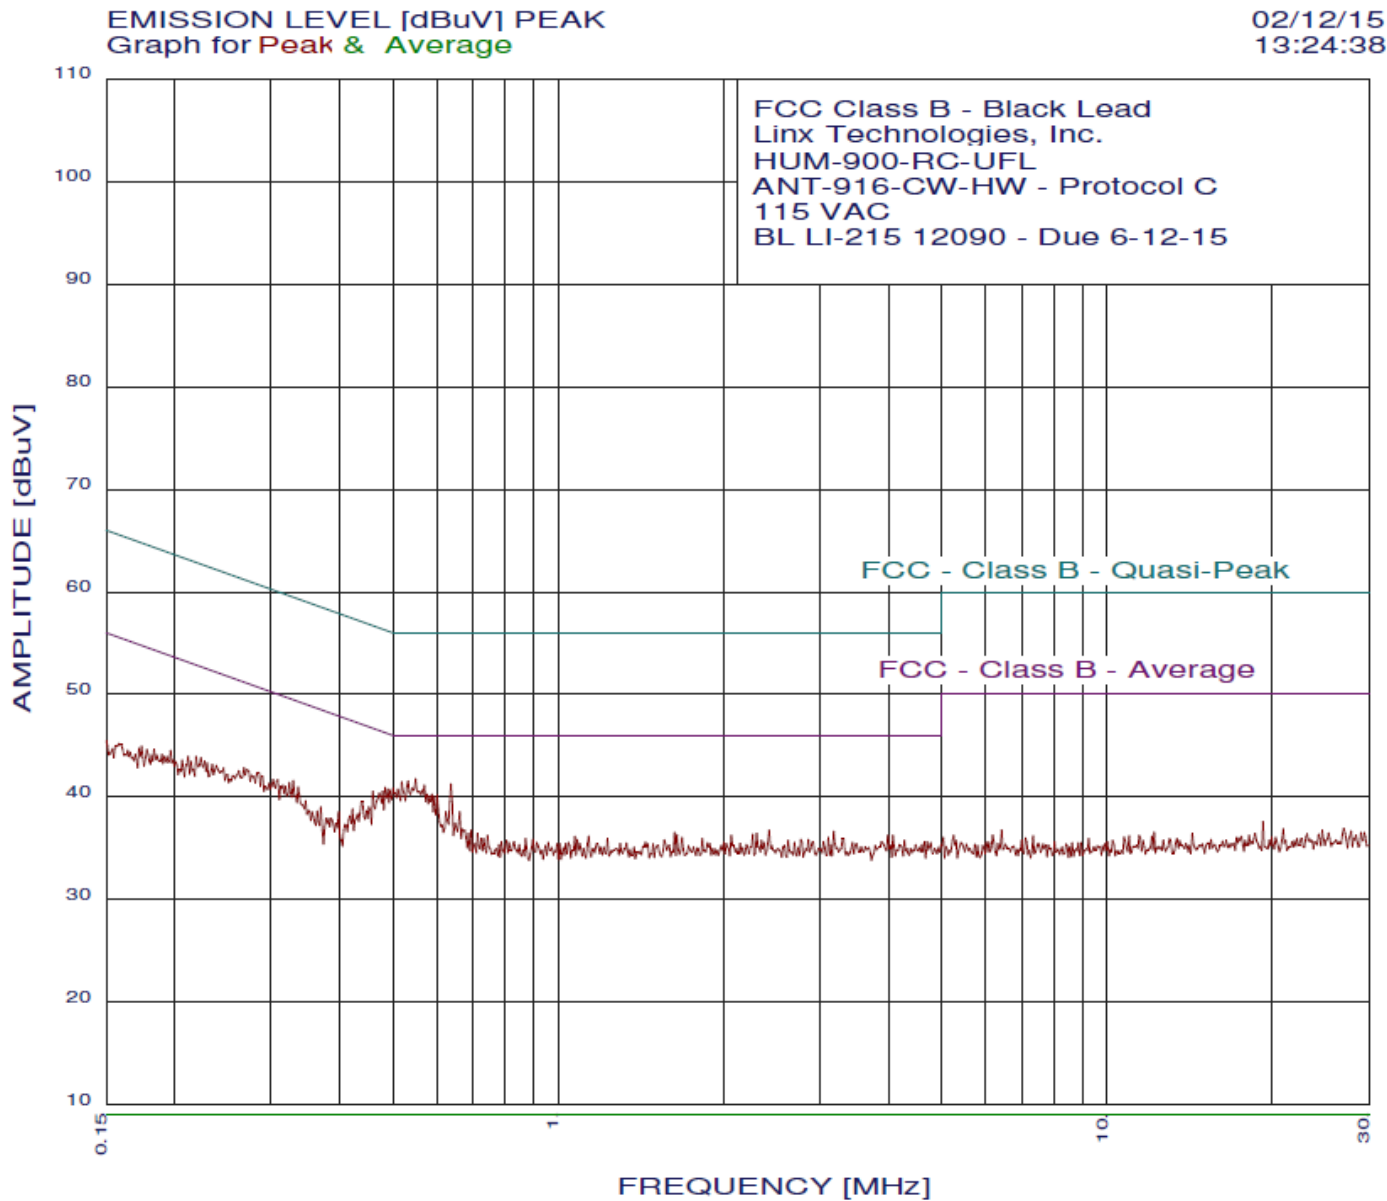

page 1/1

02/12/15 13:24:38

FCC Class B - Black Lead
Linx Technologies, Inc.
HUM-900-RC-UFL
ANT-916-CW-HW - Protocol C
115 VAC
BL LI-215 12090 - Due 6-12-15
Test Engineer : Kenneth Lee


50 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 0.01 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.550	41.74	46.00	-4.26
2	0.532	41.54	46.00	-4.46
3	0.518	41.44	46.00	-4.56
4	0.637	41.24	46.00	-4.76
5	0.570	41.14	46.00	-4.86
6	0.541	40.84	46.00	-5.16
7	0.500	40.85	46.01	-5.16
8	0.510	40.74	46.00	-5.26
9	0.484	40.94	46.27	-5.33
10	0.564	40.64	46.00	-5.36
11	0.489	40.74	46.18	-5.44
12	0.494	40.64	46.09	-5.45
13	0.558	40.54	46.00	-5.46
14	0.577	40.24	46.00	-5.76
15	0.589	40.24	46.00	-5.76
16	0.479	40.54	46.36	-5.82
17	0.601	40.14	46.00	-5.86
18	0.583	40.04	46.00	-5.96
19	0.595	39.94	46.00	-6.06
20	0.471	40.34	46.49	-6.15
21	0.459	40.53	46.71	-6.18
22	0.624	38.54	46.00	-7.46
23	0.662	38.54	46.00	-7.46
24	0.440	39.53	47.06	-7.54
25	0.452	39.03	46.85	-7.82
26	0.329	41.59	49.48	-7.89
27	0.324	41.41	49.62	-8.21
28	0.447	38.63	46.93	-8.30
29	0.309	41.67	50.01	-8.34
30	0.336	40.96	49.31	-8.35
31	0.283	42.37	50.72	-8.35
32	0.267	42.83	51.20	-8.37
33	0.270	42.62	51.11	-8.49
34	0.302	41.69	50.19	-8.49
35	0.288	42.05	50.58	-8.53
36	0.648	37.44	46.00	-8.56
37	0.421	38.82	47.42	-8.60
38	0.315	41.14	49.84	-8.69
39	0.318	41.03	49.75	-8.72
40	0.614	37.24	46.00	-8.76
41	0.262	42.55	51.38	-8.82
42	0.276	42.10	50.94	-8.84
43	0.279	41.99	50.85	-8.86
44	0.312	41.06	49.92	-8.87
45	0.223	43.81	52.70	-8.89
46	0.431	38.32	47.24	-8.91
47	0.219	43.93	52.87	-8.94
48	0.297	41.31	50.32	-9.01
49	0.227	43.49	52.57	-9.07
50	0.246	42.82	51.90	-9.09

EMISSION LEVEL [dBuV] PEAK
 Graph for Peak & Average

02/12/15
 13:27:38

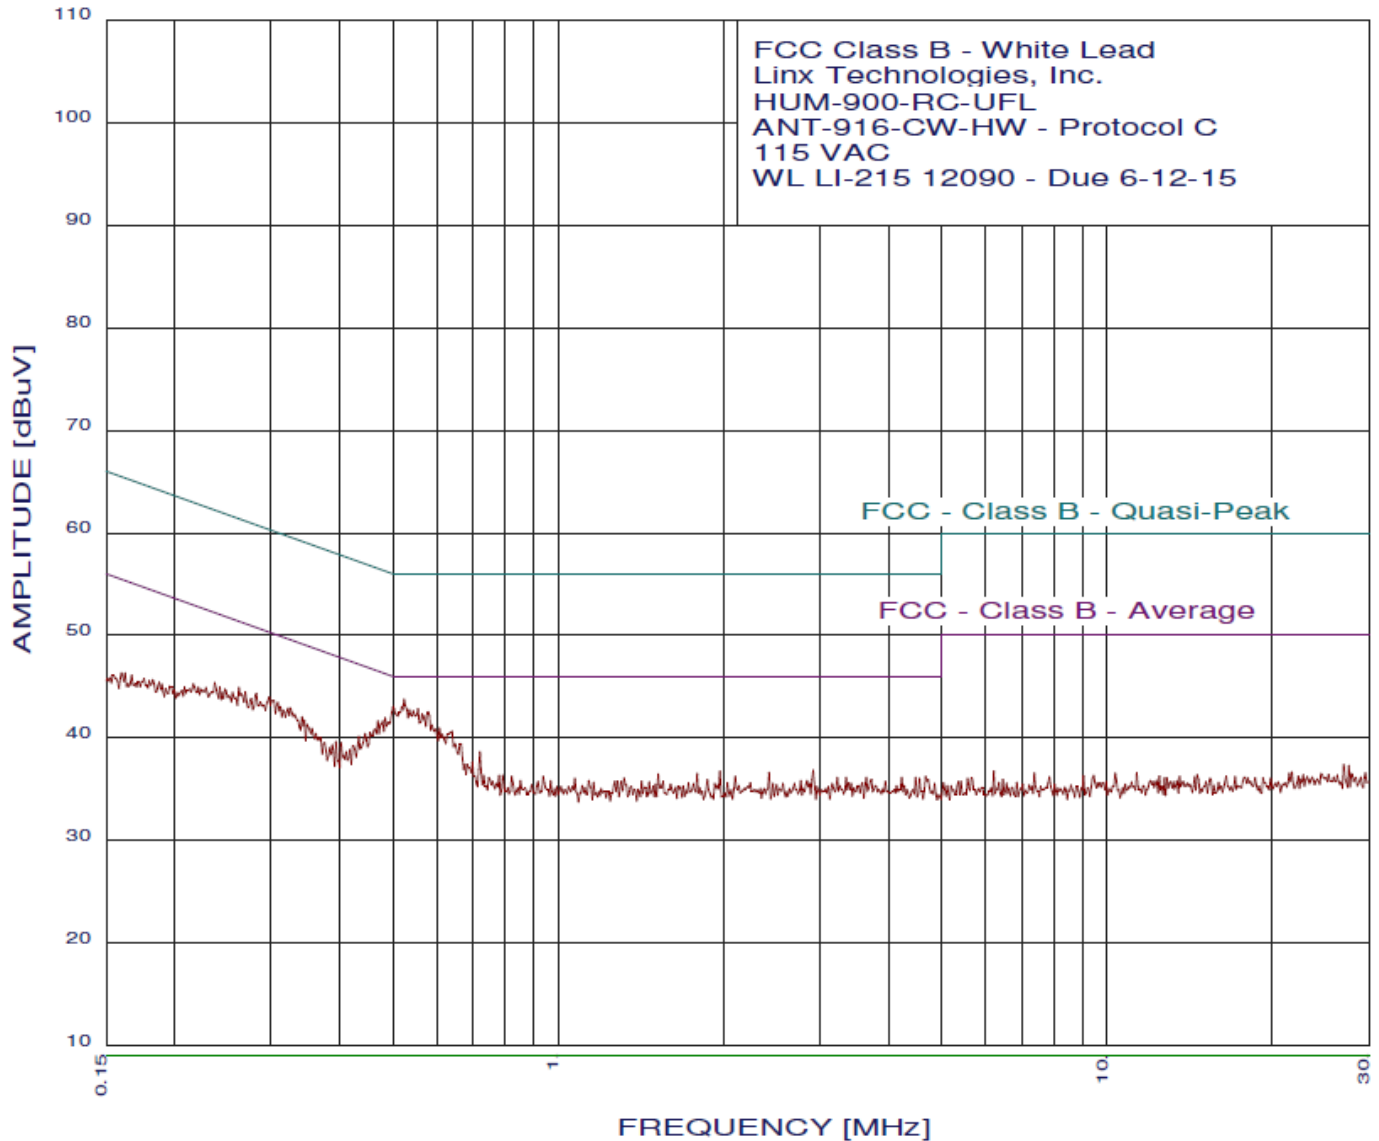

page 1/1


02/12/15 13:27:38

FCC Class B - White Lead
Linx Technologies, Inc.
HUM-900-RC-UFL
ANT-916-CW-HW - Protocol C
115 VAC
WL LI-215 12090 - Due 6-12-15
Test Engineer : Kenneth Lee

50 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 0.01 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.524	43.75	46.00	-2.25
2	0.518	43.05	46.00	-2.95
3	0.500	43.05	46.01	-2.96
4	0.555	42.84	46.00	-3.16
5	0.535	42.75	46.00	-3.25
6	0.544	42.65	46.00	-3.35
7	0.580	42.54	46.00	-3.46
8	0.564	42.34	46.00	-3.66
9	0.570	42.14	46.00	-3.86
10	0.484	41.94	46.27	-4.33
11	0.489	41.54	46.18	-4.64
12	0.479	41.64	46.36	-4.72
13	0.589	41.24	46.00	-4.76
14	0.469	41.64	46.53	-4.89
15	0.608	40.94	46.00	-5.06
16	0.598	40.84	46.00	-5.16
17	0.641	40.64	46.00	-5.36
18	0.614	40.34	46.00	-5.66
19	0.464	40.84	46.62	-5.78
20	0.454	40.54	46.80	-6.26
21	0.297	43.98	50.32	-6.34
22	0.282	44.33	50.76	-6.43
23	0.262	44.90	51.38	-6.48
24	0.302	43.67	50.19	-6.52
25	0.445	40.43	46.98	-6.54
26	0.648	39.44	46.00	-6.56
27	0.662	39.44	46.00	-6.56
28	0.309	43.45	50.01	-6.56
29	0.325	42.89	49.57	-6.68
30	0.269	44.47	51.15	-6.68
31	0.322	42.90	49.66	-6.76
32	0.237	45.37	52.21	-6.84
33	0.312	43.03	49.92	-6.89
34	0.265	44.29	51.29	-7.00
35	0.433	40.13	47.19	-7.06
36	0.242	44.96	52.04	-7.08
37	0.276	43.85	50.94	-7.09
38	0.286	43.52	50.63	-7.11
39	0.315	42.72	49.84	-7.11
40	0.247	44.74	51.86	-7.12
41	0.341	42.04	49.18	-7.14
42	0.331	42.28	49.44	-7.16
43	0.255	44.42	51.60	-7.18
44	0.291	43.20	50.49	-7.29
45	0.345	41.73	49.09	-7.36
46	0.720	38.64	46.00	-7.36
47	0.244	44.45	51.95	-7.50
48	0.259	43.90	51.47	-7.56
49	0.251	44.13	51.73	-7.60
50	0.228	44.90	52.52	-7.62

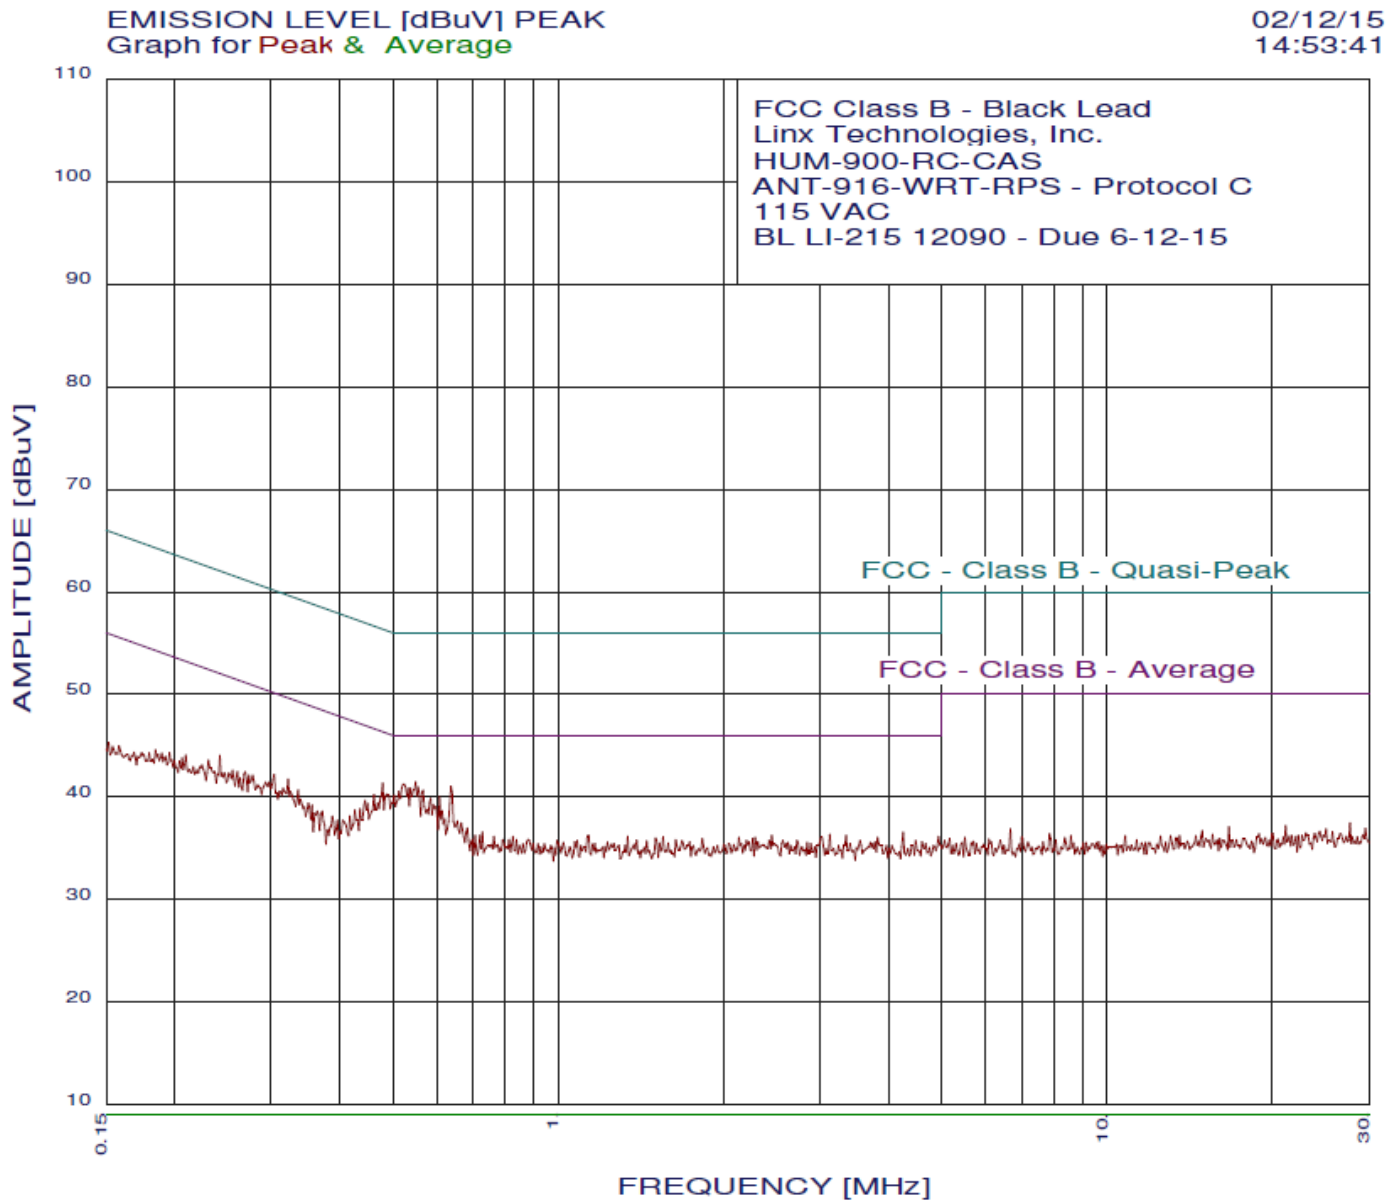

page 1/1


02/12/15 14:53:41

FCC Class B - Black Lead
Linx Technologies, Inc.
HUM-900-RC-CAS
ANT-916-WRT-RPS - Protocol C
115 VAC
BL LI-215 12090 - Due 6-12-15
Test Engineer : Kenneth Lee

50 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 0.01 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.550	41.44	46.00	-4.56
2	0.521	41.24	46.00	-4.76
3	0.637	41.04	46.00	-4.96
4	0.479	41.34	46.36	-5.02
5	0.555	40.94	46.00	-5.06
6	0.532	40.84	46.00	-5.16
7	0.538	40.84	46.00	-5.16
8	0.567	40.64	46.00	-5.36
9	0.513	40.54	46.00	-5.46
10	0.502	40.15	46.00	-5.85
11	0.486	40.24	46.23	-5.99
12	0.608	39.94	46.00	-6.06
13	0.586	39.84	46.00	-6.16
14	0.461	40.23	46.67	-6.43
15	0.592	39.24	46.00	-6.76
16	0.598	39.04	46.00	-6.96
17	0.469	39.44	46.53	-7.10
18	0.577	38.74	46.00	-7.26
19	0.445	39.63	46.98	-7.35
20	0.614	38.64	46.00	-7.36
21	0.449	39.33	46.89	-7.56
22	0.322	41.72	49.66	-7.95
23	0.304	42.19	50.14	-7.96
24	0.242	44.03	52.04	-8.00
25	0.621	37.84	46.00	-8.16
26	0.435	38.82	47.15	-8.32
27	0.655	37.64	46.00	-8.36
28	0.665	37.44	46.00	-8.56
29	0.426	38.72	47.33	-8.61
30	0.336	40.66	49.31	-8.65
31	0.269	42.43	51.15	-8.73
32	0.277	42.09	50.89	-8.80
33	0.230	43.58	52.43	-8.85
34	0.297	41.41	50.32	-8.91
35	0.273	42.11	51.02	-8.91
36	0.260	42.46	51.42	-8.96
37	0.315	40.84	49.84	-8.99
38	0.255	42.58	51.60	-9.01
39	0.293	41.43	50.45	-9.02
40	0.683	36.94	46.00	-9.06
41	0.325	40.50	49.57	-9.07
42	0.210	44.06	53.23	-9.16
43	0.417	38.12	47.50	-9.38
44	0.310	40.56	49.97	-9.40
45	0.251	42.30	51.73	-9.43
46	4.249	36.55	46.00	-9.45
47	0.728	36.54	46.00	-9.46
48	0.339	39.75	49.22	-9.47
49	0.196	44.32	53.80	-9.48
50	0.263	41.85	51.33	-9.48

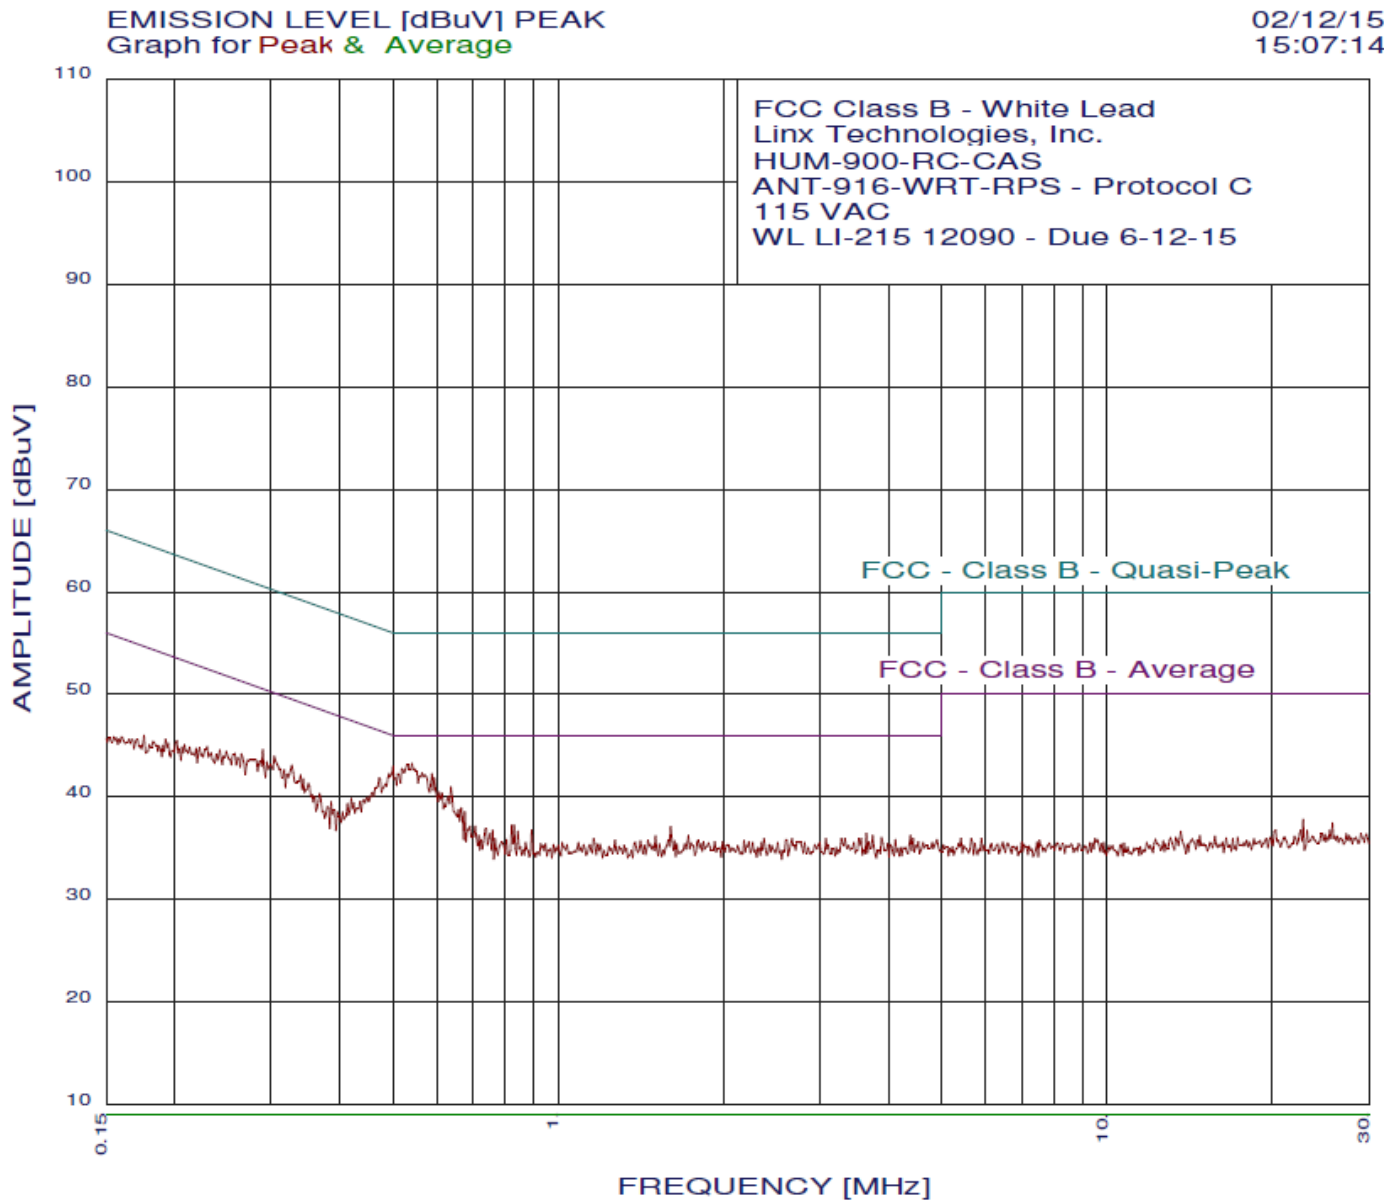

page 1/1


02/12/15 15:07:14

FCC Class B - White Lead
Linx Technologies, Inc.
HUM-900-RC-CAS
ANT-916-WRT-RPS - Protocol C
115 VAC
WL LI-215 12090 - Due 6-12-15
Test Engineer : Kenneth Lee


50 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 0.01 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.541	43.25	46.00	-2.75
2	0.530	43.15	46.00	-2.85
3	0.500	42.95	46.01	-3.06
4	0.518	42.75	46.00	-3.25
5	0.547	42.75	46.00	-3.25
6	0.564	42.34	46.00	-3.66
7	0.510	42.25	46.00	-3.75
8	0.589	42.24	46.00	-3.76
9	0.570	42.14	46.00	-3.86
10	0.492	42.25	46.14	-3.89
11	0.558	42.04	46.00	-3.96
12	0.505	41.85	46.00	-4.15
13	0.595	41.84	46.00	-4.16
14	0.471	41.84	46.49	-4.65
15	0.484	41.24	46.27	-5.03
16	0.637	40.94	46.00	-5.06
17	0.608	40.44	46.00	-5.56
18	0.614	40.34	46.00	-5.66
19	0.290	44.61	50.54	-5.93
20	0.631	40.04	46.00	-5.96
21	0.304	43.96	50.14	-6.18
22	0.459	40.44	46.71	-6.27
23	0.327	43.09	49.53	-6.44
24	0.621	39.34	46.00	-6.66
25	0.449	39.94	46.89	-6.95
26	0.294	43.39	50.41	-7.02
27	0.665	38.94	46.00	-7.06
28	0.339	42.15	49.22	-7.07
29	0.265	44.19	51.29	-7.10
30	0.299	43.18	50.28	-7.10
31	0.286	43.52	50.63	-7.11
32	0.317	42.62	49.79	-7.17
33	0.312	42.73	49.92	-7.19
34	0.279	43.64	50.85	-7.21
35	0.658	38.74	46.00	-7.26
36	0.442	39.73	47.02	-7.29
37	0.258	44.21	51.51	-7.30
38	0.275	43.65	50.98	-7.33
39	0.248	44.44	51.82	-7.38
40	0.343	41.74	49.13	-7.40
41	0.676	38.54	46.00	-7.46
42	0.242	44.56	52.04	-7.48
43	0.320	42.21	49.71	-7.50
44	0.272	43.56	51.07	-7.50
45	0.229	44.90	52.48	-7.58
46	0.435	39.53	47.15	-7.62
47	0.260	43.80	51.42	-7.62
48	0.419	39.83	47.46	-7.63
49	0.350	41.31	48.95	-7.64
50	0.222	44.82	52.74	-7.92

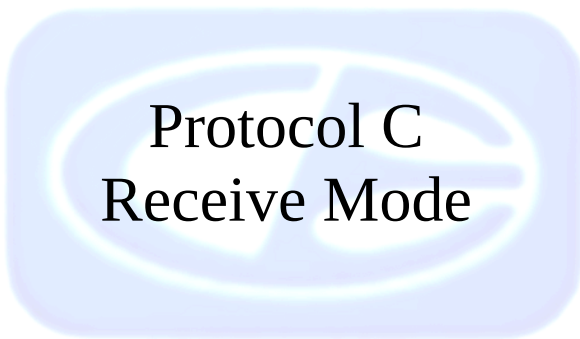

Protocol C
Receive Mode

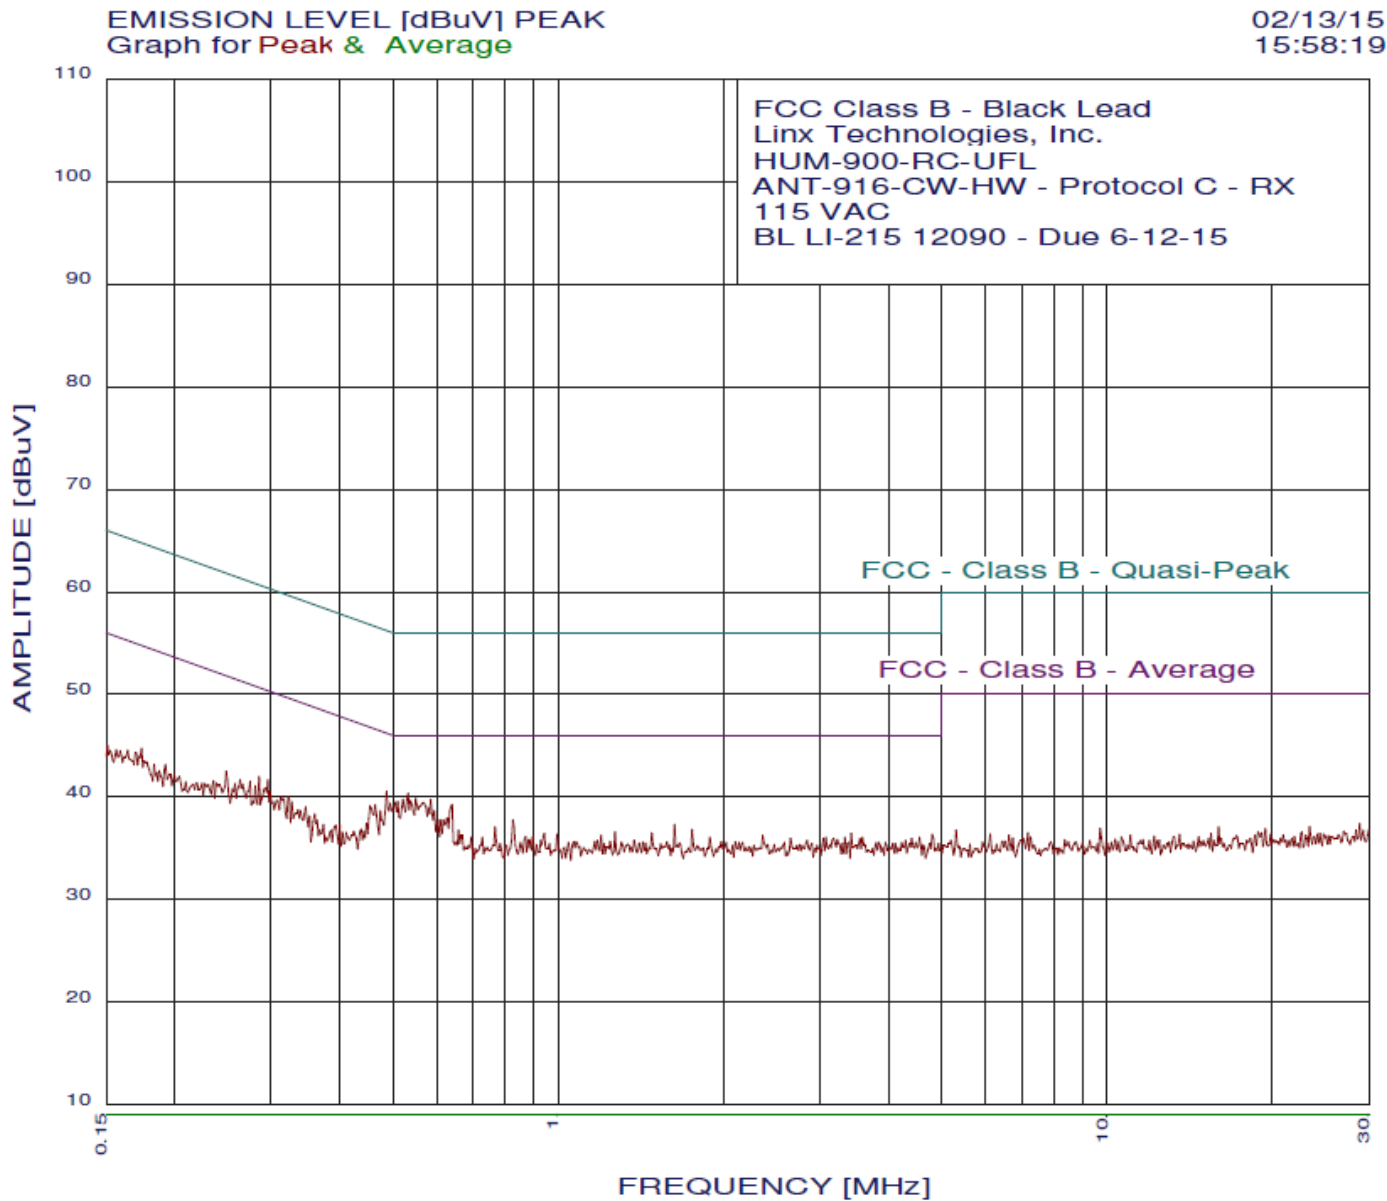

page 1/1


02/13/15 15:58:19

FCC Class B - Black Lead
Linx Technologies, Inc.
HUM-900-RC-UFL
ANT-916-CW-HW - Protocol C - RX
115 VAC
BL LI-215 12090 - Due 6-12-15
Test Engineer : Kenneth Lee

50 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 0.01 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.532	40.34	46.00	-5.66
2	0.486	40.54	46.23	-5.69
3	0.550	39.84	46.00	-6.16
4	0.521	39.74	46.00	-6.26
5	0.586	39.74	46.00	-6.26
6	0.538	39.64	46.00	-6.36
7	0.510	39.54	46.00	-6.46
8	0.505	39.45	46.00	-6.55
9	0.567	39.44	46.00	-6.56
10	0.494	39.34	46.09	-6.75
11	0.641	39.24	46.00	-6.76
12	0.580	38.94	46.00	-7.06
13	0.595	38.64	46.00	-7.36
14	0.464	39.23	46.62	-7.39
15	0.454	39.13	46.80	-7.67
16	0.474	38.64	46.45	-7.81
17	0.627	37.94	46.00	-8.06
18	0.605	37.74	46.00	-8.26
19	0.611	37.74	46.00	-8.26
20	0.618	37.74	46.00	-8.26
21	0.826	37.74	46.00	-8.26
22	1.629	37.30	46.00	-8.70
23	0.285	41.96	50.67	-8.71
24	0.296	41.62	50.36	-8.75
25	0.767	37.04	46.00	-8.96
26	1.754	36.82	46.00	-9.18
27	0.658	36.74	46.00	-9.26
28	0.248	42.51	51.82	-9.31
29	1.269	36.57	46.00	-9.43
30	0.275	41.50	50.98	-9.48
31	0.447	37.43	46.93	-9.50
32	1.480	36.49	46.00	-9.51
33	3.419	36.44	46.00	-9.56
34	0.944	36.44	46.00	-9.56
35	0.293	40.83	50.45	-9.62
36	0.322	40.02	49.66	-9.65
37	4.799	36.35	46.00	-9.65
38	0.995	36.34	46.00	-9.66
39	0.263	41.65	51.33	-9.68
40	0.280	41.08	50.81	-9.73
41	1.197	36.26	46.00	-9.74
42	0.665	36.24	46.00	-9.76
43	2.358	36.24	46.00	-9.76
44	0.872	36.14	46.00	-9.86
45	0.899	36.14	46.00	-9.86
46	0.312	40.06	49.92	-9.87
47	0.299	40.41	50.28	-9.87
48	4.552	36.05	46.00	-9.95
49	3.585	36.04	46.00	-9.96
50	3.328	36.04	46.00	-9.96

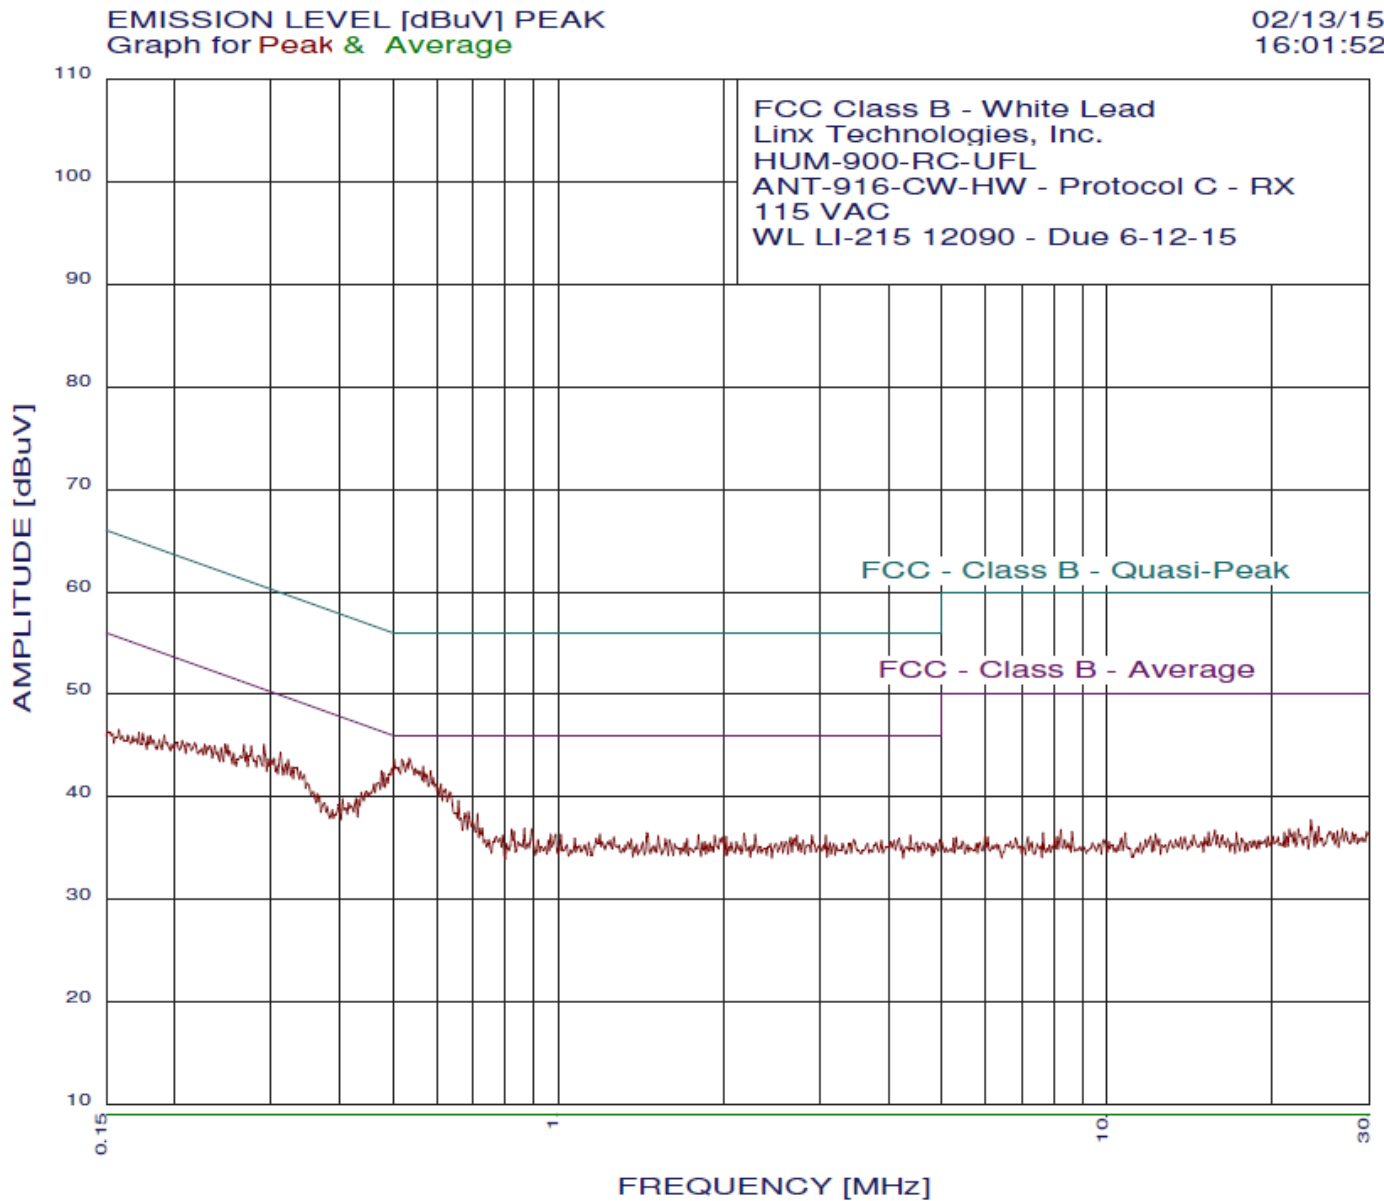

page 1/1


02/13/15 16:01:52

FCC Class B - White Lead
Linx Technologies, Inc.
HUM-900-RC-UFL
ANT-916-CW-HW - Protocol C - RX
115 VAC
WL LI-215 12090 - Due 6-12-15
Test Engineer : Kenneth Lee

50 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 0.01 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.535	43.75	46.00	-2.25
2	0.502	43.65	46.00	-2.35
3	0.518	43.65	46.00	-2.35
4	0.530	43.25	46.00	-2.75
5	0.567	42.94	46.00	-3.06
6	0.508	42.85	46.00	-3.15
7	0.550	42.75	46.00	-3.25
8	0.497	42.75	46.05	-3.30
9	0.555	42.54	46.00	-3.46
10	0.586	42.54	46.00	-3.46
11	0.561	42.44	46.00	-3.56
12	0.573	42.24	46.00	-3.76
13	0.476	42.54	46.40	-3.86
14	0.481	42.34	46.32	-3.97
15	0.592	41.84	46.00	-4.16
16	0.486	41.84	46.23	-4.39
17	0.598	41.24	46.00	-4.76
18	0.611	41.24	46.00	-4.76
19	0.471	41.34	46.49	-5.15
20	0.605	40.84	46.00	-5.16
21	0.624	40.74	46.00	-5.26
22	0.618	40.64	46.00	-5.36
23	0.291	45.10	50.49	-5.39
24	0.461	41.24	46.67	-5.43
25	0.634	40.44	46.00	-5.56
26	0.312	44.33	49.92	-5.59
27	0.276	44.95	50.94	-5.99
28	0.322	43.60	49.66	-6.06
29	0.267	45.08	51.20	-6.12
30	0.658	39.64	46.00	-6.36
31	0.304	43.76	50.14	-6.38
32	0.447	40.53	46.93	-6.40
33	0.452	40.44	46.85	-6.41
34	0.318	43.21	49.75	-6.54
35	0.331	42.88	49.44	-6.56
36	0.327	42.89	49.53	-6.64
37	0.285	44.02	50.67	-6.65
38	0.300	43.57	50.23	-6.66
39	0.438	40.43	47.11	-6.67
40	0.296	43.69	50.36	-6.68
41	0.247	45.14	51.86	-6.72
42	0.250	45.03	51.77	-6.74
43	0.339	42.45	49.22	-6.77
44	0.270	44.27	51.11	-6.84
45	0.345	42.13	49.09	-6.96
46	0.307	42.95	50.05	-7.10
47	0.237	44.97	52.21	-7.24
48	0.243	44.76	52.00	-7.24
49	0.252	44.43	51.68	-7.26
50	0.256	44.21	51.55	-7.34

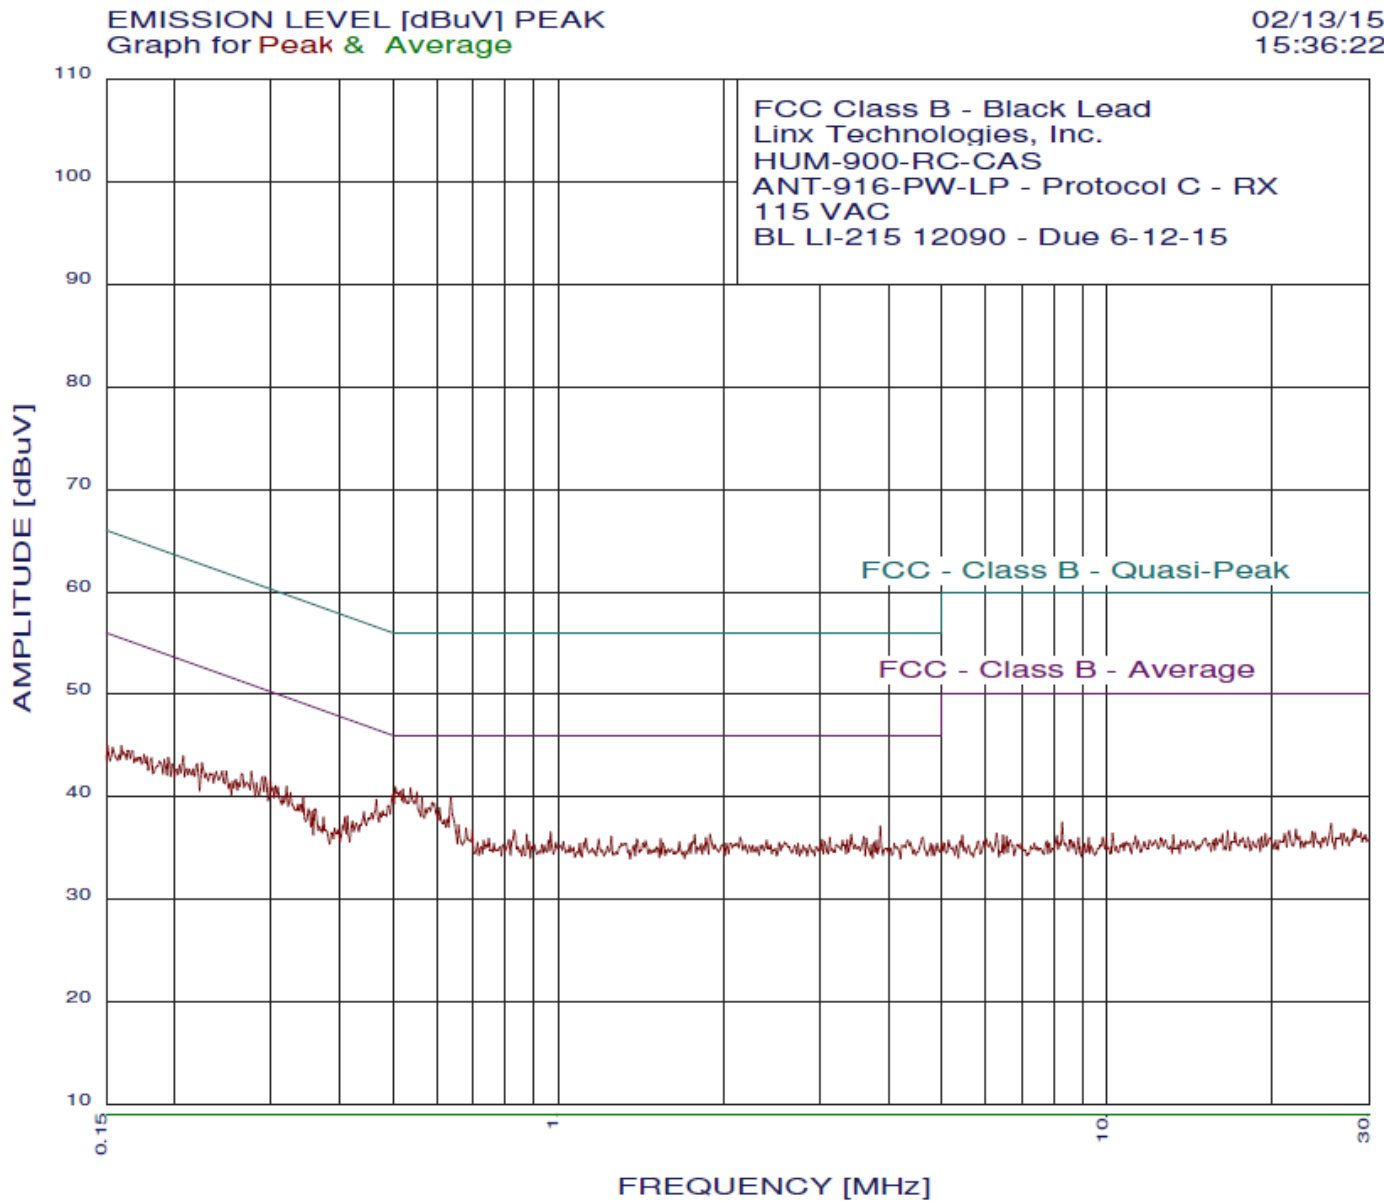

page 1/1


02/13/15 15:36:22

FCC Class B - Black Lead
Linx Technologies, Inc.
HUM-900-RC-CAS
ANT-916-PW-LP - Protocol C - RX
115 VAC
BL LI-215 12090 - Due 6-12-15
Test Engineer : Kenneth Lee

50 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 0.01 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.505	40.95	46.00	-5.05
2	0.538	40.84	46.00	-5.16
3	0.521	40.74	46.00	-5.26
4	0.516	40.54	46.00	-5.46
5	0.552	40.44	46.00	-5.56
6	0.500	40.25	46.01	-5.76
7	0.637	40.04	46.00	-5.96
8	0.564	39.94	46.00	-6.06
9	0.527	39.84	46.00	-6.16
10	0.589	39.44	46.00	-6.56
11	0.595	39.34	46.00	-6.66
12	0.466	39.73	46.58	-6.84
13	0.489	39.14	46.18	-7.04
14	0.580	38.94	46.00	-7.06
15	0.608	38.94	46.00	-7.06
16	0.573	38.84	46.00	-7.16
17	0.479	38.64	46.36	-7.72
18	0.474	38.44	46.45	-8.01
19	0.627	37.84	46.00	-8.16
20	0.621	37.74	46.00	-8.26
21	0.457	38.43	46.76	-8.32
22	0.276	42.50	50.94	-8.44
23	0.442	38.53	47.02	-8.49
24	0.293	41.93	50.45	-8.52
25	0.299	41.71	50.28	-8.57
26	0.290	41.94	50.54	-8.59
27	0.320	41.02	49.71	-8.68
28	0.658	37.24	46.00	-8.76
29	3.862	37.15	46.00	-8.85
30	0.305	41.08	50.10	-9.02
31	0.309	40.97	50.01	-9.04
32	0.265	42.24	51.29	-9.04
33	0.679	36.94	46.00	-9.06
34	0.343	40.03	49.13	-9.10
35	0.325	40.40	49.57	-9.17
36	0.698	36.74	46.00	-9.26
37	0.831	36.74	46.00	-9.26
38	0.302	40.89	50.19	-9.29
39	0.248	42.51	51.82	-9.31
40	0.207	43.97	53.31	-9.34
41	0.224	43.30	52.65	-9.35
42	0.282	41.37	50.76	-9.39
43	0.244	42.52	51.95	-9.43
44	0.969	36.54	46.00	-9.46
45	0.413	38.12	47.59	-9.47
46	0.220	43.22	52.83	-9.61
47	3.419	36.34	46.00	-9.66
48	0.876	36.34	46.00	-9.66
49	0.409	38.02	47.68	-9.66
50	1.889	36.33	46.00	-9.67

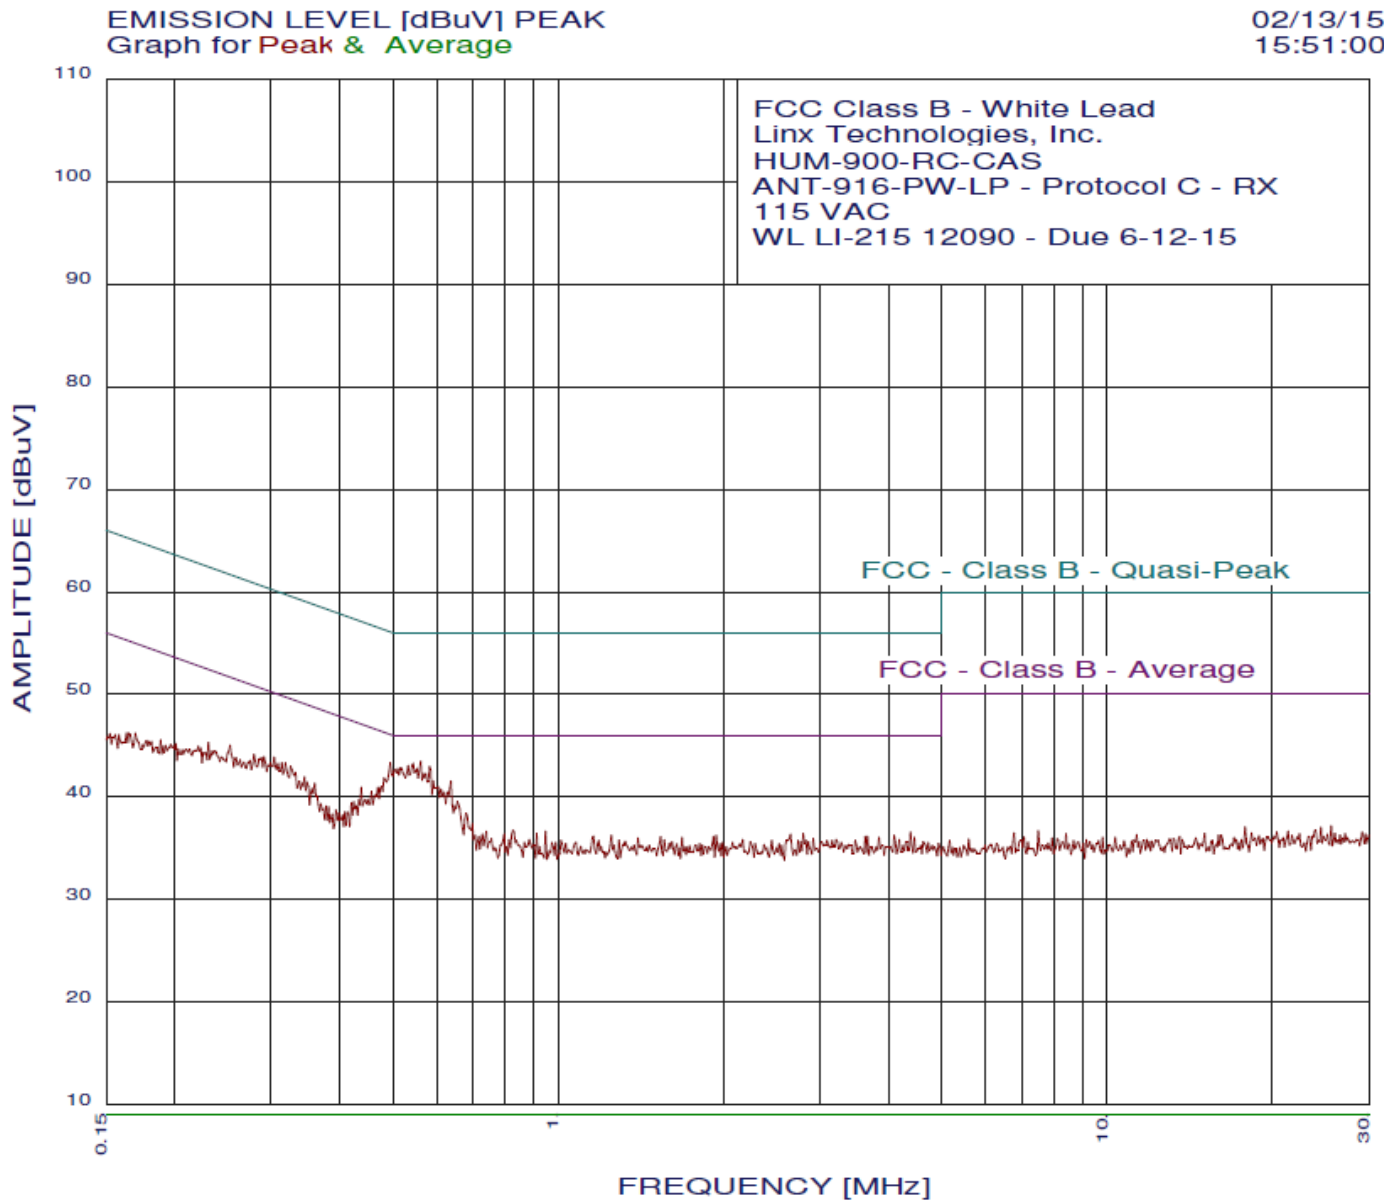

page 1/1

02/13/15 15:51:00

FCC Class B - White Lead
Linx Technologies, Inc.
HUM-900-RC-CAS
ANT-916-PW-LP - Protocol C - RX
115 VAC
WL LI-215 12090 - Due 6-12-15
Test Engineer : Kenneth Lee

50 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 0.01 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.561	43.44	46.00	-2.56
2	0.494	43.35	46.09	-2.75
3	0.544	43.25	46.00	-2.75
4	0.532	43.05	46.00	-2.95
5	0.583	42.94	46.00	-3.06
6	0.516	42.85	46.00	-3.15
7	0.510	42.75	46.00	-3.25
8	0.552	42.74	46.00	-3.26
9	0.505	42.65	46.00	-3.35
10	0.567	42.24	46.00	-3.76
11	0.573	42.24	46.00	-3.76
12	0.592	41.54	46.00	-4.46
13	0.637	41.54	46.00	-4.46
14	0.481	41.84	46.32	-4.47
15	0.605	40.94	46.00	-5.06
16	0.611	40.74	46.00	-5.26
17	0.476	41.04	46.40	-5.36
18	0.618	40.44	46.00	-5.56
19	0.627	40.44	46.00	-5.56
20	0.469	40.94	46.53	-5.59
21	0.438	40.93	47.11	-6.17
22	0.457	40.54	46.76	-6.22
23	0.304	43.86	50.14	-6.28
24	0.318	43.31	49.75	-6.44
25	0.655	39.54	46.00	-6.46
26	0.464	40.14	46.62	-6.48
27	0.313	43.33	49.88	-6.55
28	0.325	42.99	49.57	-6.58
29	0.291	43.90	50.49	-6.59
30	0.252	45.03	51.68	-6.66
31	0.279	44.14	50.85	-6.71
32	0.309	43.25	50.01	-6.76
33	0.288	43.81	50.58	-6.77
34	0.648	39.14	46.00	-6.86
35	0.299	43.28	50.28	-7.00
36	0.332	42.37	49.39	-7.02
37	0.230	45.29	52.43	-7.14
38	0.449	39.74	46.89	-7.15
39	0.345	41.93	49.09	-7.16
40	0.445	39.73	46.98	-7.24
41	0.296	43.09	50.36	-7.28
42	0.360	41.31	48.73	-7.42
43	0.275	43.55	50.98	-7.43
44	0.433	39.73	47.19	-7.46
45	0.679	38.44	46.00	-7.56
46	0.348	41.42	49.00	-7.58
47	0.259	43.80	51.47	-7.66
48	0.338	41.55	49.26	-7.71
49	0.237	44.47	52.21	-7.74
50	0.263	43.59	51.33	-7.74
