

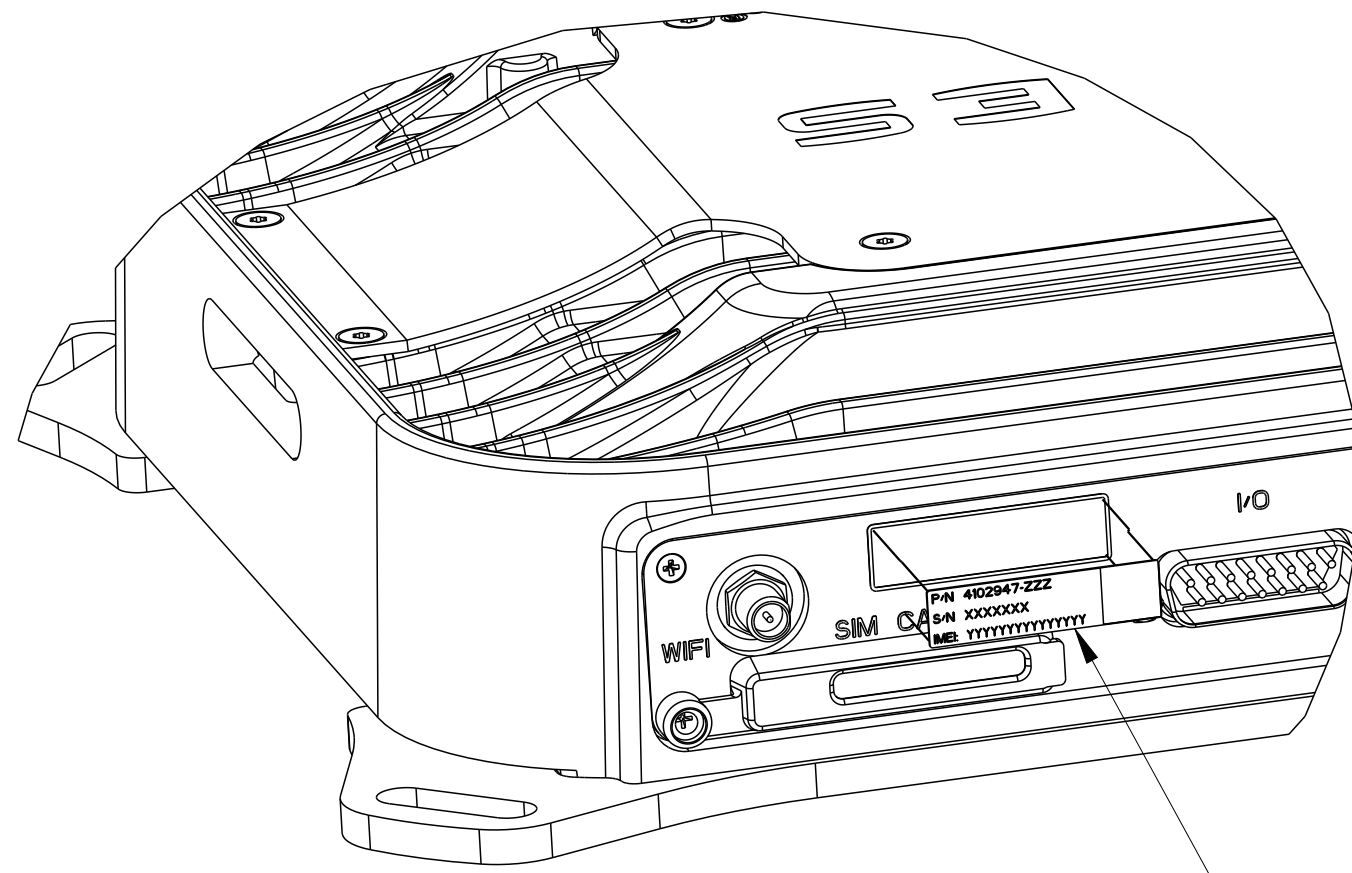


NOTES: UNLESS OTHERWISE SPECIFIED.

1. INTERPRET DRAWING PER ASME Y14.100-2013.
2. CLEAN MOUNTING SURFACE OF ITEM 21 BEFORE INSTALLING ITEM 22.
3. TORQUE ITEM 24 TO 5.00 ± .50 IN-LBS.
4. APPLY ITEMS 26 APPROXIMATELY AS SHOWN
5. PACKAGE TO PROTECT, BAG AND TAG PER MIL-STD-130. MARK "23386 4102947-X REV Y" WHERE X IS THE APPLICABLE DASH NUMBER AND Y IS THE APPLICABLE PART REVISION.

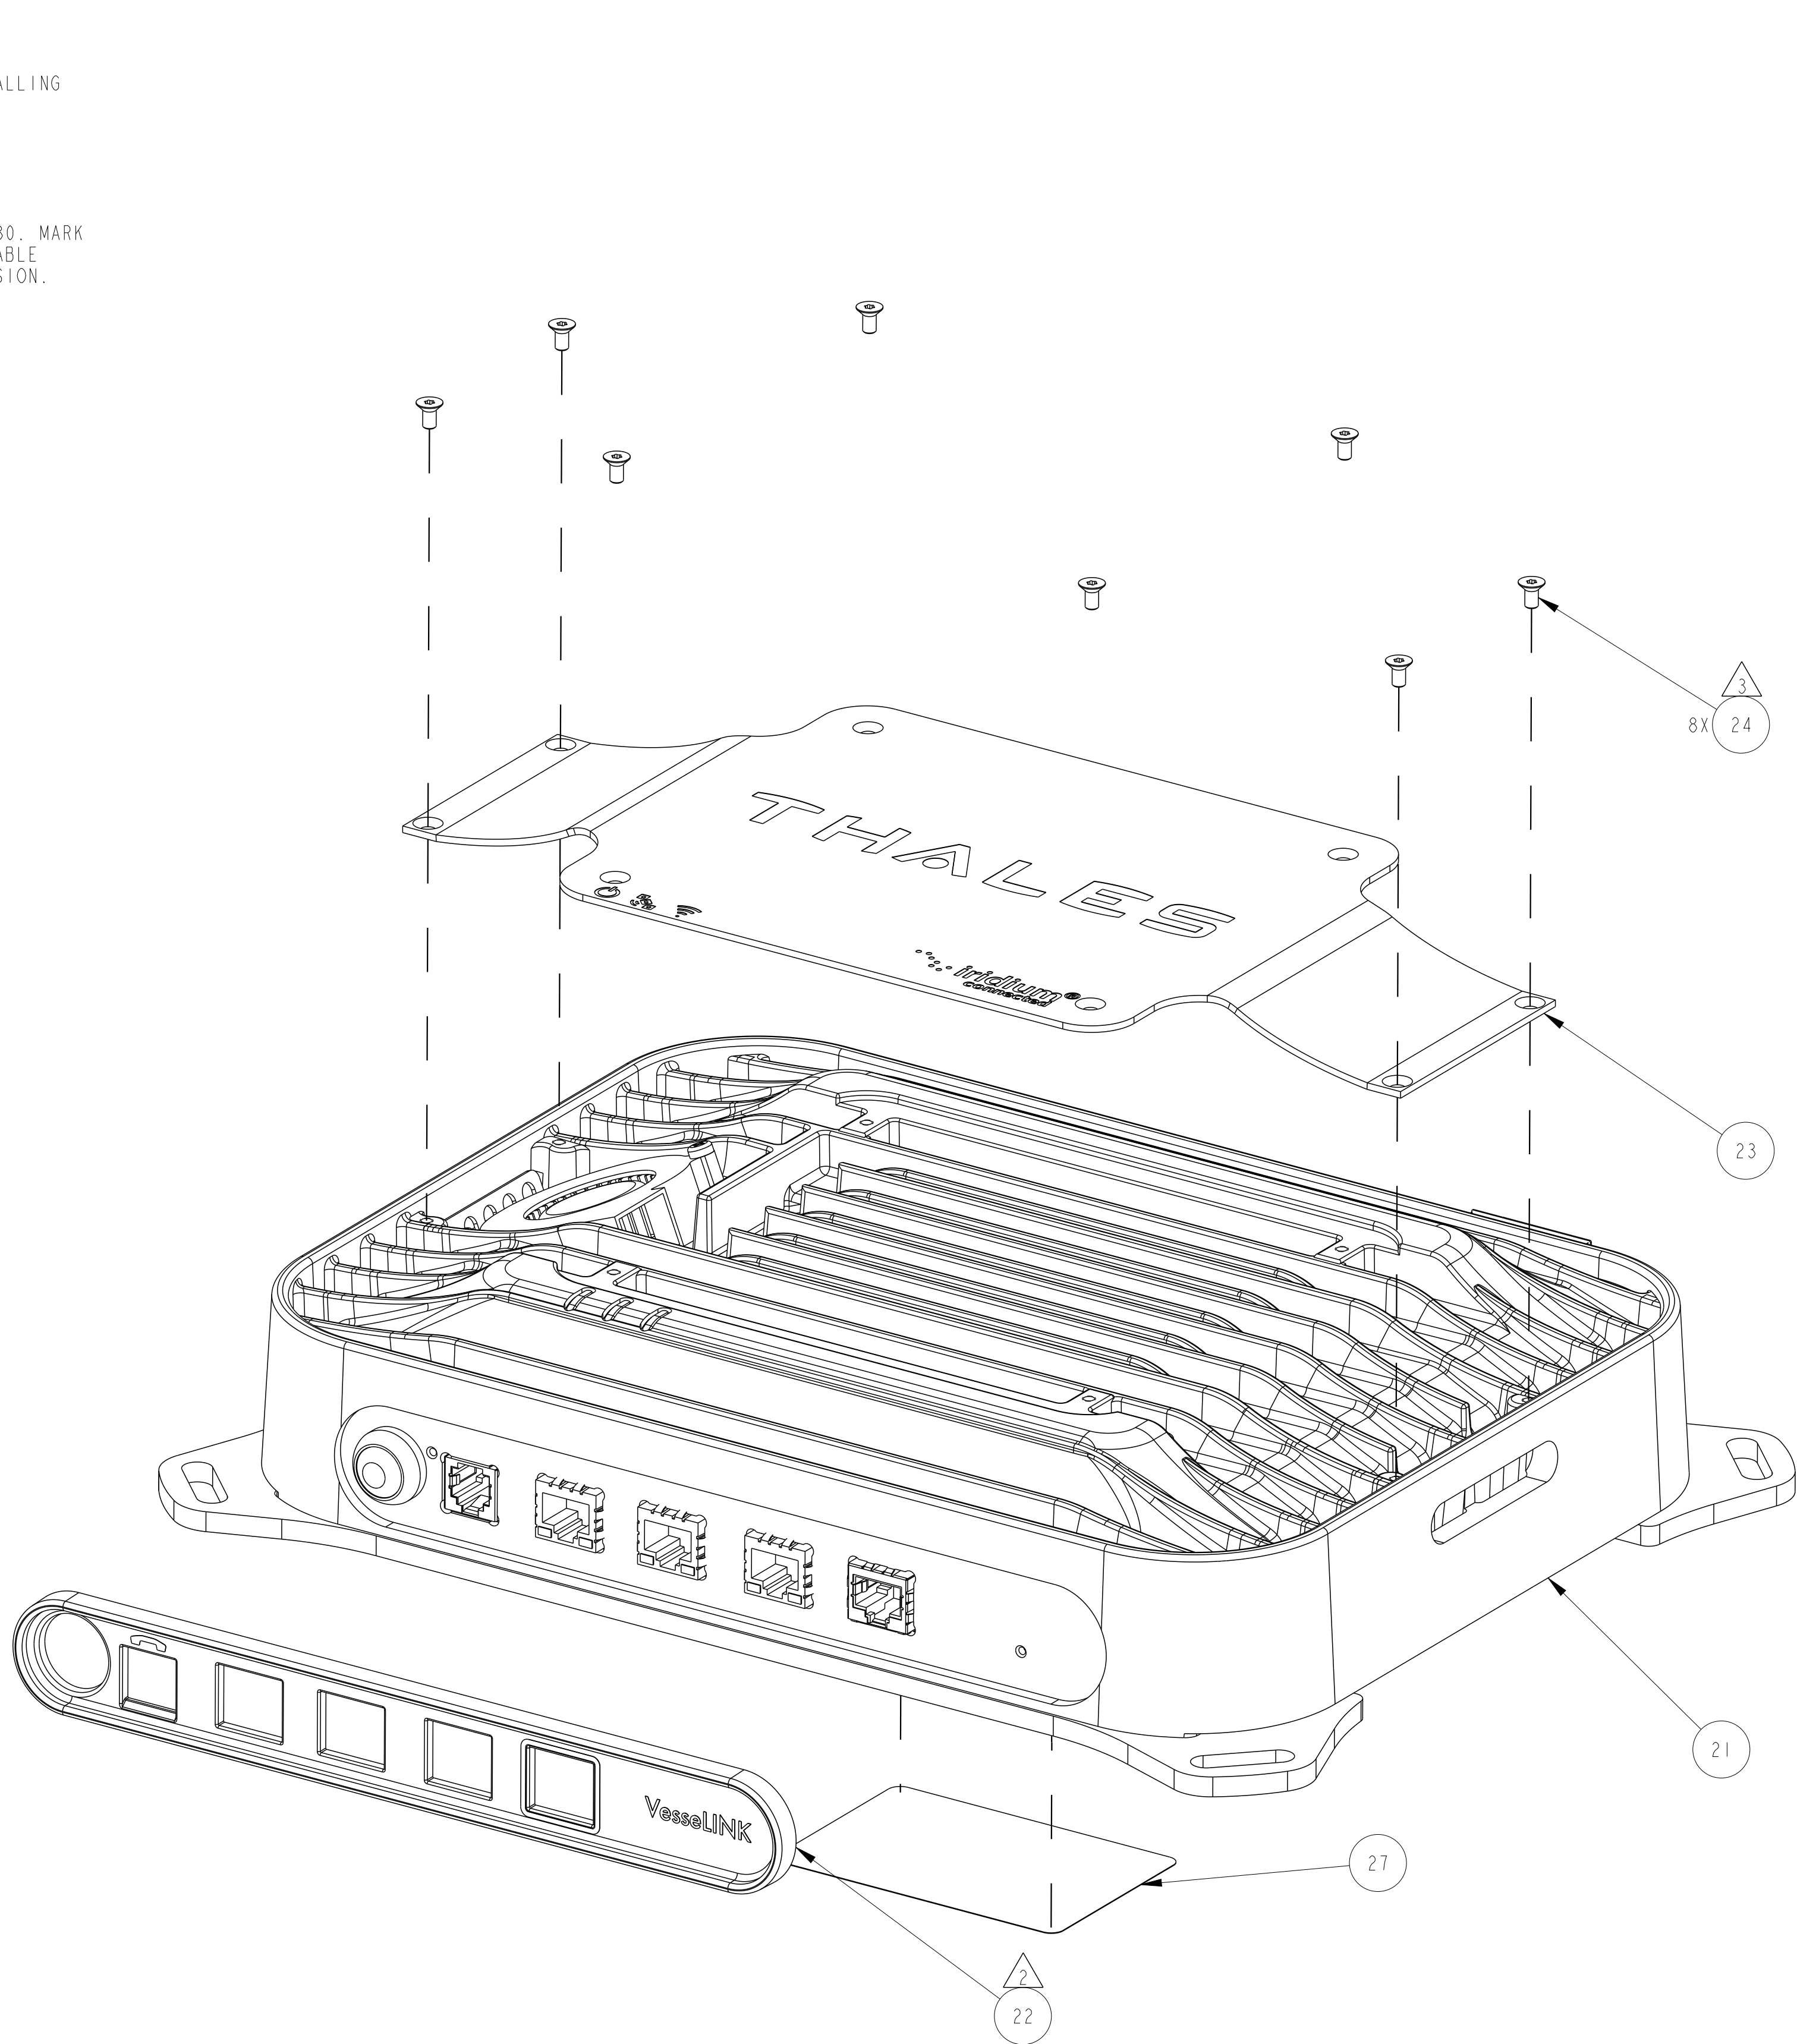

LABEL DETAIL A
ALL VARIANTS

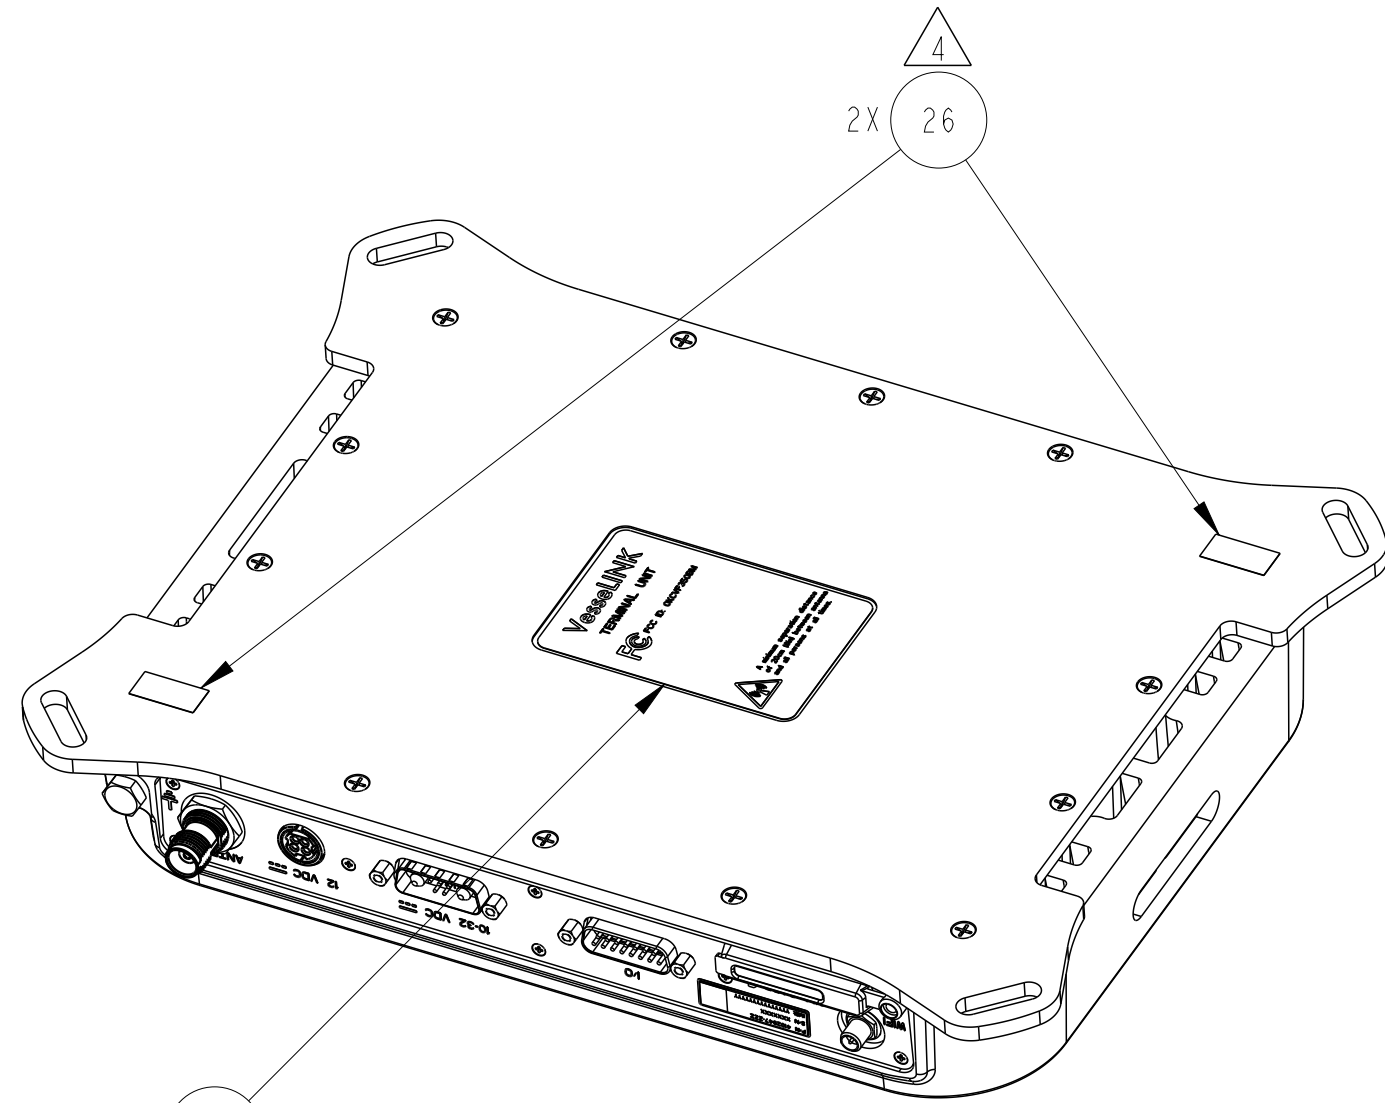

LABEL DETAIL B
ALL VARIANTS
SCALE 0.500

-501 & -505 VARIANTS


SEE SEPARATE PARTS LIST

INFORMATION SUBJECT TO EXPORT CONTROL LAWS
This document contains technology controlled
for export by the U.S. Department of Commerce in
accordance with the Export Administration Regulations.
Diversion contrary to U.S. law prohibited.

Copyright © 2017-2018, Thales Defense & Security, Inc.
All Rights Reserved

THALES PROPRIETARY

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES: TOL'S ARE: FRACTIONS: DECIMALS: 		
---	--	--

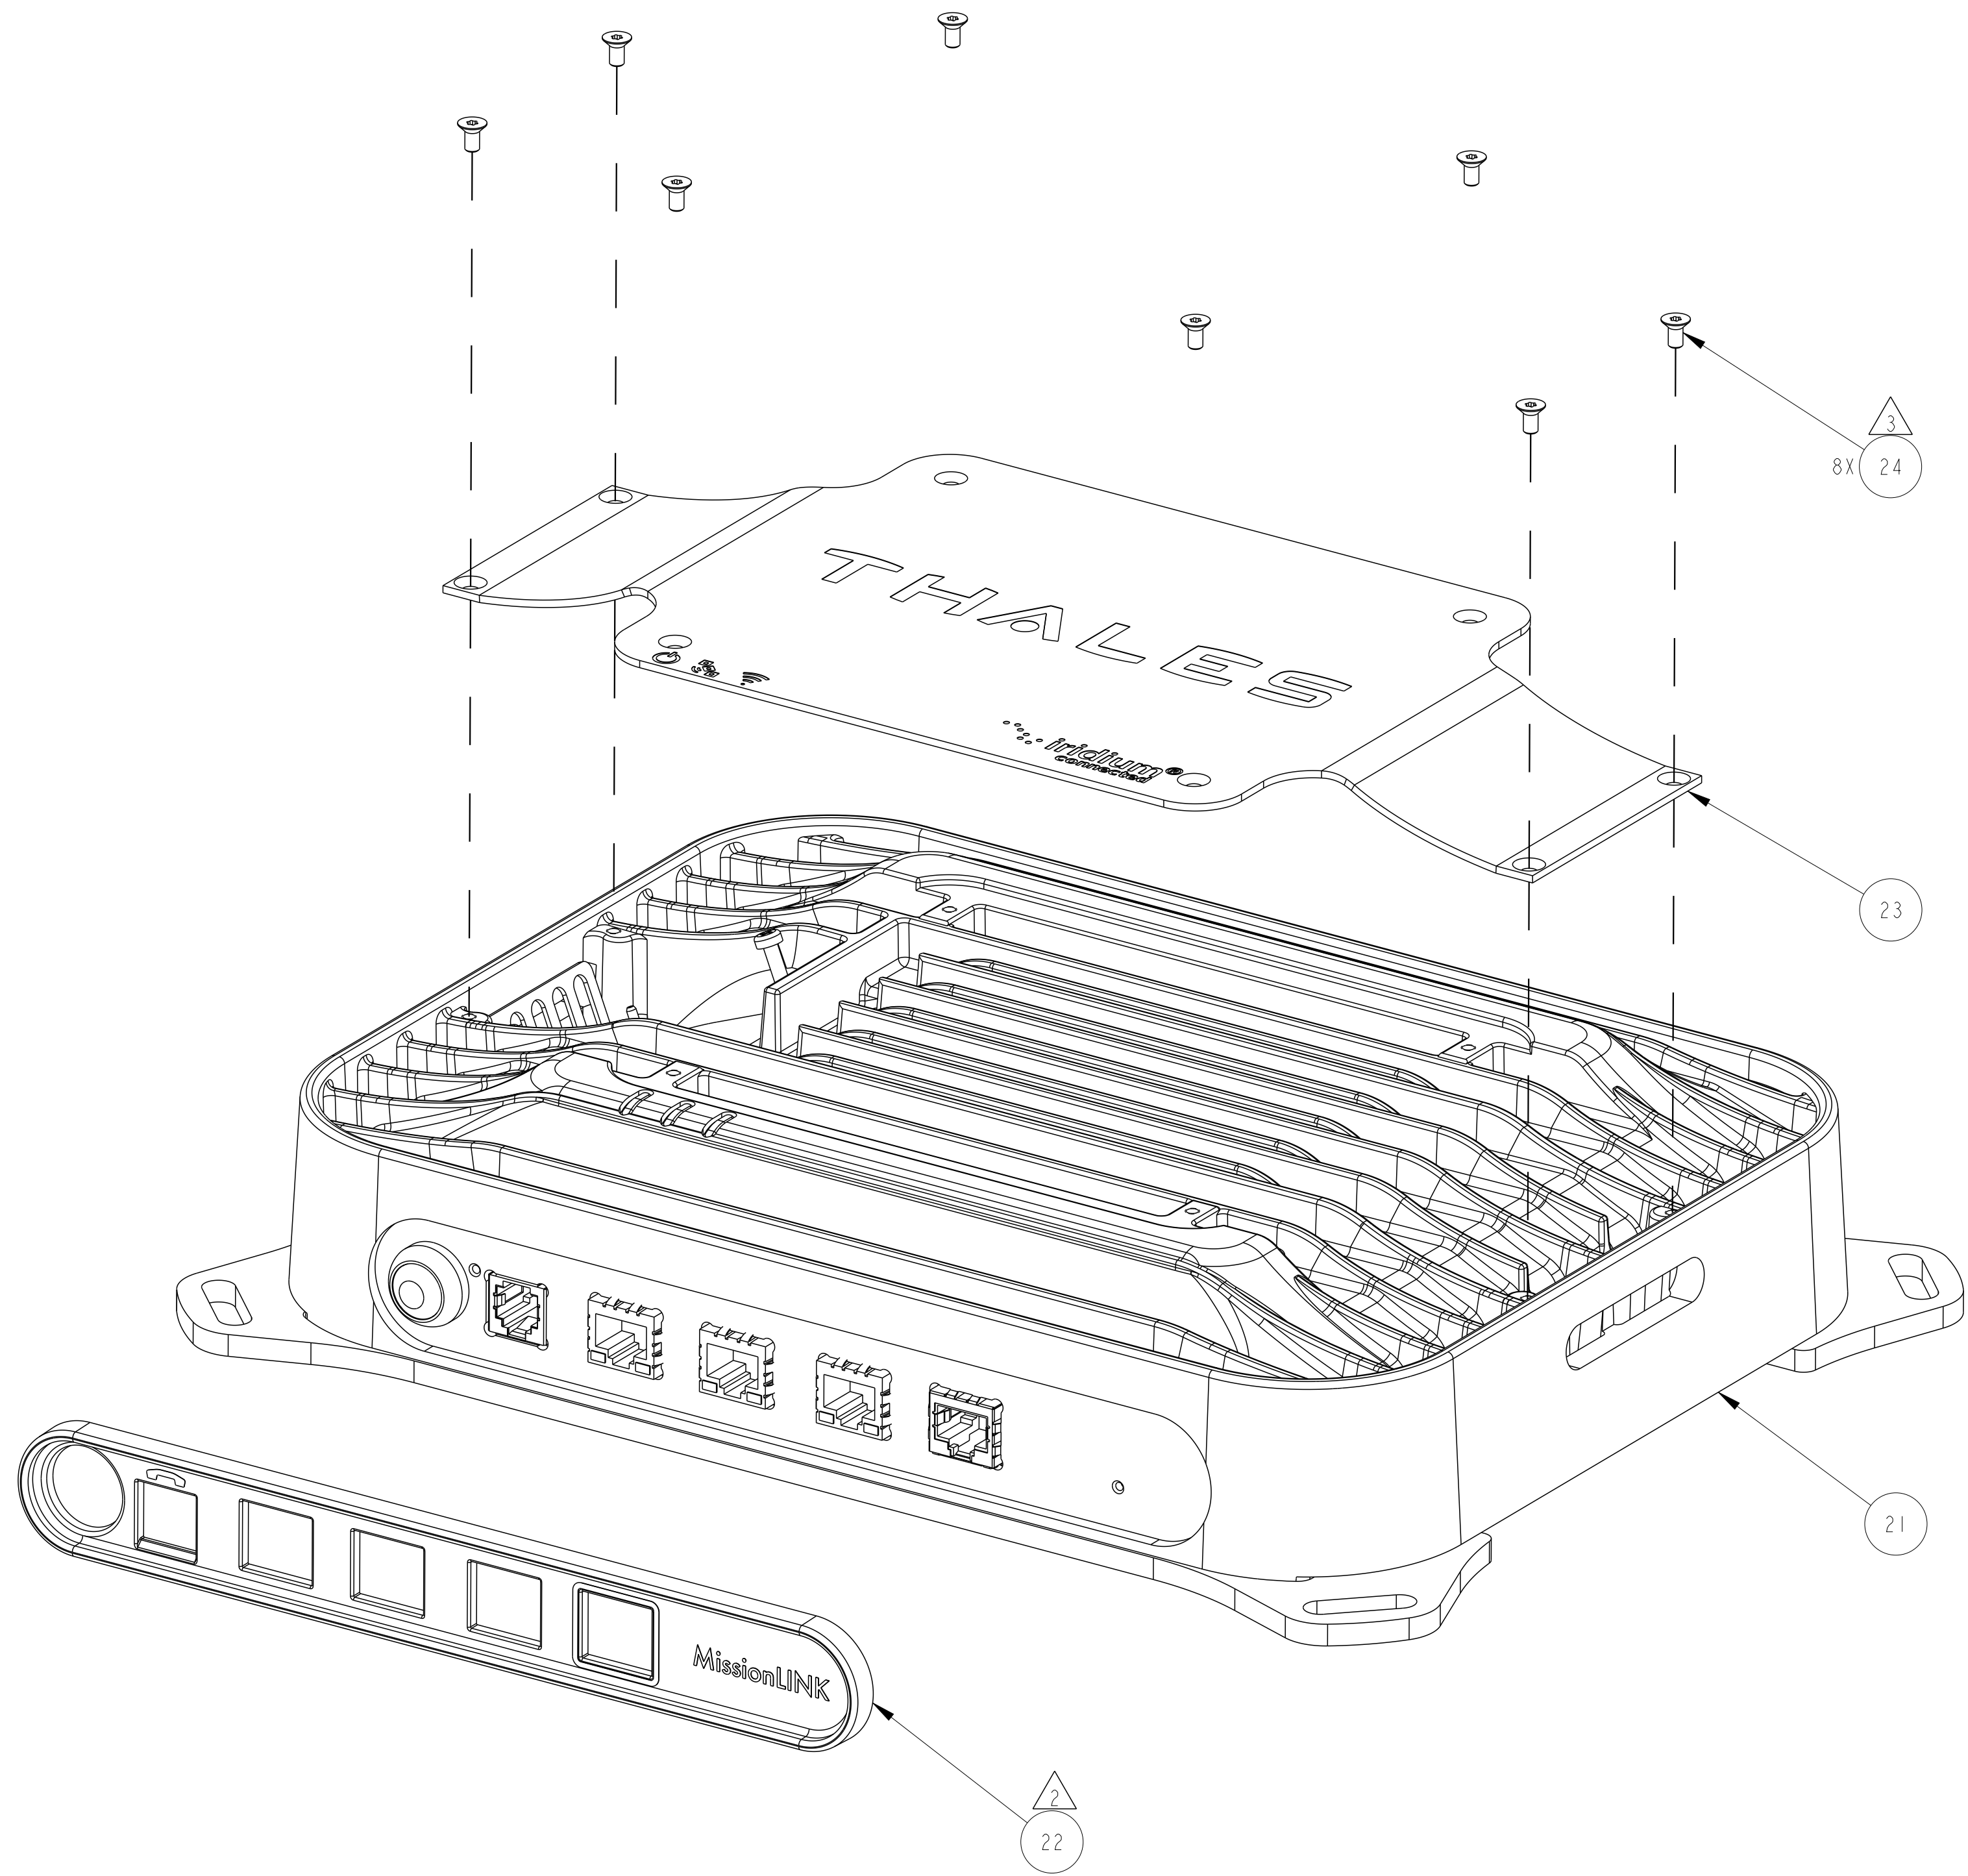

-502 & -504 VARIANTS