



FIGURE 1  
MODULATION FREQUENCY RESPONSE

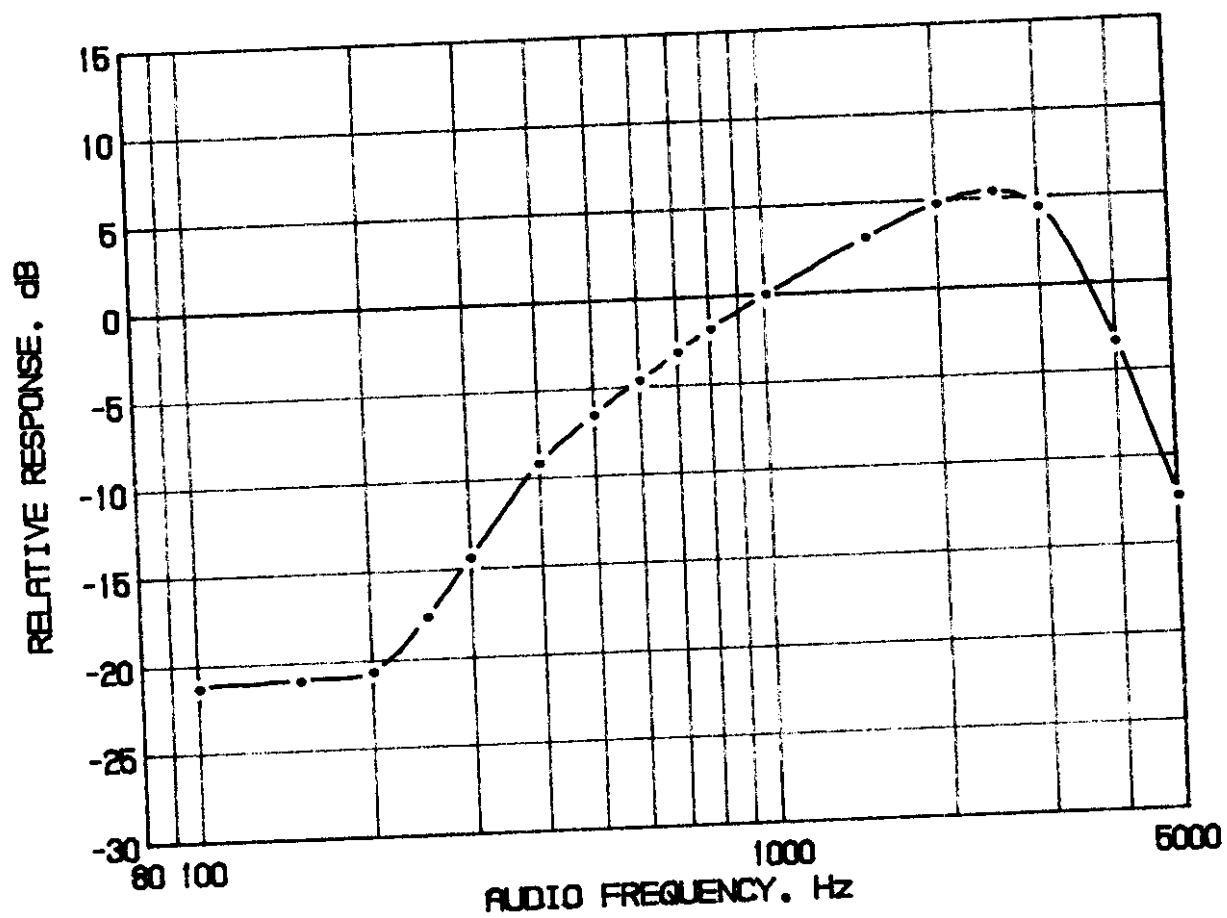

MODULATION FREQUENCY RESPONSE  
FCC ID: OKMCONNECT14

FIGURE 1


FIGURE 2  
AUDIO LIMITER CHARACTERISTICS

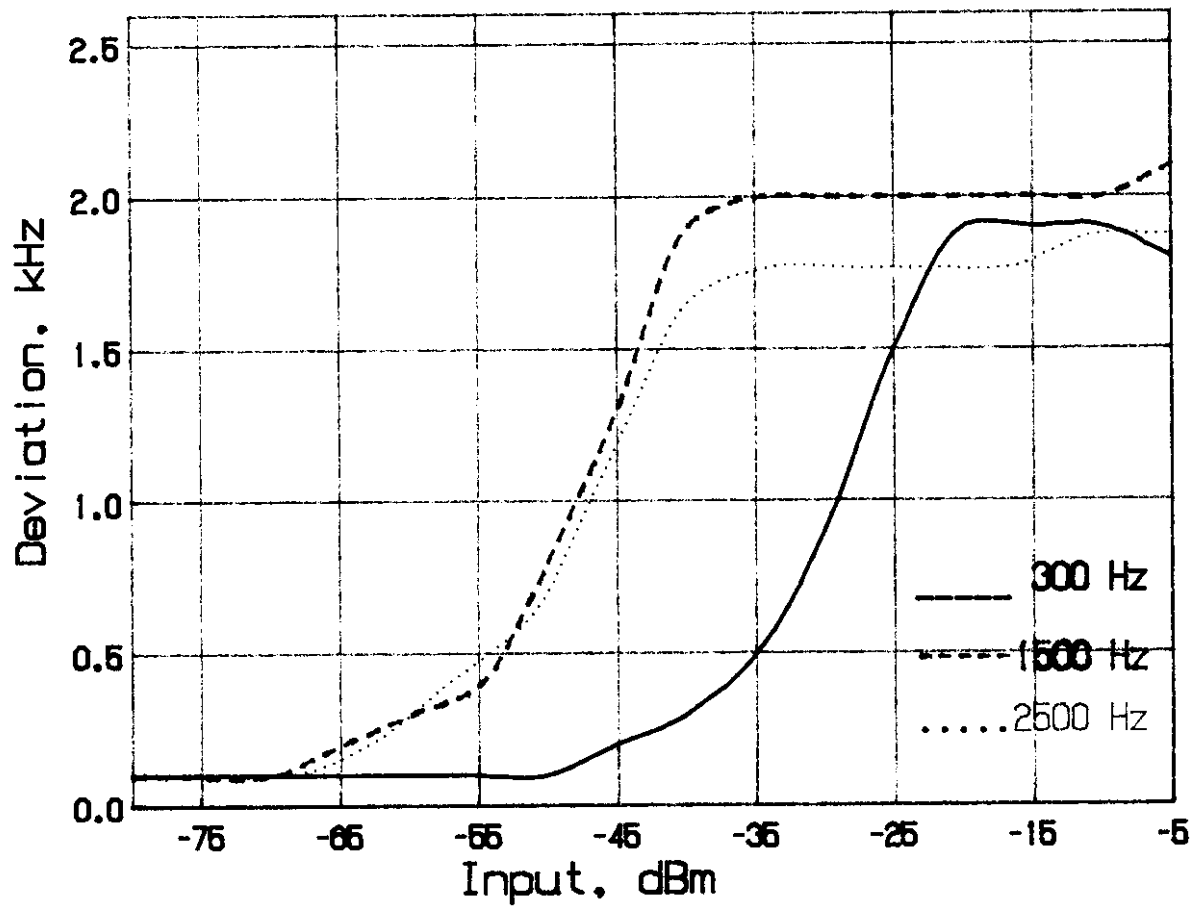

AUDIO LIMITER CHARACTERISTICS  
FCC ID: OKMCONNECT14

FIGURE 2


FIGURE 3  
AUDIO LOW PASS FILTER RESPONSE

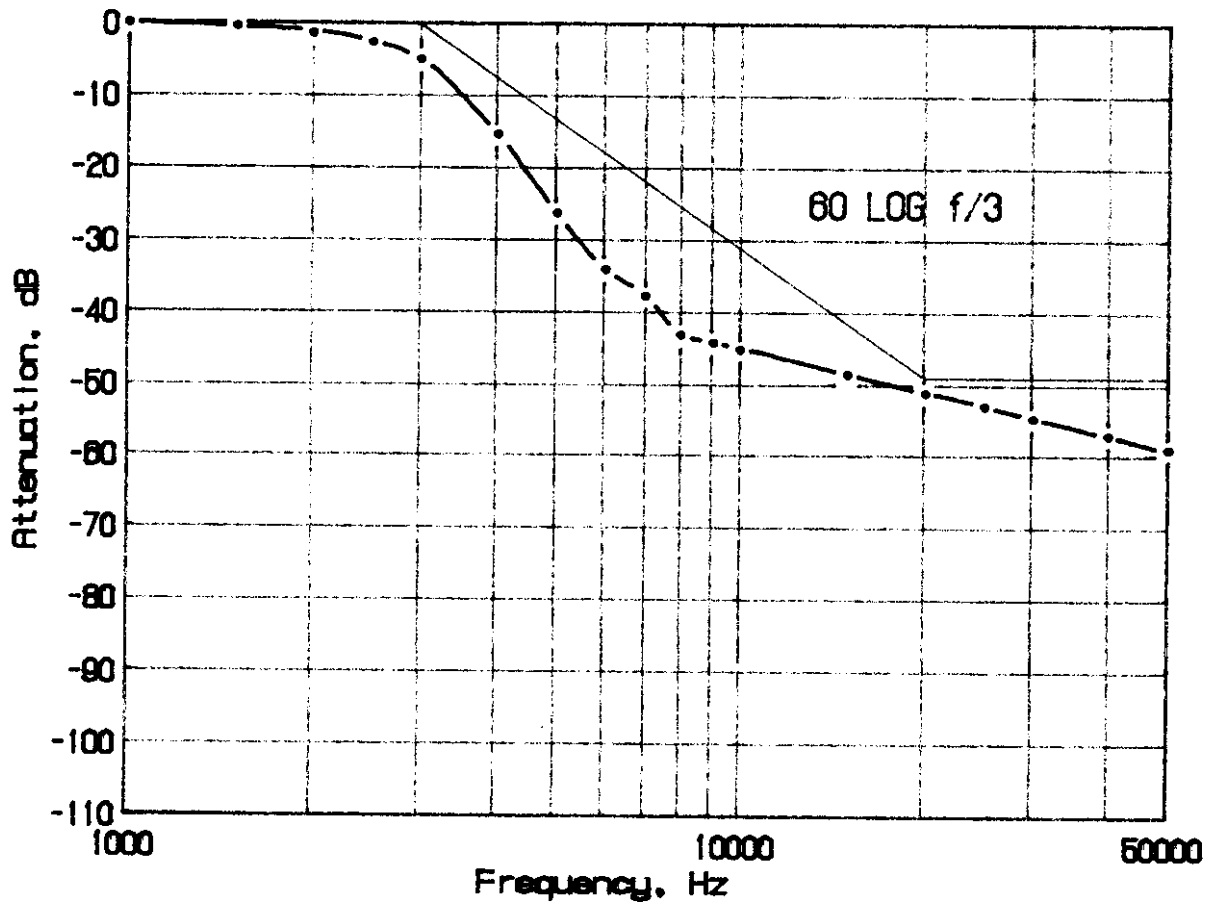

AUDIO LOW PASS FILTER  
RESPONSE  
FCC ID: OKMCONNECT14

FIGURE 3

FIGURE 4  
OCCUPIED BANDWIDTH

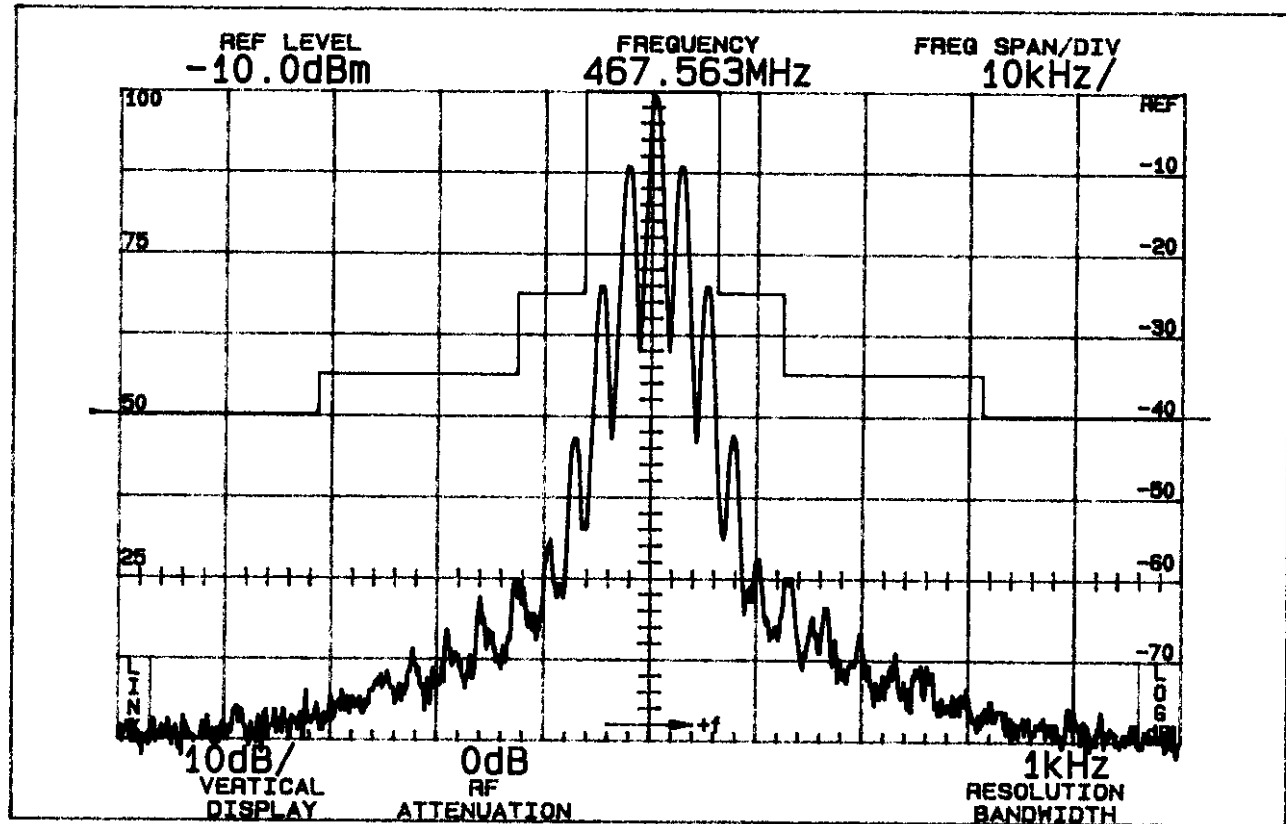

ATTENUATION IN dB BELOW  
MEAN OUTPUT POWER  
Required

On any frequency more than 50%  
up to and including 100% of the  
authorized bandwidth, 12.5 kHz  
(6.25-12.5 kHz)

25

On any frequency more than 100%,  
up to and including 250% of the  
authorized bandwidth (12.5-31.25  
kHz)

35

On any frequency removed from  
the assigned frequency by more  
than 250% of the authorized  
bandwidth (over 31.25 kHz)

$$43 + 10 \log P = 38$$

$$(P = 0.3)$$

OCCUPIED BANDWIDTH  
FCC ID: OKMCONNECT14

FIGURE 4

**D. MODULATION CHARACTERISTICS (Continued)**

The plots are within FCC limits. The horizontal scale (frequency) is 10 kHz per division and the vertical scale (amplitude) is a logarithmic presentation equal to 10 dB per division.

**E. SPURIOUS EMISSIONS AT THE ANTENNA TERMINALS  
(Paragraph 2.991 of the Rules)**

The Connect 14 has a permanently attached antenna. There is no connector for an external antenna. Therefore, no antenna terminal conducted measurements were made.

**F. DESCRIPTION OF RADIATED SPURIOUS MEASUREMENT FACILITIES**

A description of the Hyak Laboratories' radiation test facility is a matter of record with the FCC. The facility was accepted for radiation measurements from 25 to 1000 MHz on October 1, 1976 and is currently listed as an accepted site.

**G. FIELD STRENGTH MEASUREMENTS OF SPURIOUS RADIATION**

Field intensity measurements of radiated spurious emissions from the Connect 14 were made with a Tektronix 494P spectrum analyzer using Singer DM-105 for the measurements to 1 GHz, and EMCO 3115 horn to 4.8 GHz.

The transmitter was located in an open field 3 meters from the test antenna. Supply voltage was a power supply with a terminal voltage under load of 4.5 Vdc.

The transmitter and test antennae were arranged to maximize pickup. Both vertical and horizontal test antenna polarization were employed.

The measurement system was capable of detecting signals 100 dB or more below the reference level. Measurements were made from the lowest frequency generated within the unit (12 MHz), to 10 times operating frequency. Data after application of antenna factors and line loss corrections are shown in Table 3.

TABLE 3

## TRANSMITTER CABINET RADIATED SPURIOUS

462.5625 MHz, 4.5 Vdc, 0.300 watts

| <u>Spurious<br/>Frequency<br/>MHz</u> | <u>Radiated<br/>Field<br/>uV/m @ 3M</u> | <u>dB Below<br/>Carrier<br/>Reference<sup>1</sup></u> |
|---------------------------------------|-----------------------------------------|-------------------------------------------------------|
| 462.563                               | 1273503.1                               | 0.0V                                                  |
| 925.125                               | 11178.6                                 | 41.1V                                                 |
| 1387.688                              | 2559.8                                  | 53.9V                                                 |
| 1850.250                              | 2051.4                                  | 55.9V                                                 |
| 2312.813                              | 13384.4                                 | 39.6V                                                 |
| 2775.375                              | 6610.1                                  | 45.7V                                                 |
| 3237.938                              | 9713.7                                  | 42.4V                                                 |
| 3700.500                              | 1248.5                                  | 60.2V*                                                |
| 4163.063                              | 1940.5                                  | 56.3V                                                 |
| 4625.625                              | 1349.6                                  | 59.5V*                                                |

Required:  $43+10 \log(P) = 38$ <sup>1</sup>Worst-case polarization, H-Horizontal, V-Vertical.

\*Reference data only, more than 20 dB below FCC limit.

All other spurious from 12 MHz to the tenth harmonic were 20 dB or more below FCC limit.

Power:

$$\begin{aligned}
 P &= (F \cdot 1 \cdot x 3)^2 / 49.2 \\
 &= (1.2735 \times 3)^2 / 49.2 \\
 &= 0.300 \text{ W}
 \end{aligned}$$

I. FREQUENCY STABILITY AS A FUNCTION OF SUPPLY VOLTAGE  
(Paragraph 2.995(d)(2) of the Rules)

Oscillator frequency as a function of power supply voltage was measured with a HP 5385A frequency counter as supply voltage provided by an HP 6264B variable dc power supply was varied from  $\pm 15\%$  above the nominal 4.5 volt rating to below the battery end point. A Fluke 197 digital voltmeter was used to measure supply voltage at transmitter primary input terminals. Measurements were made at 20°C ambient.

TABLE 5

## FREQUENCY STABILITY AS A FUNCTION OF SUPPLY VOLTAGE

462.5625 MHz, 4.5 Vdc Nominal; 0.300W

| <u>Supply Voltage</u>    |      | <u>Output Frequency, MHz</u> | <u>p.p.m.</u> |
|--------------------------|------|------------------------------|---------------|
| 5.17                     | 115% | 462.562624                   | 0.3           |
| 4.95                     | 110% | 462.562598                   | 0.2           |
| 4.73                     | 105% | 462.562635                   | 0.3           |
| 4.50                     | 100% | 462.562645                   | 0.3           |
| 4.28                     | 95%  | 462.562721                   | 0.5           |
| 4.05                     | 90%  | 462.562690                   | 0.4           |
| 3.83                     | 85%  | 462.562703                   | 0.4           |
| 3.60                     | 80%  | 462.562724                   | 0.5           |
| Maximum frequency error: |      | 462.562724                   |               |
|                          |      | <u>462.562500</u>            |               |
|                          |      | + .000224 MHz                |               |

FCC Rule 95.627(b) specifies .00025% (2.5 p.p.m) or a maximum of  $\pm 0.001156$  MHz, corresponding to:

|            |                |
|------------|----------------|
| High Limit | 462.563656 MHz |
| Low Limit  | 462.561344 MHz |

\*Battery end point.