

Report on the FCC and IC Testing of the BALTECH AG

Model: 10115-100

In accordance with FCC 47 CFR Part 15C and
ISED Canada RSS-210 and ISED Canada RSS-
GEN

Prepared for: BALTECH AG
Lilienthalstr. 27
85399 Hallbergmoos - Germany

FCC ID: OKY10115100A06A
IC: 7657A-10115100



Product Service

Choose certainty.
Add value.

COMMERCIAL-IN-CONFIDENCE

Date: 2021-07-12

Document Number: TR-69583-20222-01 | Issue: 01

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Project Management	Michael Ingerl	2021-07-12	 SIGN-ID 531013
Authorized Signatory	Markus Biberger	2021-07-12	 SIGN-ID 531107

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Product Service document control rules.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15C and ISED Canada RSS-210 and ISED Canada RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Testing	Michael Ingerl	2021-07-12	 SIGN-ID 531014

Laboratory Accreditation

DAkkS Reg. No. D-PL-11321-11-02

Laboratory recognition

Registration No. BNetzA-CAB-16/21-15

ISED Canada test site registration

3050A-2

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN, Issue 10 (12-2019) and Issue 05 (03-2019).

Trade Register Munich
HRB 85742
VAT ID No. DE129484267
Information pursuant to Section 2(1)
DL-InfoV (Germany) at
www.tuev-sued.com/imprint

Managing Directors:
Walter Reithmaier (Sprecher / CEO)
Dr. Jens Butenandt
Patrick van Welij

Phone: +49 (0) 9421 55 22-0
Fax: +49 (0) 9421 55 22-99
www.tuev-sued.de

TÜV SÜD Product Service GmbH
Äußere Frühlingsstraße 45
94315 Straubing
Germany



Contents

1	Report Summary	3
1.1	Report Modification Record	3
1.2	Introduction	3
1.3	Brief Summary of Results.....	4
1.4	Product Information.....	5
1.5	Deviations from the Standard	5
1.6	EUT Modification Record.....	6
1.7	Test Location	6
2	Test Details.....	7
2.1	Field Strength of any Emission	7
2.2	Frequency Tolerance Under Temperature Variations.....	12
2.3	20 dB Bandwidth	14
2.4	Restricted Band Edges.....	17
2.5	AC Power Line Conducted Emissions	19
2.6	Exposure of Humans to RF Fields and SAR exclusion threshold	23
3	Test Equipment Information	25
3.1	General Test Equipment Used	25
4	Measurement Uncertainty.....	26

Annexes:

TR-69583-20222-01 Ed.1 Annex A
TR-69583-20222-01 Ed.1 Annex B
TR-69583-20222-01 Ed.1 Annex C



1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	2021-07-12

Table 1

1.2 Introduction

Applicant	BALTECH AG
Manufacturer	BALTECH AG
Model Number(s)	10115-100
Serial Number(s)	43039328
Hardware Version(s)	---
Software Version(s)	---
Number of Samples Tested	1
Test Specification/Issue/Date	FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN, Issue 10 (12-2019) and Issue 05 (03-2019), FCC rule Part 2.1093, KDB 447498 D01, RSS-102 Issue 5
Test Plan/Issue/Date	---
Order Number	5379331
Date of Receipt of EUT	2021-07-06
Start of Test	2021-07-09
Finish of Test	2021-07-12
Name of Engineer(s)	Michael Ingerl
Related Document(s)	ANSI C63.10 (2013) ANSI C63.4 (2014)



1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15C and ISED Canada RSS-210, ISED Canada RSS-GEN, FCC rule Part 2.1093, KDB 447498 D01 and RSS-102 Issue 5 is shown below.

Section	Specification Clause	Test Description	Result	Comments/Base Standard
Configuration and Mode: 5V DC Powered – Continuous transmitting				
2.1	15.225 (a)(b)(c)(d), B.1 to B.9, 6.5 and 6.6.	Field Strength of any Emission	Pass	ANSI C63.10 (2013)
2.2	15.225 (e), B.1 to B.9 and 6.11.	Frequency Tolerance Under Temperature Variations	Pass	ANSI C63.10 (2013)
2.3	15.215 (c), N/A and 6.7	20 dB Bandwidth	Pass	ANSI C63.10 (2013)
2.4	15.205, 7.1 and 8.10	Restricted Band Edges	Pass	ANSI C63.10 (2013)
2.5	15.207 and 8.8	AC Power Line Conducted Emissions	Pass	ANSI C63.10 (2013)
2.6	15.107 and 6.1	Exposure of Humans to RF Fields and SAR exclusion threshold	Pass	ANSI C63.4 (2014)

Table 2



1.4 Product Information

1.4.1 Technical Description

Equipment characteristics		
Type designation:	10115-100	
Type of equipment:	RFID Reader	
Application ¹ :	Inductive Applications	
Equipment class:	Equipment for fixed use	
Kind of equipment	Transceiver	
Operating Frequency:	13.56 MHz	
Channel spacing:	Wideband	
Number of RF channels:	1	
Antenna:	Integrated Antenna	
Type(s) of Modulation (e.g. BPSK, FSK, ASK, ...)	ASK	
Power supply:	DC supplied (USB)	
	Nominal:	5 V
	Minimum:	4.65 V
	Maximum:	5.35 V
	Nominal frequency:	DC

1.5 Deviations from the Standard

None



1.6 EUT Modification Record

The table below details modifications made to the EUT during the test programme.
The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
0	As supplied by the customer	Not Applicable	Not Applicable

Table 3

1.7 Test Location

TÜV SÜD Product Service conducted the following tests at our Straubing Test Laboratory.

Test Name	Name of Engineer(s)
Configuration and Mode: 5V DC Powered – Continuous transmitting	
Field Strength of any Emission	Michael Ingerl
Frequency Tolerance Under Temperature Variations	Michael Ingerl
20 dB Bandwidth	Michael Ingerl
Restricted Band Edges	Michael Ingerl
AC Power Line Conducted Emissions	Michael Ingerl
Exposure of Humans to RF Fields and SAR exclusion threshold	Michael Ingerl

Table 4

Office Address:

Äußere Frühlingstraße 45
94315 Straubing
Germany



2 Test Details

2.1 Field Strength of any Emission

2.1.1 Specification Reference

FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN, Clause 15.225 (a)(b)(c)(d), B.1 to B.9, 6.5 and 6.6.

2.1.2 Equipment Under Test and Modification State

10115-100, S/N: --- - Modification State 0

2.1.3 Date of Test

2021-07-09

2.1.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 6.3, 6.4 and 6.5.

Measurements were made at a distance of 3 m. The limit lines shown on the plot were extrapolated from either 300 m or 30 m to the measurement distance of 3 m in accordance with ANSI C63.10 Clause 6.4.4.2.

2.1.5 Environmental Conditions


Ambient Temperature	22,0 °C
Relative Humidity	31,0 %

2.1.6 Test Results


5V DC Powered – Continuous transmitting



Frequency MHz	Quasi-Peak Level (dBµV/m) at 3 m	Quasi-Peak Level (dBµV/m) at 30 m
13.56	61.94	21.90

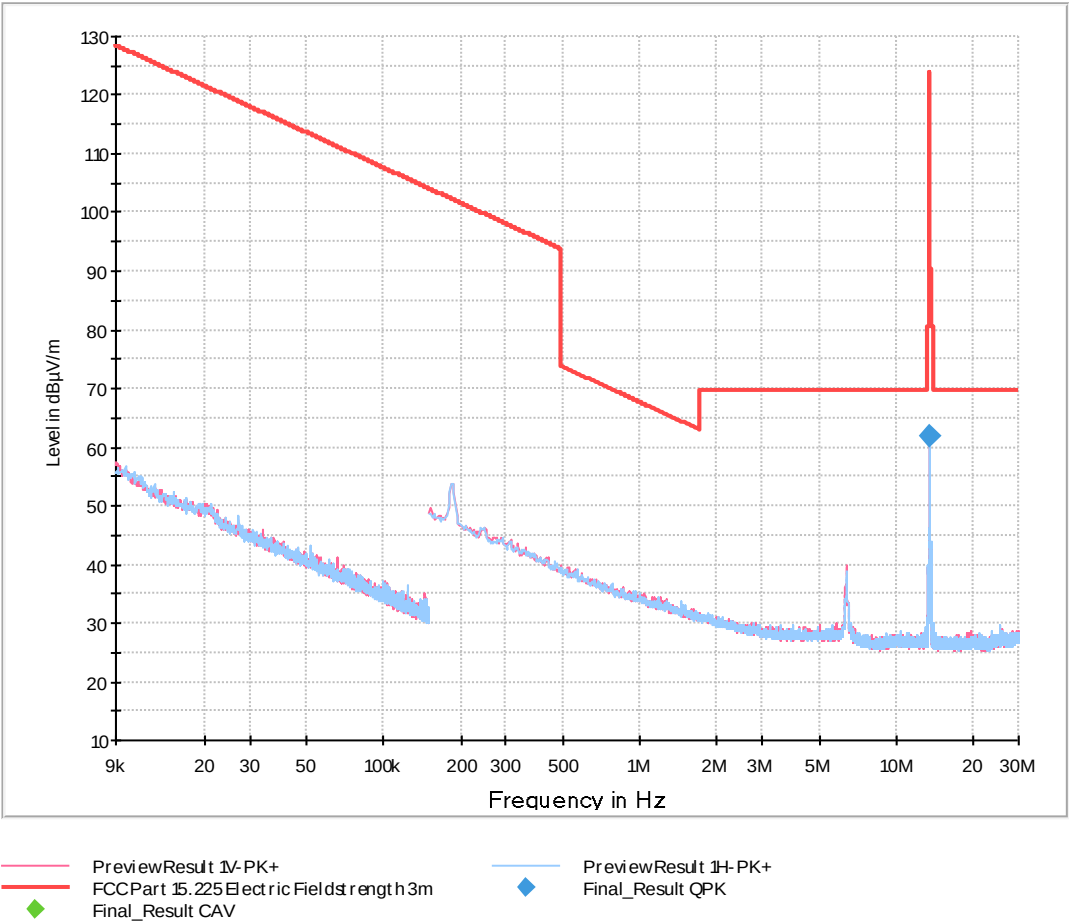

9 kHz to 30 MHz

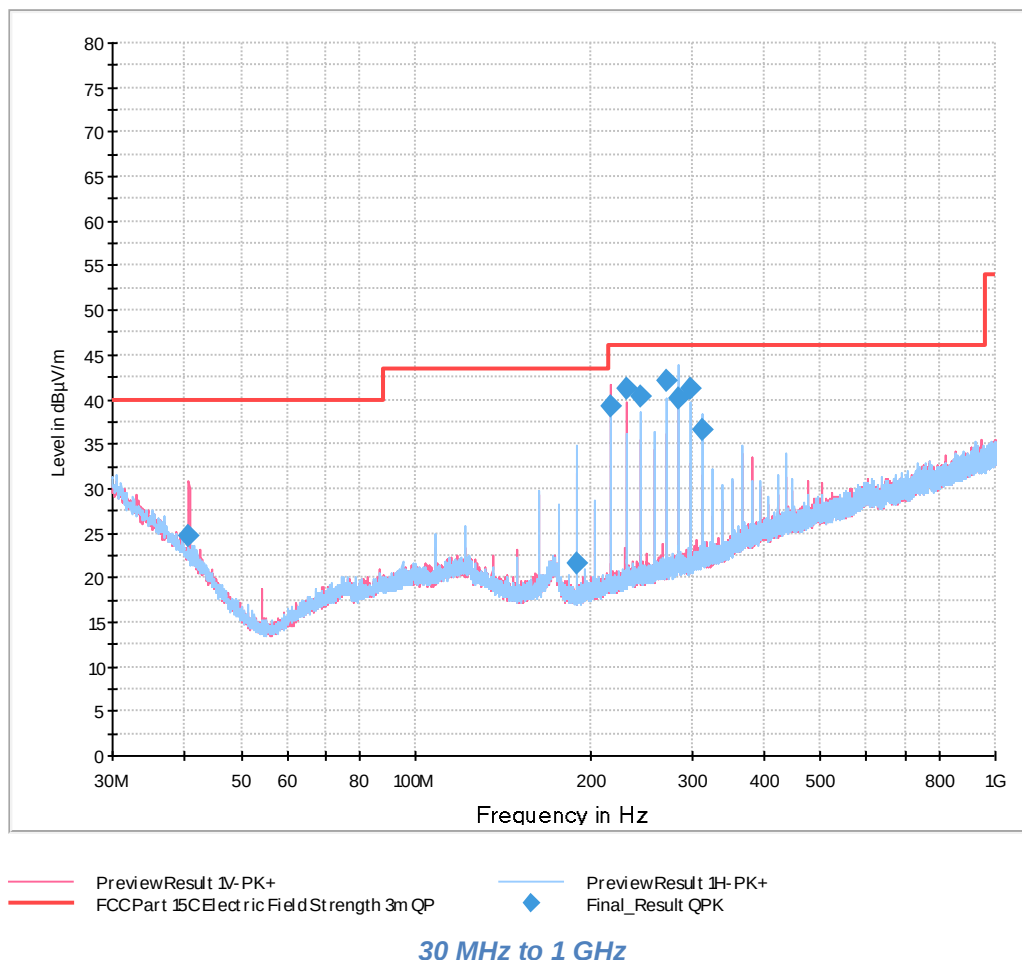

Final Results 1:

Frequency MHz	QuasiPeak dBμV/m	Limit dBμV/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB/m
40.680000	24.60	40.00	15.40	1000.0	120.000	110.0	V	150.0	20.0
189.870000	21.55	43.50	21.95	1000.0	120.000	178.0	H	94.0	16.3
216.990000	39.22	46.02	6.80	1000.0	120.000	103.0	V	14.0	17.2
230.550000	41.31	46.02	4.71	1000.0	120.000	179.0	V	201.0	17.7
244.110000	40.31	46.02	5.71	1000.0	120.000	119.0	H	124.0	18.0
271.230000	42.02	46.02	4.00	1000.0	120.000	100.0	H	-117.0	18.7
284.790000	40.21	46.02	5.81	1000.0	120.000	125.0	H	-108.0	19.2
298.350000	41.32	46.02	4.70	1000.0	120.000	100.0	H	-127.0	19.5
311.910000	36.61	46.02	9.41	1000.0	120.000	103.0	H	-125.0	20.0



FCC 47 CFR Part 15, Limit Clause 15.225 (a)(b)(c)(d)

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 m.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 m.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 m.

(d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

FCC 47 CFR Part 15, Limit Clause 15.209

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 to 0.490	2400/F (kHz)	300
0.490 to 1.705	24000/F (kHz)	30
1705 to 30	30	30
30 to 88	100**	3
88 to 216	150**	3
216 to 960	200**	3
Above 960	500	5

Table 5 - FCC Radiated Emission Limit



ISED Canada RSS-210, Limit Clause B.6

The field strength of any emission shall not exceed the following limits:

- (a) 15.848 mW/m (84 dBμV/m) at 30 m, within the band 13.553 – 13.567 MHz.
- (b) 334 μV/m (50.5 dBμV/m) at 30 m, within the bands 13.410 – 13.553 MHz and 13.567 – 13.710 MHz.
- (c) 106 μV/m (40.5 dBμV/m) at 30 m, within the bands 13.110 – 13.410 MHz and 13.710 – 14.010 MHz.
- (d) RSS-GEN general field strength limits for frequencies outside the band 13.110 – 14.010 MHz.

ISED Canada RSS-GEN, Limit Clause

Frequency	Electric Field Strength (μV/m)	Magnetic Field Strength (H-Field) (μA/m)	Measurement Distance (m)
9 - 490 kHz	2,400/F (F in kHz)	2,400/377F (F in kHz)	300
490 - 1,705 kHz	24,000/F (F in kHz)	24,000/377F (F in kHz)	30
1,705 kHz - 30 MHz	30	N/A	30

Table 6 - ISED Canada Radiated Emission Limit - Less than 30 MHz

Frequency (MHz)	Field Strength (μV/m at 3 m)
30 - 88	100
88 - 216	150
216 - 960	200
> 960	500

Table 7 - ISED Canada Radiated Emission Limit - 30 MHz to 1 GHz

2.1.7 Test Location and Test Equipment Used

This test was carried out in a Semi anechoic room - cabin no. 11.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
EMI test receiver	Rohde&Schwarz	ESW44	39897	12	2022-04-30
ULTRALOG antenna	Rohde&Schwarz	HL562E	39969	36	2022-11-30
Loop antenna	Schwarzbeck	FMZB 1519B	44334	36	2023-01-31
EMC measurement software	Rohde&Schwarz	EMC32 V10.50.10	42986	N/A	N/A

Table 8

TU - Traceability Unscheduled
 O/P Mon – Output Monitored using calibrated equipment
 N/A - Not Applicable



2.2 Frequency Tolerance Under Temperature Variations

2.2.1 Specification Reference

FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN, Clause 15.225 (e), B.1 to B.9 and 6.11.

2.2.2 Equipment Under Test and Modification State

10115-100, S/N: --- - Modification State 0

2.2.3 Date of Test

2021-07-12

2.2.4 Test Method

2.2.5 Environmental Conditions

Ambient Temperature 23,0 °C
Relative Humidity 30,0 %

2.2.6 Test Results

5V DC Powered – Continuous transmitting

Temperature	Voltage	Measured Frequency (MHz)	Frequency Deviation (%)	Frequency Error (ppm)
-20.0 °C	5.0V	13.560854	0.000449	4.494
-10.0 °C	5.0V	13.560874	0.000594	5.944
0.0 °C	5.0V	13.560811	0.000131	1.313
+10.0 °C	5.0V	13.560837	0.000325	3.249
+20.0 °C	5.0V	13.560793	0.000000	0.000
+30.0 °C	5.0V	13.560795	0.000014	0.139
+40.0 °C	5.0V	13.560889	0.000705	7.051
+50.0 °C	5.0V	13.560883	0.000664	6.637

Table 9 - Frequency Tolerance Under Temperature Variation

Temperature	Voltage	Measured Frequency (MHz)	Frequency Deviation (%)	Frequency Error (ppm)
+20.0 °C	4.25V	13.560797	0.000028	0.277
+20.0 °C	5.0V	13.560793	0.000000	0.000
+20.0 °C	5.75V	13.560818	0.000187	1.866

Table 10 - Frequency Tolerance Under Voltage Variation



FCC 47 CFR Part 15, Limit Clause 15.225 (e)

The frequency tolerance of the carrier signal shall be maintained within ± 0.01 % of the operating frequency.

ISED Canada RSS-210, Limit Clause B.6

Carrier frequency stability shall be maintained to $\pm 0.01\%$ (± 100 ppm)

2.2.7 Test Location and Test Equipment Used

This test was carried out in Non shielded room.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Spectrum Analyzer	Rohde & Schwarz	FSV40	20219	12	2022-01-31
Climatic test chamber	Feutron Klimasimulation	KPK200-2	19868	18	2021-08-31

Table 11

TU - Traceability Unscheduled

O/P Mon – Output Monitored using calibrated equipment

N/A - Not Applicable



2.3 20 dB Bandwidth

2.3.1 Specification Reference

FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN, Clause 15.215 (c), N/A and 6.7

2.3.2 Equipment Under Test and Modification State

10115-100, S/N: --- - Modification State 0

2.3.3 Date of Test

2021-07-12

2.3.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 6.9.1.

2.3.5 Environmental Conditions

Ambient Temperature 23,0 °C
Relative Humidity 30,0 %

2.3.6 Test Results


5V DC Powered – Continuous transmitting

Frequency (MHz)	20 dB Bandwidth (Hz)	99% Occupied Bandwidth (Hz)	F _{LOWER} (MHz)	F _{UPPER} (MHz)
13.56	131215	446174	13.49472	13.62594

Table 12




Product Service

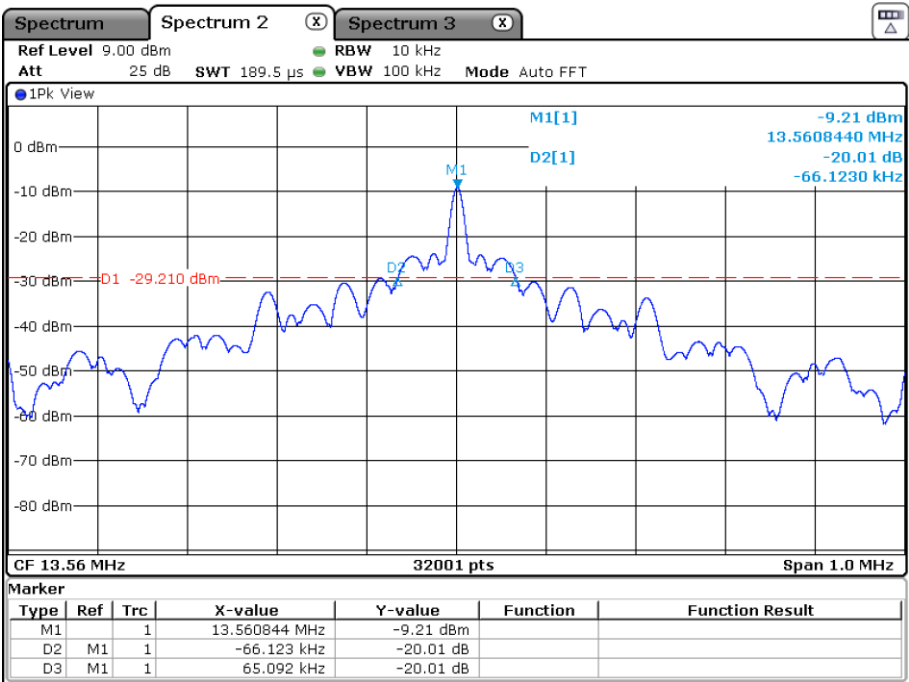

Date: 12.JUL.2021 15:42:28

Figure 1 - 20 dB Bandwidth

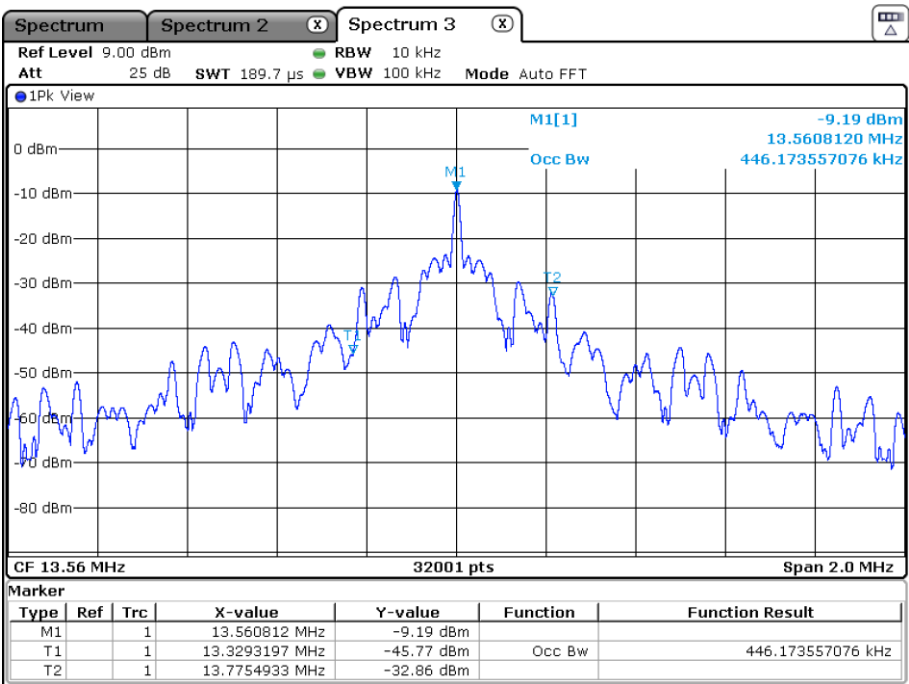

Date: 12.JUL.2021 15:47:42

Figure 2 - 99% Occupied Bandwidth



FCC 47 CFR Part 15, Limit Clause 15.215 (c)

The 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

ISED Canada RSS 210 and ISED Canada RSS GEN, Limit Clause

None specified.

2.3.7 Test Location and Test Equipment Used

This test was carried out in Non shielded room.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Spectrum Analyzer	Rohde & Schwarz	FSV40	20219	12	2022-01-31
Climatic test chamber	Feutron Klimasimulation	KPK200-2	19868	18	2021-08-31

Table 13

TU - Traceability Unscheduled

O/P Mon – Output Monitored using calibrated equipment

N/A - Not Applicable



2.4 Restricted Band Edges

2.4.1 Specification Reference

FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN, Clause 15.205, 7.1 and 8.10

2.4.2 Equipment Under Test and Modification State

10115-100, S/N: --- - Modification State 0

2.4.3 Date of Test

2021-07-09

2.4.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 11.13.1.

Plots for average measurements were taken in accordance with ANSI C63.10 clause 4.1.4.2.3.

Final average measurements were taken in accordance with ANSI C63.10 clause 4.1.4.2.2.

2.4.5 Environmental Conditions

Ambient Temperature	22,0 °C
Relative Humidity	31,0 %

2.4.6 Test Results

No restricted band in the range



FCC 47 CFR Part 15, Limit Clause 15.205

	Peak (dBμV/m)	Average (dBμV/m)
Restricted Bands of Operation	74	54

Table 14

ISED Canada RSS-GEN, Limit Clause 8.9

Frequency (MHz)	Field Strength (μV/m at 3 metres)
30-88	100
88-216	150
216-960	200
Above 960*	500

Table 15

*Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for licence-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.

2.4.7 Test Location and Test Equipment Used

This test was carried out in a Semi anechoic room - cabin no. 11.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
EMI test receiver	Rohde&Schwarz	ESW44	39897	12	2022-04-30
ULTRALOG antenna	Rohde&Schwarz	HL562E	39969	36	2022-11-30
Loop antenna	Schwarzbeck	FMZB 1519B	44334	36	2023-01-31
EMC measurement software	Rohde&Schwarz	EMC32 V10.50.10	42986	N/A	N/A

Table 16

TU - Traceability Unscheduled
 O/P Mon – Output Monitored using calibrated equipment
 N/A - Not Applicable



Product Service

2.5 AC Power Line Conducted Emissions

2.5.1 Specification Reference

FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN, Clause 15.207, N/A and 8.8

2.5.2 Equipment Under Test and Modification State

10115-100, S/N: --- - Modification State 0

2.5.3 Date of Test

2021-07-12

2.5.4 Test Method

2.5.5 Environmental Conditions


Ambient Temperature	23,0 °C
Relative Humidity	30,0 %

2.5.6 Test Results

5V DC Powered – Continuous transmitting



Line L1 - 150 kHz to 30 MHz

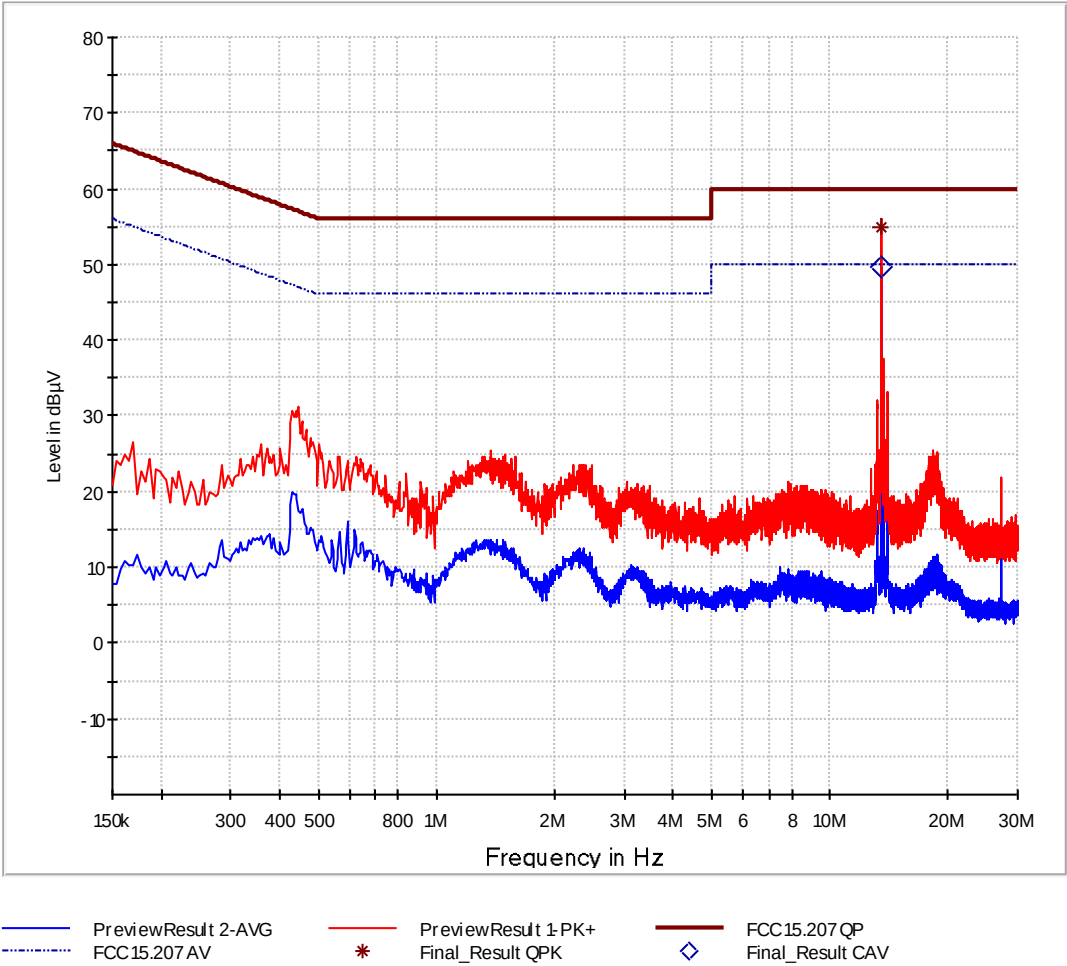


Final Results 1:

Frequency MHz	QuasiPeak dBµV	CAverage dBµV	Limit dBµV	Margin dB	Meas. Time ms	Bandwidth kHz	Line	Corr. dB
13.562000	---	49.68	50.00	0.32	1000.0	9.000	L1	10.2
13.562000	54.90	---	60.00	5.10	1000.0	9.000	L1	10.2



Line N - 150 kHz to 30 MHz

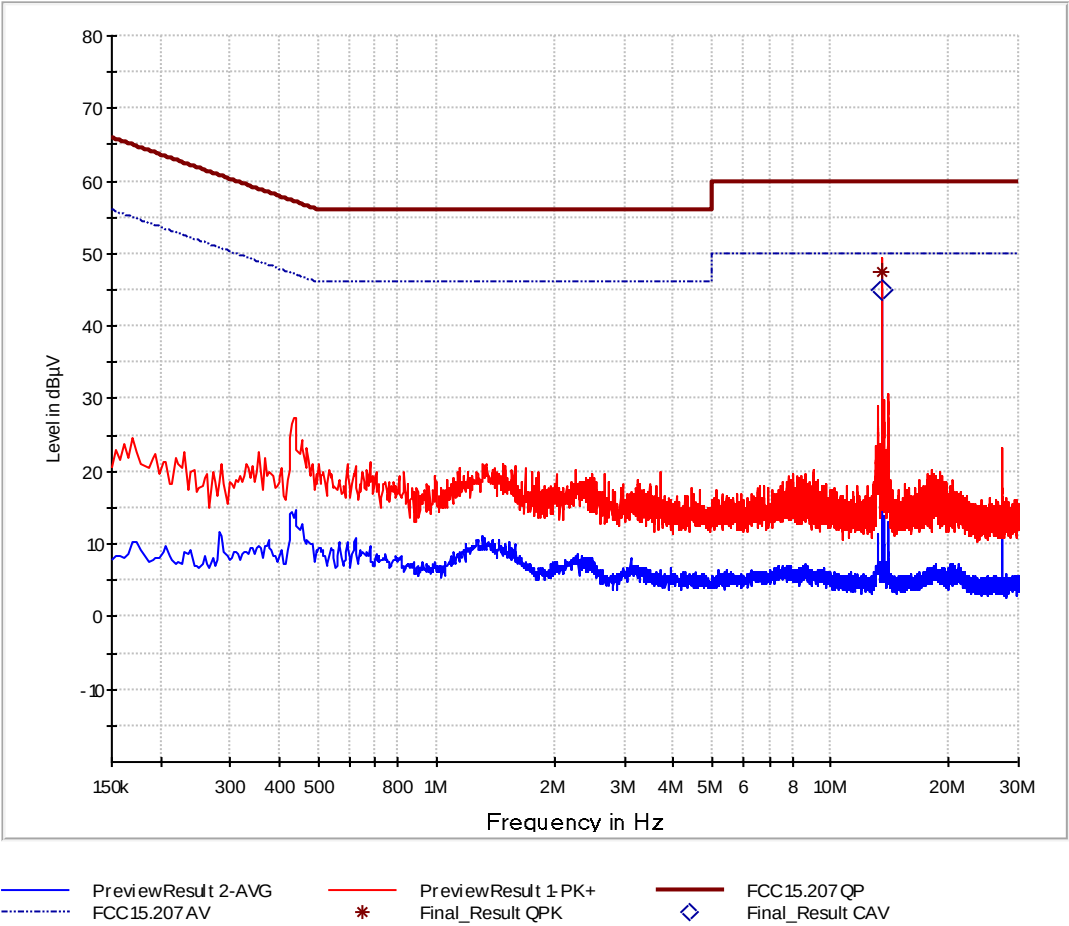

Final Results 1:

Frequency MHz	QuasiPeak dBµV	CAverage dBµV	Limit dBµV	Margin dB	Meas. Time ms	Bandwidth kHz	Line	Corr. dB
13.562000	---	45.04	50.00	4.96	1000.0	9.000	N	10.2
13.562000	47.59	---	60.00	12.41	1000.0	9.000	N	10.2



FCC 47 CFR Part 15, Limit Clause 15.207 and ISED Canada RSS-GEN, Limit Clause 8.8

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-Peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50

Table 17

*Decreases with the logarithm of the frequency.

2.5.7 Test Location and Test Equipment Used

This test was carried out in Shielded room - cabin no. 4.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
EMI test receiver	Rohde & Schwarz	ESCI3	19730	18	2022-05-31
V-network	Rohde & Schwarz	ENV216	39908	12	2022-03-31
EMC measurement software	Rohde & Schwarz	EMC32 V10.60.00	44377	N/A	N/A

Table 18

TU - Traceability Unscheduled
O/P Mon – Output Monitored using calibrated equipment
N/A - Not Applicable



2.6 Exposure of Humans to RF Fields and SAR exclusion threshold

2.6.1 Specification Reference

ISED Canada RSS-102 Issue 5, section 2.5
KDB 447498 D01 V06, section 4.3.1 c)

2.6.2 Equipment Under Test and Modification State

10115-100, S/N: --- - Modification State 0

2.6.3 Date of Test

2020-07-09

2.6.4 Test Results

5V DC Powered – Continuous transmitting

In accordance with Industry Canada RSS-102, Issue 5, chapter 2.5:

Maximum Radiated Fields Strength: (see chapter 2.1 of this test report)	61.94 dBμV/m (at 3 m distance and 13.56 MHz)
Calculated Equivalent Radiated Power:	0.46 μW (e.i.r.p.)
Minimum separation distance:	≤ 5 mm
SAR Evaluation Exemption Limit:	71 mW

SAR Exclusion threshold

Maximum Radiated Fields Strength: (see chapter 2.1 of this test report)	61.94 dBμV/m (at 3 m distance and 13.56 MHz)
Calculated Equivalent Radiated Power:	0.46 μW (e.i.r.p.) < 10 μW
Minimum separation distance:	5 mm (≤ 50 mm)
1-g numeric threshold:	$(10 \mu\text{W} / 5 \text{ mm}) \cdot \sqrt{(0.01356 \text{ GHz})} = 0.00023$
1-g numeric threshold limit:	0.25

Note 1: For test distances below 5 mm according to 4.3.1 c) the test distance is fixed to 5 mm.

$$EIRP = \frac{(FS \cdot D)^2}{30}$$



Product Service

2.6.5 Test Location and Test Equipment Used

This test was carried out in a Semi anechoic room - cabin no. 11.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
EMI test receiver	Rohde&Schwarz	ESW44	39897	12	2022-04-30
ULTRALOG antenna	Rohde&Schwarz	HL562E	39969	36	2022-11-30
Loop antenna	Schwarzbeck	FMZB 1519B	44334	36	2023-01-31
EMC measurement software	Rohde&Schwarz	EMC32 V10.50.10	42986	N/A	N/A

Table 19

TU - Traceability Unscheduled
O/P Mon – Output Monitored using calibrated equipment
N/A - Not Applicable



3 Test Equipment Information

3.1 General Test Equipment Used

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
EMI test receiver	Rohde&Schwarz	ESW44	39897	12	2022-04-30
ULTRALOG antenna	Rohde&Schwarz	HL562E	39969	36	2022-11-30
Loop antenna	Schwarzbeck	FMZB 1519B	44334	36	2023-01-31
EMC measurement software	Rohde&Schwarz	EMC32 V10.50.10	42986	N/A	N/A
EMI test receiver	Rohde & Schwarz	ESCI3	19730	18	2022-05-31
V-network	Rohde & Schwarz	ENV216	39908	12	2022-03-31
EMC measurement software	Rohde & Schwarz	EMC32 V10.60.00	44377	N/A	N/A
Spectrum Analyzer	Rohde & Schwarz	FSV40	20219	12	2022-01-31
Climatic test chamber	Feutron Klimasimulation	KPK200-2	19868	18	2021-08-31

Table 20

TU - Traceability Unscheduled
O/P Mon – Output Monitored using calibrated equipment
N/A - Not Applicable

4 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Radio Testing			
Test Name	kp	Expanded Uncertainty	Note
Occupied Bandwidth	2.0	$\pm 1.14 \%$	2
RF-Frequency error	1.96	$\pm 1 \cdot 10^{-7}$	7
RF-Power, conducted carrier	2	$\pm 0.079 \text{ dB}$	2
RF-Power uncertainty for given BER	1.96	$+0.94 \text{ dB} / -1.05$	7
RF power, conducted, spurious emissions	1.96	$+1.4 \text{ dB} / -1.6 \text{ dB}$	7
RF power, radiated			
25 MHz – 4 GHz	1.96	$+3.6 \text{ dB} / -5.2 \text{ dB}$	8
1 GHz – 18 GHz	1.96	$+3.8 \text{ dB} / -5.6 \text{ dB}$	8
18 GHz – 26.5 GHz	1.96	$+3.4 \text{ dB} / -4.5 \text{ dB}$	8
40 GHz – 170 GHz	1.96	$+4.2 \text{ dB} / -7.1 \text{ dB}$	8
Spectral Power Density, conducted	2.0	$\pm 0.53 \text{ dB}$	2
Maximum frequency deviation			
300 Hz – 6 kHz	2	$\pm 2,89 \%$	2
6 kHz – 25 kHz	2	$\pm 0.2 \text{ dB}$	2
Maximum frequency deviation for FM	2	$\pm 2,89 \%$	2
Adjacent channel power 25 MHz – 1 GHz	2	$\pm 2.31 \%$	2
Temperature	2	$\pm 0.39 \text{ K}$	4
(Relative) Humidity	2	$\pm 2.28 \%$	2
DC- and low frequency AC voltage			
DC voltage	2	$\pm 0.01 \%$	2
AC voltage up to 1 kHz	2	$\pm 1.2 \%$	2
Time	2	$\pm 0.6 \%$	2

Table 21



Radio Interference Emission Testing			
Test Name	kp	Expanded Uncertainty	Note
Conducted Voltage Emission			
9 kHz to 150 kHz (50Ω/50μH AMN)	2	± 3.8 dB	1
150 kHz to 30 MHz (50Ω/50μH AMN)	2	± 3.4 dB	1
100 kHz to 200 MHz (50Ω/5μH AMN)	2	± 3.6 dB	1
Discontinuous Conducted Emission			
9 kHz to 150 kHz (50Ω/50μH AMN)	2	± 3.8 dB	1
150 kHz to 30 MHz (50Ω/50μH AMN)	2	± 3.4 dB	1
Conducted Current Emission			
9 kHz to 200 MHz	2	± 3.5 dB	1
Magnetic Fieldstrength			
9 kHz to 30 MHz (with loop antenna)	2	± 3.9 dB	1
9 kHz to 30 MHz (large-loop antenna 2 m)	2	± 3.5 dB	1
Radiated Emission			
Test distance 1 m (ALSE)			
9 kHz to 150 kHz	2	± 4.6 dB	1
150 kHz to 30 MHz	2	± 4.1 dB	1
30 MHz to 200 MHz	2	± 5.2 dB	1
200 MHz to 2 GHz	2	± 4.4 dB	1
2 GHz to 3 GHz	2	± 4.6 dB	1
Test distance 3 m			
30 MHz to 300 MHz	2	± 4.9 dB	1
300 MHz to 1 GHz	2	± 5.0 dB	1
1 GHz to 6 GHz	2	± 4.6 dB	1
Test distance 10 m			
30 MHz to 300 MHz	2	± 4.9 dB	1
300 MHz to 1 GHz	2	± 4.9 dB	1
Radio Interference Power			
30 MHz to 300 MHz	2	± 3.5 dB	1
Harmonic Current Emissions			4
Voltage Changes, Voltage Fluctuations and Flicker			4

Table 22



Immunity Testing			
Test Name	kp	Expanded Uncertainty	Note
Electrostatic Discharges			4
Radiated RF-Field			
Pre-calibrated field level	2	+32.2 / -24.3 %	5
Dynamic feedback field level	2.05	+21.2 / -17.5 %	3
Electrical Fast Transients (EFT) / Bursts			4
Surges			4
Conducted Disturbances, induced by RF-Fields			
via CDN	2	+15.1 / -13.1 %	6
via EM clamp	2	+42.6 / -29.9 %	6
via current clamp	2	+43.9 / -30.5 %	6
Power Frequency Magnetic Field	2	+20.7 / -17.1 %	2
Pulse Magnetic Field			4
Voltage Dips, Short Interruptions and Voltage Variations			4
Oscillatory Waves			4
Conducted Low Frequency Disturbances			
Voltage setting	2	± 0.9 %	2
Frequency setting	2	± 0.1 %	2
Electrical Transient Transmission in Road Vehicles			4

Table 23



Note 1:

The expanded uncertainty reported according to CISPR 16-4-2:2003-11 is based on a standard uncertainty multiplied by a coverage factor of $k_p = 2$, providing a level of confidence of $p = 95.45\%$

Note 2:

The expanded uncertainty reported according to UKAS Lab 34 (Edition 1, 2002-08) is based on a standard uncertainty multiplied by a coverage factor of $k_p = 2$, providing a level of confidence of $p = 95.45\%$

Note 3:

The expanded uncertainty reported according to UKAS Lab 34 (Edition 1, 2002-08) is based on a standard uncertainty multiplied by a coverage factor of $k_p = 2.05$, providing a level of confidence of $p = 95.45\%$

Note 4:

It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence.

Note 5:

The expanded uncertainty reported according to IEC 61000-4-3 is based on a standard uncertainty multiplied by a coverage factor of $k_p = 2$, providing a level of confidence of $p = 95.45\%$

Note 6:

The expanded uncertainty reported according to IEC 61000-4-6 is based on a standard uncertainty multiplied by a coverage factor of $k_p = 2$, providing a level of confidence of $p = 95.45\%$

Note 7:

The expanded uncertainty reported according to ETSI TR 100 028 V1.4.1 (all parts) is based on a standard uncertainty multiplied by a coverage factor of $k_p = 1.96$, providing a level of confidence of $p = 95.45\%$

Note 8:

The expanded uncertainty reported according to ETSI TR 102 273 V1.2.1 (all parts) is based on a standard uncertainty multiplied by a coverage factor of $k_p = 1.96$, providing a level of confidence of $p = 95.45\%$