SK TELETECH FCC ID: OL6SK-5100 -- Cellular CDMA Head SAR

SAM Phantom; Right Hand Section; Probe:ET3DV6 - SN1677; ConvF(6.70,6.70,6.70)

Med. Parameters 835 MHz Brain: σ = 0.91 mho/m ε_r = 40.0 ρ = 1.00 g/cm^3; Antenna Position -- Out; Crest Factor 1.0

SAR (1g): 0.751 mW/g, SAR (10g): 0.529 mW/g

SK TELETECH Cellular CDMA phone Model: SK-5100

Celllular CDMA Mode, Ch.1013 [824.70MHz]; Standard Battery; Ambient Temp. = 22.3°C / Meas. Tissue Temp. = 22.2°C

Conducted Power = 25.0dBm; Right Head Phantom, Cheek / Touch position; Slide = up (Normal position)

Test Date -- 09/11/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

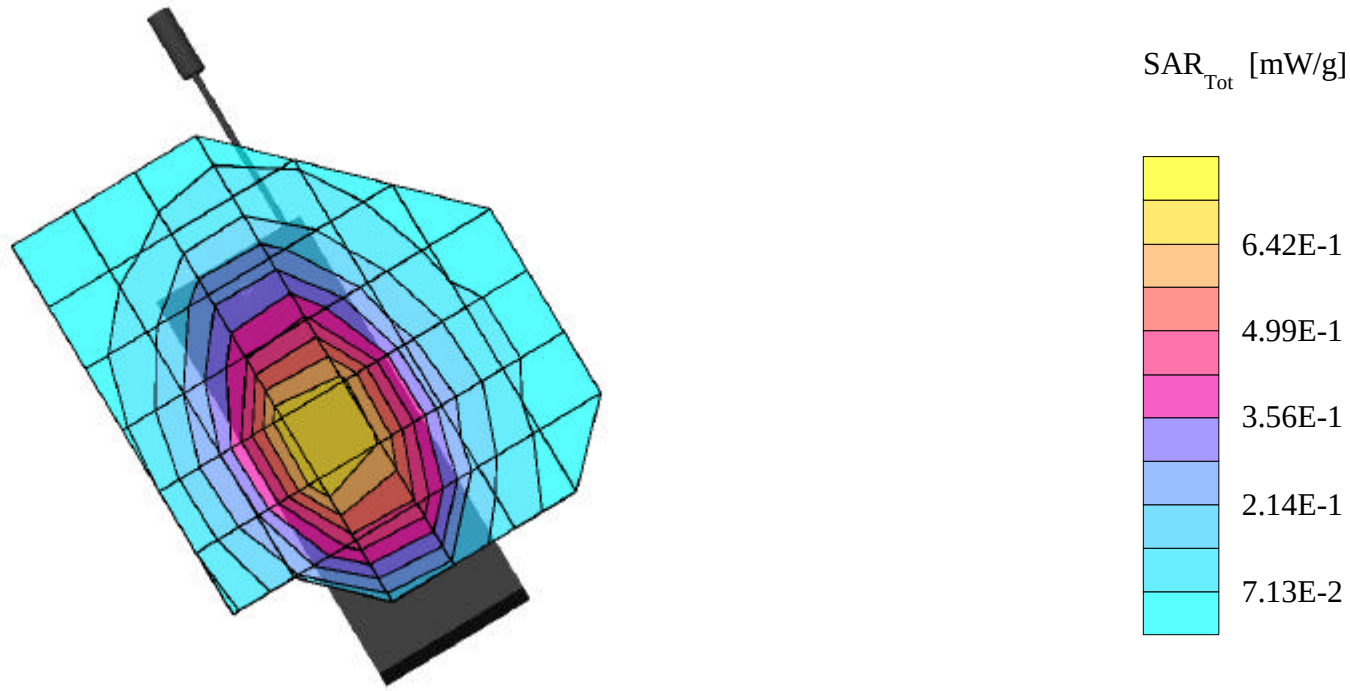

SK TELETECH FCC ID: OL6SK-5100 -- Cellular CDMA Head SAR

SAM Phantom; Right Hand Section; Probe:ET3DV6 - SN1677; ConvF(6.70,6.70,6.70)

Med. Parameters 835 MHz Brain: σ = 0.91 mho/m ε_r = 40.0 ρ = 1.00 g/cm^3; Antenna Position -- Out; Crest Factor 1.0

SAR (1g): 0.481 mW/g, SAR (10g): 0.343 mW/g

SK TELETECH Cellular CDMA phone Model: SK-5100

Celllular CDMA Mode, Ch.1013 [824.70MHz]; Standard Battery; Ambient Temp. = 22.3°C / Meas. Tissue Temp. = 22.2°C

Conducted Power = 25.0dBm; Right Head Phantom, EAR/15 Degree Tilt position; Slide = up (Normal position)

Test Date -- 09/11/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

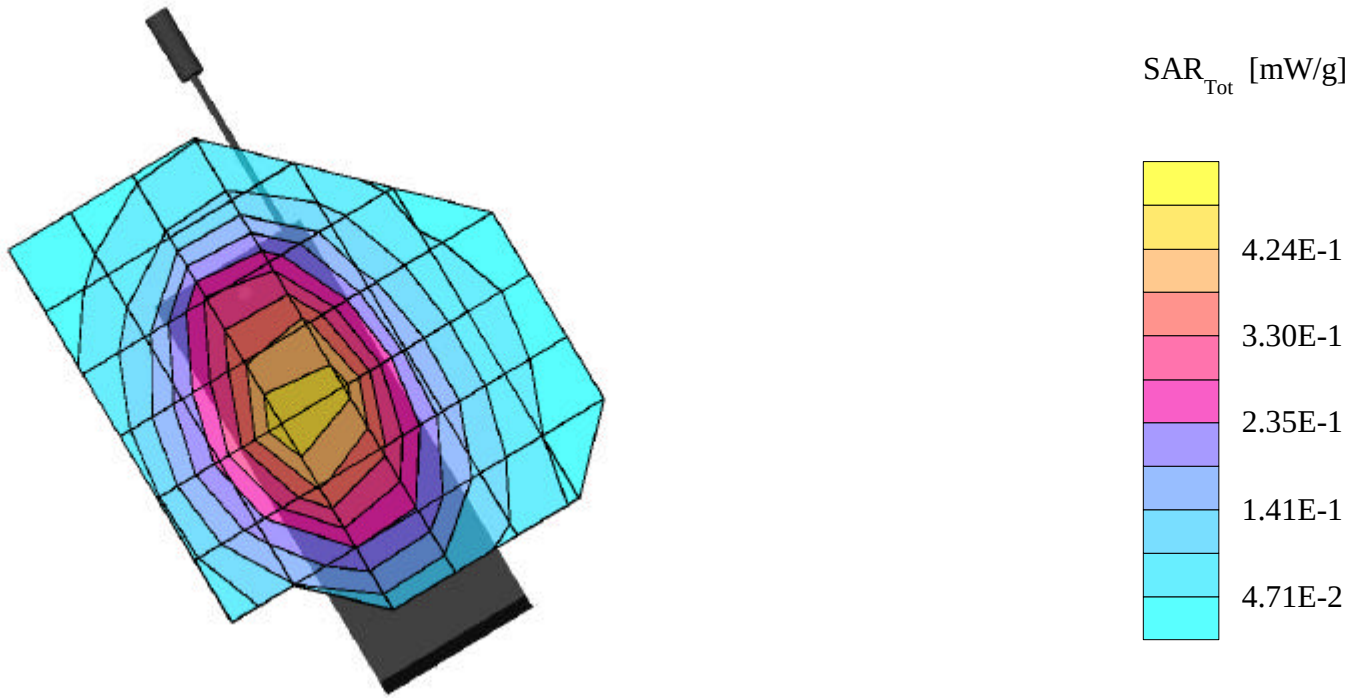

SK TELETECH FCC ID: OL6SK-5100 -- Cellular CDMA Head SAR

SAM Phantom; Left Hand Section; Probe:ET3DV6 - SN1677; ConvF(6.70,6.70,6.70)

Med. Parameters 835 MHz Brain: σ = 0.91 mho/m ε_r = 40.0 ρ = 1.00 g/cm^3; Antenna Position -- Out; Crest Factor 1.0

SAR (1g): 0.919 mW/g, SAR (10g): 0.629 mW/g

SK TELETECH Cellular CDMA phone Model: SK-5100

Celllular CDMA Mode, Ch.1013 [824.70MHz]; Standard Battery; Ambient Temp. = 22.3°C / Meas. Tissue Temp. = 22.2°C

Conducted Power = 25.0dBm; Left Head Phantom, Cheek/Touch position; Slide = up (Normal position)

Test Date -- 09/09/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

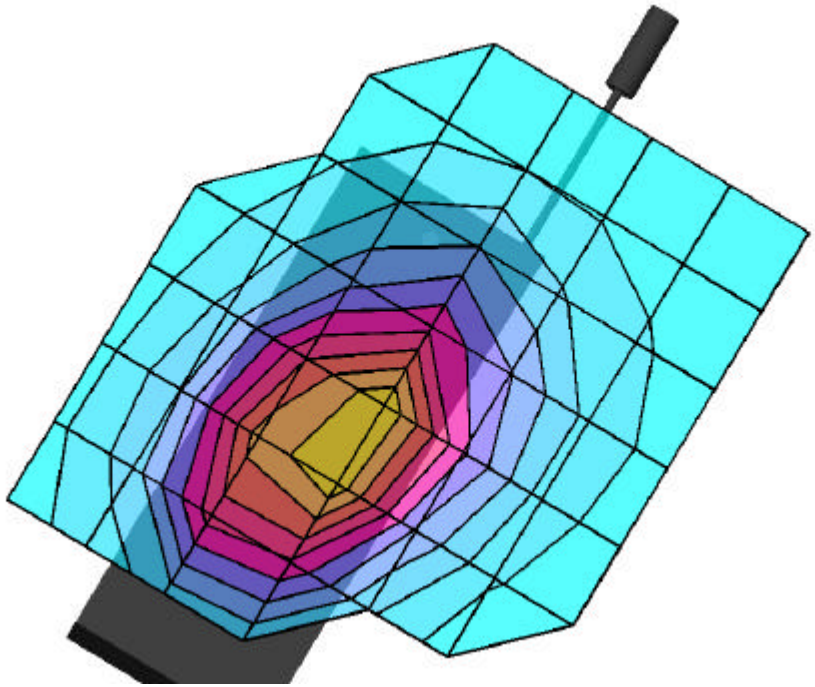

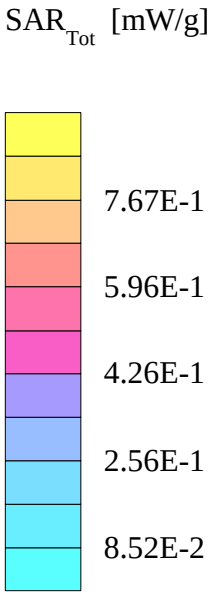

SK TELETECH FCC ID: OL6SK-5100 -- Cellular CDMA Head SAR

SAM Phantom; Left Hand Section; Probe:ET3DV6 - SN1677; ConvF(6.70,6.70,6.70)

Med. Parameters 835 MHz Brain: σ = 0.91 mho/m ε_r = 40.0 ρ = 1.00 g/cm^3; Antenna Position -- Out; Crest Factor 1.0

SAR (1g): 0.553 mW/g, SAR (10g): 0.382 mW/g

SK TELETECH Cellular CDMA phone Model: SK-5100

Celllular CDMA Mode, Ch.0779 [848.37MHz]; Standard Battery; Ambient Temp. = 22.3°C / Meas. Tissue Temp. = 22.2°C

Conducted Power = 25.0dBm; Left Head Phantom, EAR/15 Degree Tilt position; Slide = up (Normal position)

Test Date -- 09/09/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

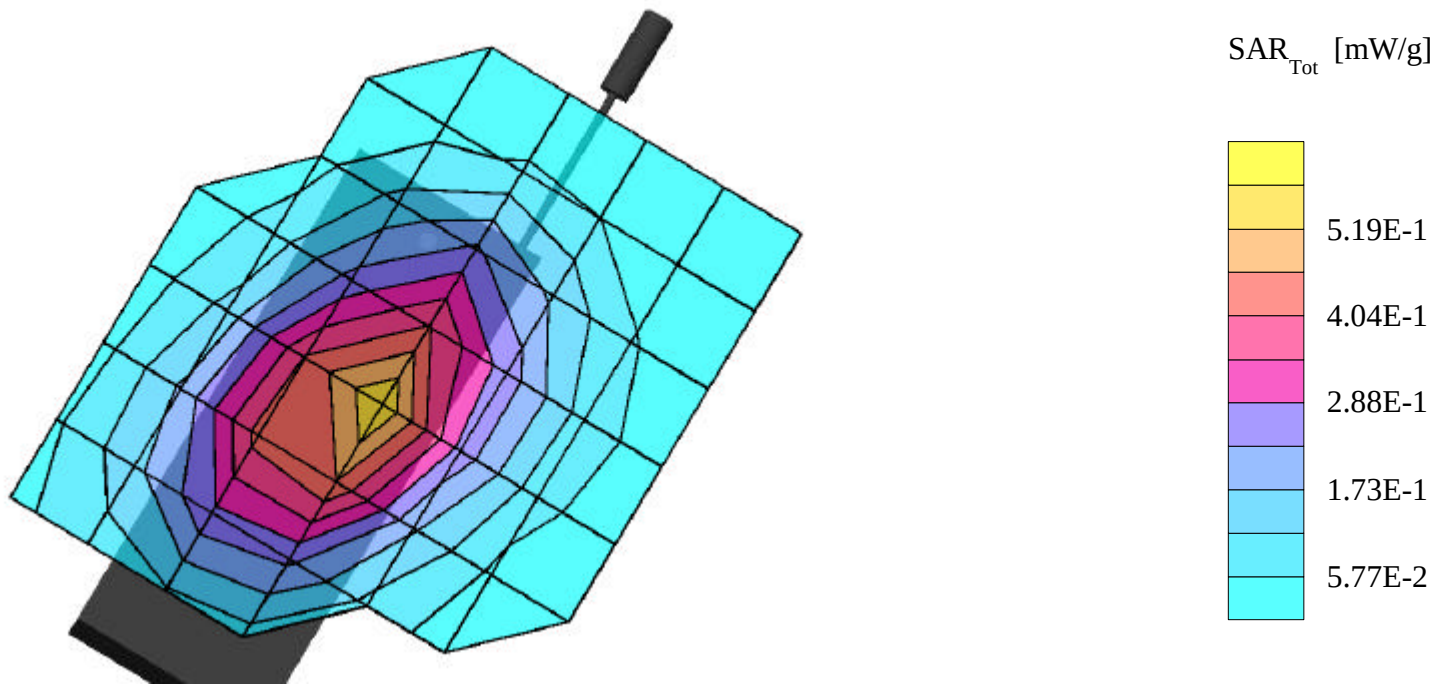

SK TELETECH FCC ID: OL6SK-5100 -- Cellular CDMA Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1677; ConvF(6.40,6.40,6.40)

Med. Parameters 835 MHz Muscle: σ = 0.98 mho/m ε_r = 55.6 ρ = 1.00 g/cm^3; Antenna Position -- Out; Crest Factor 1.0

SAR (1g): 1.28 mW/g, SAR (10g): 0.886 mW/g

SK TELETECH Cellular CDMA phone Model: SK-5100

Celllular CDMA Mode, Ch.1013 [824.70MHz]; Standard Battery; Slide = up; Ambient Temp. = 22.3°C / Meas. Tissue Temp. = 22.2°C

Conducted Power = 25.0dBm; Spacing = 1.5cm from EUT (antenna side) to flat phantom, No BeltClip/No Holster;

Test Date -- 09/11/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

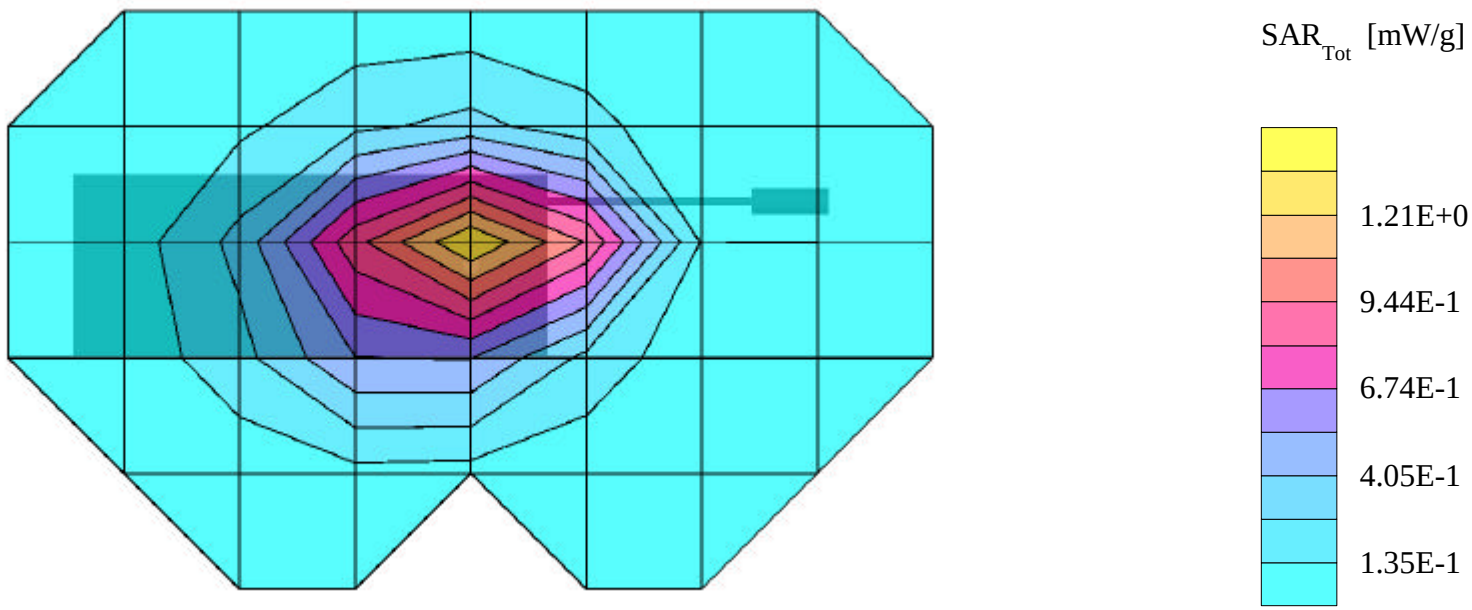

SK TELETECH FCC ID: OL6SK-5100 -- Cellular CDMA Head SAR

SAM Phantom; Right Hand Section; Probe:ET3DV6 - SN1677; ConvF(6.70,6.70,6.70)

Med. Parameters 835 MHz Brain: σ = 0.91 mho/m ε_r = 40.0 ρ = 1.00 g/cm^3; Antenna Position --In; Crest Factor 1.0

SAR (1g): 1.06 mW/g, SAR (10g): 0.716 mW/g

SK TELETECH Cellular CDMA Phone Model: SK-5100

Celllular CDMA Mode, Ch.1013 [824.70MHz]; Standard Battery; Ambient Temp. = 22.3°C / Meas. Tissue Temp. = 22.2°C

Conducted Power = 25.0dBm; Right Head Phantom, Cheek/Touch position; Slide = down (2nd. position)

Test Date -- 09/10/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

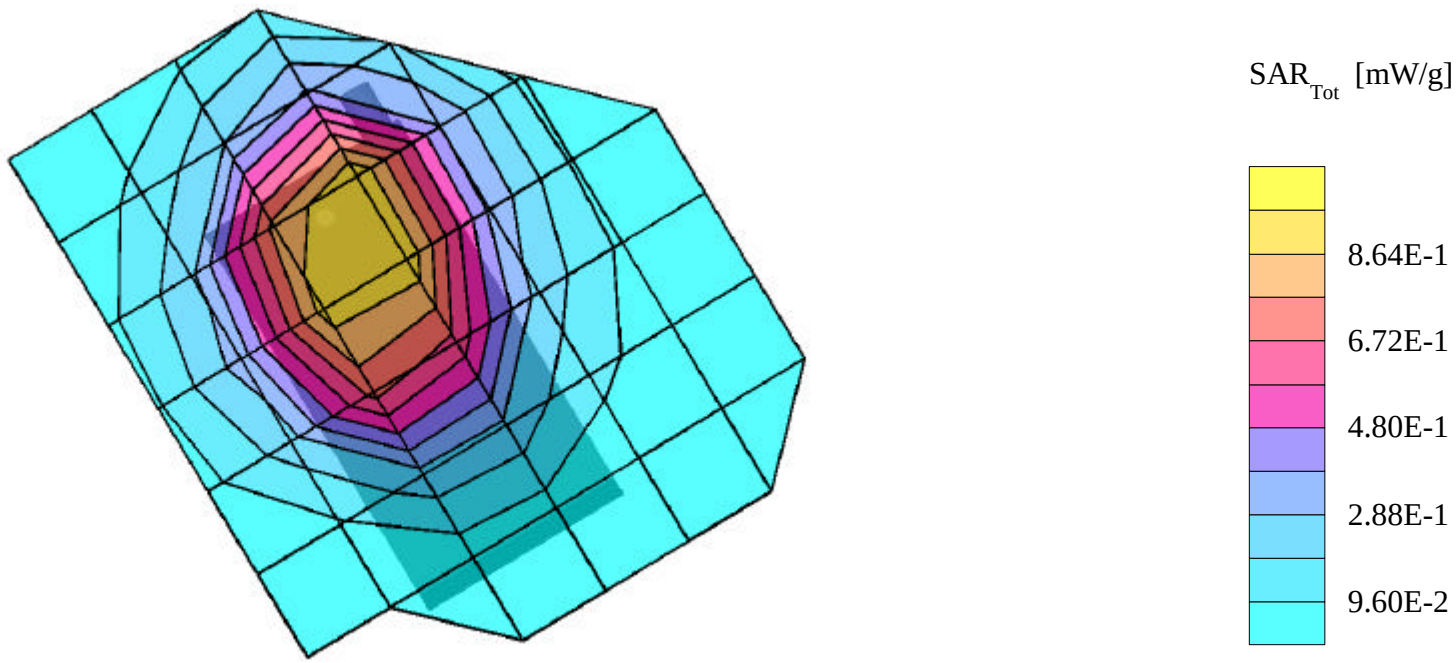

SK TELETECH FCC ID: OL6SK-5100 -- Cellular CDMA Head SAR

SAM Phantom; Right Hand Section; Probe:ET3DV6 - SN1677; ConvF(6.70,6.70,6.70)

Med. Parameters 835 MHz Brain: σ = 0.91 mho/m ε_r = 40.0 ρ = 1.00 g/cm^3; Antenna Position -- In; Crest Factor 1.0

SAR (1g): 0.980 mW/g, SAR (10g): 0.653 mW/g

SK TELETECH Cellular CDMA Phone Model: SK-5100

Celllular CDMA Mode, Ch.1013 [824.70MHz]; Standard Battery; Ambient Temp. = 22.3°C / Meas. Tissue Temp. = 22.2°C

Conducted Power = 25.0dBm; Right Head Phantom, EAR/15 Degree Tilt position; Slide = down (2nd. position)

Test Date -- 09/10/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

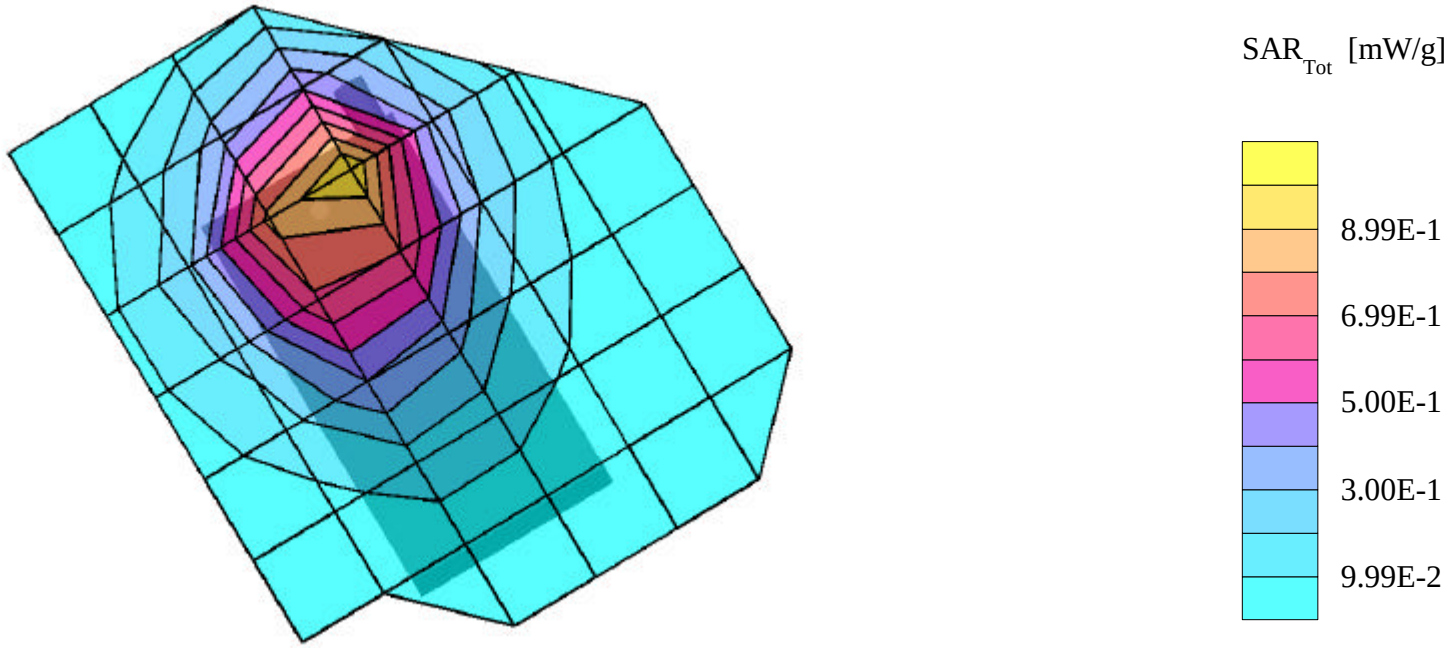

SK TELETECH FCC ID: OL6SK-5100 -- Cellular CDMA Head SAR

SAM Phantom; Left Hand Section; Probe:ET3DV6 - SN1677; ConvF(6.70,6.70,6.70)

Med. Parameters 835 MHz Brain: σ = 0.91 mho/m ε_r = 40.0 ρ = 1.00 g/cm^3; Antenna Position -- In; Crest Factor 1.0

SAR (1g): 1.24 mW/g, SAR (10g): 0.831 mW/g

SK TELETECH Cellular CDMA Phone Model: SK-5100

Celllular CDMA Mode, Ch.1013 [824.70MHz]; Slim Battery; Ambient Temp. = 22.3°C / Meas. Tissue Temp. = 22.2°C

Conducted Power = 25.0dBm; Left Head Phantom, Cheek/Touch position; Slide = down (2nd.position).

Test Date -- 09/10/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

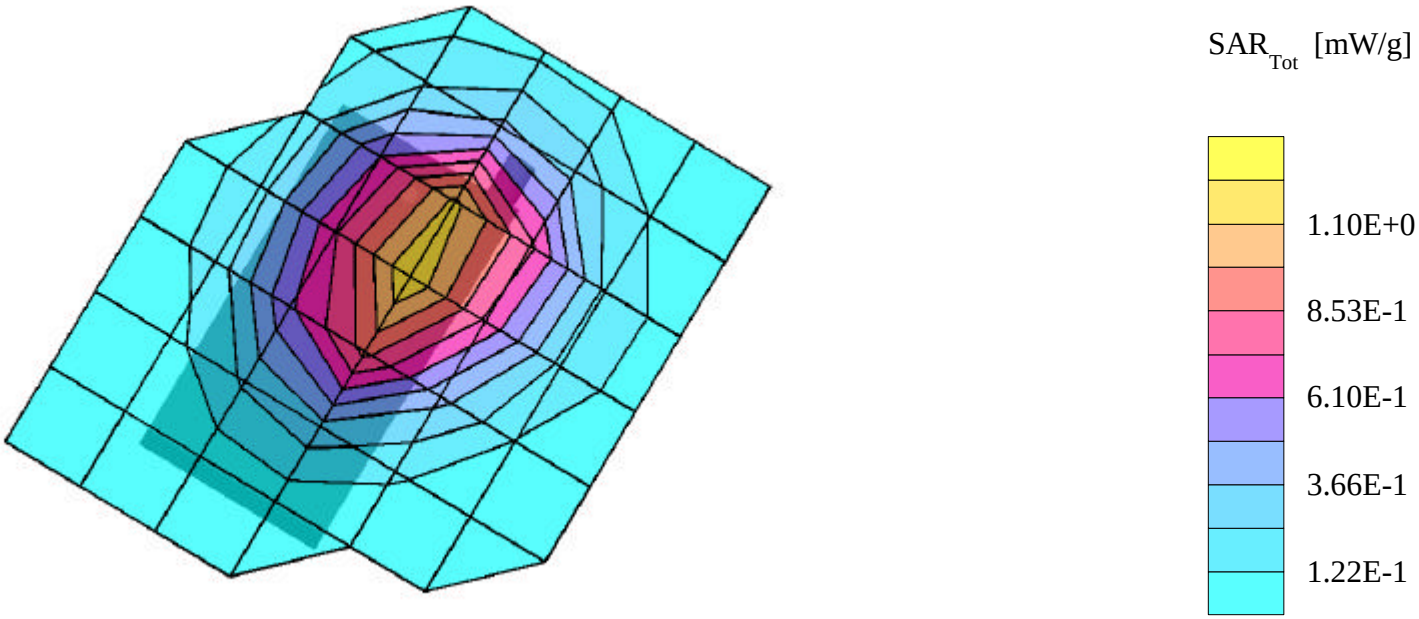

SK TELETECH FCC ID: OL6SK-5100 -- Cellular CDMA Head SAR

SAM Phantom; Left Hand Section; Probe:ET3DV6 - SN1677; ConvF(6.70,6.70,6.70)

Med. Parameters 835 MHz Brain: σ = 0.91 mho/m ε_r = 40.0 ρ = 1.00 g/cm^3; Antenna Position --In; Crest Factor 1.0

SAR (1g): 1.21 mW/g, SAR (10g): 0.781 mW/g

SK TELETECH Cellular CDMA Phone Model: SK-5100

Celllular CDMA Mode, Ch.1013 [824.70MHz]; Standard Battery; Ambient Temp. = 22.3°C / Meas. Tissue Temp. = 22.2°C

Conducted Power = 25.0dBm; Left Head Phantom, EAR/15 Degree Tilt position; Slide = down (2nd. position)

Test Date -- 09/10/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

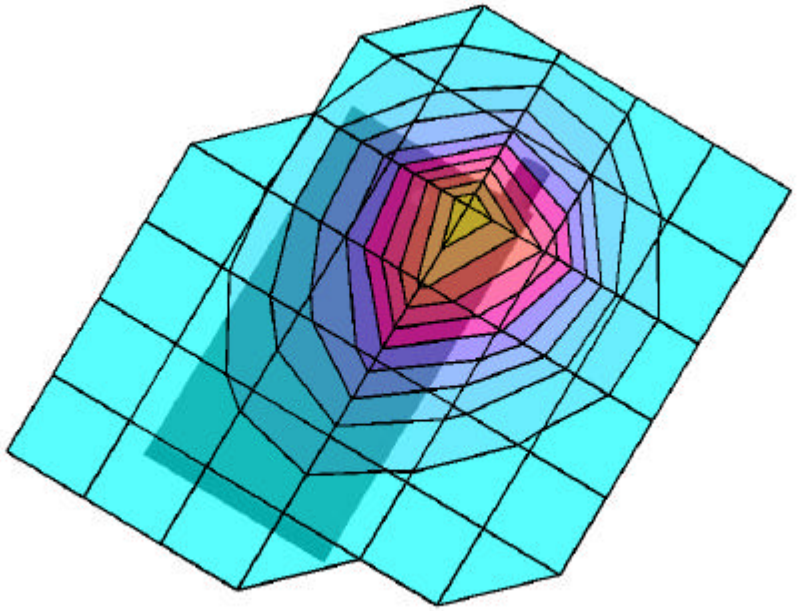

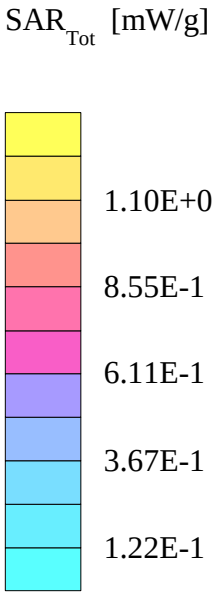

YISO Telecom FCC ID: PC6CF-2031 -- PCS CDMA Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1677; ConvF(6.40,6.40,6.40)

Med. Parameters 835 MHz Muscle: σ = 0.98 mho/m ε_r = 55.6 ρ = 1.00 g/cm^3; Antenna Position -- Out; Crest Factor 1.0

SAR (1g): 1.43 mW/g, SAR (10g): 0.975 mW/g

SK TELETECH Cellular CDMA Phone Model: SK-5100

Celllular CDMA Mode, Ch.1013 [824.70MHz]; Slim Battery; Slide = down; Ambient Temp. = 22.3°C / Meas. Tissue Temp. = 22.1°C

Conducted Power = 25.0dBm; Spacing = 1.5cm from EUT (antenna side) to flat phantom, No BeltClip/No Holster

Test Date -- 09/12/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

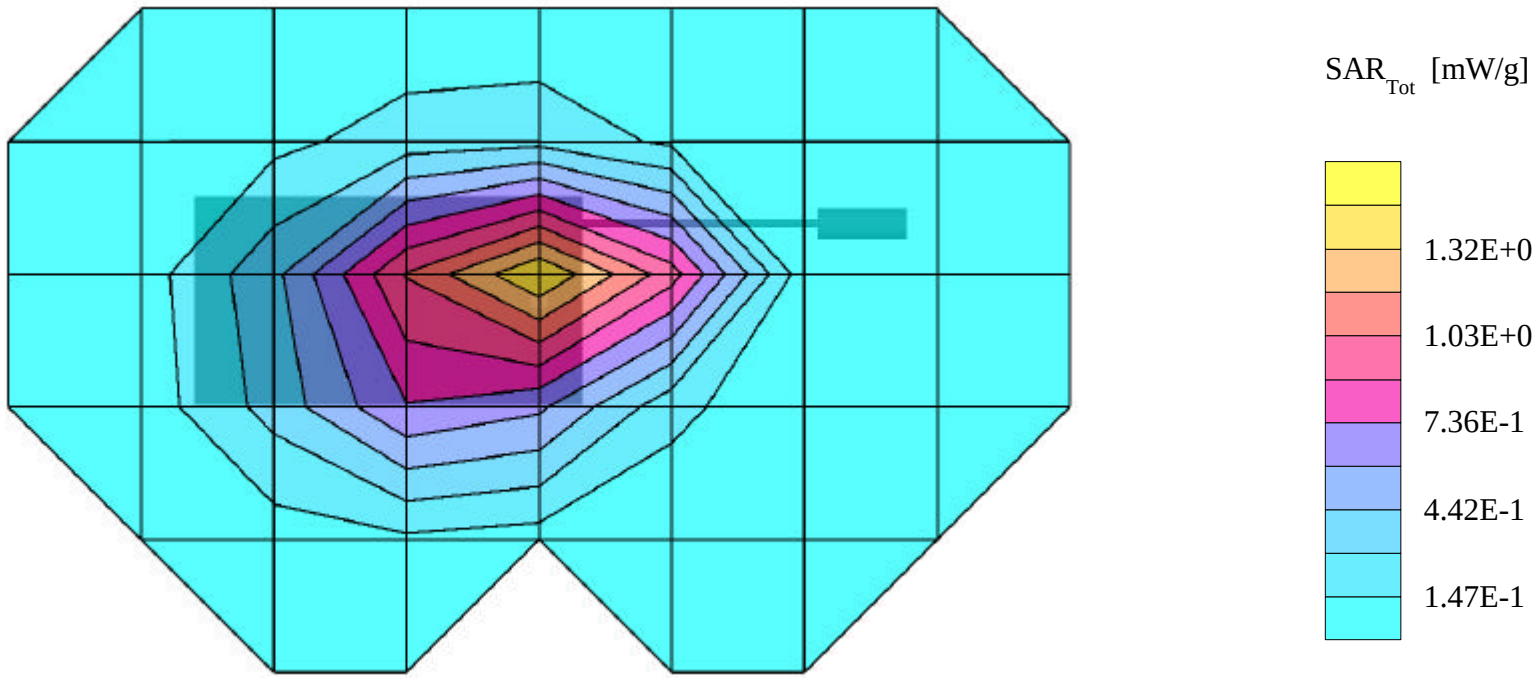

SK TELETECH FCC ID: OL6SK-5100 -- Cellular CDMA Head SAR

SAM Phantom; Left Hand Section; Probe:ET3DV6 - SN1677; ConvF(6.70,6.70,6.70)

Med. Parameters 835 MHz Brain: $\sigma = 0.91$ mho/m $\varepsilon_r = 40.0$ $\rho = 1.00$ g/cm^3; Antenna Position -- Out; Crest Factor 1.0

SAR (1g): 1.24 mW/g, SAR (10g): 0.831 mW/g

SK TELETECH Cellular CDMA Phone Model: SK-5100

Celllular CDMA Mode, Ch.1013 [824.70MHz]; Standard Battery; Ambient Temp. = 22.3°C / Meas. Tissue Temp. = 22.2°C

Conducted Power = 25.0dBm; Left Head Phantom, Cheek/Touch position; Slide = down (2nd.position).

Test Date -- 09/10/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

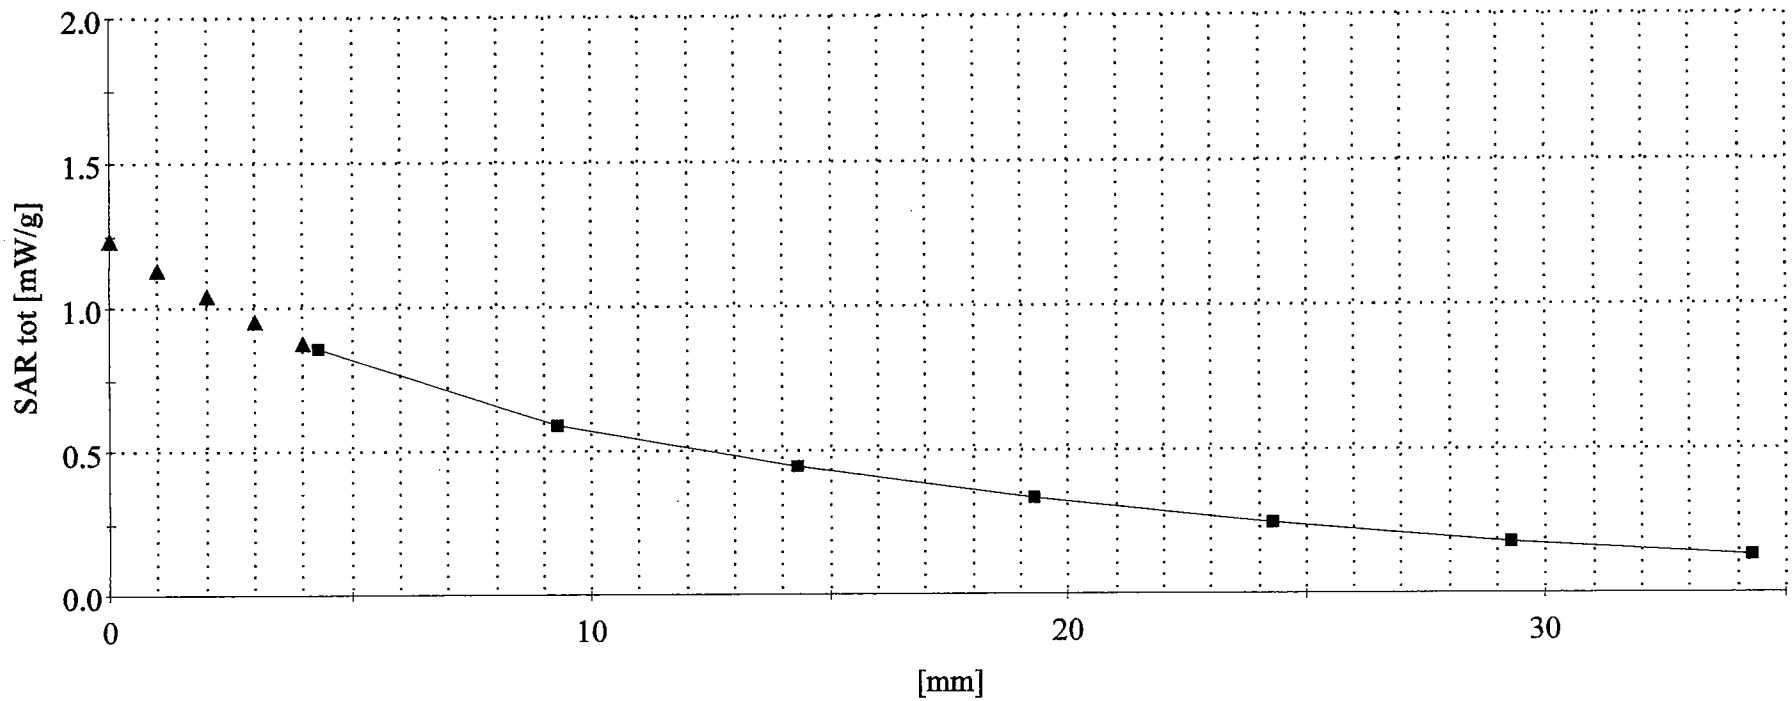

SK TELETECH FCC ID: OL6SK-5100 -- Cellular CDMA Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1677; ConvF(6.40,6.40,6.40)

Med. Parameters 835 MHz Muscle: $\sigma = 0.98$ mho/m $\varepsilon_r = 55.6$ $\rho = 1.00$ g/cm^3; Antenna Position -- Out; Crest Factor 1.0

SAR (1g): 1.43 mW/g, SAR (10g): 0.975 mW/g

SK TELETECH Cellular CDMA Phone Model: SK-5100

Celllular CDMA Mode, Ch.1013 [824.70MHz]; Standard Battery; Slide = down; Ambient Temp. = 22.3°C / Meas. Tissue Temp. = 22.2°C

Conducted Power = 25.0dBm; Spacing = 1.5cm from EUT (antenna side) to flat phantom, No BeltClip/No Holster
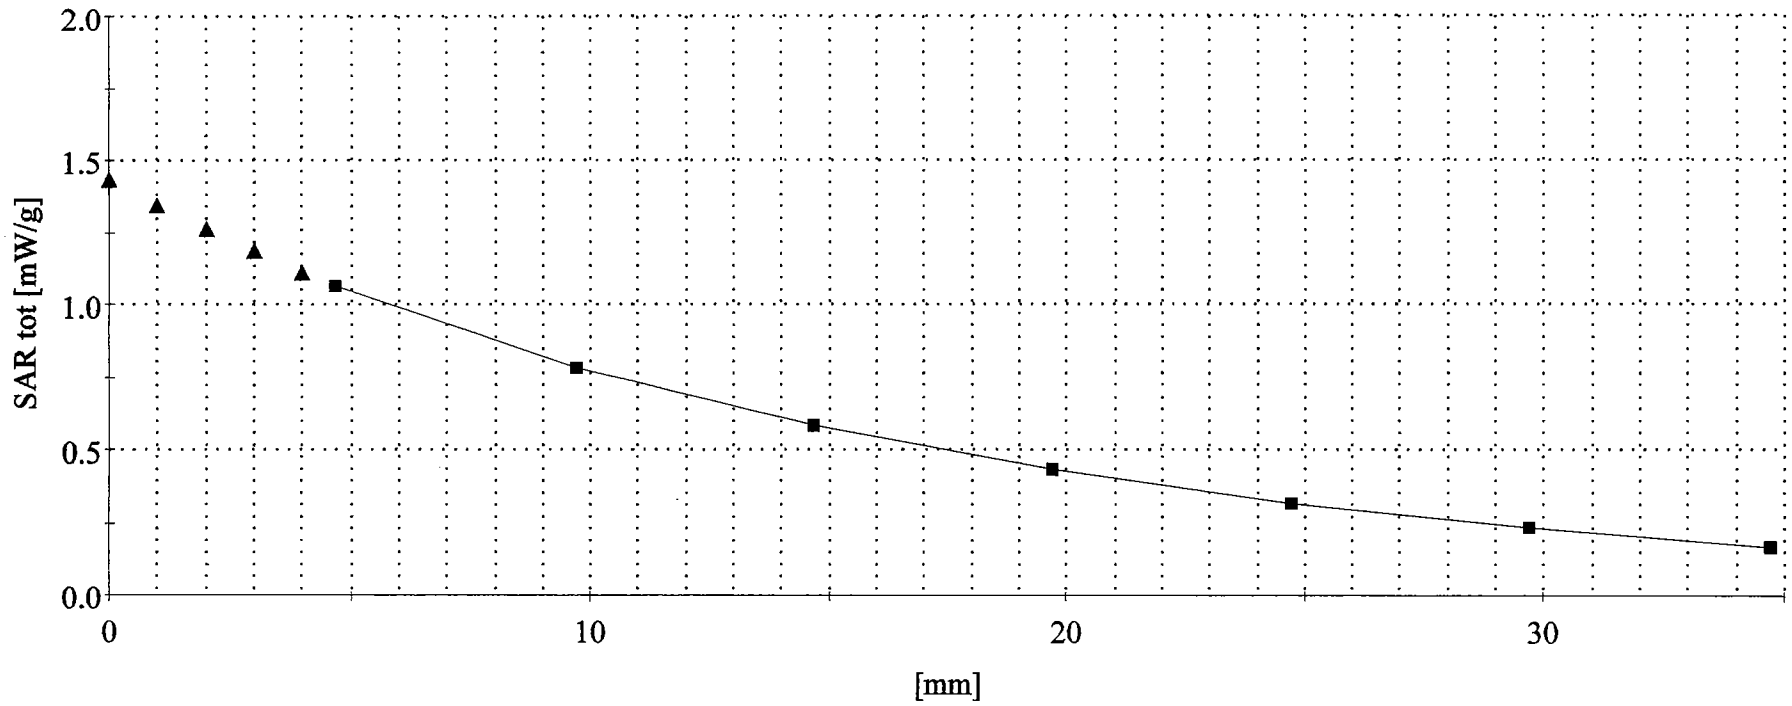
Test Date -- 09/12/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]