

FCC CERTIFICATION TEST REPORT

Applicant:	iFIT Inc.
Address:	1500 South 1000 West, Logan, UT 84321, USA
Manufacturer:	iFIT Inc.
Address:	1500 South 1000 West, Logan, UT 84321, USA
Product Description:	Tablet
Brand Name:	iFIT
Tested Model:	MP24-Cesium-V, MP16-Cesium-V, MP10-Cesium-V
FCC ID:	OMC-CESIUM1
Report No.:	JCF260410101-004
Received Date:	Apr. 10, 2026
Tested Date:	Apr. 10, 2026 ~ Jul. 07, 2026
Issued Date:	Jul. 07, 2026
Test Standards:	FCC Rules and Regulations Part 15 Subpart E
Test Procedure:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, 789033 D02 General U-NII Test Procedures New Rules v02r01, 662911 D01 Multiple Transmitter Output v02r01,
Test Result:	Pass

Prepared By:




Roger Li/Engineer **Date:** Jul. 07, 2026

Reviewed By:



Kennys Zhang/Engineer **Date:** Jul. 07, 2026

Approved By:



Talent Zhang/Engineer **Date:** Jul. 07, 2026

Note: The test results in this report apply exclusively to the tested model / sample. Without written approval of Guangzhou Jingce Testing Technology Co., Ltd. the test report shall not be reproduced except in full.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
--	/	Jul. 07, 2026	Original Report	/

Table of Contents

1. Test Report Declare	5
2. Summary of test results	6
3. Test Laboratory	6
4. Equipment Under Test	7
4.1. Description of EUT	7
4.2. Channel List	7
4.3. Test Channel Configuration	9
4.4. Test Environment Conditions	11
4.5. The Worse Case Power Setting Parameter	11
4.6. Description of Available Antennas	14
5. Description of Test Setup	15
5.1. Accessory	15
5.2. Support Equipment	15
5.3. Test Setup	15
5.4. Setup Diagram for Tests	15
6. Measurement uncertainty	15
7. Measuring Instrument and Software Used	16
8. Duty Cycle	18
8.1. Block Diagram of Test Setup	18
8.2. Limits	18
8.3. Procedure	18
8.4. Results	18
8.5. Original Test Data	22
9. 26dB Bandwidth, 6dB Bandwidth and 99% Bandwidth	85
9.1. Block Diagram of Test Setup	85
9.2. Limits	85
9.3. Test Procedure	85
9.4. Test Result	85
9.5. Original Test Data	95
10. Maximum Output Power	240
10.1. Block Diagram of Test Setup	240
10.2. Limits	240
10.3. Test Procedure	240
10.4. Test Result	240
11. Power Spectral Density	246
11.1. Block Diagram of Test Setup	246
11.2. Limits	246
11.3. Test Procedure	246
11.4. Test Result	247
11.5. Original Test Data	252
12. Frequency Stability Measurement	322
12.1. Block Diagram of Test Setup	322
12.2. Limit of Frequency Stability	322
12.3. Test Procedures	322
12.4. Test Result	322
13. Radiated Emission	329
13.1. Block Diagram of Test Setup	329
13.2. Limit	330
13.3. Test Procedure	331
13.4. Test Result	333
13.5. Original Test Data	333
14. AC Power Line Conducted Emissions	334

14.1. Block Diagram of Test Setup	334
14.2. Limits	334
14.3. Test Procedure	334
14.4. Test Result	335
14.5. Original Test Data	335
15. Dynamic Frequency Selection	336
15.1. Applicability of DFS Requirements	336
15.2. Limit	336
15.3. Parameters of Radar Test Waveform	337
15.4. Calibration of Radar Waveform	338
15.5. Channel Closing Transmission Time, Channel Move Time and Non-Occupancy Period	339
15.6. Test Setup	339
15.7. Test Result	340
16. Antenna Requirements	342
16.1. Applicable Requirements	342
16.2. Result	342
APPENDIX A - Radiated Emission Below 1GHz Test Data	343
APPENDIX B - Radiated Emission Above 1GHz Test Data	367
APPENDIX C - AC Power Line Conducted Emission Test Data	751

1. Test Report Declare

Applicant:	iFIT Inc.
Address:	1500 South 1000 West, Logan, UT 84321, USA
Manufacturer:	iFIT Inc.
Address:	1500 South 1000 West, Logan, UT 84321, USA
Product Name:	Tablet
Brand Name:	iFIT
Model Name:	MP24-Cesium-V, MP16-Cesium-V, MP10-Cesium-V, MP24-CESIUM-M, MP16-CESIUM-M, MP10-CESIUM-M
Difference Description:	1. The three size variants of the product only differ in appearance, dimensions, and display circuitry, while everything else remains the same. All models share the same main chip and RF hardware, including modules, crystal oscillators, antennas, etc., and have identical functionality. 2. The same size “-V” and “-M” only Different of model names for trading purpose.

We Declare:

The equipment described above is tested by Guangzhou Jingce Testing Technology Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangzhou Jingce Testing Technology Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests except as provided information by clients.

2. Summary of test results

The EUT have been tested according to the applicable standards as referenced below.

Clause	Description of Test Item	Standard	Verdict
1	6/26dB Bandwidth	FCC 15.407 (a)&(e)	Pass
2	99% Occupied Bandwidth	/	Pass
3	Maximum Conducted Output Power & EIRP	FCC 15.407 (a)	Pass
4	Power Spectral Density	FCC 15.407 (a)	Pass
5	Frequency Stability Measurement	FCC 15.407 (g)	Pass
6	Radiated Band edge and Spurious Emission	FCC 15.407 (b) FCC 15.209 FCC 15.205	Pass
7	Power Line Conducted Emission	FCC 15.207	Pass
8	Antenna requirement	FCC 15.203	Pass
9	Dynamic Frequency Selection	FCC 15.407 (h)	Pass

Note 1: This report was tested strictly in accordance with the standards, without any additions, deviations or omissions to the standard content.

Note 2: The model: MP24-Cesium-V; MP16-Cesium-V; MP10-Cesium-V share the same main chip and RF hardware, including modules, crystal oscillators, antennas, etc., and have identical functionality. So except for item 6&7 above, which requires all models to be tested, the remaining items only test model MP24-Cesium-V.

Note3: Two screen suppliers are used for the same model. Matching tests have been completed for both screens. Only the test data of the screen with the worst-performing results is presented in the report, which serves as the judgment basis for this model.

3. Test Laboratory

Guangzhou Jingce Testing Technology Co., Ltd.

Add.: No.10, Hefeng No.1 street, Huangpu District, Guangzhou, Guangdong, People's Republic of China

Association for Laboratory Accreditation(A2LA). Certificate Number: 6594.03

FCC Designation Number: CN1381. Test Firm Registration Number: 486550

IC Test Firm Registration Number: 31808

Conformity Assessment Body identifier: CN0173

4. Equipment Under Test

4.1. Description of EUT

EUT Name:	Tablet
Model Number:	MP24-Cesium-V, MP16-Cesium-V, MP10-Cesium-V
EUT Function Description:	Please refer to user manual of this device
Power Supply:	DC 12V 3A
Sample No.:	260410101-01-01, 260410101-01-02, 260410101-01-03
Hardware Version:	N/A
Software Version:	N/A
Radio Specification:	IEEE 802.11a/n/ac/ax
Operation Frequency:	IEEE 802.11a: 5180MHz—5825MHz IEEE 802.11n HT20: 5180MHz—5825MHz IEEE 802.11n HT40: 5190MHz—5795MHz IEEE 802.11ac VHT20: 5180MHz—5825MHz IEEE 802.11ac VHT40: 5190MHz—5795MHz IEEE 802.11ac VHT80: 5210MHz—5775MHz IEEE 802.11ax HE20: 5180MHz—5825MHz IEEE 802.11ax HE40: 5190MHz—5795MHz IEEE 802.11ax HE80: 5210MHz—5775MHz
Modulation:	IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20, HT40: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac (VHT20/40/80): OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax (HE20/40/80): OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)
Antenna Type:	See below table

Model	Ant.	Ant. type	Ant. Gain (dBi)	Directional Gain (dBi)
MP10-Cesium-V	WIFI ANT1	FPC	2.63	6.79
	WIFI ANT 2	FPC	4.80	
MP16-Cesium-V	WIFI ANT1	FPC	5.46	7.58
	WIFI ANT 2	FPC	3.57	
MP24-Cesium-V	WIFI ANT1	FPC	3.39	5.83
	WIFI ANT 2	FPC	2.22	

Note 1: EUT is the ab. of equipment under test.

Note 2: The antenna gain is declared by the customer and the laboratory is not responsible for the accuracy of the antenna gain.

4.2. Channel List

UNII-1 (For Bandwidth = 20 MHz)		UNII-1 (For Bandwidth = 40 MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190
40	5200	46	5230
44	5220	/	/
48	5240	/	/
UNII-1			

(For Bandwidth = 80 MHz)	
Channel	Frequency (MHz)
42	5210

UNII-2A (For Bandwidth = 20 MHz)		UNII-2A (For Bandwidth = 40 MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270
56	5280	62	5310
60	5300	/	/
64	5320	/	/
UNII-2A (For Bandwidth = 80 MHz)			
Channel		Frequency (MHz)	
58		5290	

UNII-2C (For Bandwidth = 20 MHz)		UNII-2C (For Bandwidth = 40 MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510
104	5520	110	5550
108	5540	118	5590
112	5560	126	5630
116	5580	134	5670
120	5600	142	5710
124	5620	/	/
128	5640	/	/
132	5660	/	/
136	5680	/	/
140	5700	/	/
144	5720	/	/
UNII-2C (For Bandwidth = 80 MHz)			
Channel		Frequency (MHz)	
106		5530	
122		5610	
138		5690	

UNII-3 (For Bandwidth = 20 MHz)		UNII-3 (For Bandwidth = 40 MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755

153	5765	159	5795
157	5785	/	/
161	5805	/	/
165	5825	/	/
UNII-3 (For Bandwidth = 80 MHz)			
Channel		Frequency (MHz)	
155		5775	

4.3. Test Channel Configuration

Mode	Data rate (Mbps) (see Note)	Test Channel and Frequency
802.11a TX Mode	6	CH36, 5180
	6	CH44, 5220
	6	CH48, 5240
	6	CH52, 5260
	6	CH60, 5300
	6	CH64, 5320
	6	CH100, 5500
	6	CH116, 5580
	6	CH140, 5700
	6	CH144, 5720
	6	CH149, 5745
	6	CH157, 5785
	6	CH165, 5825
802.11n HT20 TX Mode	MCS 8	CH36, 5180
	MCS 8	CH44, 5220
	MCS 8	CH48, 5240
	MCS 8	CH52, 5260
	MCS 8	CH60, 5300
	MCS 8	CH64, 5320
	MCS 8	CH100, 5500
	MCS 8	CH116, 5580
	MCS 8	CH140, 5700
	MCS 8	CH144, 5720
	MCS 8	CH149, 5745
	MCS 8	CH157, 5785
	MCS 8	CH165, 5825
802.11n HT40 TX Mode	MCS 8	CH38, 5190
	MCS 8	CH46, 5230
	MCS 8	CH54, 5270
	MCS 8	CH62, 5310

	MCS 8	CH102, 5510
	MCS 8	CH110, 5550
	MCS 8	CH134, 5670
	MCS 8	CH142, 5710
	MCS 8	CH151, 5755
	MCS 8	CH159, 5795
802.11ac VHT20 TX Mode	MCS 0	CH36, 5180
	MCS 0	CH44, 5220
	MCS 0	CH48, 5240
	MCS 0	CH52, 5260
	MCS 0	CH60, 5300
	MCS 0	CH64, 5320
	MCS 0	CH100, 5500
	MCS 0	CH116, 5580
	MCS 0	CH140, 5700
	MCS 0	CH144, 5720
	MCS 0	CH149, 5745
	MCS 0	CH157, 5785
	MCS 0	CH165, 5825
802.11ac VHT40 TX Mode	MCS 0	CH38, 5190
	MCS 0	CH46, 5230
	MCS 0	CH54, 5270
	MCS 0	CH62, 5310
	MCS 0	CH102, 5510
	MCS 0	CH110, 5550
	MCS 0	CH134, 5670
	MCS 0	CH142, 5710
	MCS 0	CH151, 5755
	MCS 0	CH159, 5795
802.11ac VHT80 TX Mode	MCS 0	CH42, 5210
	MCS 0	CH58, 5290
	MCS 0	CH106, 5530
	MCS 0	CH122, 5610
	MCS 0	CH138, 5690
	MCS 0	CH155, 5775
802.11ax HE20 TX Mode	MCS 0	CH36, 5180
	MCS 0	CH44, 5220
	MCS 0	CH48, 5240
	MCS 0	CH52, 5260
	MCS 0	CH60, 5300
	MCS 0	CH64, 5320

	MCS 0	CH100, 5500
	MCS 0	CH116, 5580
	MCS 0	CH140, 5700
	MCS 0	CH144, 5720
	MCS 0	CH149, 5745
	MCS 0	CH157, 5785
	MCS 0	CH165, 5825
802.11ax HE40 TX Mode	MCS 0	CH38, 5190
	MCS 0	CH46, 5230
	MCS 0	CH54, 5270
	MCS 0	CH62, 5310
	MCS 0	CH102, 5510
	MCS 0	CH110, 5550
	MCS 0	CH134, 5670
	MCS 0	CH142, 5710
	MCS 0	CH151, 5755
	MCS 0	CH159, 5795
802.11ax HE80 TX Mode	MCS 0	CH42, 5210
	MCS 0	CH58, 5290
	MCS 0	CH106, 5530
	MCS 0	CH122, 5610
	MCS 0	CH138, 5690
	MCS 0	CH155, 5775
Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.		

4.4. Test Environment Conditions

During the measurement the environmental conditions were within the listed ranges:

	Normal Conditions	Extreme Conditions
Temperature range	21-25 °C	0 °C to +40 °C
Humidity range	40-75%	N/A
Pressure range	86-106 kPa	N/A
Power supply	NV: DC 12V	N/A

Note: The Extreme temperature range and extreme voltages are declared by the manufacturer.

4.5. The Worse Case Power Setting Parameter

The Worse Case Power Setting Parameter			
Test Software	AP_META_exe_V4.2520.00		
Mode	Channel	Soft set value	
		ANT0	ANT1
802.11a	36	13	11
	44	13	11
	48	13	11

	52	13	11
	60	13	11
	64	13	11
	100	13	11
	116	13	11
	140	13	11
	144	13	11
	149	13	11
	157	13	11
	165	13	11
802.11n HT20	36	8	8
	44	9	9
	48	8	8
	52	8	8
	60	8	8
	64	8	8
	100	8	8
	116	7	7
	140	7	7
	144	7	7
	149	7	7
	157	7	7
	165	7	7
802.11n HT40	38	7	7
	46	7	7
	54	7	7
	62	7	7
	102	7	7
	110	7	7
	134	7	7
	142	7	7
	151	7	7
	159	7	7
802.11ac VHT20	36	7	7
	44	7	7
	48	7	7
	52	7	7
	60	7	7
	64	7	7
	100	7	7
	116	7	7

	140	7	7
	144	7	7
	149	7	7
	157	7	7
	165	7	7
802.11ac VHT40	38	7	7
	46	7	7
	54	7	7
	62	7	7
	102	7	7
	110	7	7
	134	7	7
	144	7	7
	151	7	7
	159	7	7
802.11ac VHT80	42	7	7
	58	7	7
	106	7	7
	122	7	7
	155	7	7
802.11ax HE20	36	7	7
	44	7	7
	48	7	7
	52	7	7
	60	7	7
	64	7	7
	100	7	7
	116	7	7
	140	7	7
	144	7	7
	149	7	7
	157	7	7
	165	7	7
802.11ax HE40	38	7	7
	46	7	7
	54	7	7
	62	7	7
	102	7	7
	110	7	7
	134	7	7
	142	7	7

	151	7	7
	159	7	7
802.11ax HE80	42	7	7
	58	7	7
	106	7	7
	122	7	7
	138	7	7
	155	7	7

4.6. Description of Available Antennas

Test Mode	Transmit and Receive Mode	Description
802.11a	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11n HT20	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11n HT40	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11ac VHT20	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11ac VHT40	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11ac VHT80	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11ax HE20	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11ax HE40	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11ax HE80	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
Note: The 802.11n, 11ac and 11ax support MIMO.		

5. Description of Test Setup

5.1. Accessory

Description of Accessories	Manufacturer	Model Number	Description	Remark
/	/	/	/	/

5.2. Support Equipment

Equipment	Brand Name	Model Name	P/N
PC	Lenovo	T480	/
Adapter	HONOTO	ADS-50HF-12-1 12040E	/

5.3. Test Setup

The EUT can work in Fixed Frequency mode.

5.4. Setup Diagram for Tests

RF Connect Test:



Radiated Emission Test:



AC Power Line Conducted Emissions Test:



6. Measurement uncertainty

Test Item	Uncertainty
AC Power Conduction emission	1.37 dB
All Radiated emissions	5.4dB
Conducted emissions	3.09 dB
Occupied Channel Bandwidth	1.1%
Conducted Output power	0.82dB
Power Spectral Density	0.82dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of $k = 2$.


7. Measuring Instrument and Software Used

TS Test System						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☑	Spectrum Analyzer	Keysight	N9030B	MY56320512	Jul. 31, 2025	Jul. 30, 2026
☑	Vector Signal Generator	Keysight	N5182B	MY57300334	Jul. 31, 2025	Jul. 30, 2026
☑	Signal Generator	Keysight	N5171B	MY57280639	Jul. 31, 2025	Jul. 30, 2026
☑	DC POWER	Keysight	E342A	MY59020356	Jul. 31, 2025	Jul. 30, 2026
☑	Incubator thermometer	GWS	EL-02JA	21107288	Jul. 31, 2025	Jul. 30, 2026
☑	Control unit(Power sensor)	Tonscend	JS0806-2	/	Jul. 31, 2025	Jul. 30, 2026
☑	Spectrum Analyzer	Keysight	N9020B	MY60112206	Jul. 31, 2025	Jul. 30, 2026
☑	Control unit(Power sensor)	Tonscend	JS0806-2	21H8060465	Aug. 01, 2025	Jul. 31, 2026
☑	Spectrum Analyzer	Keysight	N9020B	MY60112811	Jul. 31, 2025	Jul. 30, 2026
☑	Signal Generator	Keysight	N5173B	MY62220145	Jul. 31, 2025	Jul. 30, 2026
☑	Vector Signal Generator	Keysight	N5182B	MY61252859	Jul. 31, 2025	Jul. 30, 2026
☑	DC POWER	Keysight	E3642A	MY40005294	Jul. 31, 2025	Jul. 30, 2026
☑	Control unit(Power sensor)	Tonscend	JS0806-2	24F80620865	Aug. 01, 2025	Jul. 31, 2026
Software						
Used	Description	Manufacturer	Name		Version	
☑	Test software	Tonscend	JS1120-3		V3.3.10	
RSE Test System						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☑	EMI Receiver	R&S	ESR26	101424	Nov. 25, 2025	Nov. 24, 2026
☑	Hybrid Antenna	Schwarzbeck	VULB9163	01361	May. 28, 2025	May. 27, 2026
☑	Hybrid Antenna	Schwarzbeck	VULB9163	01361	May. 26, 2026	May. 25, 2027
☑	Horn Antenna 1	Schwarzbeck	BBHA 9120 D	02910	Aug. 31, 2025	Aug. 30, 2026
☑	Horn Antenna 2	ETS	BBHA 9170	1090	Aug. 31, 2025	Aug. 30, 2026
☑	loop-antenna	Schwarzbeck	FMZB 1513-60	00030	Jan. 11, 2026	Jan. 10, 2027
☑	Test path	/	Path3: WIFI-5.1G 1-6.5GHz	/	Jul. 31, 2025	Jul. 30, 2026
☑	Test path	/	Path4: WIFI-5.4G 1-6.5GHz	/	Jul. 31, 2025	Jul. 30, 2026
☑	Test path	/	Path5: WIFI-5.8G 1-6.5GHz	/	Jul. 31, 2025	Jul. 30, 2026
☑	Test path	/	Path7: ALL PASS 1-18GHz	/	Jul. 31, 2025	Jul. 30, 2026

☒	Test path	/	Path10: 6.5GHz High PASS 6.5-18GHz	/	Jul. 31, 2025	Jul. 30, 2026
☒	Test path	/	Path16: 30MHZ-1GHZ ALL PASS NO AMP	/	Jul. 31, 2025	Jul. 30, 2026
☒	Signal Pre-Amplifier	ETS	3116C-PA	00217677	Jul. 31, 2025	Jul. 30, 2026
☒	3m Fully-anechoic Chamber	YIHENG	9m*6m*6m	001	Sep. 05, 2023	Sep. 04, 2026
Software						
Used	Description	Manufacturer	Name		Version	
☒	Test software	Tonscend	TS+		V5.0.0.0	
Conducted Emission Test For AC Power Port						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	LISN	R&S	ENV216	102509	Aug. 01, 2025	Jul. 31, 2026
☒	EMI Receiver	R&S	ESR	102154	Aug. 01, 2025	Jul. 31, 2026
Software						
Used	Description	Manufacturer	Name		Version	
☒	Test software	EZ	EZ-EMC		EMEC-3A1	
Other Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	Temperature & Humidity	Temperature	HTC-1	/	Sep. 20, 2025	Sep. 21, 2026

8. Duty Cycle

8.1. Block Diagram of Test Setup

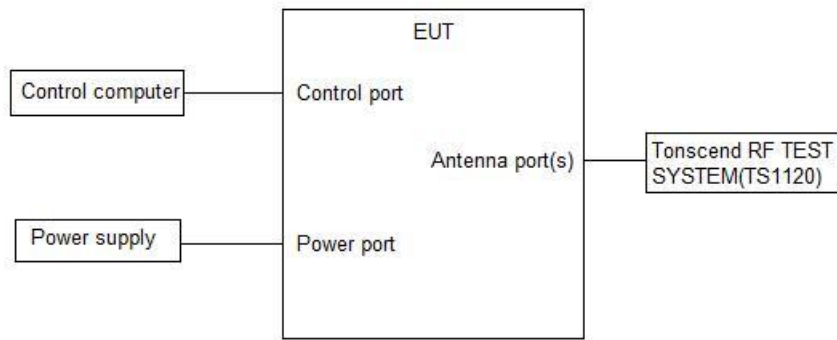

Note: The EUT is connected to the Control unit, and then the signal is transmitted through internal circuits to the Spectrum Analyzer.

8.2. Limits

None; for reporting purposes only.

8.3. Procedure

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.B.

The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set RBW $\geq$ EBW if possible; otherwise,

set RBW to the largest available value. Set VBW $\geq$ RBW.

Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in II.B.1.a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

8.4. Results

Test Mode	Ant.	Freq. (MHz)	Transmission Duration (ms)	Transmission Period (ms)	Duty Cycle (%)
11A	Ant1	5180	27.00	27.00	100.00
	Ant2	5180	27.00	27.00	100.00
	Ant1	5200	27.00	27.00	100.00
	Ant2	5200	27.00	27.00	100.00
	Ant1	5240	27.00	27.00	100.00
	Ant2	5240	27.00	27.00	100.00
	Ant1	5260	27.00	27.00	100.00
	Ant2	5260	27.00	27.00	100.00
	Ant1	5280	27.00	27.00	100.00
	Ant2	5280	27.00	27.00	100.00
	Ant1	5320	27.00	27.00	100.00
	Ant2	5320	27.00	27.00	100.00
	Ant1	5500	27.00	27.00	100.00
	Ant2	5500	27.00	27.00	100.00
	Ant1	5580	27.00	27.00	100.00
	Ant2	5580	27.00	27.00	100.00
	Ant1	5700	27.00	27.00	100.00
	Ant2	5700	27.00	27.00	100.00
	Ant1	5720	27.00	27.00	100.00
	Ant2	5720	27.00	27.00	100.00

	Ant1	5745	27.00	27.00	100.00
	Ant2	5745	27.00	27.00	100.00
	Ant1	5785	27.00	27.00	100.00
	Ant2	5785	27.00	27.00	100.00
	Ant1	5825	27.00	27.00	100.00
	Ant2	5825	27.00	27.00	100.00
11N20MIMO	Ant1	5180	27.00	27.00	100.00
	Ant2	5180	27.00	27.00	100.00
	Ant1	5200	27.00	27.00	100.00
	Ant2	5200	27.00	27.00	100.00
	Ant1	5240	27.00	27.00	100.00
	Ant2	5240	27.00	27.00	100.00
	Ant1	5260	27.00	27.00	100.00
	Ant2	5260	27.00	27.00	100.00
	Ant1	5280	27.00	27.00	100.00
	Ant2	5280	27.00	27.00	100.00
	Ant1	5320	27.00	27.00	100.00
	Ant2	5320	27.00	27.00	100.00
	Ant1	5500	27.00	27.00	100.00
	Ant2	5500	27.00	27.00	100.00
	Ant1	5580	27.00	27.00	100.00
	Ant2	5580	27.00	27.00	100.00
	Ant1	5700	27.00	27.00	100.00
	Ant2	5700	27.00	27.00	100.00
	Ant1	5720	27.00	27.00	100.00
	Ant2	5720	27.00	27.00	100.00
	Ant1	5745	27.00	27.00	100.00
	Ant2	5745	27.00	27.00	100.00
	Ant1	5785	27.00	27.00	100.00
	Ant2	5785	27.00	27.00	100.00
	Ant1	5825	27.00	27.00	100.00
	Ant2	5825	27.00	27.00	100.00
11N40MIMO	Ant1	5190	27.00	27.00	100.00
	Ant2	5190	27.00	27.00	100.00
	Ant1	5230	27.00	27.00	100.00
	Ant2	5230	27.00	27.00	100.00
	Ant1	5270	27.00	27.00	100.00
	Ant2	5270	27.00	27.00	100.00
	Ant1	5310	27.00	27.00	100.00
	Ant2	5310	27.00	27.00	100.00
	Ant1	5510	27.00	27.00	100.00
	Ant2	5510	27.00	27.00	100.00
	Ant1	5550	27.00	27.00	100.00
	Ant2	5550	27.00	27.00	100.00
	Ant1	5670	27.00	27.00	100.00
	Ant2	5670	27.00	27.00	100.00
	Ant1	5710	27.00	27.00	100.00
	Ant2	5710	27.00	27.00	100.00
	Ant1	5755	27.00	27.00	100.00
	Ant2	5755	27.00	27.00	100.00
	Ant1	5795	27.00	27.00	100.00
	Ant2	5795	27.00	27.00	100.00
11AC20MIMO	Ant1	5180	27.00	27.00	100.00
	Ant2	5180	27.00	27.00	100.00
	Ant1	5200	27.00	27.00	100.00
	Ant2	5200	27.00	27.00	100.00
	Ant1	5240	27.00	27.00	100.00
	Ant2	5240	27.00	27.00	100.00
	Ant1	5260	27.00	27.00	100.00
	Ant2	5260	27.00	27.00	100.00

	Ant1	5280	27.00	27.00	100.00
	Ant2	5280	27.00	27.00	100.00
	Ant1	5320	27.00	27.00	100.00
	Ant2	5320	27.00	27.00	100.00
	Ant1	5500	27.00	27.00	100.00
	Ant2	5500	27.00	27.00	100.00
	Ant1	5580	27.00	27.00	100.00
	Ant2	5580	27.00	27.00	100.00
	Ant1	5700	27.00	27.00	100.00
	Ant2	5700	27.00	27.00	100.00
	Ant1	5720	27.00	27.00	100.00
	Ant2	5720	27.00	27.00	100.00
	Ant1	5745	27.00	27.00	100.00
	Ant2	5745	27.00	27.00	100.00
	Ant1	5785	27.00	27.00	100.00
	Ant2	5785	27.00	27.00	100.00
	Ant1	5825	27.00	27.00	100.00
	Ant2	5825	27.00	27.00	100.00
11AC40MIMO	Ant1	5190	27.00	27.00	100.00
	Ant2	5190	27.00	27.00	100.00
	Ant1	5230	27.00	27.00	100.00
	Ant2	5230	27.00	27.00	100.00
	Ant1	5270	27.00	27.00	100.00
	Ant2	5270	27.00	27.00	100.00
	Ant1	5310	27.00	27.00	100.00
	Ant2	5310	27.00	27.00	100.00
	Ant1	5510	27.00	27.00	100.00
	Ant2	5510	27.00	27.00	100.00
	Ant1	5550	27.00	27.00	100.00
	Ant2	5550	27.00	27.00	100.00
	Ant1	5670	27.00	27.00	100.00
	Ant2	5670	27.00	27.00	100.00
	Ant1	5710	27.00	27.00	100.00
	Ant2	5710	27.00	27.00	100.00
	Ant1	5755	27.00	27.00	100.00
	Ant2	5755	27.00	27.00	100.00
	Ant1	5795	27.00	27.00	100.00
	Ant2	5795	27.00	27.00	100.00
11AC80MIMO	Ant1	5210	27.00	27.00	100.00
	Ant2	5210	27.00	27.00	100.00
	Ant1	5290	27.00	27.00	100.00
	Ant2	5290	27.00	27.00	100.00
	Ant1	5530	27.00	27.00	100.00
	Ant2	5530	27.00	27.00	100.00
	Ant1	5610	27.00	27.00	100.00
	Ant2	5610	27.00	27.00	100.00
	Ant1	5690	27.00	27.00	100.00
	Ant2	5690	27.00	27.00	100.00
	Ant1	5775	27.00	27.00	100.00
	Ant2	5775	27.00	27.00	100.00
11AX20MIMO	Ant1	5180	27.00	27.00	100.00
	Ant2	5180	27.00	27.00	100.00
	Ant1	5200	27.00	27.00	100.00
	Ant2	5200	27.00	27.00	100.00
	Ant1	5240	27.00	27.00	100.00
	Ant2	5240	27.00	27.00	100.00
	Ant1	5260	27.00	27.00	100.00
	Ant2	5260	27.00	27.00	100.00
	Ant1	5280	27.00	27.00	100.00
	Ant2	5280	27.00	27.00	100.00

	Ant1	5320	27.00	27.00	100.00
	Ant2	5320	27.00	27.00	100.00
	Ant1	5500	27.00	27.00	100.00
	Ant2	5500	27.00	27.00	100.00
	Ant1	5580	27.00	27.00	100.00
	Ant2	5580	27.00	27.00	100.00
	Ant1	5700	27.00	27.00	100.00
	Ant2	5700	27.00	27.00	100.00
	Ant1	5720	27.00	27.00	100.00
	Ant2	5720	27.00	27.00	100.00
	Ant1	5745	27.00	27.00	100.00
	Ant2	5745	27.00	27.00	100.00
	Ant1	5785	27.00	27.00	100.00
	Ant2	5785	27.00	27.00	100.00
	Ant1	5825	27.00	27.00	100.00
	Ant2	5825	27.00	27.00	100.00
11AX40MIMO	Ant1	5190	27.00	27.00	100.00
	Ant2	5190	27.00	27.00	100.00
	Ant1	5230	27.00	27.00	100.00
	Ant2	5230	27.00	27.00	100.00
	Ant1	5270	27.00	27.00	100.00
	Ant2	5270	27.00	27.00	100.00
	Ant1	5310	27.00	27.00	100.00
	Ant2	5310	27.00	27.00	100.00
	Ant1	5510	27.00	27.00	100.00
	Ant2	5510	27.00	27.00	100.00
	Ant1	5550	27.00	27.00	100.00
	Ant2	5550	27.00	27.00	100.00
	Ant1	5670	27.00	27.00	100.00
	Ant2	5670	27.00	27.00	100.00
	Ant1	5710	27.00	27.00	100.00
	Ant2	5710	27.00	27.00	100.00
11AX80MIMO	Ant1	5755	27.00	27.00	100.00
	Ant2	5755	27.00	27.00	100.00
	Ant1	5795	27.00	27.00	100.00
	Ant2	5795	27.00	27.00	100.00
	Ant1	5210	27.00	27.00	100.00
	Ant2	5210	27.00	27.00	100.00
	Ant1	5290	27.00	27.00	100.00
	Ant2	5290	27.00	27.00	100.00
	Ant1	5530	27.00	27.00	100.00
	Ant2	5530	27.00	27.00	100.00
	Ant1	5610	27.00	27.00	100.00
	Ant2	5610	27.00	27.00	100.00
	Ant1	5690	27.00	27.00	100.00
	Ant2	5690	27.00	27.00	100.00
	Ant1	5775	27.00	27.00	100.00
	Ant2	5775	27.00	27.00	100.00

Note: Offset=cable loss + Test system insertion loss

8.5. Original Test Data















































