


Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11AX20_MCS0_5700	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 21:21:13

Test Graph

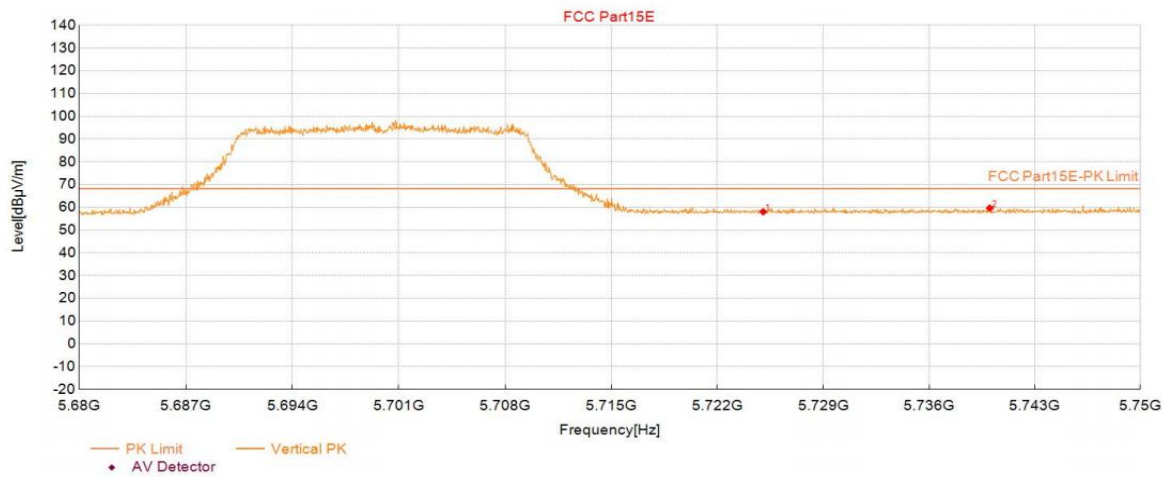

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.03	38.46	58.05	19.59	68.20	10.15	150	357	Vertical
2	5740.02	39.98	59.65	19.67	68.20	8.55	150	241	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11AX20_MCS0_5745	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 21:23:22

Test Graph

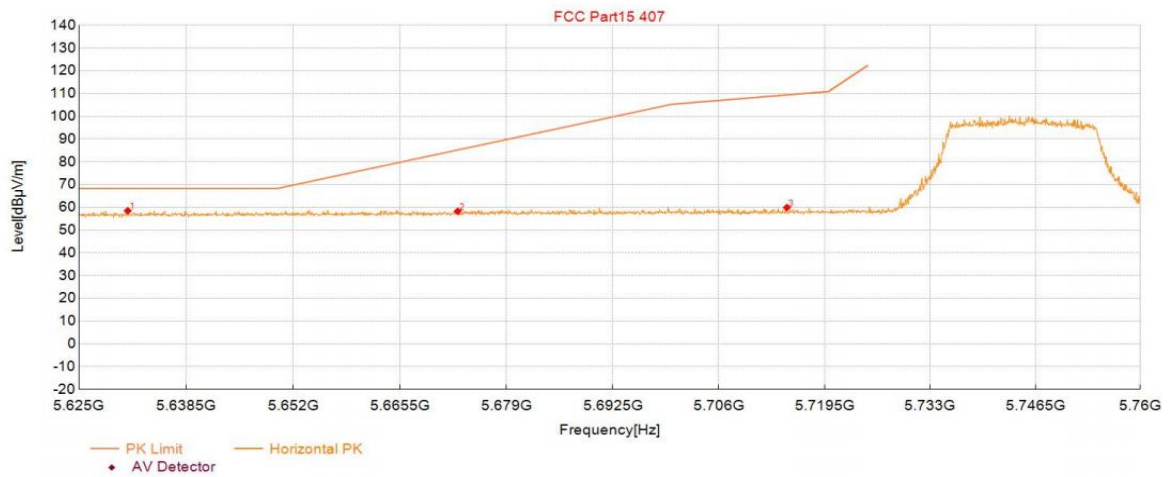

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5631.15	39.55	58.51	18.96	68.30	9.79	150	74	Horizontal
2	5672.81	38.99	58.25	19.26	85.22	26.97	150	60	Horizontal
3	5714.68	40.36	59.90	19.54	109.41	49.51	150	116	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11AX20_MCS0_5745	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 21:24:01

Test Graph

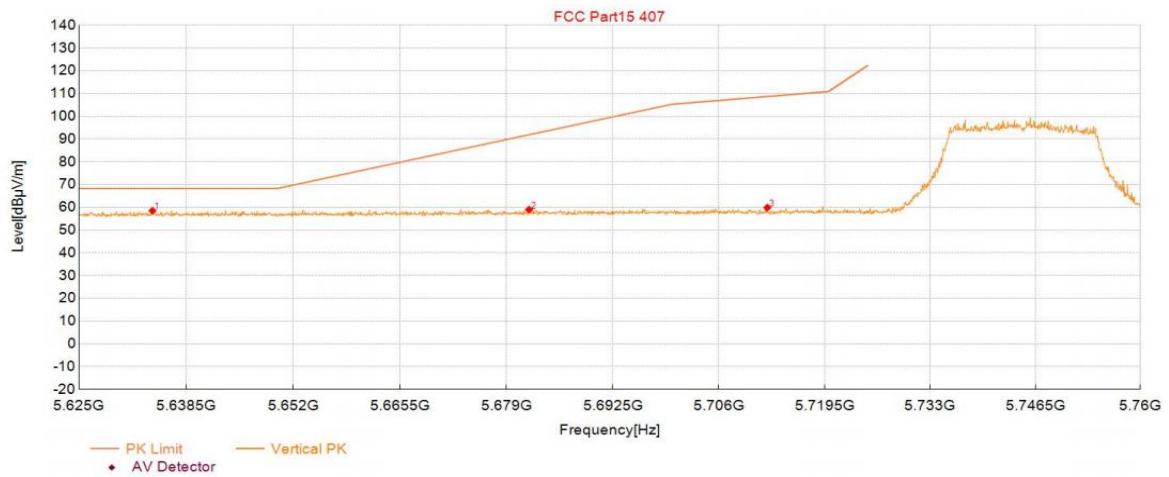

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5634.25	39.54	58.53	18.99	68.30	9.77	150	0	Vertical
2	5681.86	39.73	59.06	19.33	91.92	32.86	150	5	Vertical
3	5712.19	40.35	59.88	19.53	108.71	48.83	150	30	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11AX20_MCS0_5825	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 21:25:39

Test Graph

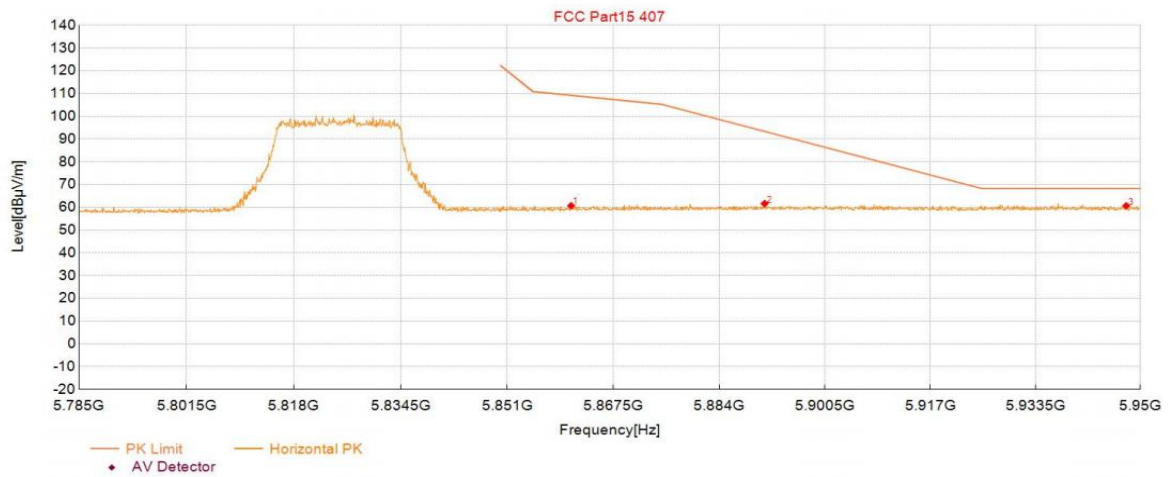

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5860.94	40.15	60.73	20.58	109.24	48.51	150	244	Horizontal
2	5891.07	40.76	61.64	20.88	93.38	31.74	150	356	Horizontal
3	5947.77	39.65	60.66	21.01	68.30	7.64	150	23	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11AX20_MCS0_5825	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 21:26:15

Test Graph

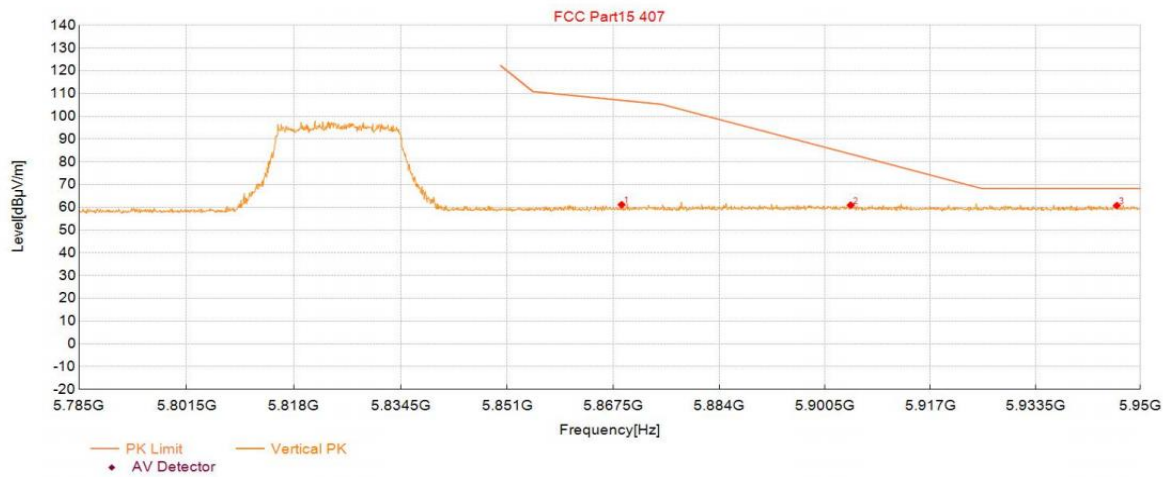

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5868.78	40.50	61.16	20.66	107.04	45.88	150	0	Vertical
2	5904.52	40.01	60.98	20.97	83.42	22.44	150	334	Vertical
3	5946.29	39.78	60.78	21.00	68.30	7.52	150	3	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11AX40_MCS0_5190	Voltage:	12V
Environment:	24.2°C 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 21:33:55

Test Graph

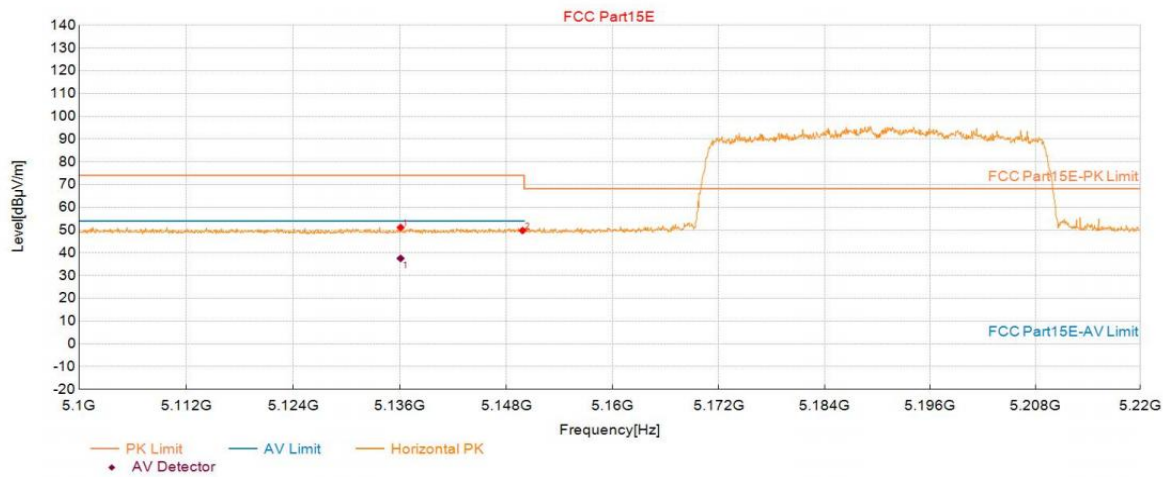

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5136.08	33.60	51.15	17.55	74.00	22.85	150	44	Horizontal
2	5149.82	32.22	49.79	17.57	74.00	24.21	150	143	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5136.08	20.01	17.55	37.56	54.00	16.44	150	44	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11AX40_MCS0_5190	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 21:34:34

Test Graph

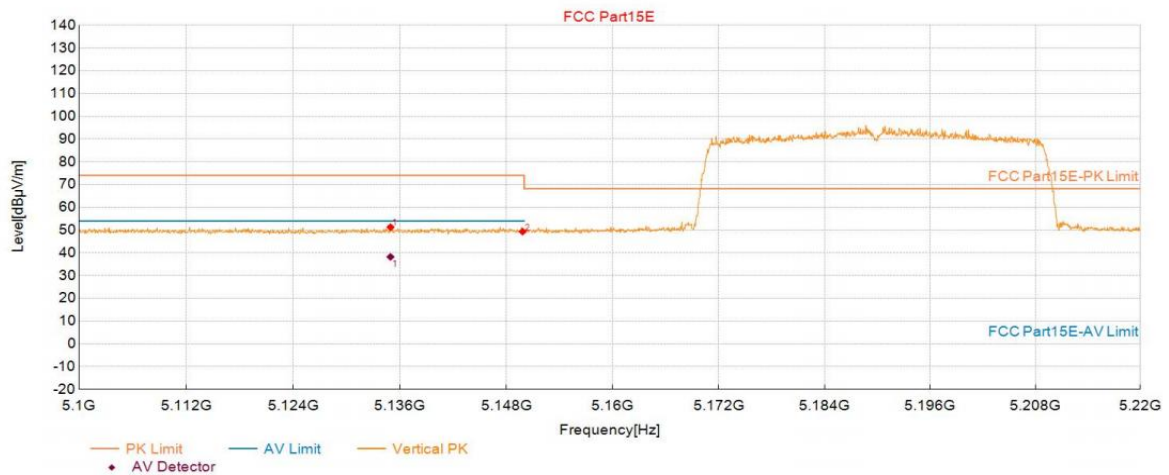

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5134.94	33.76	51.30	17.54	74.00	22.70	150	178	Vertical
2	5149.82	31.77	49.34	17.57	74.00	24.66	150	85	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5134.94	20.69	17.54	38.23	54.00	15.77	150	178	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11AX40_MCS0_5310	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 21:38:48

Test Graph

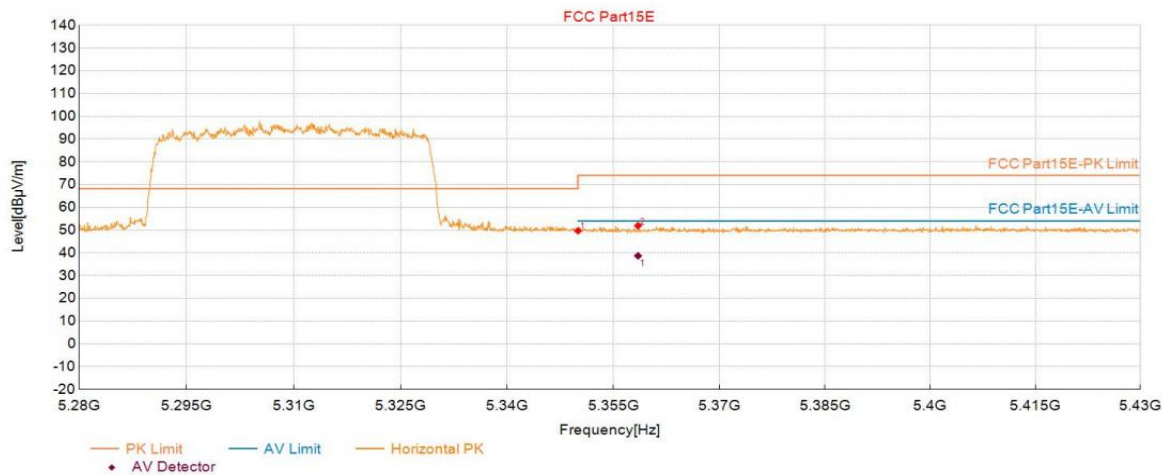

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.01	31.62	49.70	18.08	74.00	24.30	150	236	Horizontal
2	5358.49	33.82	51.94	18.12	74.00	22.06	150	292	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5358.49	20.56	18.12	38.68	54.00	15.32	150	292	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11AX40_MCS0_5310	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 21:39:28

Test Graph

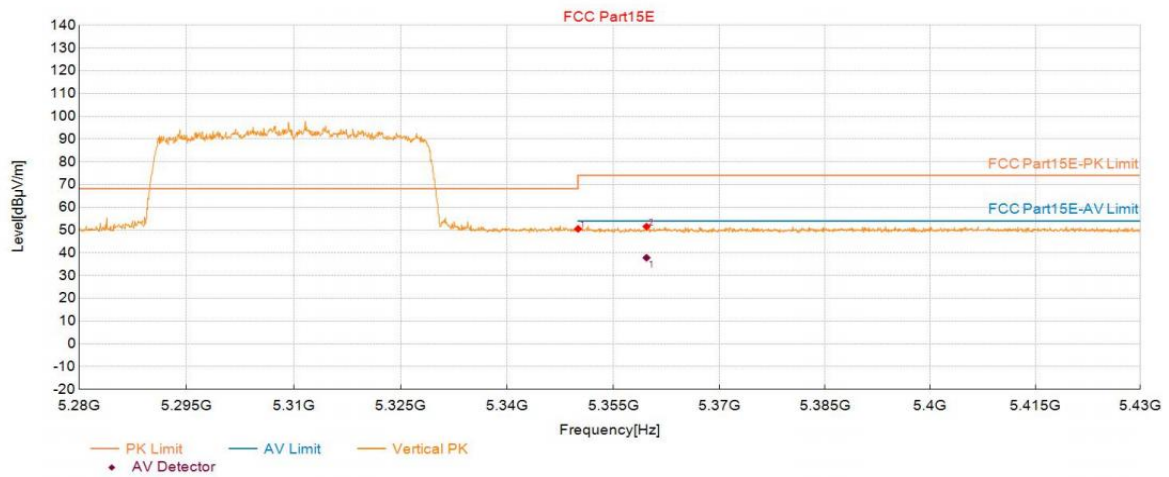

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.01	32.47	50.55	18.08	74.00	23.45	150	1	Vertical
2	5359.69	33.43	51.56	18.13	74.00	22.44	150	146	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5359.69	19.71	18.13	37.84	54.00	16.16	150	146	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11AX40_MCS0_5510	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 21:41:32

Test Graph

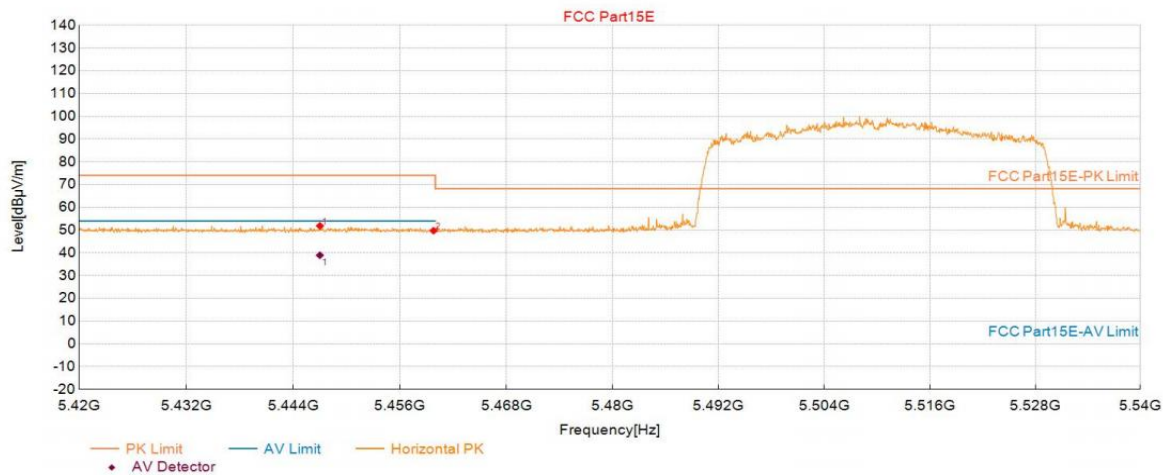

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5447.01	33.48	51.86	18.38	74.00	22.14	150	326	Horizontal
2	5459.80	31.35	49.74	18.39	74.00	24.26	150	286	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5447.01	20.56	18.38	38.94	54.00	15.06	150	326	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11AX40_MCS0_5510	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 21:42:12

Test Graph

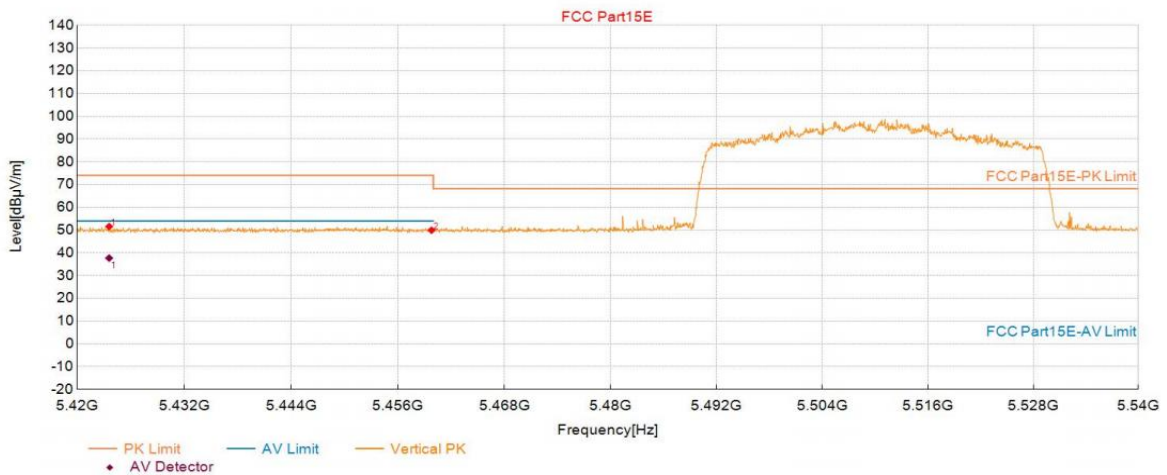

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5423.60	33.22	51.57	18.35	74.00	22.43	150	20	Vertical
2	5459.80	31.53	49.92	18.39	74.00	24.08	150	44	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5423.60	19.35	18.35	37.70	54.00	16.30	150	20	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11AX40_MCS0_5670	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 21:44:40

Test Graph

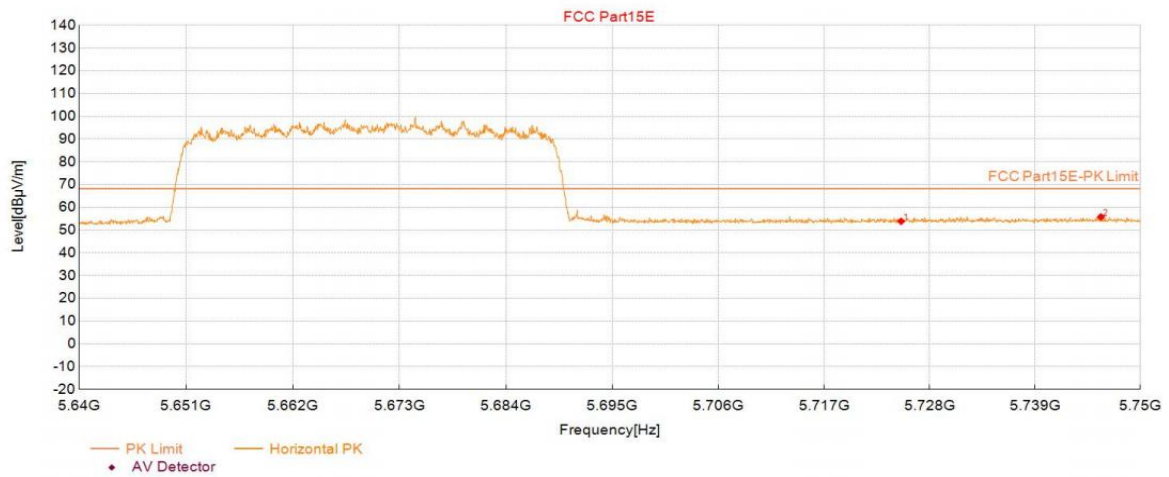

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.02	34.27	53.86	19.59	68.20	14.34	150	283	Horizontal
2	5745.87	36.11	55.81	19.70	68.20	12.39	150	46	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11AX40_MCS0_5670	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 21:45:20

Test Graph

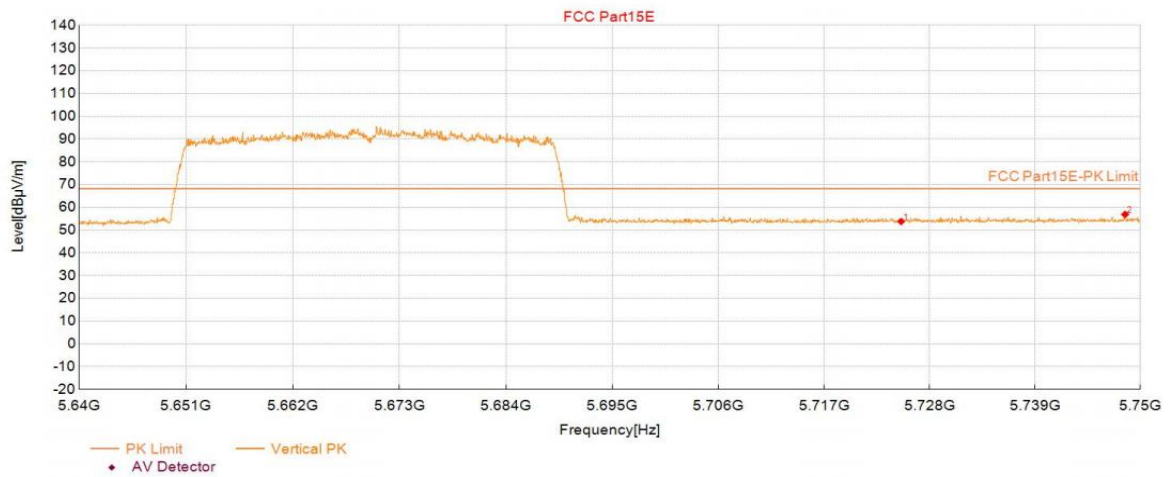

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.02	34.21	53.80	19.59	68.20	14.40	150	261	Vertical
2	5748.40	37.16	56.88	19.72	68.20	11.32	150	231	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11AX40_MCS0_5755	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 21:47:29

Test Graph

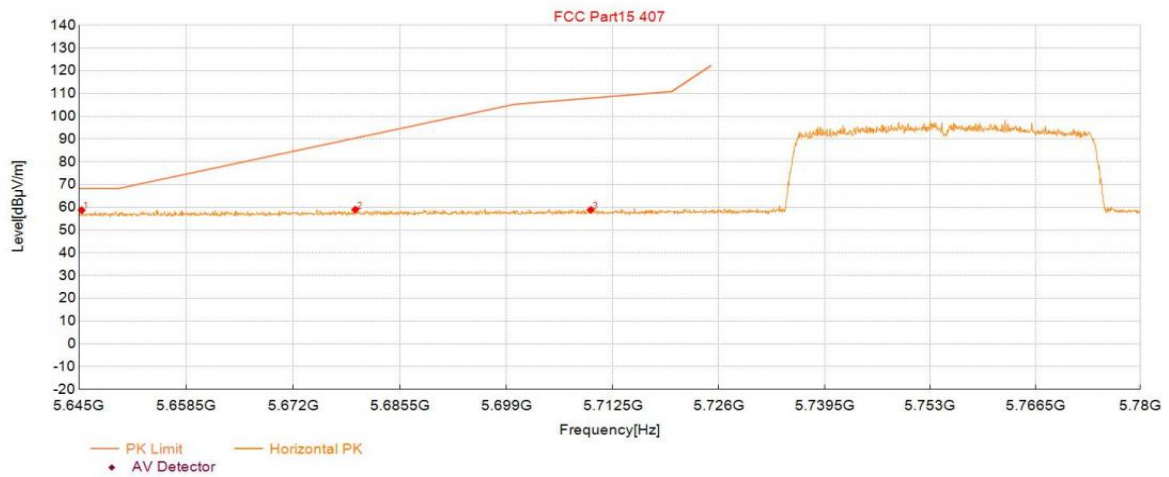

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5645.34	39.72	58.79	19.07	68.30	9.51	150	319	Horizontal
2	5679.85	39.71	59.03	19.32	90.43	31.40	150	2	Horizontal
3	5709.70	39.35	58.86	19.51	108.02	49.16	150	359	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11AX40_MCS0_5755	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 21:48:05

Test Graph

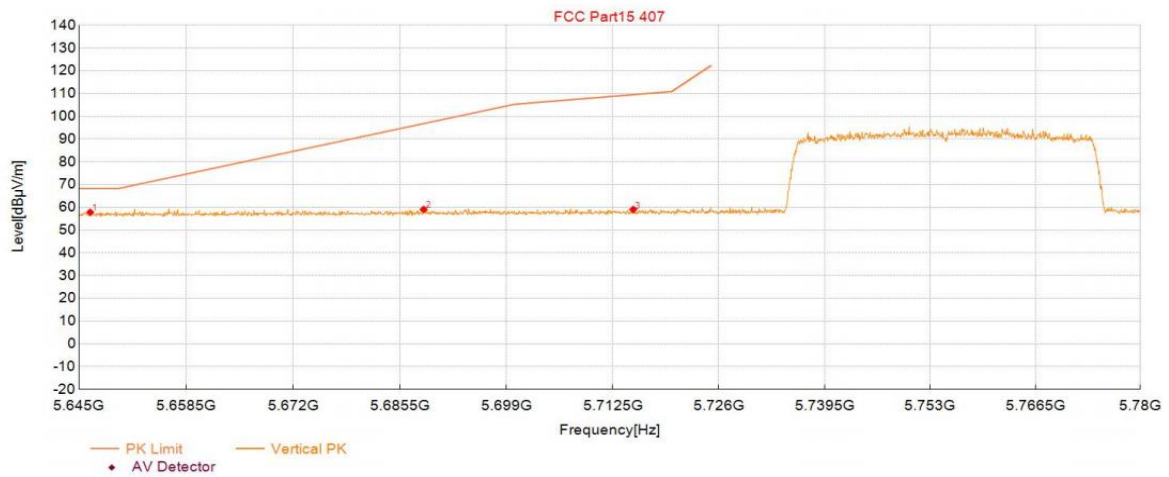

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5646.42	38.76	57.84	19.08	68.30	10.46	150	75	Vertical
2	5688.49	39.72	59.10	19.38	96.81	37.71	150	167	Vertical
3	5715.10	39.55	59.09	19.54	109.53	50.44	150	2	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11AX40_MCS0_5795	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 21:50:06

Test Graph

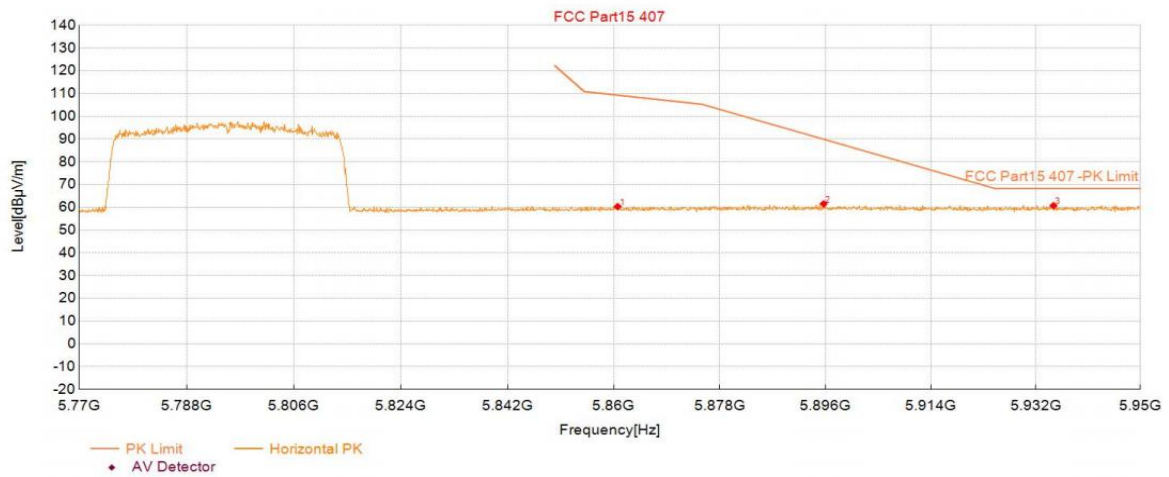

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5860.68	39.75	60.33	20.58	109.31	48.98	150	274	Horizontal
2	5895.70	40.59	61.52	20.93	89.94	28.42	150	2	Horizontal
3	5935.05	39.73	60.72	20.99	68.30	7.58	150	60	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11AX40_MCS0_5795	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 21:50:43

Test Graph

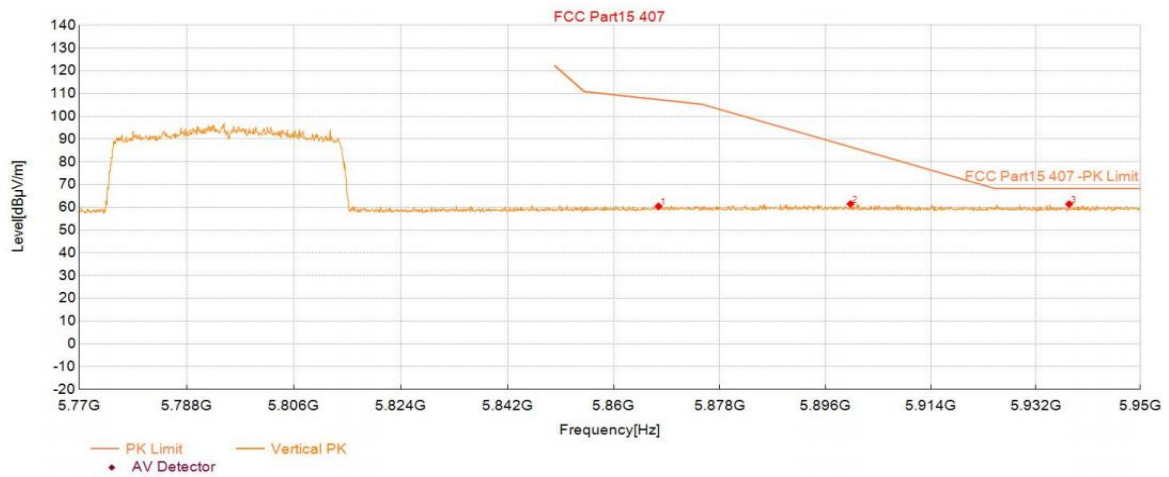

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5867.61	39.82	60.47	20.65	107.37	46.90	150	226	Vertical
2	5900.30	40.53	61.50	20.97	86.54	25.04	150	9	Vertical
3	5937.75	40.41	61.41	21.00	68.30	6.89	150	0	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11AX80_MCS0_5210	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 09:34:59

Test Graph

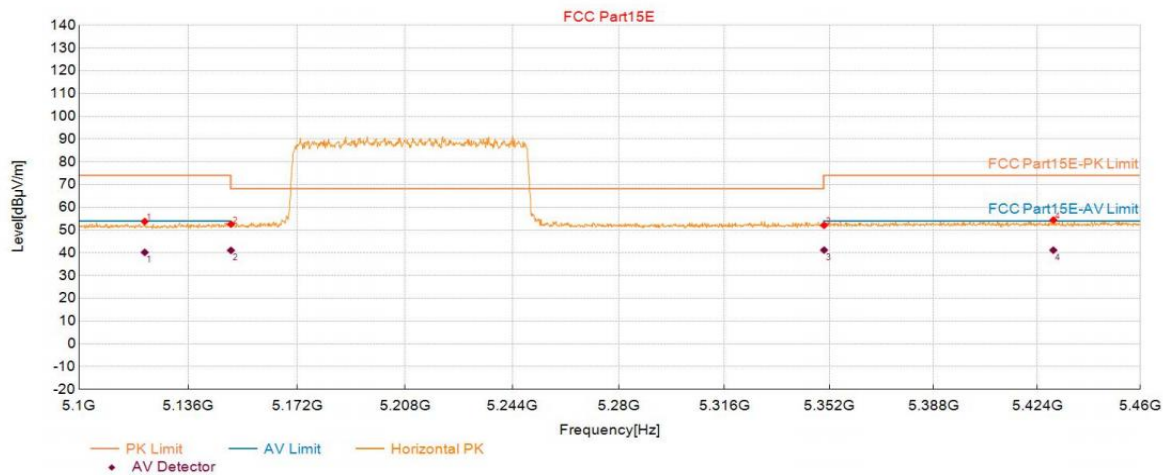

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5121.61	36.26	53.78	17.52	74.00	20.22	150	80	Horizontal
2	5150.07	35.02	52.59	17.57	68.20	15.61	150	128	Horizontal
3	5350.15	34.03	52.11	18.08	74.00	21.89	150	100	Horizontal
4	5429.56	36.08	54.44	18.36	74.00	19.56	150	52	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5121.61	22.69	17.52	40.21	54.00	13.79	150	80	Horizontal
2	5150.07	23.53	17.57	41.10	-	12.81	150	128	Horizontal
3	5350.15	23.15	18.08	41.23	54.00	12.77	150	100	Horizontal
4	5429.56	22.81	18.36	41.17	54.00	12.83	150	52	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11AX80_MCS0_5210	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 09:35:40

Test Graph

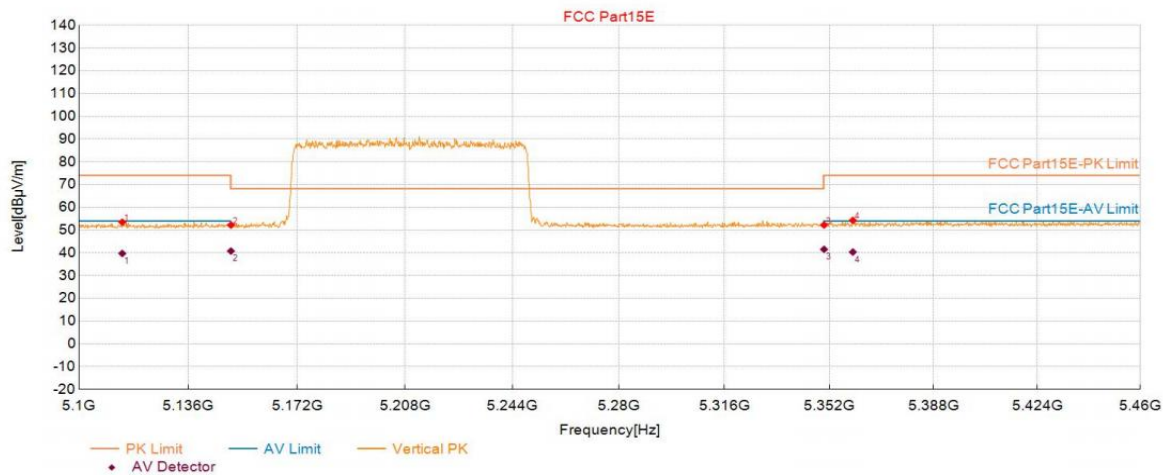

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5114.23	36.00	53.50	17.50	74.00	20.50	150	129	Vertical
2	5150.07	34.64	52.21	17.57	68.20	15.99	150	200	Vertical
3	5350.15	34.15	52.23	18.08	74.00	21.77	150	246	Vertical
4	5360.05	36.14	54.27	18.13	74.00	19.73	150	256	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5114.23	22.22	17.50	39.72	54.00	14.28	150	129	Vertical
2	5150.07	23.21	17.57	40.78	-	13.13	150	200	Vertical
3	5350.15	23.47	18.08	41.55	54.00	12.45	150	246	Vertical
4	5360.05	22.22	18.13	40.35	54.00	13.65	150	256	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11AX80_MCS0_5290	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 09:38:30

Test Graph

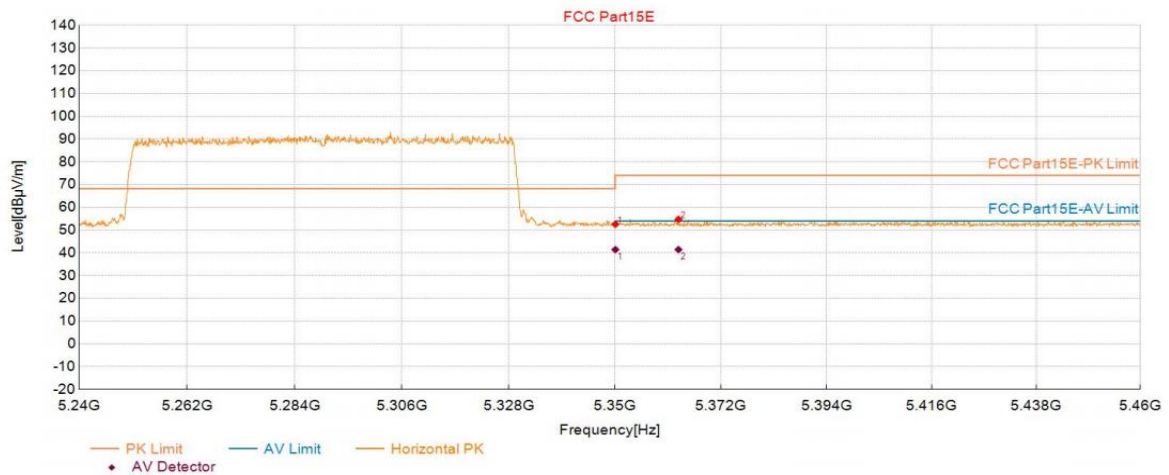

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.06	34.47	52.55	18.08	74.00	21.45	150	218	Horizontal
2	5363.15	36.58	54.73	18.15	74.00	19.27	150	252	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.06	23.34	18.08	41.42	54.00	12.58	150	218	Horizontal
2	5363.15	23.28	18.15	41.43	54.00	12.57	150	252	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11AX80_MCS0_5290	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 09:39:10

Test Graph

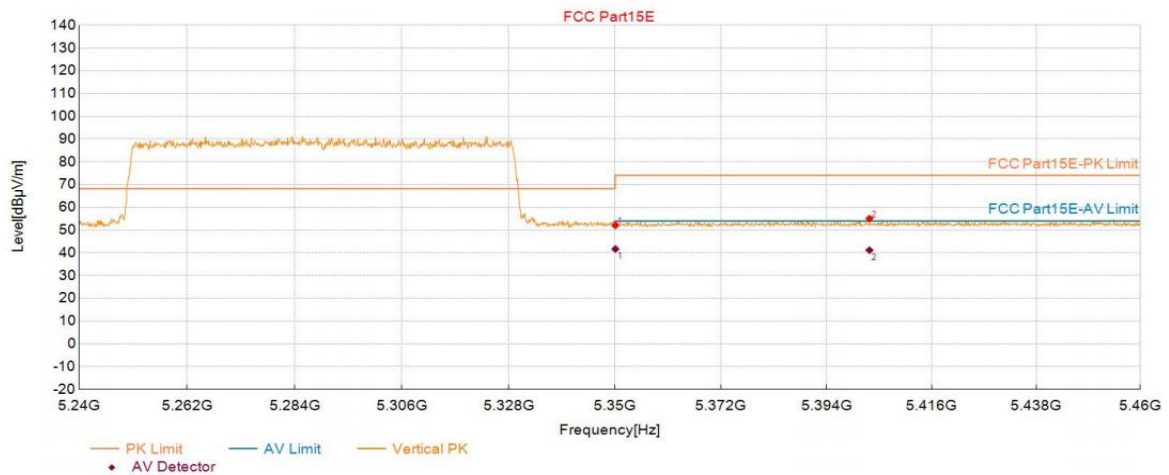

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.06	33.99	52.07	18.08	74.00	21.93	150	302	Vertical
2	5402.99	36.75	55.08	18.33	74.00	18.92	150	12	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.06	23.62	18.08	41.70	54.00	12.30	150	302	Vertical
2	5402.99	22.83	18.33	41.16	54.00	12.84	150	12	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11AX80_MCS0_5530	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 09:41:19

Test Graph

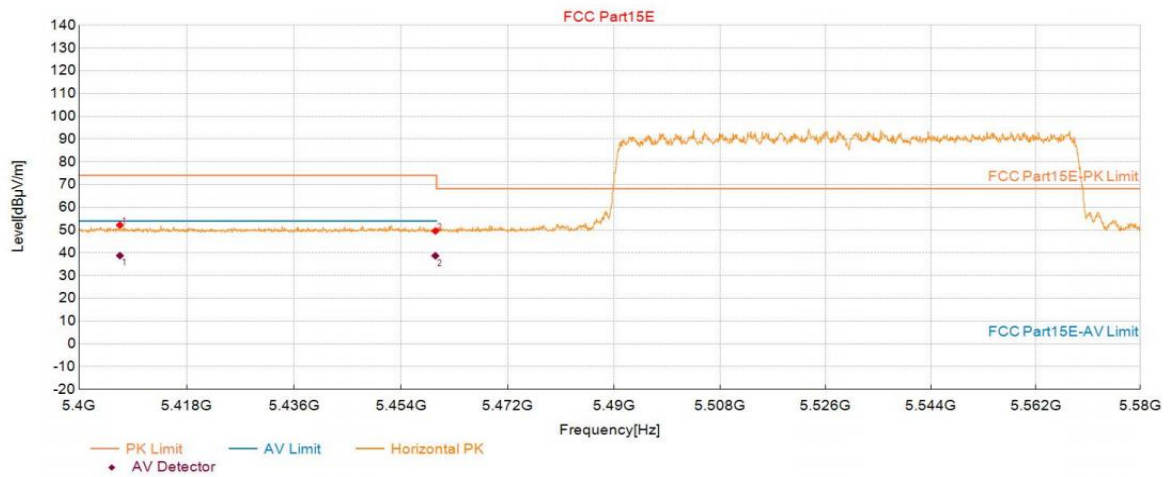

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5406.84	33.86	52.20	18.34	74.00	21.80	150	174	Horizontal
2	5459.79	31.22	49.61	18.39	74.00	24.39	150	28	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5406.84	20.43	18.34	38.77	54.00	15.23	150	174	Horizontal
2	5459.79	20.31	18.39	38.70	54.00	15.30	150	28	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11AX80_MCS0_5530	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 09:41:58

Test Graph

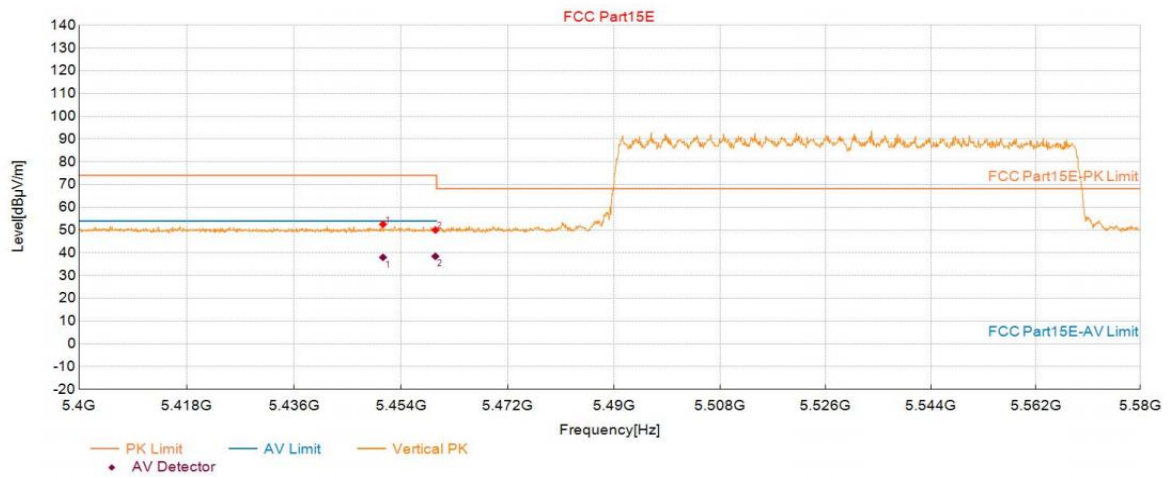

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5450.97	34.16	52.54	18.38	74.00	21.46	150	304	Vertical
2	5459.79	31.64	50.03	18.39	74.00	23.97	150	350	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5450.97	19.63	18.38	38.01	54.00	15.99	150	304	Vertical
2	5459.79	20.07	18.39	38.46	54.00	15.54	150	350	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11AX80_MCS0_5610	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 09:45:57

Test Graph

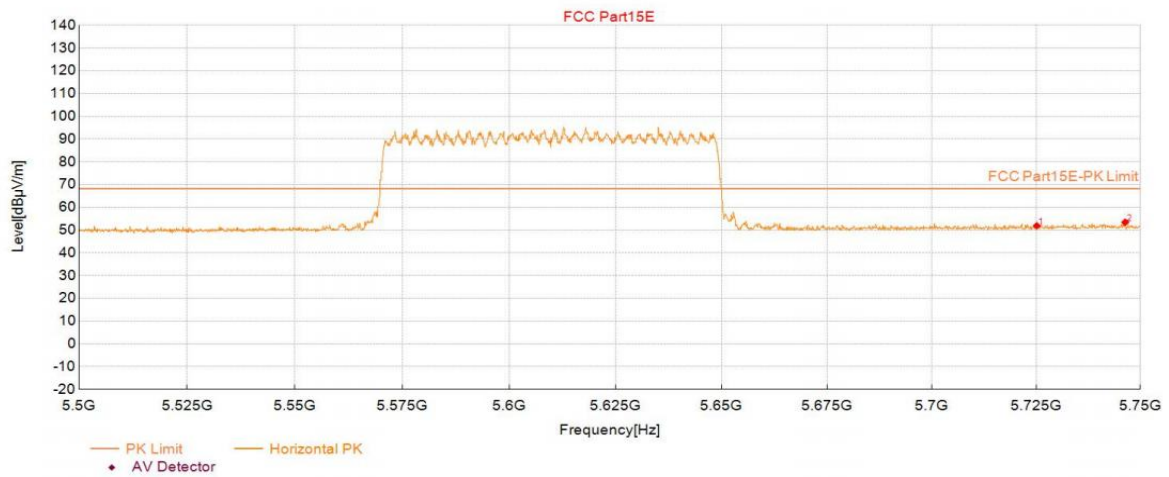

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.11	32.31	51.90	19.59	68.20	16.30	150	62	Horizontal
2	5746.37	33.74	53.45	19.71	68.20	14.75	150	131	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11AX80_MCS0_5610	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 09:46:36

Test Graph

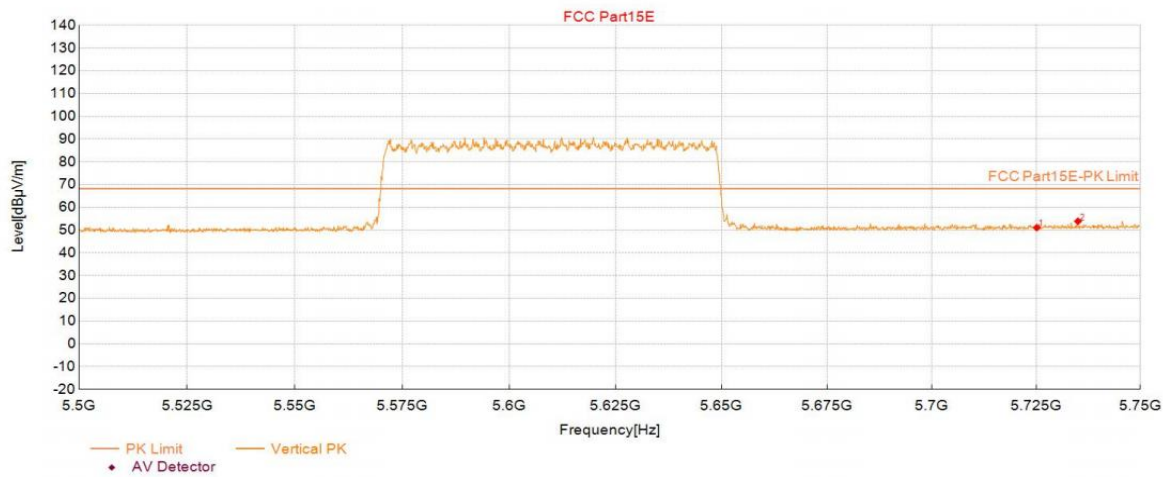


Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.11	31.47	51.06	19.59	68.20	17.14	150	192	Vertical
2	5734.99	34.24	53.88	19.64	68.20	14.32	150	223	Vertical

Note1: Level=Reading+Factor, Margin=Limit - Level

APPENDIX C – AC Power Line Conducted Emission Test Data

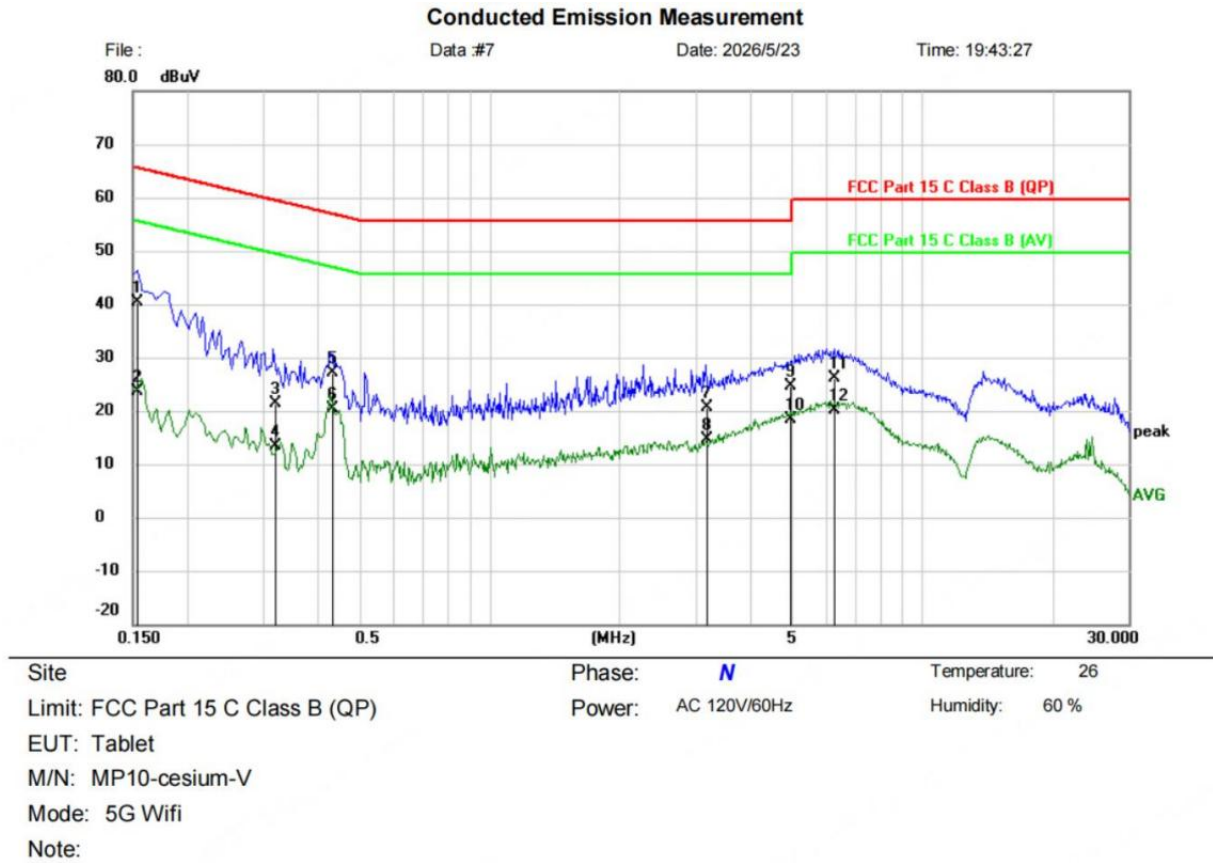

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1	*	0.1538	31.08	9.36	40.44	65.79	-25.35	QP	
2		0.1538	14.32	9.36	23.68	55.79	-32.11	AVG	
3		0.3191	12.13	9.37	21.50	59.73	-38.23	QP	
4		0.3191	3.98	9.37	13.35	49.73	-36.38	AVG	
5		0.4309	17.83	9.39	27.22	57.24	-30.02	QP	
6		0.4309	10.96	9.39	20.35	47.24	-26.89	AVG	
7		3.1690	10.96	9.69	20.65	56.00	-35.35	QP	
8		3.1690	5.05	9.69	14.74	46.00	-31.26	AVG	
9		4.9526	14.66	9.96	24.62	56.00	-31.38	QP	
10		4.9526	8.53	9.96	18.49	46.00	-27.51	AVG	
11		6.2819	15.90	10.18	26.08	60.00	-33.92	QP	
12		6.2819	9.95	10.18	20.13	50.00	-29.87	AVG	

Conducted Emission Measurement


File :

Data :#15

Date: 2026/5/25

Time: 10:16:21

80.0 dBuV

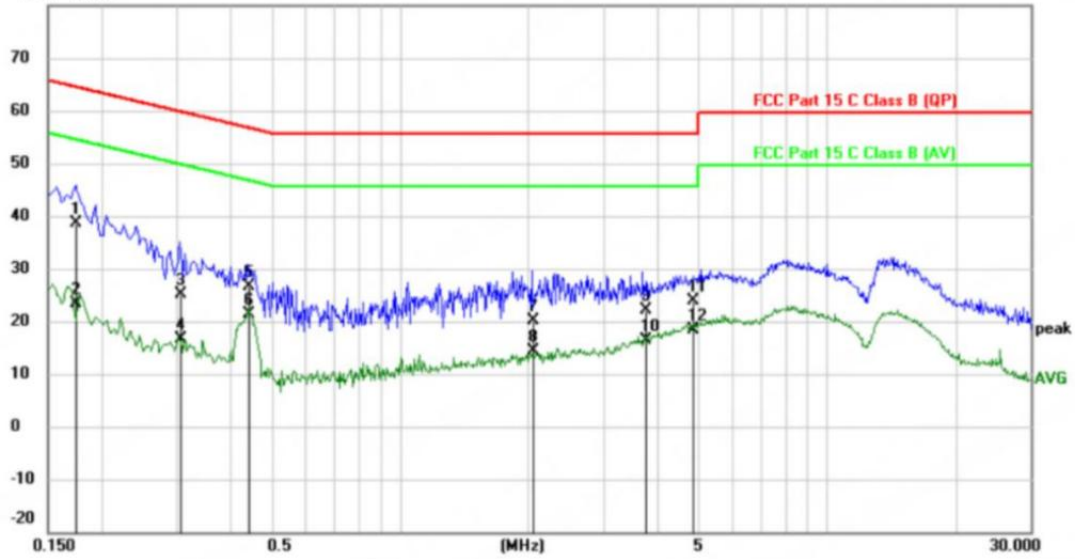

Site

Phase:

N

Temperature:

26

Limit: FCC Part 15 C Class B (QP)

Power: AC 120V/60Hz

Humidity: 60 %

EUT: Tablet

M/N: MP16-cesium-V

Mode: 2.4G Wifi

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1733	29.26	9.33	38.59	64.80	-26.21	QP	
2		0.1733	14.05	9.33	23.38	54.80	-31.42	AVG	
3		0.3061	15.80	9.34	25.14	60.08	-34.94	QP	
4		0.3061	7.37	9.34	16.71	50.08	-33.37	AVG	
5		0.4422	17.36	9.36	26.72	57.02	-30.30	QP	
6	*	0.4422	12.03	9.36	21.39	47.02	-25.63	AVG	
7		2.0455	10.66	9.49	20.15	56.00	-35.85	QP	
8		2.0455	4.87	9.49	14.36	46.00	-31.64	AVG	
9		3.7506	12.40	9.71	22.11	56.00	-33.89	QP	
10		3.7506	6.79	9.71	16.50	46.00	-29.50	AVG	
11		4.8344	14.05	9.85	23.90	56.00	-32.10	QP	
12		4.8344	8.64	9.85	18.49	46.00	-27.51	AVG	


Conducted Emission Measurement

File :

Data :#17

Date: 2026/5/25

Time: 10:25:37

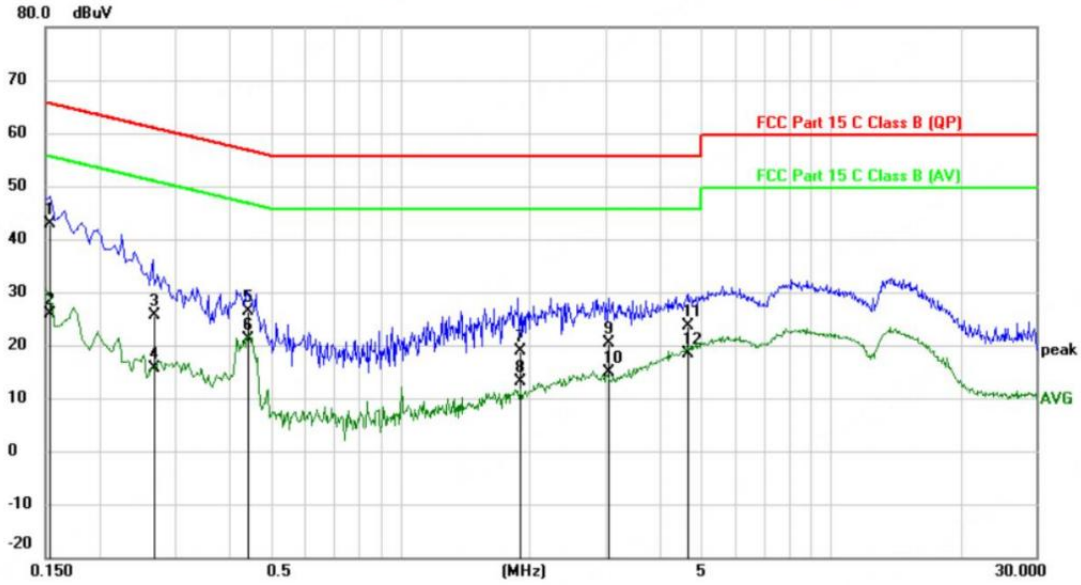

Site

Phase: **L1**

Temperature: 26

Limit: FCC Part 15 C Class B (QP)

Power: AC 120V/60Hz

Humidity: 60 %

EUT: Tablet

M/N: MP16-cesium-V

Mode: 5G Wifi

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1536	33.46	9.36	42.82	65.80	-22.98	QP	
2		0.1536	16.41	9.36	25.77	55.80	-30.03	AVG	
3		0.2675	16.31	9.37	25.68	61.20	-35.52	QP	
4		0.2675	6.23	9.37	15.60	51.20	-35.60	AVG	
5		0.4415	17.00	9.39	26.39	57.03	-30.64	QP	
6		0.4415	11.66	9.39	21.05	47.03	-25.98	AVG	
7		1.8895	9.35	9.54	18.89	56.00	-37.11	QP	
8		1.8895	3.51	9.54	13.05	46.00	-32.95	AVG	
9		3.0435	10.79	9.68	20.47	56.00	-35.53	QP	
10		3.0435	5.15	9.68	14.83	46.00	-31.17	AVG	
11		4.6610	13.82	9.92	23.74	56.00	-32.26	QP	
12		4.6610	8.35	9.92	18.27	46.00	-27.73	AVG	


Conducted Emission Measurement

File :

Data :#18

Date: 2026/5/25

Time: 10:32:09

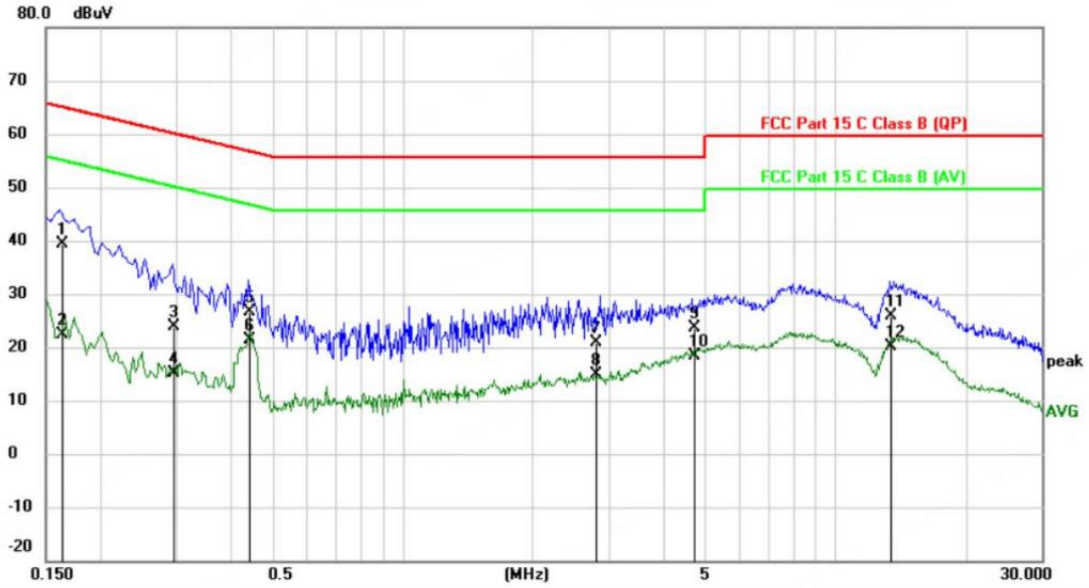

Site

Phase: **N**

Temperature: 26

Limit: FCC Part 15 C Class B (QP)

Power: AC 120V/60Hz

Humidity: 60 %

EUT: Tablet


M/N: MP16-caesium-V

Mode: 5G Wifi

Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.1627	30.10	9.33	39.43	65.32	-25.89	QP	
2	0.1627	13.10	9.33	22.43	55.32	-32.89	AVG	
3	0.2952	14.59	9.34	23.93	60.38	-36.45	QP	
4	0.2952	5.91	9.34	15.25	50.38	-35.13	AVG	
5	0.4417	17.33	9.36	26.69	57.03	-30.34	QP	
6 *	0.4417	11.95	9.36	21.31	47.03	-25.72	AVG	
7	2.7805	11.20	9.58	20.78	56.00	-35.22	QP	
8	2.7805	5.42	9.58	15.00	46.00	-31.00	AVG	
9	4.7057	13.85	9.84	23.69	56.00	-32.31	QP	
10	4.7057	8.43	9.84	18.27	46.00	-27.73	AVG	
11	13.4105	14.55	11.23	25.78	60.00	-34.22	QP	
12	13.4105	8.93	11.23	20.16	50.00	-29.84	AVG	


Conducted Emission Measurement

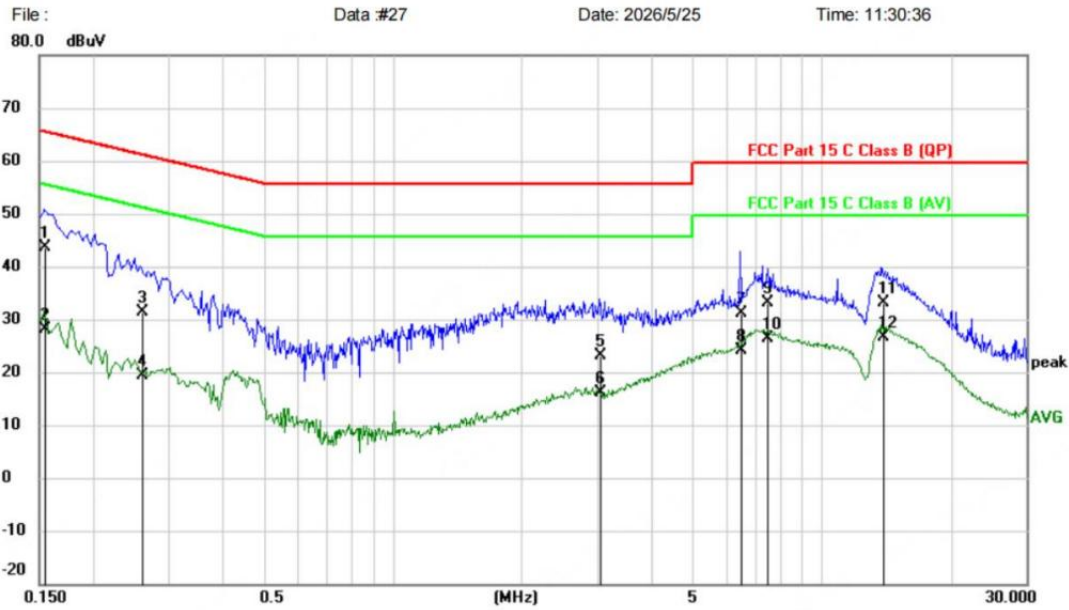

Site Phase: **L1** Temperature: 26
 Limit: FCC Part 15 C Class B (QP) Power: AC 120V/60Hz Humidity: 60 %
 EUT: Tablet
 M/N: MP24-cesium-V
 Mode: 5G Wifi
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1545	34.31	9.36	43.67	65.75	-22.08	QP	
2		0.1545	18.87	9.36	28.23	55.75	-27.52	AVG	
3		0.2593	22.05	9.37	31.42	61.45	-30.03	QP	
4		0.2593	9.99	9.37	19.36	51.45	-32.09	AVG	
5		3.0552	13.56	9.68	23.24	56.00	-32.76	QP	
6		3.0552	6.42	9.68	16.10	46.00	-29.90	AVG	
7		6.4704	20.86	10.21	31.07	60.00	-28.93	QP	
8		6.4704	13.82	10.21	24.03	50.00	-25.97	AVG	
9		7.4860	22.81	10.39	33.20	60.00	-26.80	QP	
10		7.4860	16.10	10.39	26.49	50.00	-23.51	AVG	
11		13.8589	21.49	11.56	33.05	60.00	-26.95	QP	
12		13.8589	15.13	11.56	26.69	50.00	-23.31	AVG	

Conducted Emission Measurement

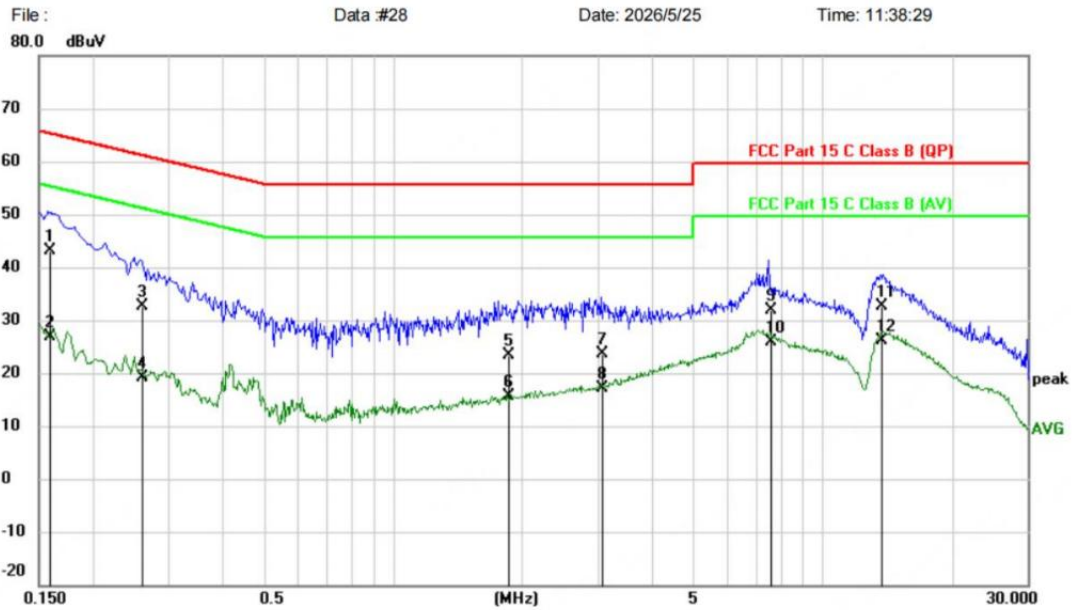

Site Phase: **N** Temperature: 26
 Limit: FCC Part 15 C Class B (QP) Power: AC 120V/60Hz Humidity: 60 %
 EUT: Tablet
 M/N: MP24-cesium-V
 Mode: 5G Wifi
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1586	33.81	9.33	43.14	65.54	-22.40	QP	
2		0.1586	17.61	9.33	26.94	55.54	-28.60	AVG	
3		0.2590	23.37	9.34	32.71	61.46	-28.75	QP	
4		0.2590	9.89	9.34	19.23	51.46	-32.23	AVG	
5		1.8535	13.94	9.48	23.42	56.00	-32.58	QP	
6		1.8535	6.12	9.48	15.60	46.00	-30.40	AVG	
7		3.0620	13.99	9.62	23.61	56.00	-32.39	QP	
8		3.0620	7.52	9.62	17.14	46.00	-28.86	AVG	
9		7.5377	21.63	10.26	31.89	60.00	-28.11	QP	
10		7.5377	15.69	10.26	25.95	50.00	-24.05	AVG	
11		13.7322	21.36	11.28	32.64	60.00	-27.36	QP	
12		13.7322	14.76	11.28	26.04	50.00	-23.96	AVG	

END OF REPORT