









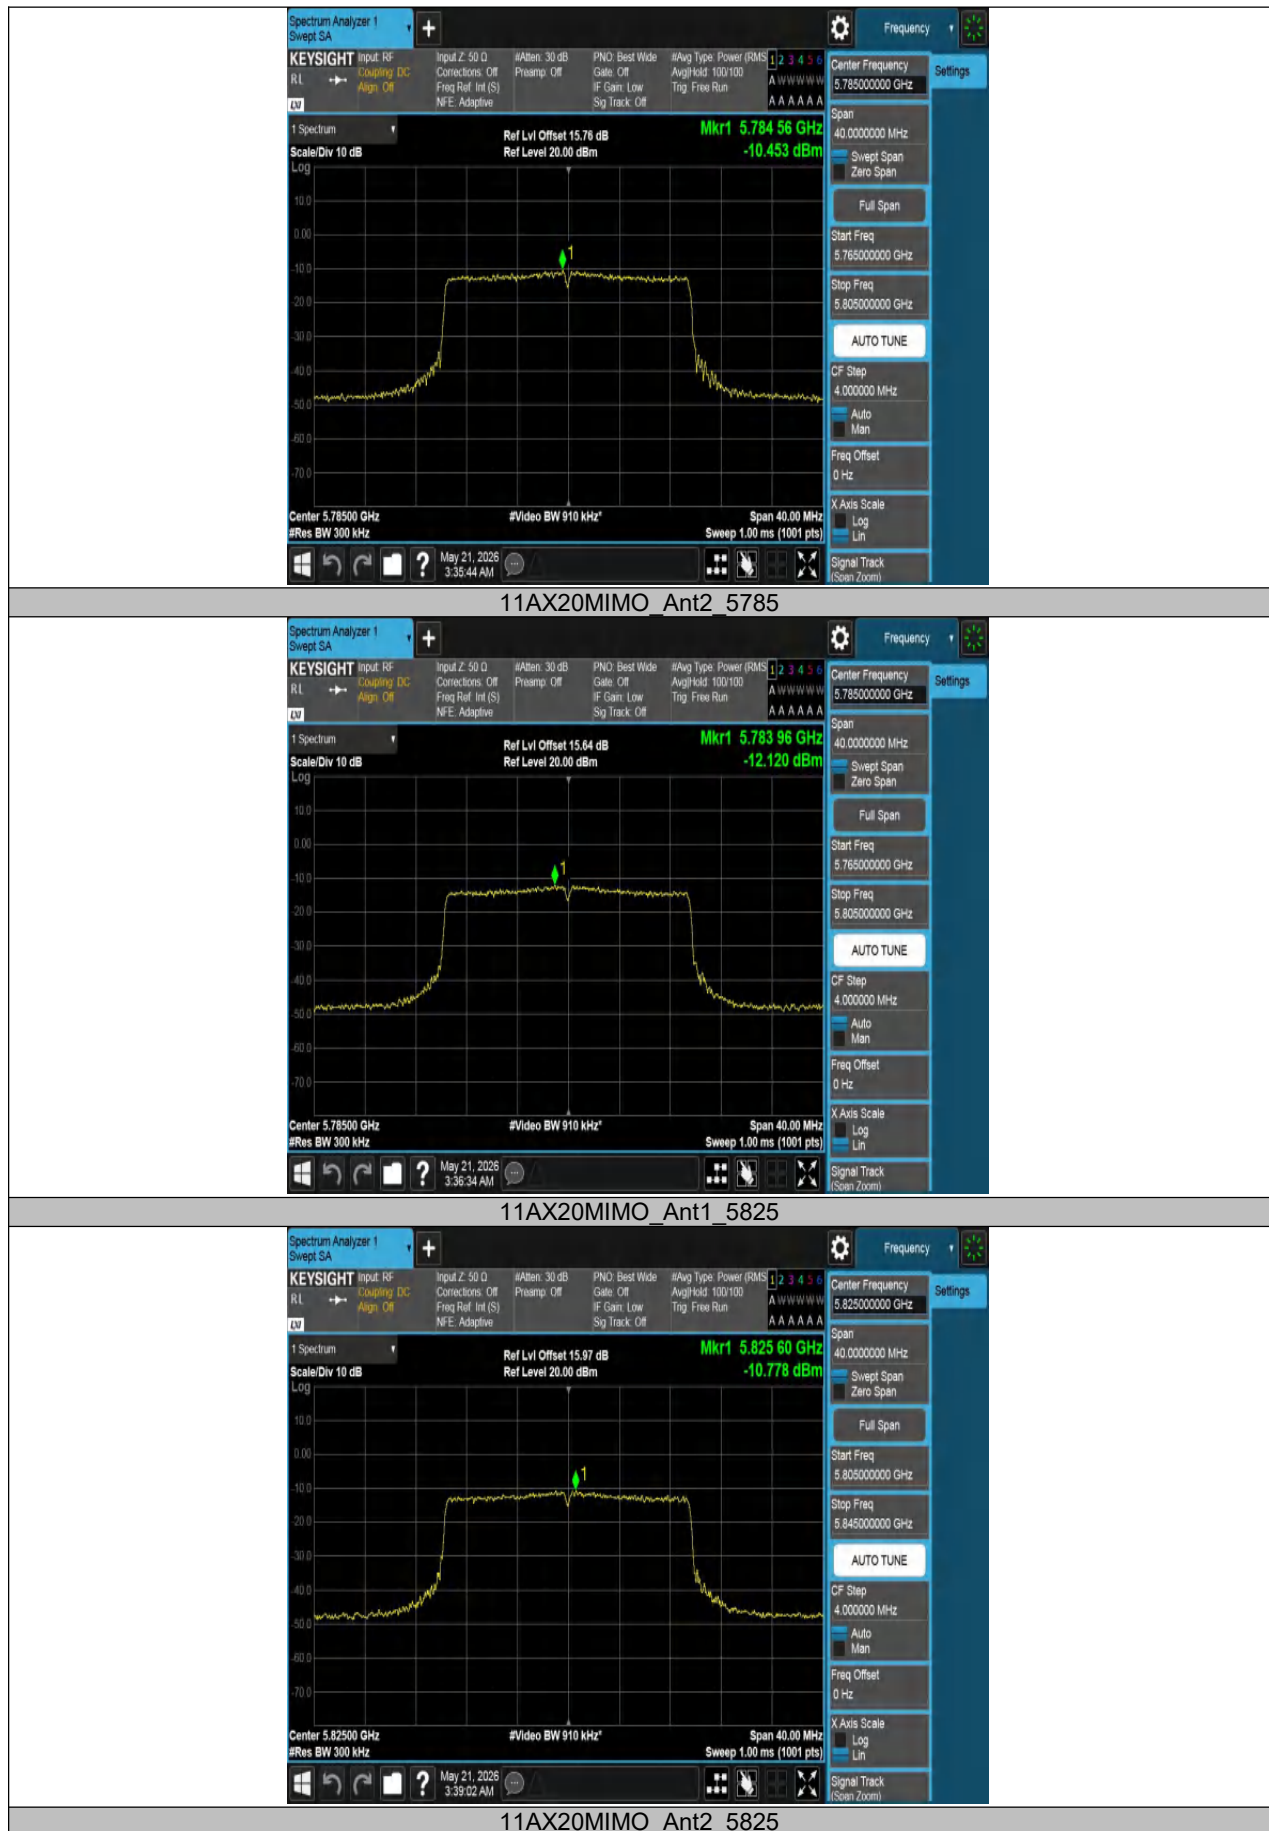

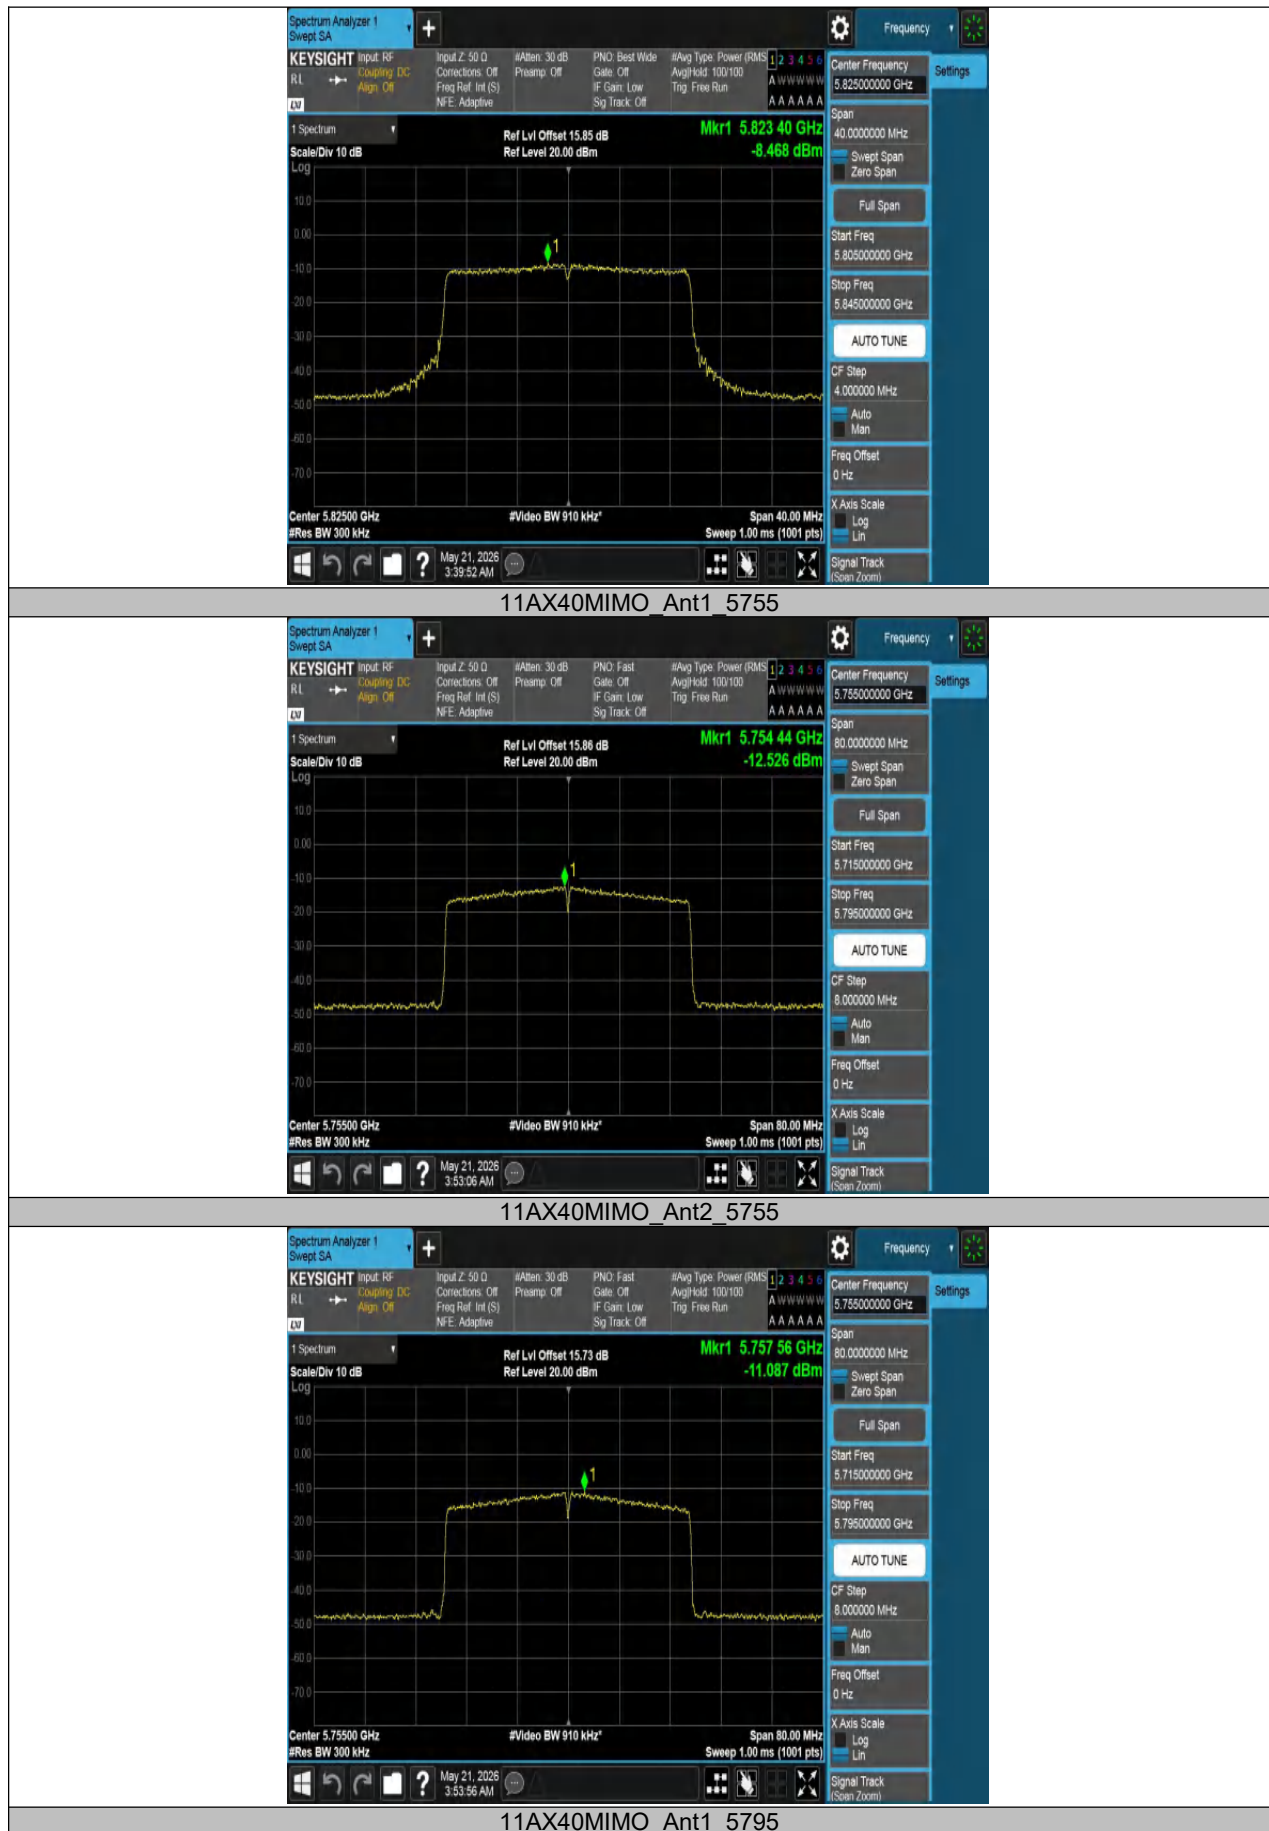



12. Frequency Stability Measurement

12.1. Block Diagram of Test Setup

Same as section 8.1

12.2. Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

12.3. Test Procedures

(1) To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.

(2) The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10 dB lower than the measured peak value.

(3) The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

12.4. Test Result

Voltage								
Test Mode	Ant.	Freq. (MHz)	Voltage (Vdc)	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
11AX20 MIMO	Ant1	5180	NV	NT	-21000.00	-4.054054	20	PASS
			LV	NT	-21000.00	-4.054054	20	PASS
			HV	NT	-21000.00	-4.054054	20	PASS
		5200	NV	NT	-22000.00	-4.230769	20	PASS
			LV	NT	-22000.00	-4.230769	20	PASS
			HV	NT	-21000.00	-4.038462	20	PASS
		5240	NV	NT	-22000.00	-4.198473	20	PASS
			LV	NT	-22000.00	-4.198473	20	PASS
			HV	NT	-22000.00	-4.198473	20	PASS
		5260	NV	NT	-22000.00	-4.182510	20	PASS
			LV	NT	-22000.00	-4.182510	20	PASS
			HV	NT	-22000.00	-4.182510	20	PASS
		5280	NV	NT	-22000.00	-4.166667	20	PASS
			LV	NT	-22000.00	-4.166667	20	PASS
			HV	NT	-22000.00	-4.166667	20	PASS
		5320	NV	NT	-22000.00	-4.135338	20	PASS
			LV	NT	-22000.00	-4.135338	20	PASS
			HV	NT	-22000.00	-4.135338	20	PASS
		5500	NV	NT	-23000.00	-4.181818	20	PASS
			LV	NT	-23000.00	-4.181818	20	PASS
			HV	NT	-23000.00	-4.181818	20	PASS
		5580	NV	NT	-23000.00	-4.121864	20	PASS
			LV	NT	-23000.00	-4.121864	20	PASS
			HV	NT	-23000.00	-4.121864	20	PASS
		5700	NV	NT	-23000.00	-4.035088	20	PASS
			LV	NT	-23000.00	-4.035088	20	PASS
			HV	NT	-23000.00	-4.035088	20	PASS
		5720	NV	NT	-28000.00	-4.895105	20	PASS
			LV	NT	-28000.00	-4.895105	20	PASS
			HV	NT	-28000.00	-4.895105	20	PASS
		5745	NV	NT	-26000.00	-4.525674	20	PASS
			LV	NT	-26000.00	-4.525674	20	PASS

		5785	HV	NT	-26000.00	-4.525674	20	PASS
			NV	NT	-26000.00	-4.494382	20	PASS
			LV	NT	-26000.00	-4.494382	20	PASS
		5825	HV	NT	-26000.00	-4.494382	20	PASS
			NV	NT	-26000.00	-4.463519	20	PASS
			LV	NT	-26000.00	-4.463519	20	PASS
			HV	NT	-26000.00	-4.463519	20	PASS
			NV	NT	-23000.00	-4.431599	20	PASS
			LV	NT	-23000.00	-4.431599	20	PASS
11AX40 MIMO	Ant1	5190	HV	NT	-23000.00	-4.431599	20	PASS
			NV	NT	-23000.00	-4.397706	20	PASS
			LV	NT	-23000.00	-4.397706	20	PASS
		5230	HV	NT	-23000.00	-4.397706	20	PASS
			NV	NT	-23000.00	-4.397706	20	PASS
			LV	NT	-23000.00	-4.397706	20	PASS
		5270	HV	NT	-22000.00	-4.174573	20	PASS
			NV	NT	-23000.00	-4.364326	20	PASS
			LV	NT	-23000.00	-4.364326	20	PASS
		5310	HV	NT	-23000.00	-4.364326	20	PASS
			NV	NT	-23000.00	-4.331450	20	PASS
			LV	NT	-22000.00	-4.143126	20	PASS
		5510	HV	NT	-23000.00	-4.331450	20	PASS
			NV	NT	-23000.00	-4.174229	20	PASS
			LV	NT	-23000.00	-4.174229	20	PASS
		5550	HV	NT	-23000.00	-4.174229	20	PASS
			NV	NT	-23000.00	-4.144144	20	PASS
			LV	NT	-23000.00	-4.144144	20	PASS
		5670	HV	NT	-23000.00	-4.144144	20	PASS
			NV	NT	-24000.00	-4.232804	20	PASS
			LV	NT	-24000.00	-4.232804	20	PASS
		5710	HV	NT	-23000.00	-4.056437	20	PASS
			NV	NT	-24000.00	-4.203152	20	PASS
			LV	NT	-24000.00	-4.203152	20	PASS
		5755	HV	NT	-24000.00	-4.203152	20	PASS
			NV	NT	-24000.00	-4.170287	20	PASS
			LV	NT	-24000.00	-4.170287	20	PASS
		5795	HV	NT	-24000.00	-4.170287	20	PASS
			NV	NT	-24000.00	-4.141501	20	PASS
			LV	NT	-24000.00	-4.141501	20	PASS
11AX80 MIMO	Ant1	5210	HV	NT	-24000.00	-4.141501	20	PASS
			NV	NT	-21000.00	-4.030710	20	PASS
			LV	NT	-22000.00	-4.222649	20	PASS
		5290	HV	NT	-22000.00	-4.222649	20	PASS
			NV	NT	-22000.00	-4.158790	20	PASS
			LV	NT	-21000.00	-3.969754	20	PASS
		5530	HV	NT	-22000.00	-4.158790	20	PASS
			NV	NT	-25000.00	-4.520796	20	PASS
			LV	NT	-25000.00	-4.520796	20	PASS
		5610	HV	NT	-25000.00	-4.520796	20	PASS
			NV	NT	-26000.00	-4.634581	20	PASS
			LV	NT	-25000.00	-4.456328	20	PASS
		5775	HV	NT	-26000.00	-4.634581	20	PASS
			NV	NT	-27000.00	-4.675325	20	PASS
			LV	NT	-27000.00	-4.675325	20	PASS
			HV	NT	-27000.00	-4.675325	20	PASS

Temperature								
Test Mode	Ant.	Freq. (MHz)	Voltage (Vdc)	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
11AX20 MIMO	Ant1	5180	NV	-30	-21000.00	-4.054054	20	PASS
			NV	-20	-21000.00	-4.054054	20	PASS
			NV	-10	-22000.00	-4.247104	20	PASS

			NV	0	-21000.00	-4.054054	20	PASS
			NV	10	-21000.00	-4.054054	20	PASS
			NV	20	-22000.00	-4.247104	20	PASS
			NV	30	-21000.00	-4.054054	20	PASS
			NV	40	-22000.00	-4.247104	20	PASS
			NV	50	-22000.00	-4.247104	20	PASS
		5200	NV	-30	-21000.00	-4.038462	20	PASS
			NV	-20	-22000.00	-4.230769	20	PASS
			NV	-10	-22000.00	-4.230769	20	PASS
			NV	0	-22000.00	-4.230769	20	PASS
			NV	10	-22000.00	-4.230769	20	PASS
			NV	20	-22000.00	-4.230769	20	PASS
			NV	30	-22000.00	-4.230769	20	PASS
			NV	40	-22000.00	-4.230769	20	PASS
			NV	50	-22000.00	-4.230769	20	PASS
		5240	NV	-30	-22000.00	-4.198473	20	PASS
			NV	-20	-22000.00	-4.198473	20	PASS
			NV	-10	-22000.00	-4.198473	20	PASS
			NV	0	-22000.00	-4.198473	20	PASS
			NV	10	-22000.00	-4.198473	20	PASS
			NV	20	-22000.00	-4.198473	20	PASS
			NV	30	-22000.00	-4.198473	20	PASS
			NV	40	-21000.00	-4.007634	20	PASS
			NV	50	-22000.00	-4.198473	20	PASS
		5260	NV	-30	-22000.00	-4.182510	20	PASS
			NV	-20	-22000.00	-4.182510	20	PASS
			NV	-10	-22000.00	-4.182510	20	PASS
			NV	0	-22000.00	-4.182510	20	PASS
			NV	10	-22000.00	-4.182510	20	PASS
			NV	20	-22000.00	-4.182510	20	PASS
			NV	30	-22000.00	-4.182510	20	PASS
			NV	40	-22000.00	-4.182510	20	PASS
			NV	50	-22000.00	-4.182510	20	PASS
		5280	NV	-30	-22000.00	-4.166667	20	PASS
			NV	-20	-22000.00	-4.166667	20	PASS
			NV	-10	-22000.00	-4.166667	20	PASS
			NV	0	-22000.00	-4.166667	20	PASS
			NV	10	-22000.00	-4.166667	20	PASS
			NV	20	-22000.00	-4.166667	20	PASS
			NV	30	-22000.00	-4.166667	20	PASS
			NV	40	-22000.00	-4.166667	20	PASS
			NV	50	-22000.00	-4.166667	20	PASS
		5320	NV	-30	-22000.00	-4.135338	20	PASS
			NV	-20	-22000.00	-4.135338	20	PASS
			NV	-10	-22000.00	-4.135338	20	PASS
			NV	0	-22000.00	-4.135338	20	PASS
			NV	10	-22000.00	-4.135338	20	PASS
			NV	20	-22000.00	-4.135338	20	PASS
			NV	30	-22000.00	-4.135338	20	PASS
			NV	40	-22000.00	-4.135338	20	PASS
			NV	50	-22000.00	-4.135338	20	PASS
		5500	NV	-30	-23000.00	-4.181818	20	PASS
			NV	-20	-23000.00	-4.181818	20	PASS
			NV	-10	-23000.00	-4.181818	20	PASS
			NV	0	-23000.00	-4.181818	20	PASS
			NV	10	-23000.00	-4.181818	20	PASS
			NV	20	-23000.00	-4.181818	20	PASS
			NV	30	-23000.00	-4.181818	20	PASS
			NV	40	-23000.00	-4.181818	20	PASS
			NV	50	-23000.00	-4.181818	20	PASS

		5580	NV	-30	-23000.00	-4.121864	20	PASS
			NV	-20	-23000.00	-4.121864	20	PASS
			NV	-10	-23000.00	-4.121864	20	PASS
			NV	0	-23000.00	-4.121864	20	PASS
			NV	10	-23000.00	-4.121864	20	PASS
			NV	20	-23000.00	-4.121864	20	PASS
			NV	30	-23000.00	-4.121864	20	PASS
			NV	40	-23000.00	-4.121864	20	PASS
		5700	NV	50	-23000.00	-4.121864	20	PASS
			NV	-30	-23000.00	-4.035088	20	PASS
			NV	-20	-24000.00	-4.210526	20	PASS
			NV	-10	-24000.00	-4.210526	20	PASS
			NV	0	-24000.00	-4.210526	20	PASS
			NV	10	-24000.00	-4.210526	20	PASS
			NV	20	-24000.00	-4.210526	20	PASS
			NV	30	-24000.00	-4.210526	20	PASS
		5720	NV	40	-24000.00	-4.210526	20	PASS
			NV	50	-24000.00	-4.210526	20	PASS
			NV	-30	-28000.00	-4.895105	20	PASS
			NV	-20	-28000.00	-4.895105	20	PASS
			NV	-10	-28000.00	-4.895105	20	PASS
			NV	0	-27000.00	-4.720280	20	PASS
			NV	10	-27000.00	-4.720280	20	PASS
			NV	20	-27000.00	-4.720280	20	PASS
		5745	NV	30	-27000.00	-4.720280	20	PASS
			NV	40	-27000.00	-4.720280	20	PASS
			NV	50	-27000.00	-4.720280	20	PASS
			NV	-30	-26000.00	-4.525674	20	PASS
			NV	-20	-26000.00	-4.525674	20	PASS
			NV	-10	-26000.00	-4.525674	20	PASS
			NV	0	-26000.00	-4.525674	20	PASS
			NV	10	-26000.00	-4.525674	20	PASS
		5785	NV	20	-26000.00	-4.525674	20	PASS
			NV	30	-26000.00	-4.525674	20	PASS
			NV	40	-26000.00	-4.525674	20	PASS
			NV	50	-26000.00	-4.525674	20	PASS
			NV	-30	-26000.00	-4.494382	20	PASS
			NV	-20	-26000.00	-4.494382	20	PASS
			NV	-10	-26000.00	-4.494382	20	PASS
			NV	0	-26000.00	-4.494382	20	PASS
		5825	NV	10	-26000.00	-4.494382	20	PASS
			NV	20	-26000.00	-4.494382	20	PASS
			NV	30	-26000.00	-4.494382	20	PASS
			NV	40	-26000.00	-4.494382	20	PASS
			NV	50	-26000.00	-4.494382	20	PASS
			NV	-30	-26000.00	-4.463519	20	PASS
			NV	-20	-26000.00	-4.463519	20	PASS
			NV	-10	-26000.00	-4.463519	20	PASS
11AX40 MIMO	Ant1	5190	NV	0	-26000.00	-4.463519	20	PASS
			NV	10	-26000.00	-4.463519	20	PASS
			NV	20	-26000.00	-4.463519	20	PASS
			NV	30	-26000.00	-4.463519	20	PASS
			NV	40	-26000.00	-4.463519	20	PASS
			NV	50	-26000.00	-4.463519	20	PASS
		5190	NV	-30	-23000.00	-4.431599	20	PASS
			NV	-20	-23000.00	-4.431599	20	PASS
			NV	-10	-23000.00	-4.431599	20	PASS
			NV	0	-23000.00	-4.431599	20	PASS
			NV	10	-23000.00	-4.431599	20	PASS
			NV	20	-23000.00	-4.431599	20	PASS

			NV	30	-23000.00	-4.431599	20	PASS
			NV	40	-23000.00	-4.431599	20	PASS
			NV	50	-23000.00	-4.431599	20	PASS
		5230	NV	-30	-23000.00	-4.397706	20	PASS
			NV	-20	-23000.00	-4.397706	20	PASS
			NV	-10	-23000.00	-4.397706	20	PASS
			NV	0	-23000.00	-4.397706	20	PASS
			NV	10	-23000.00	-4.397706	20	PASS
			NV	20	-23000.00	-4.397706	20	PASS
			NV	30	-23000.00	-4.397706	20	PASS
			NV	40	-23000.00	-4.397706	20	PASS
			NV	50	-23000.00	-4.397706	20	PASS
		5270	NV	-30	-23000.00	-4.364326	20	PASS
			NV	-20	-23000.00	-4.364326	20	PASS
			NV	-10	-23000.00	-4.364326	20	PASS
			NV	0	-23000.00	-4.364326	20	PASS
			NV	10	-23000.00	-4.364326	20	PASS
			NV	20	-22000.00	-4.174573	20	PASS
			NV	30	-23000.00	-4.364326	20	PASS
			NV	40	-22000.00	-4.174573	20	PASS
		5310	NV	50	-23000.00	-4.364326	20	PASS
			NV	-30	-23000.00	-4.331450	20	PASS
			NV	-20	-23000.00	-4.331450	20	PASS
			NV	-10	-22000.00	-4.143126	20	PASS
			NV	0	-23000.00	-4.331450	20	PASS
			NV	10	-23000.00	-4.331450	20	PASS
			NV	20	-23000.00	-4.331450	20	PASS
			NV	30	-23000.00	-4.331450	20	PASS
		5510	NV	40	-23000.00	-4.331450	20	PASS
			NV	50	-23000.00	-4.331450	20	PASS
			NV	-30	-23000.00	-4.174229	20	PASS
			NV	-20	-23000.00	-4.174229	20	PASS
			NV	-10	-23000.00	-4.174229	20	PASS
			NV	0	-23000.00	-4.174229	20	PASS
			NV	10	-23000.00	-4.174229	20	PASS
			NV	20	-23000.00	-4.174229	20	PASS
		5550	NV	30	-23000.00	-4.174229	20	PASS
			NV	40	-23000.00	-4.174229	20	PASS
			NV	50	-23000.00	-4.174229	20	PASS
			NV	-30	-23000.00	-4.144144	20	PASS
			NV	-20	-23000.00	-4.144144	20	PASS
			NV	-10	-23000.00	-4.144144	20	PASS
			NV	0	-23000.00	-4.144144	20	PASS
			NV	10	-23000.00	-4.144144	20	PASS
		5670	NV	20	-23000.00	-4.144144	20	PASS
			NV	30	-23000.00	-4.144144	20	PASS
			NV	40	-23000.00	-4.144144	20	PASS
			NV	50	-23000.00	-4.144144	20	PASS
			NV	-30	-24000.00	-4.232804	20	PASS
			NV	-20	-24000.00	-4.232804	20	PASS
			NV	-10	-24000.00	-4.232804	20	PASS
			NV	0	-24000.00	-4.232804	20	PASS
		5710	NV	10	-24000.00	-4.232804	20	PASS
			NV	20	-24000.00	-4.232804	20	PASS
			NV	30	-24000.00	-4.232804	20	PASS
			NV	40	-24000.00	-4.232804	20	PASS
			NV	50	-23000.00	-4.056437	20	PASS
			NV	-30	-24000.00	-4.203152	20	PASS
			NV	-20	-24000.00	-4.203152	20	PASS
			NV	-10	-24000.00	-4.203152	20	PASS


			NV	0	-24000.00	-4.203152	20	PASS
			NV	10	-24000.00	-4.203152	20	PASS
			NV	20	-24000.00	-4.203152	20	PASS
			NV	30	-24000.00	-4.203152	20	PASS
			NV	40	-24000.00	-4.203152	20	PASS
			NV	50	-24000.00	-4.203152	20	PASS
		5755	NV	-30	-24000.00	-4.170287	20	PASS
			NV	-20	-24000.00	-4.170287	20	PASS
			NV	-10	-24000.00	-4.170287	20	PASS
			NV	0	-24000.00	-4.170287	20	PASS
			NV	10	-24000.00	-4.170287	20	PASS
			NV	20	-24000.00	-4.170287	20	PASS
			NV	30	-24000.00	-4.170287	20	PASS
			NV	40	-24000.00	-4.170287	20	PASS
			NV	50	-24000.00	-4.170287	20	PASS
		5795	NV	-30	-24000.00	-4.141501	20	PASS
			NV	-20	-24000.00	-4.141501	20	PASS
			NV	-10	-24000.00	-4.141501	20	PASS
			NV	0	-24000.00	-4.141501	20	PASS
			NV	10	-24000.00	-4.141501	20	PASS
			NV	20	-24000.00	-4.141501	20	PASS
			NV	30	-24000.00	-4.141501	20	PASS
			NV	40	-24000.00	-4.141501	20	PASS
			NV	50	-24000.00	-4.141501	20	PASS
11AX80 MIMO	Ant1	5210	NV	-30	-22000.00	-4.222649	20	PASS
			NV	-20	-22000.00	-4.222649	20	PASS
			NV	-10	-21000.00	-4.030710	20	PASS
			NV	0	-22000.00	-4.222649	20	PASS
			NV	10	-22000.00	-4.222649	20	PASS
			NV	20	-22000.00	-4.222649	20	PASS
			NV	30	-22000.00	-4.222649	20	PASS
			NV	40	-21000.00	-4.030710	20	PASS
			NV	50	-21000.00	-4.030710	20	PASS
		5290	NV	-30	-22000.00	-4.158790	20	PASS
			NV	-20	-22000.00	-4.158790	20	PASS
			NV	-10	-22000.00	-4.158790	20	PASS
			NV	0	-22000.00	-4.158790	20	PASS
			NV	10	-22000.00	-4.158790	20	PASS
			NV	20	-22000.00	-4.158790	20	PASS
			NV	30	-22000.00	-4.158790	20	PASS
			NV	40	-22000.00	-4.158790	20	PASS
			NV	50	-21000.00	-3.969754	20	PASS
		5530	NV	-30	-25000.00	-4.520796	20	PASS
			NV	-20	-25000.00	-4.520796	20	PASS
			NV	-10	-25000.00	-4.520796	20	PASS
			NV	0	-25000.00	-4.520796	20	PASS
			NV	10	-25000.00	-4.520796	20	PASS
			NV	20	-25000.00	-4.520796	20	PASS
			NV	30	-25000.00	-4.520796	20	PASS
			NV	40	-25000.00	-4.520796	20	PASS
			NV	50	-25000.00	-4.520796	20	PASS
		5610	NV	-30	-26000.00	-4.634581	20	PASS
			NV	-20	-26000.00	-4.634581	20	PASS
			NV	-10	-26000.00	-4.634581	20	PASS
			NV	0	-26000.00	-4.634581	20	PASS
			NV	10	-26000.00	-4.634581	20	PASS
			NV	20	-26000.00	-4.634581	20	PASS
			NV	30	-26000.00	-4.634581	20	PASS
			NV	40	-26000.00	-4.634581	20	PASS
			NV	50	-26000.00	-4.634581	20	PASS

		5775	NV	-30	-27000.00	-4.675325	20	PASS
			NV	-20	-27000.00	-4.675325	20	PASS
			NV	-10	-27000.00	-4.675325	20	PASS
			NV	0	-27000.00	-4.675325	20	PASS
			NV	10	-27000.00	-4.675325	20	PASS
			NV	20	-27000.00	-4.675325	20	PASS
			NV	30	-27000.00	-4.675325	20	PASS
			NV	40	-27000.00	-4.675325	20	PASS
			NV	50	-27000.00	-4.675325	20	PASS


13. Radiated Emission

13.1. Block Diagram of Test Setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

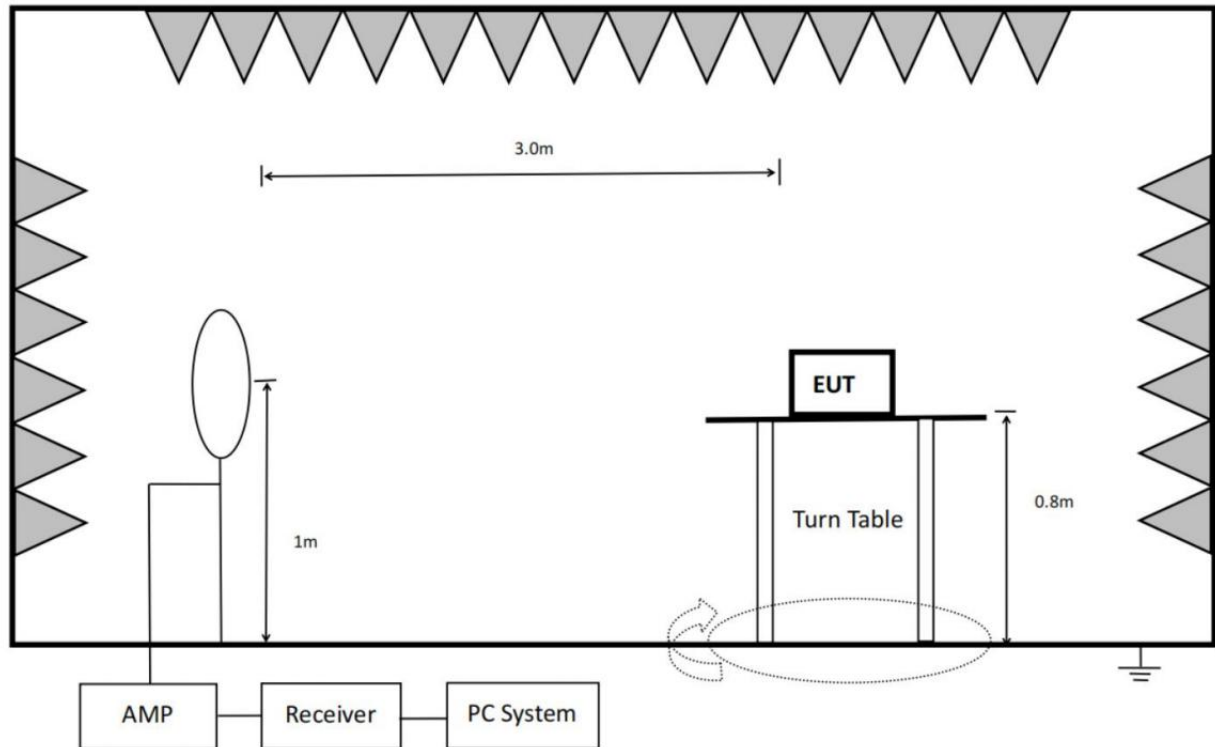

In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

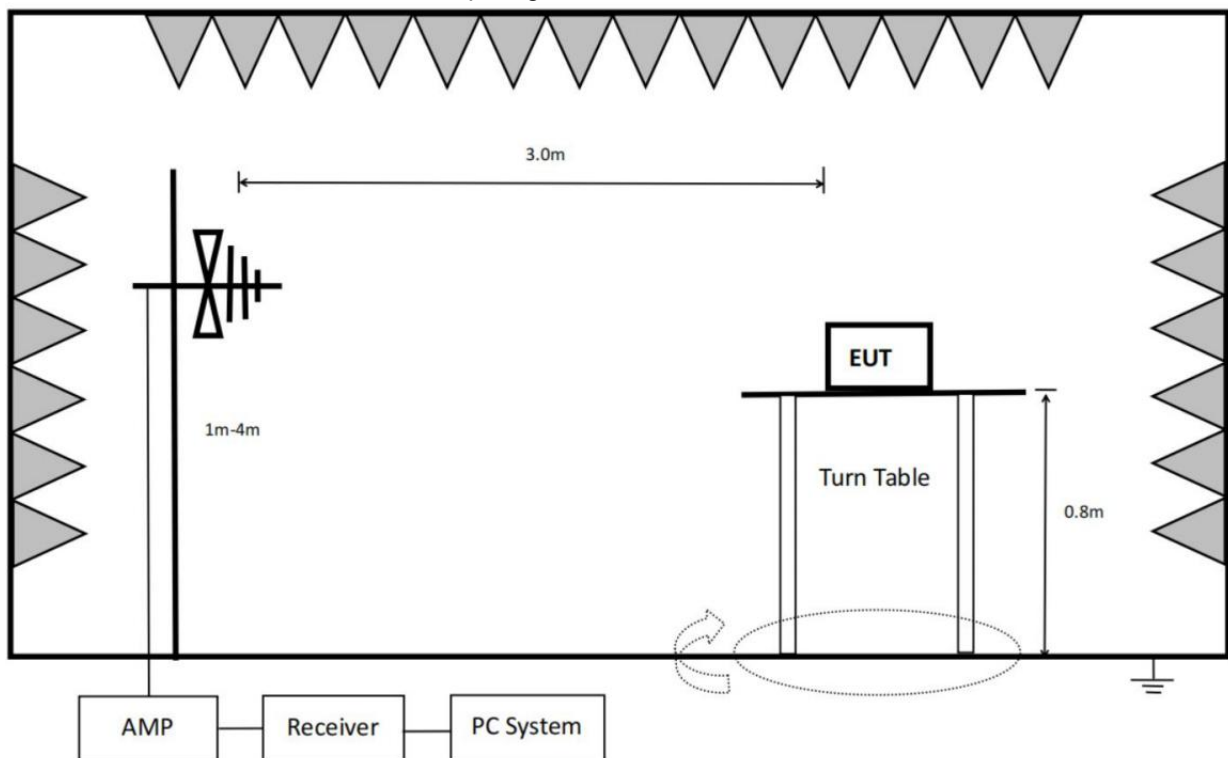

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

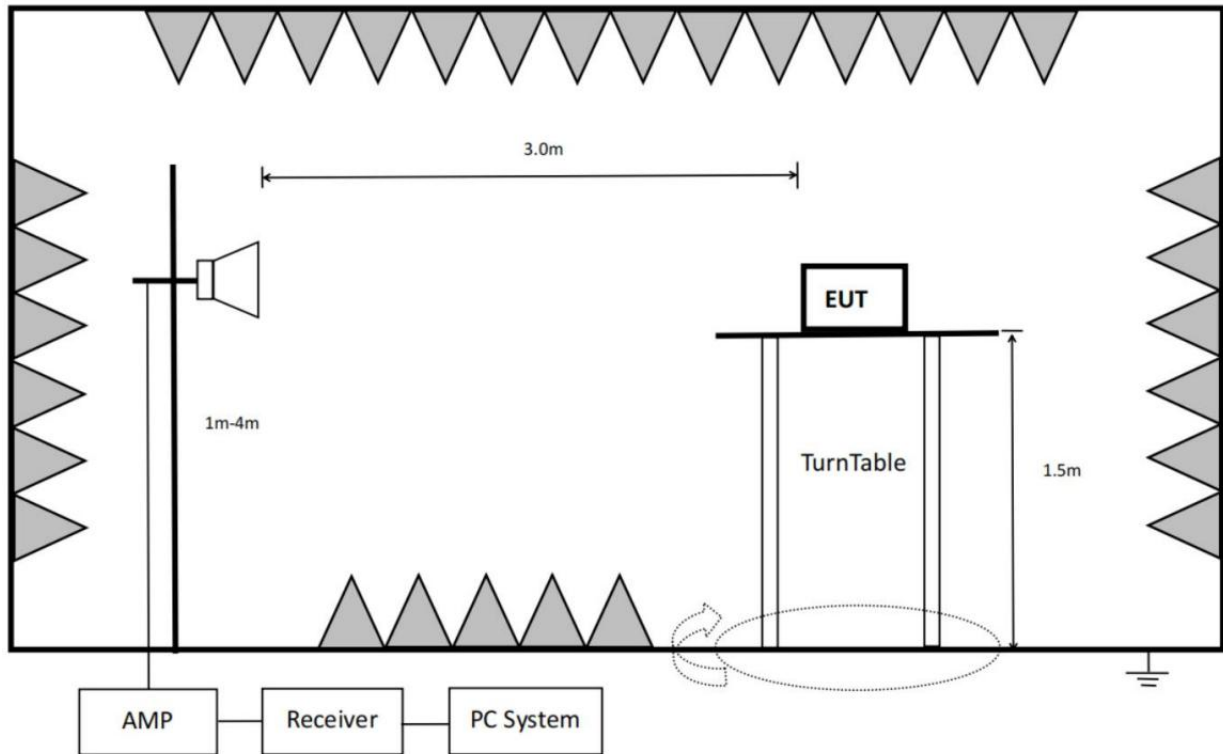

Note: For harmonic emissions test a band rejection filter was inserted in the input port of AMP.

13.2. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41	/	/	/

(2) FCC 15.209 Limit.

Frequency MHz	Distance Meters	Field strengths limit		
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$	$\mu\text{A/m}$

0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)	6.37/F (F in kHz)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)	63.7/F (F in kHz)
1.705 ~ 30.0	30	30	29.54	0.08
30 ~ 88	3	100	40.0	--
88 ~ 216	3	150	43.5	--
216 ~ 960	3	200	46.0	--
960 ~ 1000	3	500	54.0	--
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)		

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm / MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm / MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm / MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm / MHz.

(5) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

(6) The provisions of §15.205 apply to intentional radiators operating under this section.

-27 dBm/MHz Limit=95.2+EIRP (dBm)=95.2-27=68.2 dBμV/m

Note:

(1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

Limit_{3m}(dBuV/m) = Limit_{30m}(dBuV/m) + 40Log(30m/3m)

(3) Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions or comply with 15.209 limits.

13.3. Test Procedure

Below 30 MHz:

The setting of the spectrum Analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10

2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.

3. The EUT was placed on a turntable with 80 cm meter above ground.

4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of 1 meter height antenna tower.

5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are

then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore, sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KdB 414788.

Below 1 GHz and above 30 MHz:

The setting of the spectrum Analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10.

2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

3. The EUT was placed on a turntable with 80 cm above ground.

4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.

5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz:

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10.

2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a band rejection filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

3. The EUT was placed on a turntable with 1.5m above ground.

4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.

5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.

6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for AVG measurements. For the Duty Cycle please refer to clause 8.1.ON TIME AND DUTY CYCLE.

7. Restriction band: Investigated frequency range from 5.15-5.25 GHz, 5250-5350 GHz, 5470-5725 GHz, 5.725-5.85 GHz.

All restriction band should comply with 15.209, other emission should be at least 20 dB below the fundamental.

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: The EUT does not support simultaneous transmission.

Note 3: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

13.4. Test Result

PASS. (See below detailed test result)

All the emissions except fundamental emission from 9kHz to 40GHz were comply with 15.209 limit.

Note 1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz, so the final test was performed with frequency range from 30 MHz to 40 GHz and recorded in below.

Note 2: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in 11a mode.

Note 3: For below test data, when the limit tabular marked “/” means this frequency point is the fundamental emission and no need comply with this limit.

Note 4: As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit

Note 5: For emissions Above 1 GHz, all mode have been tested, 11a mode of ANT1 is worse case and recorded in report.

Note 6: For emissions Above 18 GHz, the all the emission is ambient noise, so only show the worse case channel and recorded in report.


13.5. Original Test Data

Below 1 GHz and above 30 MHz test data Refer to appendix A

Above 1 GHz test data Refer to appendix B

14. AC Power Line Conducted Emissions

14.1. Block Diagram of Test Setup

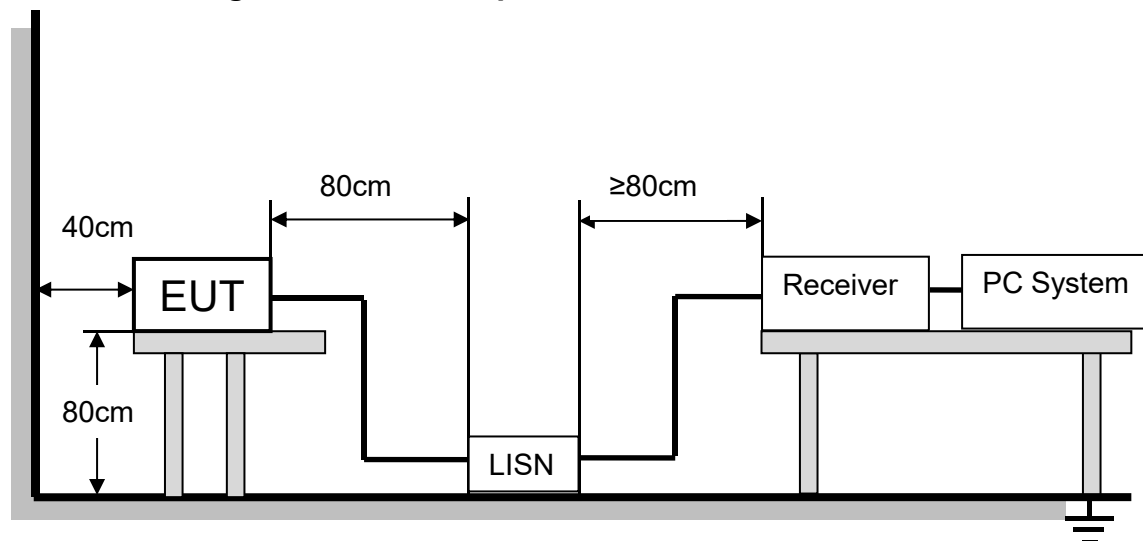

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through an Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

14.2. Limits

Please refer to CFR 47 FCC §15.207 (a).

Frequency (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

14.3. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test equipment as described in clause 10.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

14.4. Test Result

Pass. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded worse case.

Note3: $\text{Measurement} = \text{Reading Level} + \text{Correct Factor}$

$\text{Over} = \text{Measurement} - \text{Limit}$

14.5. Original Test Data

AC Power Line Conducted Emission Test Data Refer to appendix C

15. Dynamic Frequency Selection

15.1. Applicability of DFS Requirements

A U-NII network will employ a DFS function to detect signals from radar systems and to avoid co-channel operation with these systems. This applies to the 5250-5350 MHz and/or 5470-5725 MHz bands.

Within the context of the operation of the DFS function, a U-NII device will operate in either Master Mode or Client Mode. U-NII devices operating in Client Mode can only operate in a network controlled by a U-NII device operating in Master Mode.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	☐ Master	☒ Client Without Radar Detection	☐ Client with Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	☐ Master Device or Client with Radar Detection	☒ Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	☐ Master Device or Client with Radar Detection	☒ Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

15.2. Limit

(1) DFS Detection Thresholds

Table 3: DFS Detection Thresholds for Master Devices and Client Devices with Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the

test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KdB Publication 662911 D01.

(2) DFS Response Requirements

Table 4: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required facilitating a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

15.3. Parameters of Radar Test Waveform

This section provides the parameters for required test waveforms, minimum percentage of successful detection, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Table 5 Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A	Roundup $\left\{ \frac{1}{360} \right\}$	60%	30
		Test B			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests. Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with

Test B and must also be unique and not repeated from the previous waveforms in Tests A or B. Test aggregate is average of the percentage of successful detections of short pulse radar types 1-4

15.4. Calibration of Radar Waveform

Radar Waveform Calibration Procedure:


A 50 ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to place of the master

The interference Radar Detection Threshold Level is $-62\text{dBm} + 0\text{dBi} + 1\text{dB} = -61\text{dBm}$ that had been taken into account the output power range and antenna gain.

The following equipment setup was used to calibrate the conducted radar waveform. A vector signal generator was utilized to establish the test signal level for radar type 0. During this process there were no transmissions by either the master or client device. The spectrum analyzer was switched to the zero spans (time domain) at the frequency of the radar waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz. The spectrum analyzer had offset -1.0dB to compensate RF cable loss 1.0dB.

The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was $-62\text{dBm} + 0\text{dBi} + 1\text{dB} = -61\text{dBm}$. Capture the spectrum analyzer plots on short pulse radar waveform.

Conducted Calibration Setup:

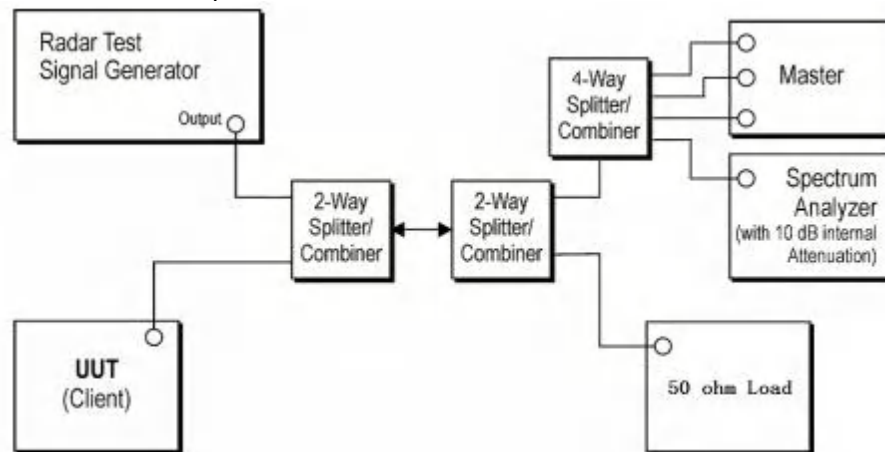



Note: 1. Use the software "Web" to set the frequency channel.

2. EUT is not support TPC and not with Radar detection.

Radar Waveform Calibration Result:

Radar Type 0

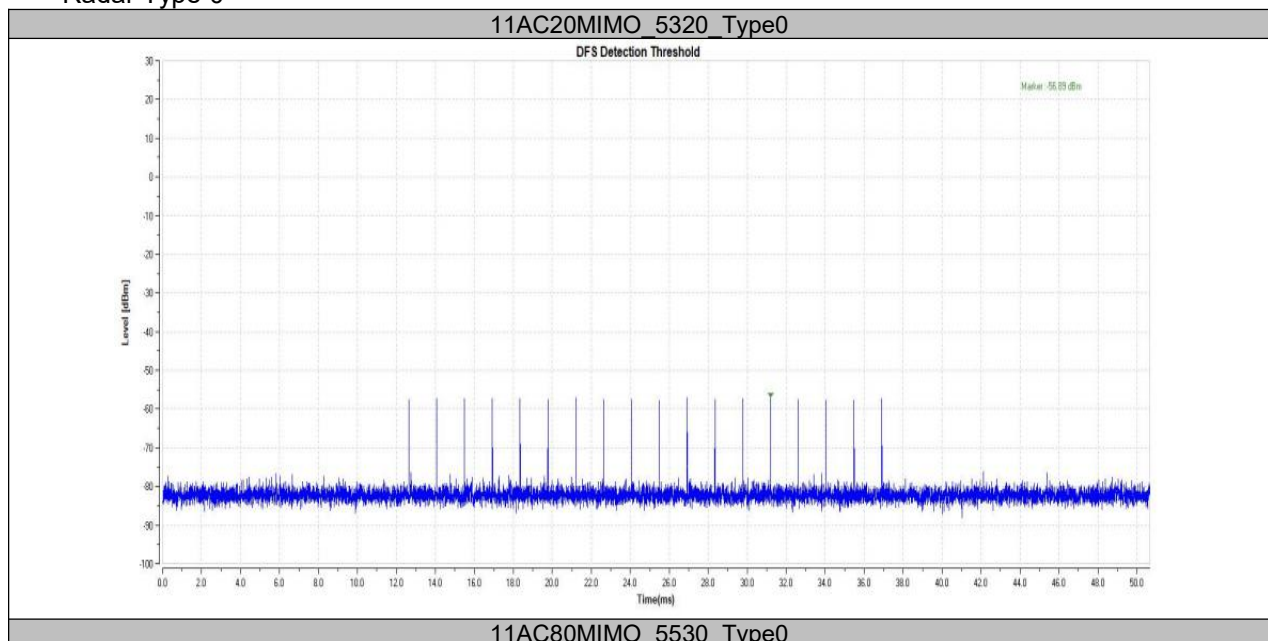

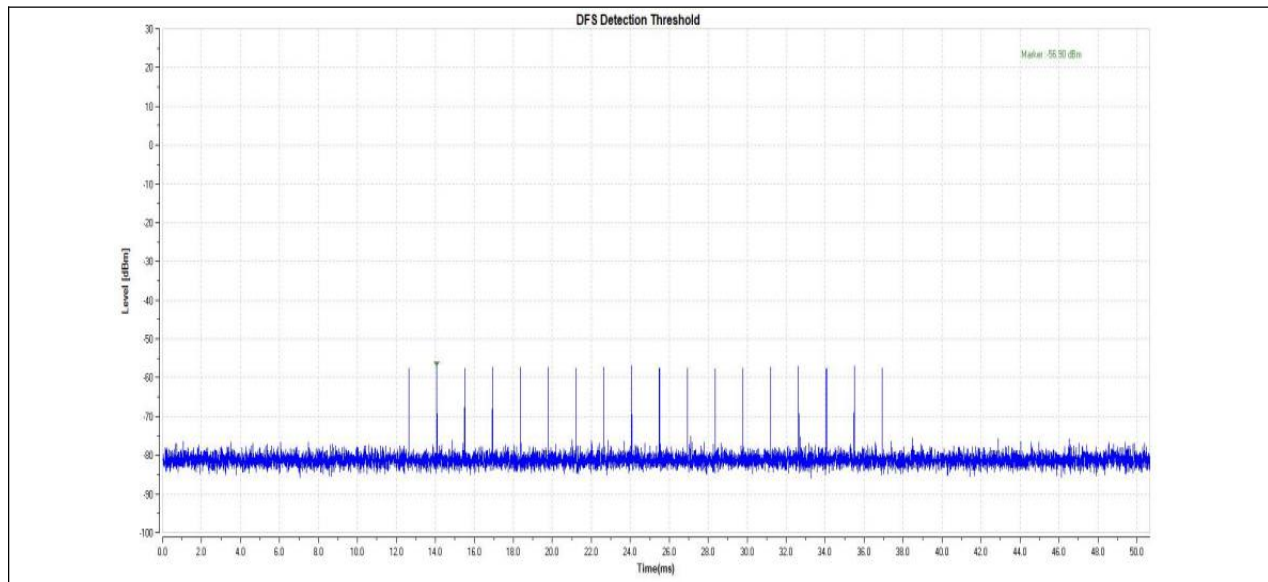

15.5. Channel Closing Transmission Time, Channel Move Time and Non-Occupancy Period

Block diagram of test setup Test Procedure:

The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.

The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.

A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.

EUT will associate with the master at channel. The file “iperf.exe” specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Test Software in order to properly load the network for the entire period of the test.

When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.

Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.


Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.

Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

15.6. Test Setup

Setup for Client with injection at the Master


Master Name	Brand Name	Model Name	FCC ID	Run-up Time(s)
ROG Rapture Tri-band Gaming Router	ASUS	GT-AXE11000	MSQ-RTAXJF00	90

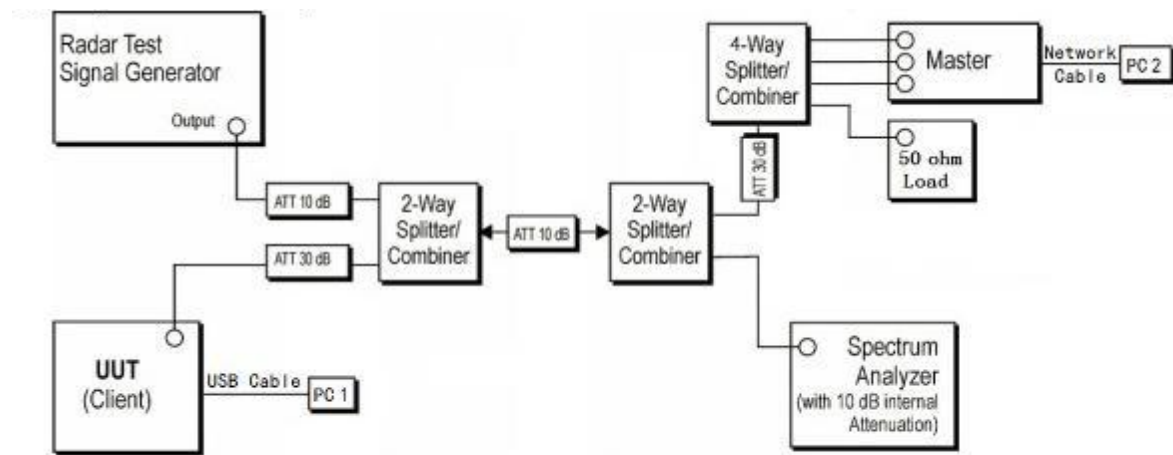


15.7. Test Result

BW/Channel	Test Item	Test Result	Limit	Results
20M/5320MHz	Channel Move Time	0.824s	< 10s	pass
	Channel Closing Transmission Time	0.214s	< 0.26s	pass
80M/5530MHz	Channel Move Time	0.912s	< 10s	pass
	Channel Closing Transmission Time	0.224s	< 0.26s	pass

Test plots as follows:

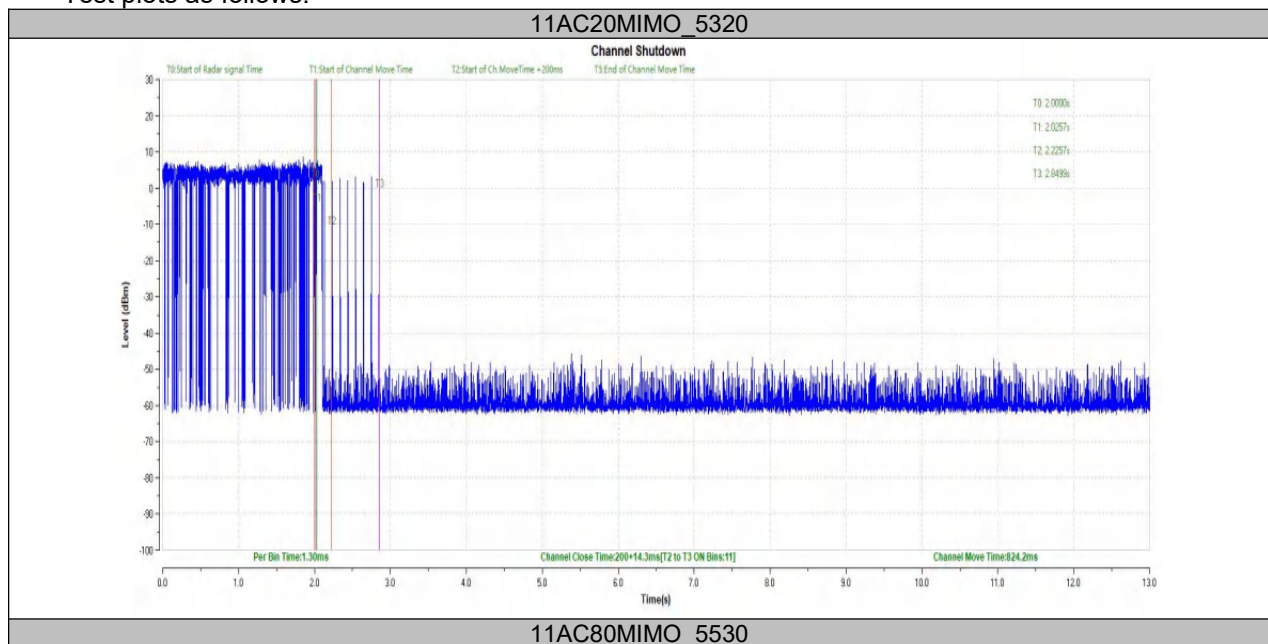

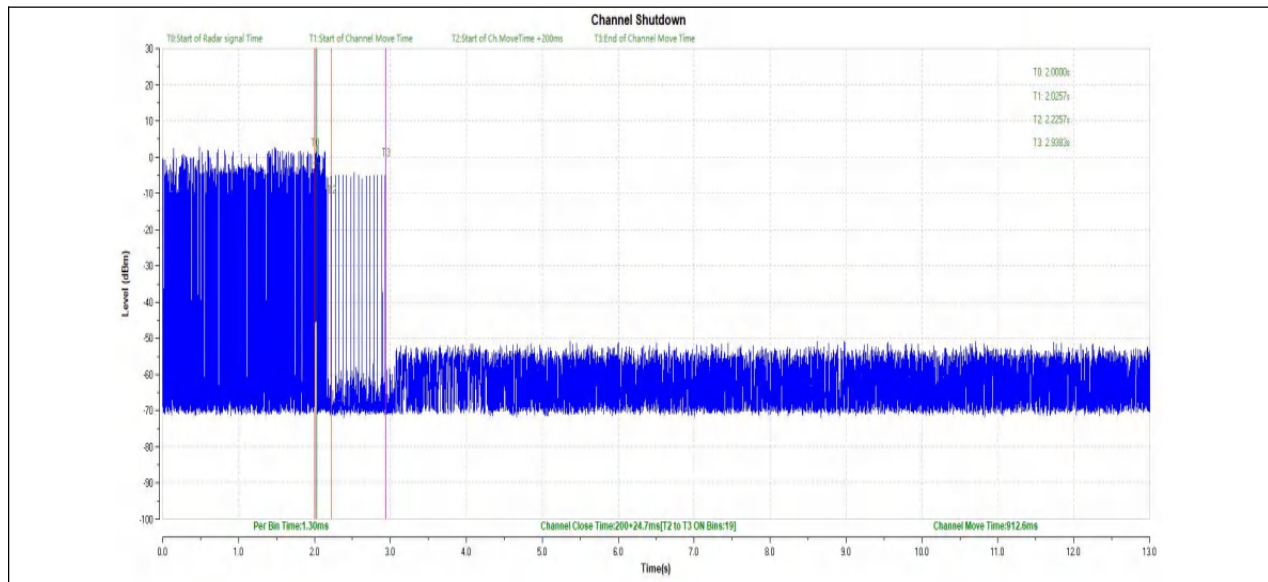

Note 1: We test all channels that need to be tested for DFS, reporting only part of the test pattern and data. In this report, we have identified other parts that are compliant with FCC regulations.

Note 2: The method of establishing a connection between the master device and the slave device. After inserting the EUT USB port into the PC, the laptop opens the router control interface to connect to the EUT and control its corresponding signal transmission.

1. The frequency range of equipment operation is: UNII-1: 5180 MHz to 5240 MHz, U-NII-2A: 5260 MHz to 5320 MHz, U-NII-2C: 5500 MHz to 5700 MHz, U-NI-3: 5745 MHz to 5825 MHz

2. The operating mode is Client, Equipped with radar detection capability, the main U-NII device FCC ID used for DFS testing is MSQ-RTAXJF00.

3. (Equivalent Isotropic Radiated Power (EIRP)) of the equipment, The antenna gain is 8.15 dBi.

4. Test sequences or messages that should be used for communication between Master and Client Devices, which are used for Channel loading. Stream the test file from the Master Device to the Client Device for IP based systems or frame based systems which dynamically allocate the talk/listen ratio.

5. The time required for the master and slave devices to fully start is 120 seconds.

6. The product belongs to Slave without radar detection.

7. Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user.

8. Manufacturers can manually select the first channel 5510 MHz.

16. Antenna Requirements

16.1. Applicable Requirements

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

16.2. Result

The device support 2T2R MIMO, the antennas both used for this product are dedicated FPC antennas and other than that furnished by the responsible party shall be used with the device, maximum antenna gain is 5.46 dBi for antenna 1, 4.80 dBi for antenna 2.


APPENDIX A – Radiated Emission Below 1GHz Test Data

Test Report

Project Information			
EUT:	Tablet		
Customer:			
Model:	MP10-Cesium-V	SN:	
Mode:	11A_OFDM_6M_5745	Voltage:	12V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-07-04 10:55:23

Test Graph

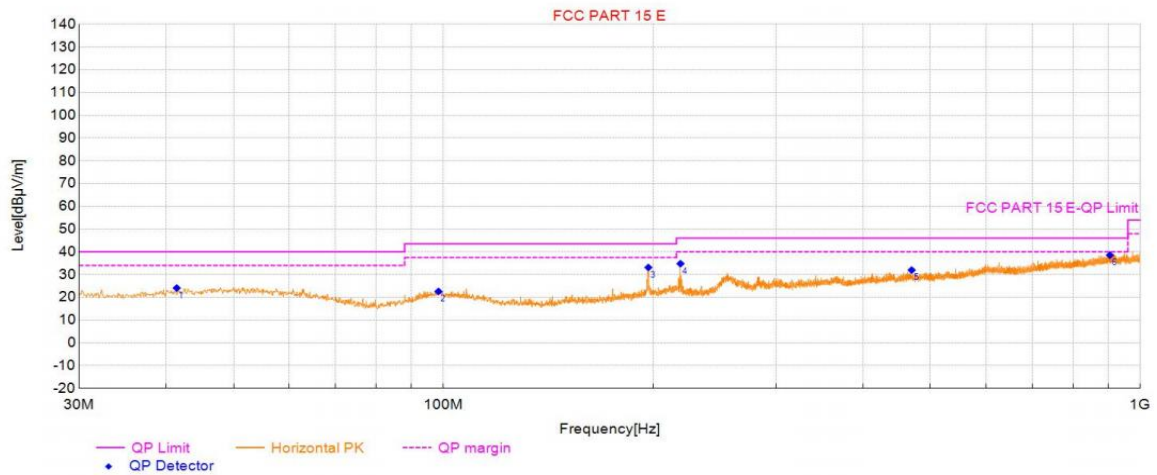

Final Data List

NO.	Freq. (MHz)	QP Reading (dBμV/m)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	41.45	4.05	20.04	24.09	40.00	15.91	100	105	Horizontal	PASS
2	98.39	3	19.60	22.60	43.50	20.90	100	6	Horizontal	PASS
3	196.86	13.49	19.65	33.14	43.50	10.36	100	346	Horizontal	PASS
4	218.88	14.17	20.63	34.80	46.00	11.20	100	332	Horizontal	PASS
5	469.84	5.06	26.92	31.98	46.00	14.02	100	2	Horizontal	PASS
6	904.35	4.83	33.71	38.54	46.00	7.46	100	194	Horizontal	PASS


Note: Margin=QP Limit - QP Value, QP Value=Reading + Factor

Test Report

Project Information			
EUT:	Tablet		
Customer:			
Model:	MP10-Cesium-V	SN:	
Mode:	11A_OFDM_6M_5745	Voltage:	12V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-07-04 10:56:05

Test Graph

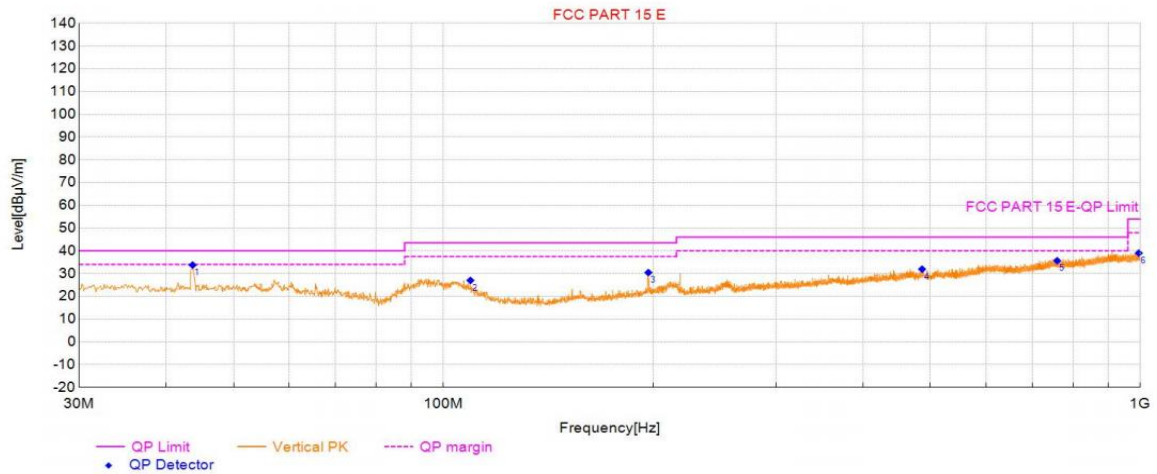

Final Data List

NO.	Freq. (MHz)	QP Reading (dBμV/m)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	43.68	13.25	20.50	33.75	40.00	6.25	100	86	Vertical	PASS
2	109.35	7.48	19.53	27.01	43.50	16.49	100	224	Vertical	PASS
3	196.86	10.8	19.65	30.45	43.50	13.05	100	246	Vertical	PASS
4	486.24	4.89	27.05	31.94	46.00	14.06	100	280	Vertical	PASS
5	759.71	3.66	32.00	35.66	46.00	10.34	100	288	Vertical	PASS
6	994.96	3.9	35.12	39.02	54.00	14.98	100	151	Vertical	PASS


Note: Margin=QP Limit - QP Value, QP Value=Reading + Factor

Test Report

Project Information			
EUT:	Tablet		
Customer:			
Model:	MP10-Cesium-V	SN:	
Mode:	11A_OFDM_6M_5180	Voltage:	12V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-07-04 10:57:28

Test Graph

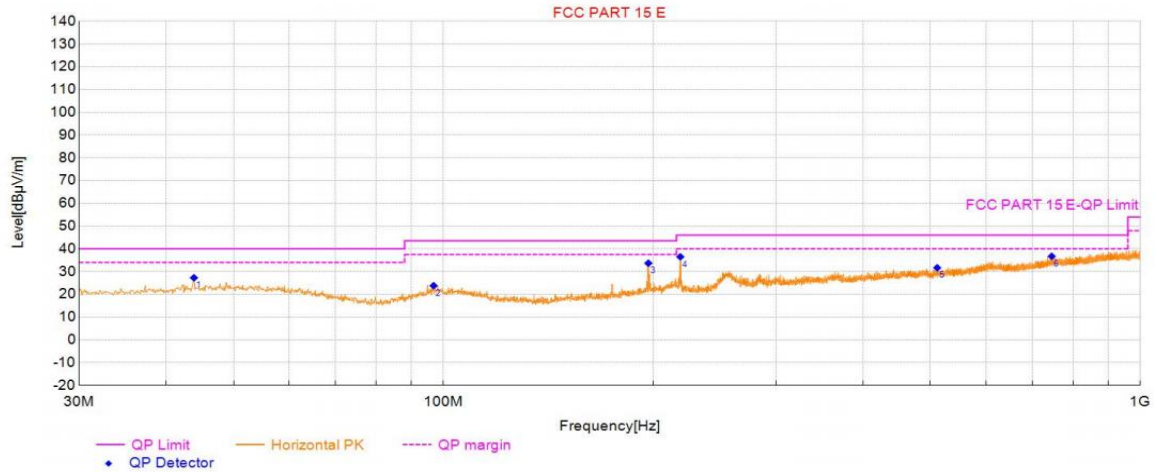

Final Data List

NO.	Freq. (MHz)	QP Reading (dBμV/m)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	43.87	6.75	20.53	27.28	40.00	12.72	100	2	Horizontal	PASS
2	96.84	4.56	19.23	23.79	43.50	19.71	100	2	Horizontal	PASS
3	196.86	14.03	19.65	33.68	43.50	9.82	100	324	Horizontal	PASS
4	218.78	15.86	20.63	36.49	46.00	9.51	100	314	Horizontal	PASS
5	511.17	4.26	27.41	31.67	46.00	14.33	100	223	Horizontal	PASS
6	746.22	4.78	31.95	36.73	46.00	9.27	100	107	Horizontal	PASS


Note: Margin=QP Limit - QP Value, QP Value=Reading + Factor

Test Report

Project Information			
EUT:	Tablet		
Customer:			
Model:	MP10-Cesium-V	SN:	
Mode:	11A_OFDM_6M_5180	Voltage:	12V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-07-04 10:58:10

Test Graph

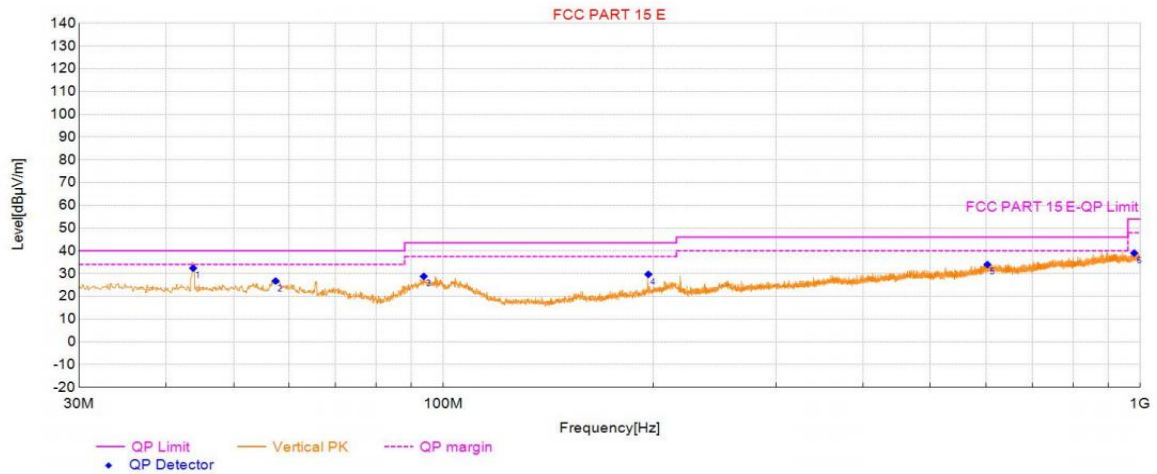

Final Data List

NO.	Freq. (MHz)	QP Reading (dBμV/m)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	43.75	11.89	20.50	32.39	40.00	7.61	100	107.9	Vertical	PASS
2	57.45	6.21	20.54	26.75	40.00	13.25	100	338	Vertical	PASS
3	93.74	10.32	18.46	28.78	43.50	14.72	100	0	Vertical	PASS
4	196.86	10.01	19.65	29.66	43.50	13.84	100	286	Vertical	PASS
5	603.42	4.18	29.79	33.97	46.00	12.03	100	5	Vertical	PASS
6	979.92	4.26	34.77	39.03	54.00	14.97	100	116	Vertical	PASS


Note: Margin=QP Limit - QP Value, QP Value=Reading + Factor

Test Report

Project Information			
EUT:	Tablet		
Customer:			
Model:	MP10-Cesium-V	SN:	
Mode:	11A_OFDM_6M_5320	Voltage:	12V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-07-04 11:01:07

Test Graph

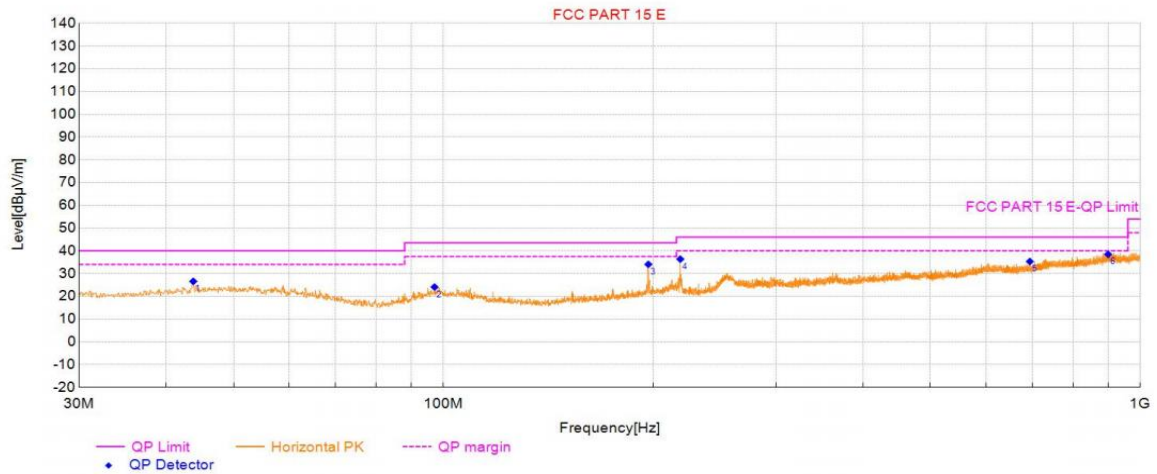

Final Data List

NO.	Freq. (MHz)	QP Reading (dBμV/m)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	43.78	6.09	20.52	26.61	40.00	13.39	100	2	Horizontal	PASS
2	97.13	4.8	19.30	24.10	43.50	19.40	100	2	Horizontal	PASS
3	196.86	14.41	19.65	34.06	43.50	9.44	100	359	Horizontal	PASS
4	218.78	15.73	20.63	36.36	46.00	9.64	100	326	Horizontal	PASS
5	694.13	4.87	30.45	35.32	46.00	10.68	100	236	Horizontal	PASS
6	899.01	4.77	33.68	38.45	46.00	7.55	100	198	Horizontal	PASS


Note: Margin=QP Limit - QP Value, QP Value=Reading + Factor

Test Report

Project Information			
EUT:	Tablet		
Customer:			
Model:	MP10-Cesium-V	SN:	
Mode:	11A_OFDM_6M_5320	Voltage:	12V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-07-04 11:01:49

Test Graph

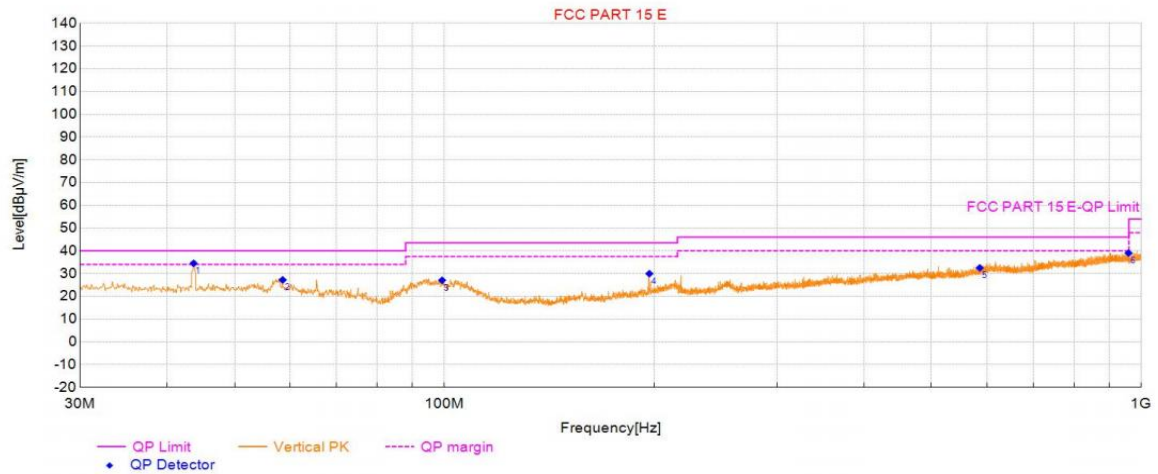

Final Data List

NO.	Freq. (MHz)	QP Reading (dBμV/m)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	43.68	14	20.50	34.50	40.00	5.50	100	12	Vertical	PASS
2	58.62	6.81	20.42	27.23	40.00	12.77	100	3	Vertical	PASS
3	99.26	7.25	19.82	27.07	43.50	16.43	100	62	Vertical	PASS
4	196.86	10.32	19.65	29.97	43.50	13.53	100	278	Vertical	PASS
5	586.35	3.26	29.24	32.50	46.00	13.50	100	124	Vertical	PASS
6	958.67	4.54	34.47	39.01	46.00	6.99	100	62	Vertical	PASS


Note: Margin=QP Limit - QP Value, QP Value=Reading + Factor

Test Report

Project Information			
EUT:	Tablet		
Customer:			
Model:	MP10-Cesium-V	SN:	
Mode:	11A_OFDM_6M_5500	Voltage:	12V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-07-04 11:03:45

Test Graph

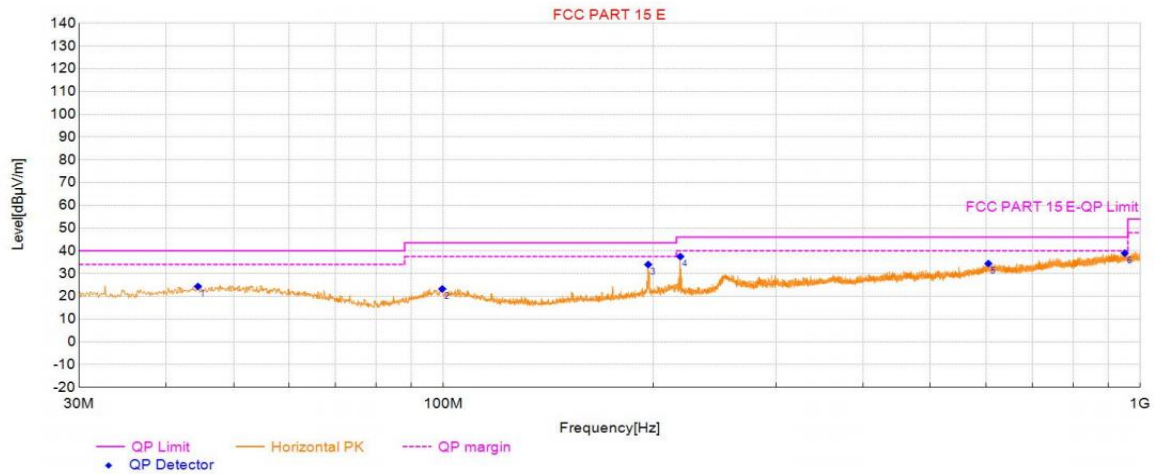

Final Data List

NO.	Freq. (MHz)	QP Reading (dBμV/m)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	44.45	3.7	20.65	24.35	40.00	15.65	100	340	Horizontal	PASS
2	99.65	3.37	19.91	23.28	43.50	20.22	100	272	Horizontal	PASS
3	196.76	14.34	19.64	33.98	43.50	9.52	100	10	Horizontal	PASS
4	218.78	16.87	20.63	37.50	46.00	8.50	100	314	Horizontal	PASS
5	605.27	4.62	29.80	34.42	46.00	11.58	100	41	Horizontal	PASS
6	950.04	4.62	34.36	38.98	46.00	7.02	100	23	Horizontal	PASS


Note: Margin=QP Limit - QP Value, QP Value=Reading + Factor

Test Report

Project Information			
EUT:	Tablet		
Customer:			
Model:	MP10-Cesium-V	SN:	
Mode:	11A_OFDM_6M_5500	Voltage:	12V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-07-04 11:04:27

Test Graph

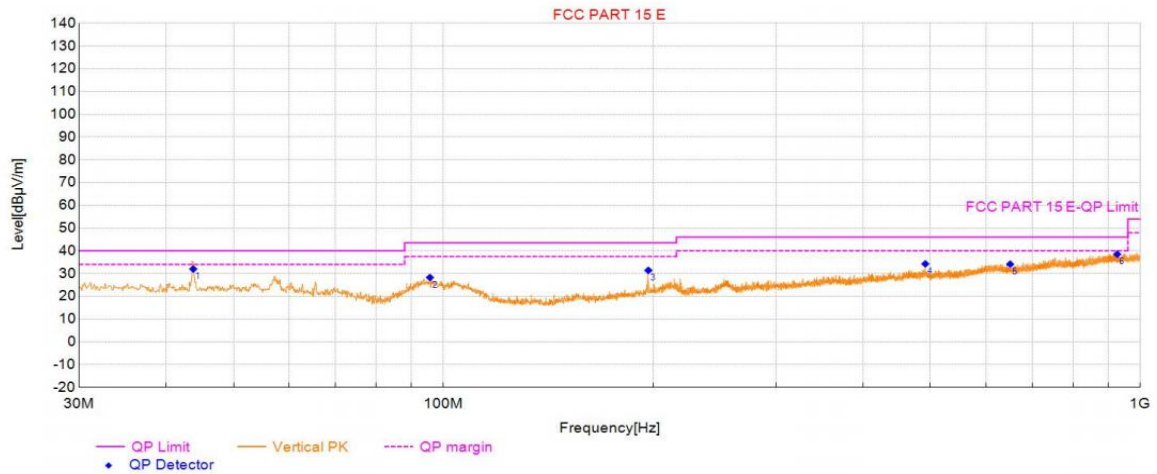

Final Data List

NO.	Freq. (MHz)	QP Reading (dBμV/m)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	43.77	11.51	20.50	32.01	40.00	7.99	100	79	Vertical	PASS
2	95.68	9.33	18.94	28.27	43.50	15.23	100	114	Vertical	PASS
3	196.86	11.76	19.65	31.41	43.50	12.09	100	271	Vertical	PASS
4	491.48	6.92	27.35	34.27	46.00	11.73	100	276	Vertical	PASS
5	650.47	4.09	30.06	34.15	46.00	11.85	100	203	Vertical	PASS
6	926.47	4.5	34.01	38.51	46.00	7.49	100	155	Vertical	PASS


Note: Margin=QP Limit - QP Value, QP Value=Reading + Factor

Test Report

Project Information			
EUT:	Tablet		
Customer:			
Model:	MP16-Cesium-V	SN:	
Mode:	11A_OFDM_6M_5745	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-11 20:14:13

Test Graph

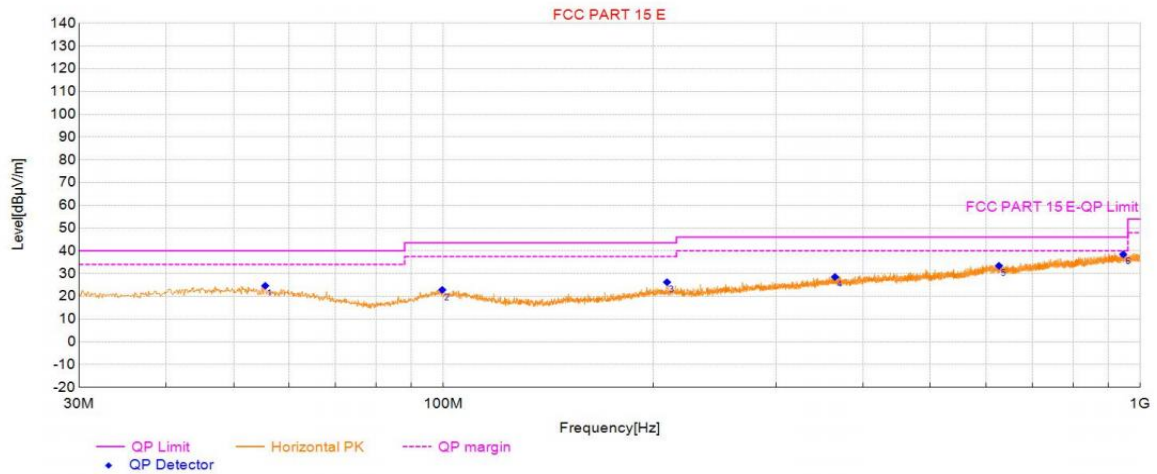

Final Data List

NO.	Freq. (MHz)	QP Reading (dBμV/m)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	55.51	3.93	20.73	24.66	40.00	15.34	100	327	Horizontal	PASS
2	99.65	2.94	19.91	22.85	43.50	20.65	100	340	Horizontal	PASS
3	209.37	6	20.23	26.23	43.50	17.27	100	163	Horizontal	PASS
4	364.68	3.98	24.54	28.52	46.00	17.48	100	229	Horizontal	PASS
5	626.80	3.49	29.93	33.42	46.00	12.58	100	181	Horizontal	PASS
6	945.00	4.24	34.22	38.46	46.00	7.54	100	56	Horizontal	PASS


Note: Margin=QP Limit - QP Value, QP Value=Reading + Factor

Test Report

Project Information			
EUT:	Tablet		
Customer:			
Model:	MP16-Cesium-V	SN:	
Mode:	11A_OFDM_6M_5745	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-11 20:14:55

Test Graph

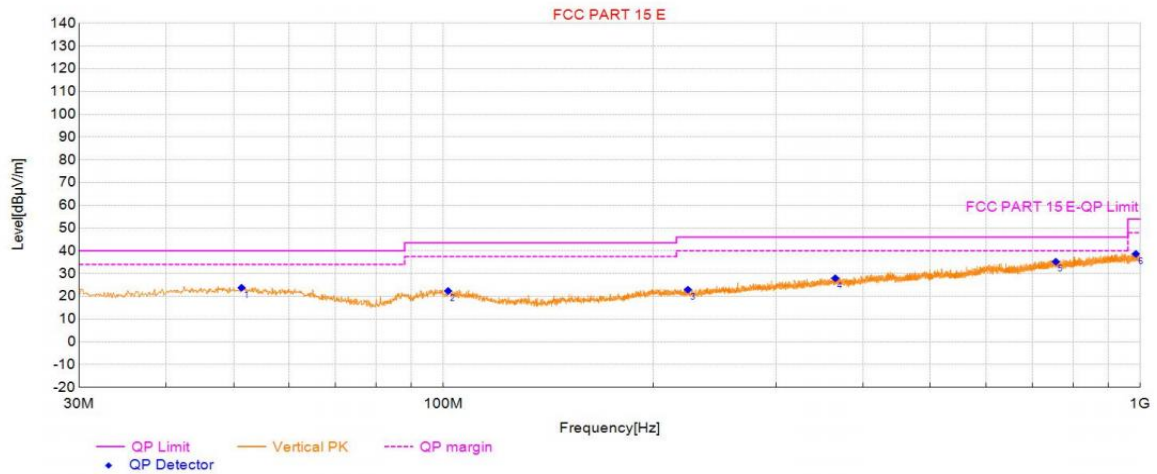

Final Data List

NO.	Freq. (MHz)	QP Reading (dBμV/m)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	51.34	2.61	21.16	23.77	40.00	16.23	100	63	Vertical	PASS
2	101.59	2.47	19.91	22.38	43.50	21.12	100	38	Vertical	PASS
3	224.31	2.18	20.77	22.95	46.00	23.05	100	29	Vertical	PASS
4	365.07	3.43	24.54	27.97	46.00	18.03	100	29	Vertical	PASS
5	756.31	3.22	32.02	35.24	46.00	10.76	100	260	Vertical	PASS
6	985.35	3.71	34.94	38.65	54.00	15.35	100	357	Vertical	PASS


Note: Margin=QP Limit - QP Value, QP Value=Reading + Factor

Test Report

Project Information			
EUT:	Tablet		
Customer:			
Model:	MP16-Cesium-V	SN:	
Mode:	11A_OFDM_6M_5180	Voltage:	12V
Environment:	24.2°C 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-22 10:19:22

Test Graph

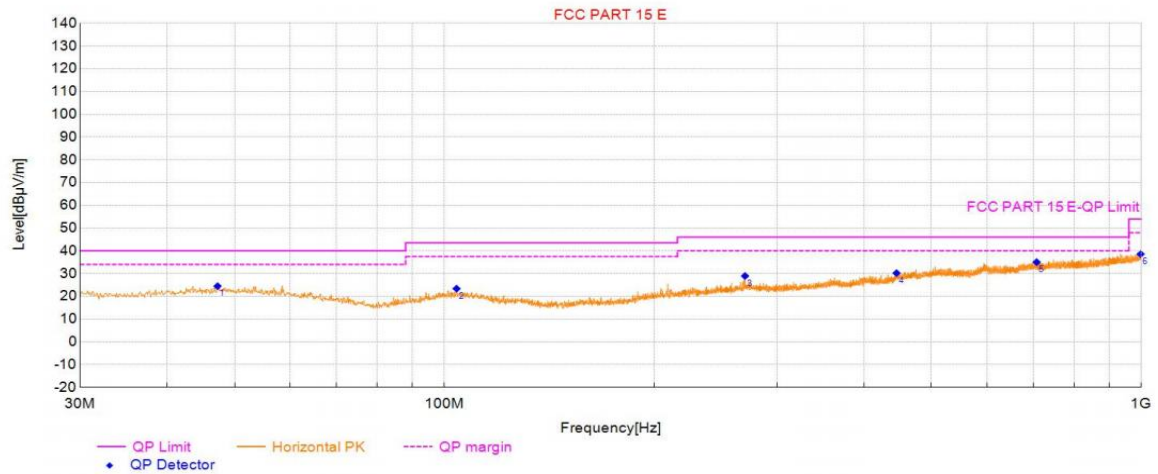

Final Data List

NO.	Freq. (MHz)	QP Reading (dBμV/m)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	47.27	3.49	21.01	24.50	40.00	15.50	100	176	Horizontal	PASS
2	104.12	3.6	19.78	23.38	43.50	20.12	100	356	Horizontal	PASS
3	270.00	7.15	21.81	28.96	46.00	17.04	100	312	Horizontal	PASS
4	445.40	4.26	25.97	30.23	46.00	15.77	100	92	Horizontal	PASS
5	707.61	4.24	30.80	35.04	46.00	10.96	100	227	Horizontal	PASS
6	997.67	3.42	35.13	38.55	54.00	15.45	100	68	Horizontal	PASS


Note: Margin=QP Limit - QP Value, QP Value=Reading + Factor

Test Report

Project Information			
EUT:	Tablet		
Customer:			
Model:	MP16-Cesium-V	SN:	
Mode:	11A_OFDM_6M_5180	Voltage:	12V
Environment:	24.2°C 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-22 10:20:04

Test Graph

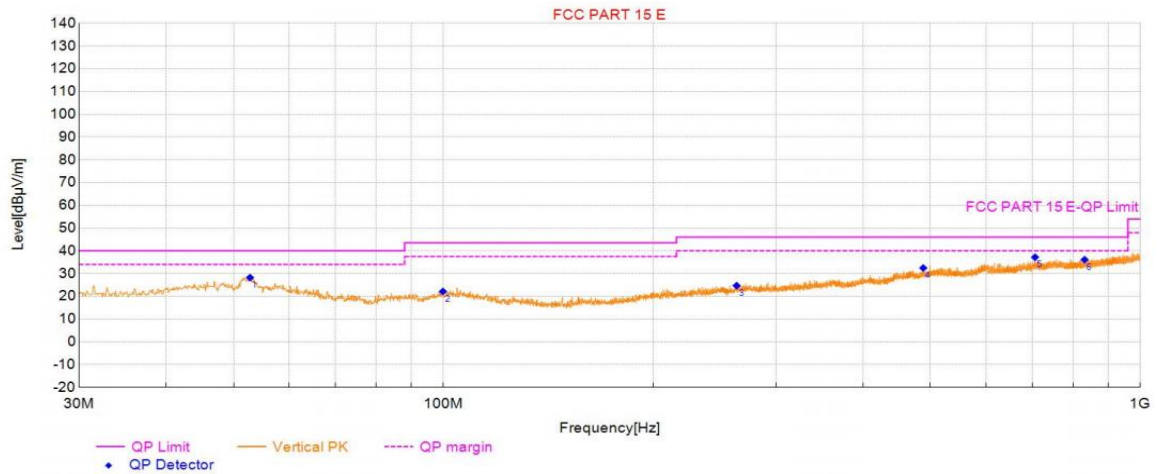

Final Data List

NO.	Freq. (MHz)	QP Reading (dBμV/m)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	52.80	7.25	21.00	28.25	40.00	11.75	100	135	Vertical	PASS
2	99.85	2.2	19.95	22.15	43.50	21.35	100	238	Vertical	PASS
3	263.50	3.08	21.61	24.69	46.00	21.31	100	185	Vertical	PASS
4	488.18	5.24	27.22	32.46	46.00	13.54	100	339	Vertical	PASS
5	706.16	6.44	30.76	37.20	46.00	8.80	100	310	Vertical	PASS
6	831.79	3.59	32.54	36.13	46.00	9.87	100	226	Vertical	PASS


Note: Margin=QP Limit - QP Value, QP Value=Reading + Factor

Test Report

Project Information			
EUT:	Tablet		
Customer:			
Model:	MP16-Cesium-V	SN:	
Mode:	11A_OFDM_6M_5320	Voltage:	12V
Environment:	24.2°C 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-22 10:21:20

Test Graph

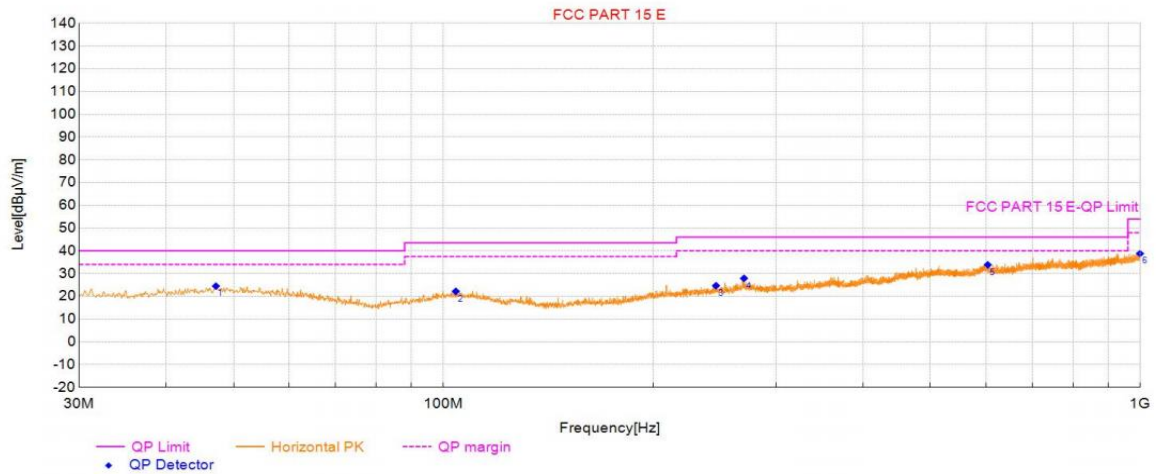

Final Data List

NO.	Freq. (MHz)	QP Reading (dBμV/m)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	47.17	3.48	21.00	24.48	40.00	15.52	100	217	Horizontal	PASS
2	104.21	2.41	19.78	22.19	43.50	21.31	100	125	Horizontal	PASS
3	246.14	3.2	21.48	24.68	46.00	21.32	100	125	Horizontal	PASS
4	270.00	6.1	21.81	27.91	46.00	18.09	100	82	Horizontal	PASS
5	604.01	4.06	29.79	33.85	46.00	12.15	100	358	Horizontal	PASS
6	998.84	3.66	35.12	38.78	54.00	15.22	100	210	Horizontal	PASS


Note: Margin=QP Limit - QP Value, QP Value=Reading + Factor

Test Report

Project Information			
EUT:	Tablet		
Customer:			
Model:	MP16-Cesium-V	SN:	
Mode:	11A_OFDM_6M_5320	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-22 10:22:01

Test Graph

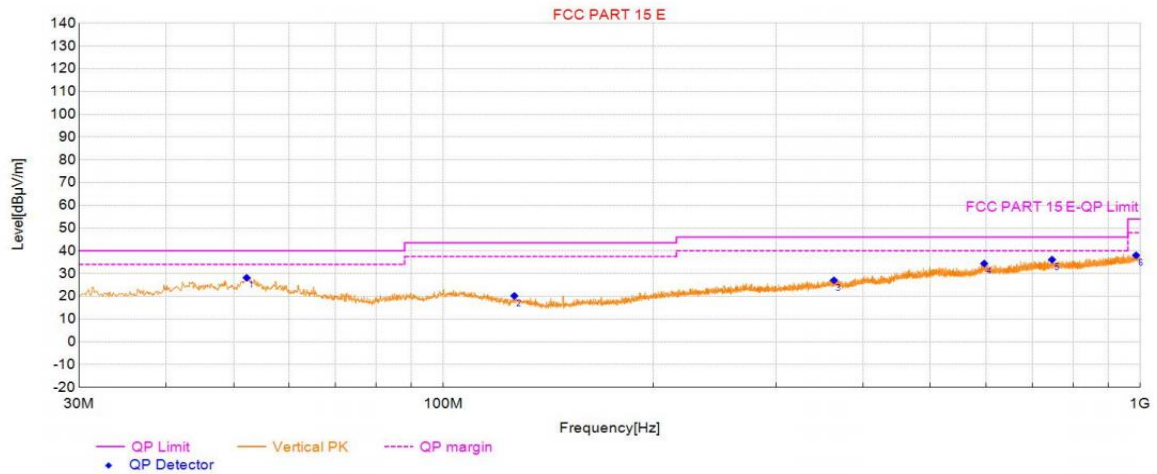

Final Data List

NO.	Freq. (MHz)	QP Reading (dBμV/m)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	52.22	7.11	21.06	28.17	40.00	11.83	100	82	Vertical	PASS
2	126.43	3.03	17.18	20.21	43.50	23.29	100	203	Vertical	PASS
3	363.42	2.57	24.50	27.07	46.00	18.93	100	246	Vertical	PASS
4	597.02	4.77	29.65	34.42	46.00	11.58	100	328	Vertical	PASS
5	746.90	4.17	31.97	36.14	46.00	9.86	100	117	Vertical	PASS
6	986.03	3.09	34.97	38.06	54.00	15.94	100	165	Vertical	PASS


Note: Margin=QP Limit - QP Value, QP Value=Reading + Factor

Test Report

Project Information			
EUT:	Tablet		
Customer:			
Model:	MP16-Cesium-V	SN:	
Mode:	11A_OFDM_6M_5500	Voltage:	12V
Environment:	24.2°C 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-22 10:24:22

Test Graph

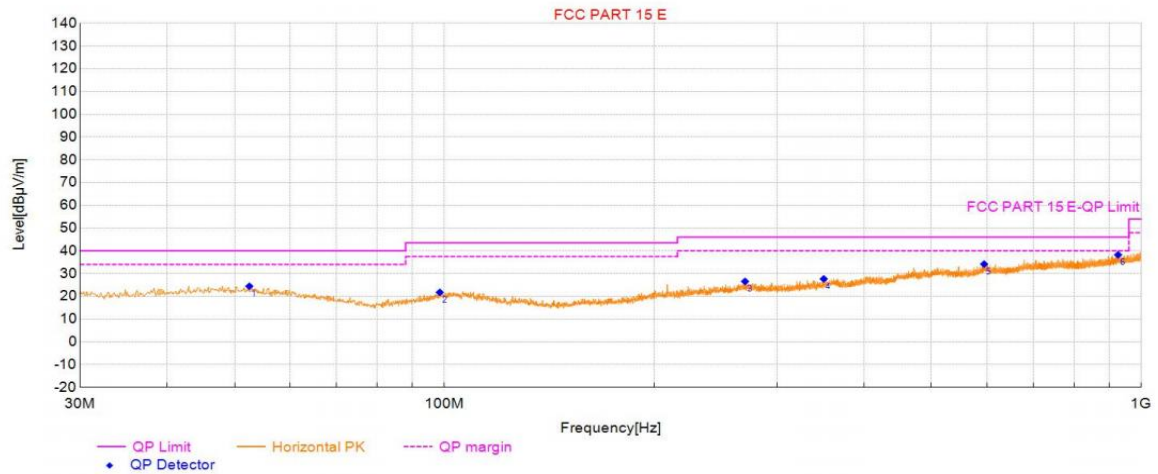

Final Data List

NO.	Freq. (MHz)	QP Reading (dBμV/m)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	52.51	3.41	21.04	24.45	40.00	15.55	100	66	Horizontal	PASS
2	98.49	2.14	19.62	21.76	43.50	21.74	100	248	Horizontal	PASS
3	270.00	4.75	21.81	26.56	46.00	19.44	100	100	Horizontal	PASS
4	350.23	3.45	24.22	27.67	46.00	18.33	100	347	Horizontal	PASS
5	594.89	4.61	29.57	34.18	46.00	11.82	100	190	Horizontal	PASS
6	926.08	4.26	33.99	38.25	46.00	7.75	100	212	Horizontal	PASS


Note: Margin=QP Limit - QP Value, QP Value=Reading + Factor

Test Report

Project Information			
EUT:	Tablet		
Customer:			
Model:	MP16-Cesium-V	SN:	
Mode:	11A_OFDM_6M_5500	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-22 10:25:04

Test Graph

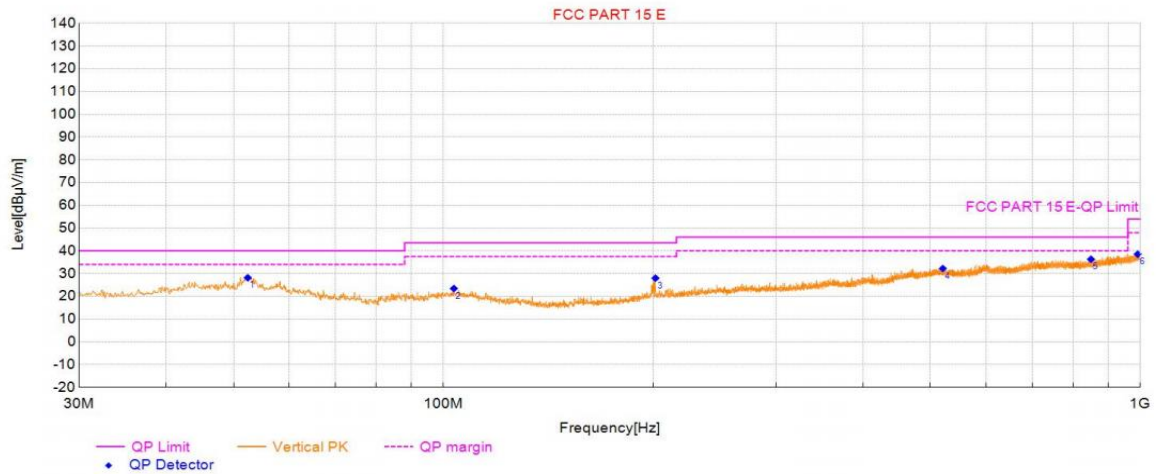

Final Data List

NO.	Freq. (MHz)	QP Reading (dBμV/m)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	52.41	7.12	21.05	28.17	40.00	11.83	100	291	Vertical	PASS
2	103.53	3.64	19.81	23.45	43.50	20.05	100	64	Vertical	PASS
3	201.51	8.01	20.00	28.01	43.50	15.49	100	241	Vertical	PASS
4	520.77	4.66	27.57	32.23	46.00	13.77	100	248	Vertical	PASS
5	849.44	3.49	32.81	36.30	46.00	9.70	100	68	Vertical	PASS
6	991.27	3.41	35.11	38.52	54.00	15.48	100	100	Vertical	PASS


Note: Margin=QP Limit - QP Value, QP Value=Reading + Factor

Test Report

Project Information			
EUT:	Tablet		
Customer:			
Model:	MP24-Cesium-V	SN:	
Mode:	11A_OFDM_6M_5745	Voltage:	12V
Environment:	24.2°C 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-11 21:07:21

Test Graph

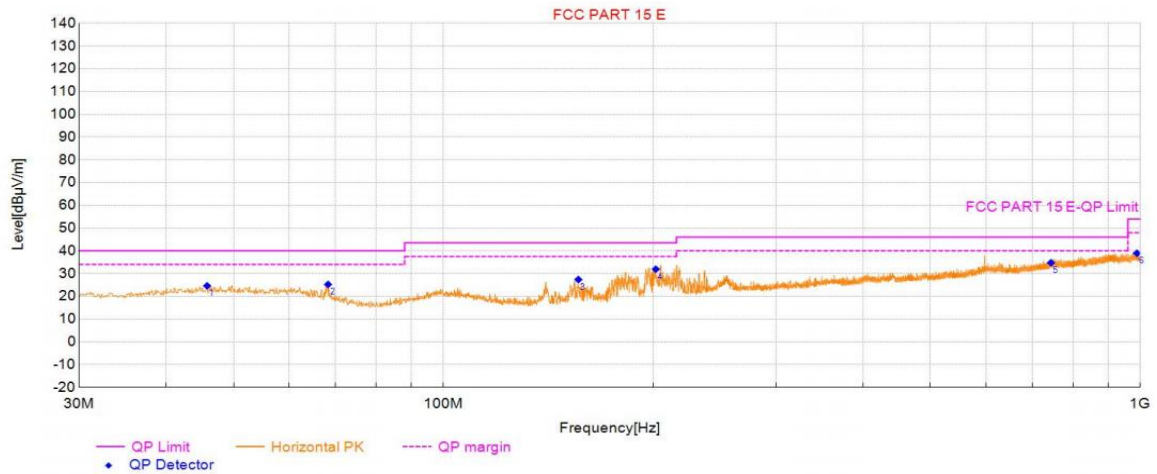

Final Data List

NO.	Freq. (MHz)	QP Reading (dBμV/m)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	45.81	3.78	20.85	24.63	40.00	15.37	100	118	Horizontal	PASS
2	68.32	7.52	17.73	25.25	40.00	14.75	100	2	Horizontal	PASS
3	156.21	10.31	17.07	27.38	43.50	16.12	100	353	Horizontal	PASS
4	201.71	11.92	20.01	31.93	43.50	11.57	100	10	Horizontal	PASS
5	744.48	2.84	31.92	34.76	46.00	11.24	100	126	Horizontal	PASS
6	988.65	3.9	35.05	38.95	54.00	15.05	100	152	Horizontal	PASS


Note: Margin=QP Limit - QP Value, QP Value=Reading + Factor

Test Report

Project Information			
EUT:	Tablet		
Customer:			
Model:	MP24-Cesium-V	SN:	
Mode:	11A_OFDM_6M_5745	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-11 21:08:03

Test Graph

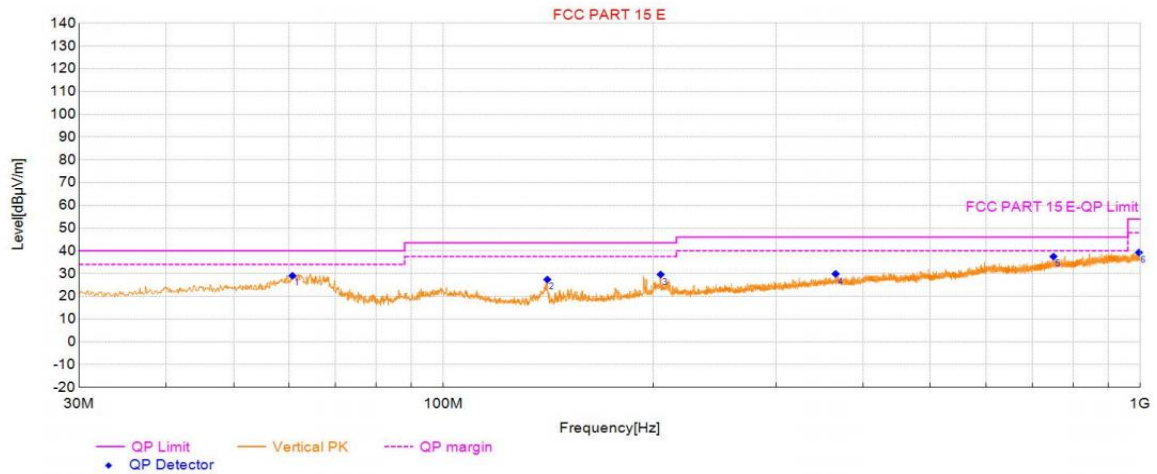

Final Data List

NO.	Freq. (MHz)	QP Reading (dBμV/m)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	60.75	8.98	20.05	29.03	40.00	10.97	100	271	Vertical	PASS
2	140.98	11.23	16.17	27.40	43.50	16.10	100	216	Vertical	PASS
3	205.01	9.5	20.11	29.61	43.50	13.89	100	358	Vertical	PASS
4	365.36	5.32	24.55	29.87	46.00	16.13	100	108	Vertical	PASS
5	750.59	5.45	32.04	37.49	46.00	8.51	100	353	Vertical	PASS
6	995.34	4.16	35.11	39.27	54.00	14.73	100	227	Vertical	PASS


Note: Margin=QP Limit - QP Value, QP Value=Reading + Factor

Test Report

Project Information			
EUT:	Tablet		
Customer:			
Model:	MP24-Cesium-V	SN:	
Mode:	11A_OFDM_6M_5180	Voltage:	12V
Environment:	24.2°C 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-22 11:16:10

Test Graph

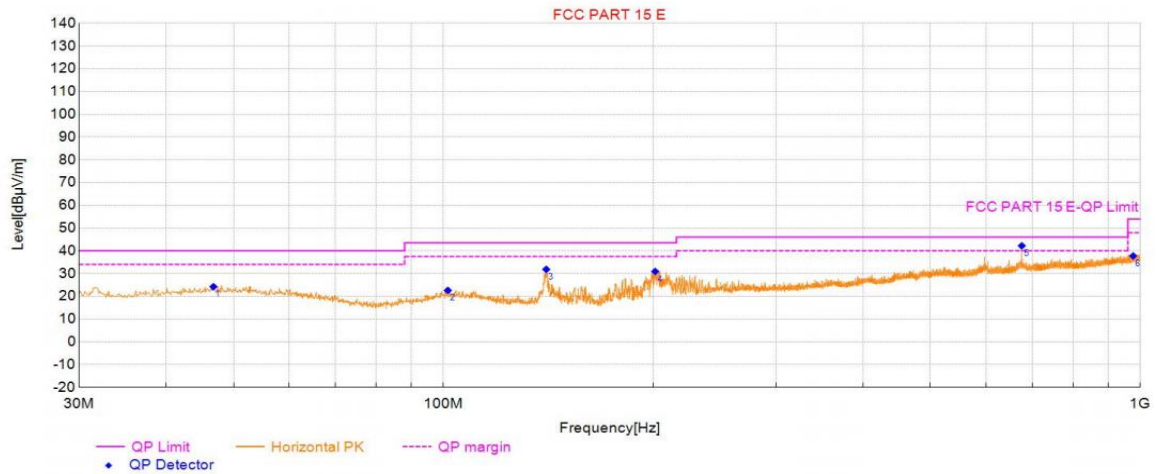

Final Data List

NO.	Freq. (MHz)	QP Reading (dBμV/m)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	46.78	3.29	20.95	24.24	40.00	15.76	100	205	Horizontal	PASS
2	101.50	2.68	19.92	22.60	43.50	20.90	100	288	Horizontal	PASS
3	140.49	15.72	16.13	31.85	43.50	11.65	100	360	Horizontal	PASS
4	201.32	10.92	20.00	30.92	43.50	12.58	100	28	Horizontal	PASS
5	675.99	11.86	30.36	42.22	46.00	3.78	100	224	Horizontal	PASS
6	976.62	3.06	34.69	37.75	54.00	16.25	100	283	Horizontal	PASS


Note: Margin=QP Limit - QP Value, QP Value=Reading + Factor

Test Report

Project Information			
EUT:	Tablet		
Customer:			
Model:	MP24-Cesium-V	SN:	
Mode:	11A_OFDM_6M_5180	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-22 11:16:51

Test Graph

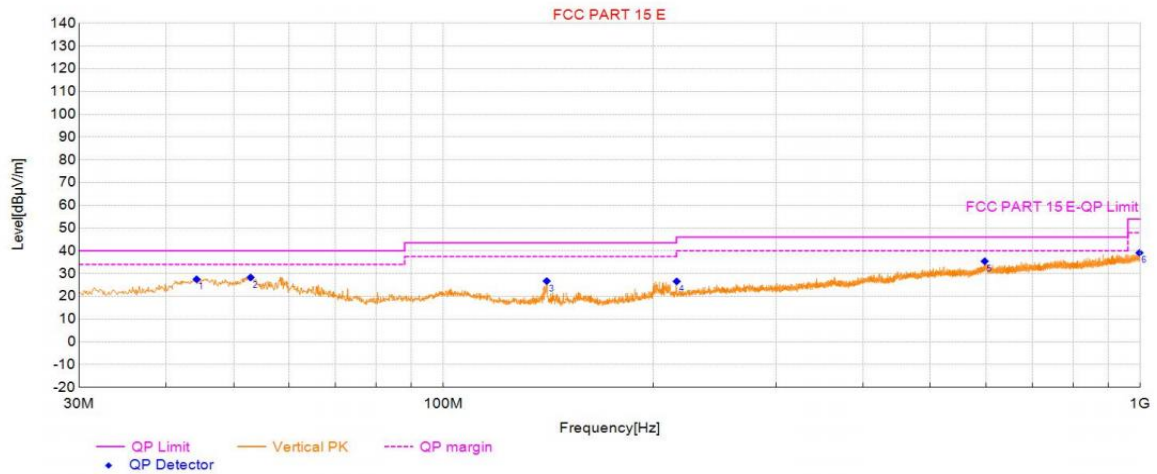

Final Data List

NO.	Freq. (MHz)	QP Reading (dBμV/m)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	44.26	6.89	20.61	27.50	40.00	12.50	100	166	Vertical	PASS
2	52.89	7.32	20.99	28.31	40.00	11.69	100	296	Vertical	PASS
3	140.69	10.57	16.15	26.72	43.50	16.78	100	358	Vertical	PASS
4	216.16	6.07	20.51	26.58	46.00	19.42	100	358	Vertical	PASS
5	597.99	5.73	29.70	35.43	46.00	10.57	100	255	Vertical	PASS
6	997.19	4.01	35.12	39.13	54.00	14.87	100	150	Vertical	PASS


Note: Margin=QP Limit - QP Value, QP Value=Reading + Factor

Test Report

Project Information			
EUT:	Tablet		
Customer:			
Model:	MP24-Cesium-V	SN:	
Mode:	11A_OFDM_6M_5320	Voltage:	12V
Environment:	24.2°C 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-22 11:18:32

Test Graph

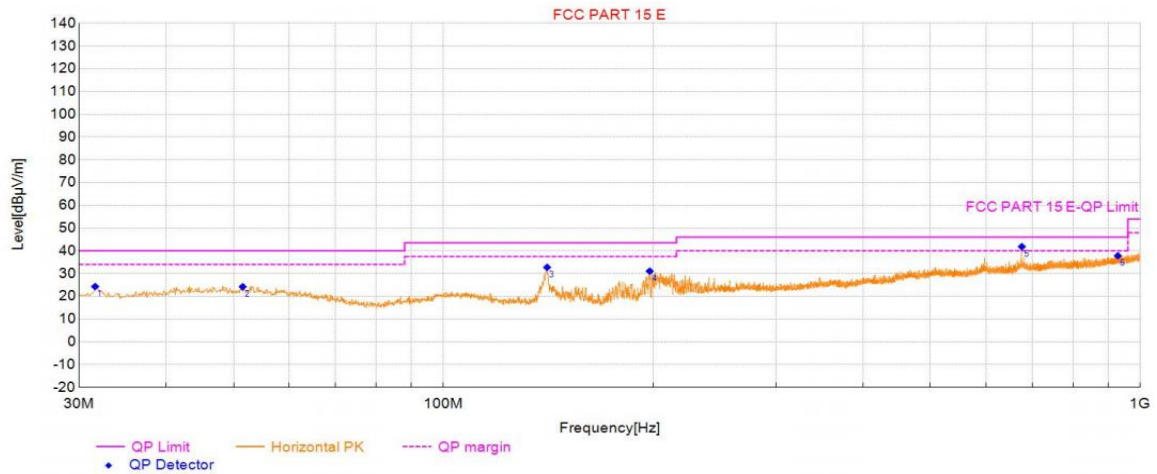

Final Data List

NO.	Freq. (MHz)	QP Reading (dBμV/m)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	31.65	6.73	17.59	24.32	40.00	15.68	100	170	Horizontal	PASS
2	51.54	3.08	21.14	24.22	40.00	15.78	100	301	Horizontal	PASS
3	140.88	16.58	16.17	32.75	43.50	10.75	100	2	Horizontal	PASS
4	197.73	11.33	19.73	31.06	43.50	12.44	100	166	Horizontal	PASS
5	675.99	11.48	30.36	41.84	46.00	4.16	100	223	Horizontal	PASS
6	928.41	3.83	34.02	37.85	46.00	8.15	100	267	Horizontal	PASS


Note: Margin=QP Limit - QP Value, QP Value=Reading + Factor

Test Report

Project Information			
EUT:	Tablet		
Customer:			
Model:	MP24-Cesium-V	SN:	
Mode:	11A_OFDM_6M_5320	Voltage:	12V
Environment:	24.2°C 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-22 11:19:14

Test Graph

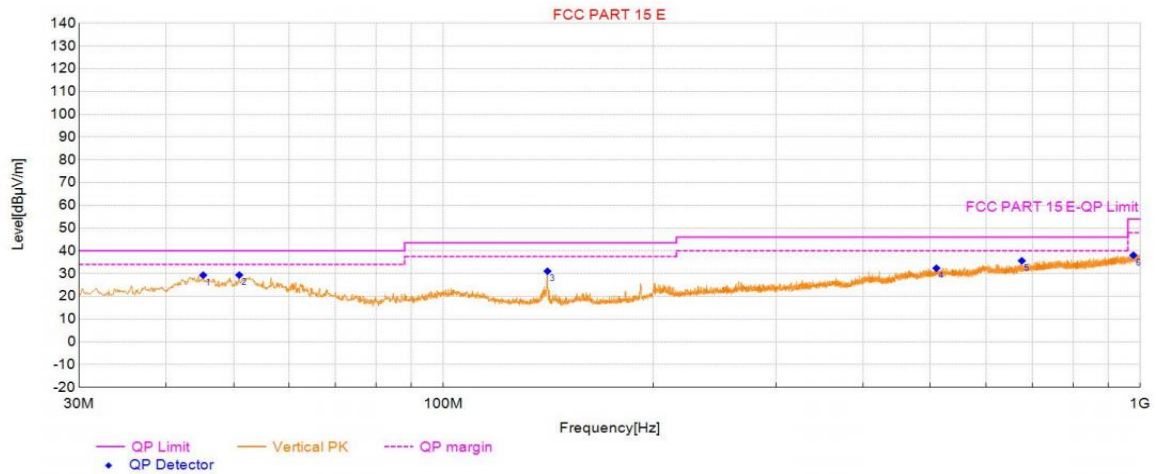

Final Data List

NO.	Freq. (MHz)	QP Reading (dBμV/m)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	45.23	8.52	20.79	29.31	40.00	10.69	100	233	Vertical	PASS
2	50.95	8.17	21.20	29.37	40.00	10.63	100	208	Vertical	PASS
3	141.08	14.88	16.17	31.05	43.50	12.45	100	358	Vertical	PASS
4	509.81	4.98	27.39	32.37	46.00	13.63	100	82	Vertical	PASS
5	675.99	5.26	30.36	35.62	46.00	10.38	100	208	Vertical	PASS
6	977.30	3.38	34.70	38.08	54.00	15.92	100	7	Vertical	PASS


Note: Margin=QP Limit - QP Value, QP Value=Reading + Factor

Test Report

Project Information			
EUT:	Tablet		
Customer:			
Model:	MP24-Cesium-V	SN:	
Mode:	11A_OFDM_6M_5500	Voltage:	12V
Environment:	24.2°C 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-22 11:21:43

Test Graph

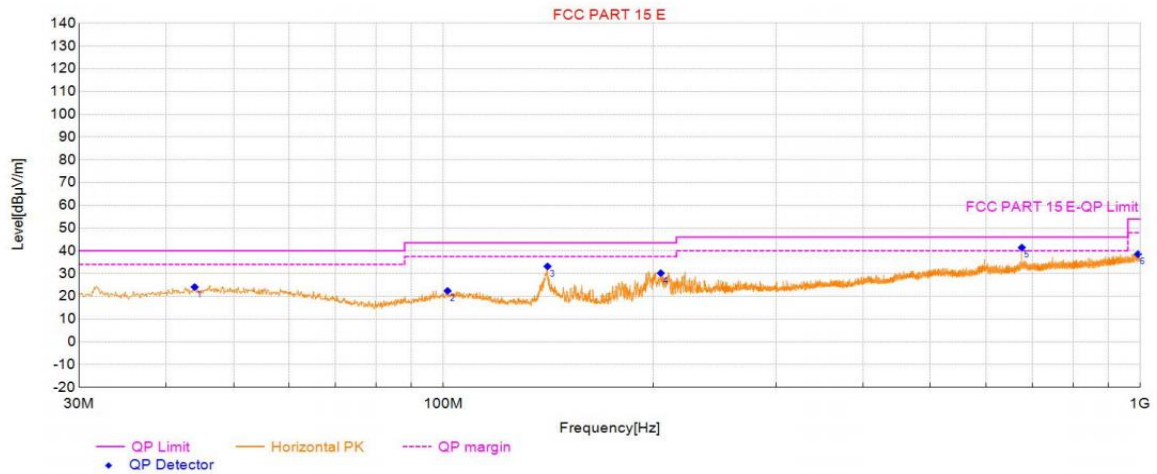

Final Data List

NO.	Freq. (MHz)	QP Reading (dBμV/m)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	43.97	3.56	20.55	24.11	40.00	15.89	100	0	Horizontal	PASS
2	101.40	2.49	19.92	22.41	43.50	21.09	100	60	Horizontal	PASS
3	141.08	17	16.17	33.17	43.50	10.33	100	358	Horizontal	PASS
4	205.10	10.09	20.11	30.20	43.50	13.30	100	0	Horizontal	PASS
5	675.99	11.09	30.36	41.45	46.00	4.55	100	232	Horizontal	PASS
6	992.14	3.43	35.10	38.53	54.00	15.47	100	111	Horizontal	PASS

Note: Margin=QP Limit - QP Value, QP Value=Reading + Factor