

FCC CERTIFICATION TEST REPORT

Applicant:	iFIT Health and Fitness, Inc.
Address:	1500 S 1000 W, Logan, Utah 84321, United States
Manufacturer:	Guangzhou Yuandong Smart Sports Technology Co., Ltd.
Address:	Room 1002, Building 2, No. 6 Yunpu Fourth Road, Huangpu District, Guangzhou
Product Description:	Tablet
Brand Name:	iFIT
Tested Model:	MP24-Xenon1.2-V
FCC ID:	OMC453584V
Report No.:	JCF250530111-004
Received Date:	May 30, 2025
Tested Date:	May 30, 2025 ~ Mar. 12, 2026
Issued Date:	Mar. 12, 2026
Test Standards:	FCC Rules and Regulations Part 15 Subpart E,
Test Procedure:	ANSI C63.10:2020, 789033 D02 General U-NII Test Procedures New Rules v02r01, 662911 D01 Multiple Transmitter Output v02r01
Test Result:	Pass
Prepared By:  <u>Roger Li/Engineer</u> Date: Mar. 12, 2026	
Reviewed By:  <u>Kennys Zhang/Engineer</u> Date: Mar. 12, 2026	
Approved By:  <u>Talent Zhang/Engineer</u> Date: Mar. 12, 2026	



Note: The test results in this report apply exclusively to the tested model / sample. Without written approval of Guangzhou Jingce Testing Technology Co., Ltd. the test report shall not be reproduced except in full.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
--	/	Mar. 12, 2026	Original Report	/

Reference Report	Differences between the statement
JCF240131021-004	Based on the original report "JCF240131021-004", the appearance photo has been updated, and an serial port socket has been added. The wireless related components have not been changed. After assessment, only need test the worst case of radiated emission and DFS.

Table of Contents

1. Test Report Declare	5
2. Summary of test results	6
3. Test Laboratory	6
4. Equipment Under Test	7
4.1. Description of EUT	7
4.2. Channel List	7
4.3. Test Channel Configuration	9
4.4. Test Environment Conditions	10
4.5. The Worse Case Power Setting Parameter	10
4.6. Description of Available Antennas	12
5. Description of Test Setup	12
5.1. Accessory	12
5.2. Support Equipment	12
5.3. Test Setup	12
5.4. Setup Diagram for Tests	12
6. Measurement uncertainty	13
7. Measuring Instrument and Software Used	13
8. Duty Cycle	16
8.1. Block Diagram of Test Setup	16
8.2. Limits	16
8.3. Procedure	16
8.4. Results	16
9. 26dB Bandwidth and 6dB Bandwidth	17
9.1. Block Diagram of Test Setup	17
9.2. Limits	17
9.3. Test Procedure	17
9.4. Test Result	17
10. Maximum Output Power	18
10.1. Block Diagram of Test Setup	18
10.2. Limits	18
10.3. Test Procedure	18
10.4. Test Result	18
11. Power Spectral Density	19
11.1. Block Diagram of Test Setup	19
11.2. Limits	19
11.3. Test Procedure	19
11.4. Test Result	20
12. Frequency Stability Measurement	21
12.1. Block Diagram of Test Setup	21
12.2. Limit of Frequency Stability	21
12.3. Test Procedures	21
12.4. Test Result	21
13. Radiated Emission	22
13.1. Block Diagram of Test Setup	22
13.2. Limit	23
13.3. Test Procedure	24
13.4. Test Result	26
14. AC Power Line Conducted Emissions	27
14.1. Block Diagram of Test Setup	27
14.2. Limits	27
14.3. Test Procedure	27
14.4. Test Result	28

15. Dynamic Frequency Selection	29
15.1. Applicability of DFS Requirements	29
15.2. Limit	30
15.3. Parameters of Radar Test Waveform	30
15.4. Calibration of Radar Waveform	31
15.5. Channel Closing Transmission Time, Channel Move Time and Non-Occupancy Period	31
15.6. Test Setup	32
15.7. Test Result	32
16. Antenna Requirements	33
16.1. Applicable Requirements	33
16.2. Result	33
APPENDIX A - Radiated Emission Below 1GHz Test Data	34
APPENDIX B - Radiated Emission Above 1GHz Test Data	36

1. Test Report Declare

Applicant:	iFIT Health and Fitness, Inc.
Address:	1500 S 1000 W, Logan, Utah 84321, United States
Manufacturer:	Guangzhou Yuandong Smart Sports Technology Co., Ltd.
Address:	Room 1002, Building 2, No. 6 Yunpu Fourth Road, Huangpu District, Guangzhou
Product Name:	Tablet
Brand Name:	iFIT
Model Name:	MP24-Xenon1.2-V

We Declare:

The equipment described above is tested by Guangzhou Jingce Testing Technology Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangzhou Jingce Testing Technology Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests except as provided information by clients.

2. Summary of test results

The EUT have been tested according to the applicable standards as referenced below.

Clause	Description of Test Item	Standard	Verdict
1	6/26dB Bandwidth	FCC 15.407 (a)&(e)	NA
2	Maximum Conducted Output Power	FCC 15.407 (a)	NA
3	Power Spectral Density	FCC 15.407 (a)	NA
4	Frequency Stability Measurement	FCC 15.407 (g)	NA
5	Radiated Band edge and Spurious Emission	FCC 15.407 (b) FCC 15.209 FCC 15.205	Pass
6	Power Line Conducted Emission	FCC 15.207	NA
7	Antenna requirement	FCC 15.203	NA
8	Dynamic Frequency Selection	FCC 15.407 (h)	Pass

Note: The original report has already been certified. The appearance photo has been updated, and an serial port socket has been added. The wireless related components have not been changed. So above test data should refer to the original report "JCF240131021-004", only Radiated emission Worst case need be retest.

3. Test Laboratory

Guangzhou Jingce Testing Technology Co., Ltd.

Add.: No.10, Hefeng No.1 street, Huangpu District, Guangzhou, Guangdong, People's Republic of China

Association for Laboratory Accreditation(A2LA). Certificate Number: 6594.03

FCC Designation Number: CN1381. Test Firm Registration Number: 486550

IC Test Firm Registration Number: 31808

Conformity Assessment Body identifier: CN0173

4. Equipment Under Test

4.1. Description of EUT

EUT Name:	Tablet
Model Number:	MP24-Xenon1.2-V
EUT Function Description:	Refer to user manual
Power Supply:	DC 12V 3A
Hardware Version:	N/A
Software Version:	N/A
Radio Specification:	IEEE 802.11a/n/ac
Operation Frequency:	IEEE 802.11a: 5180MHz—5825MHz IEEE 802.11n HT20: 5180MHz—5825MHz IEEE 802.11n HT40: 5190MHz—5795MHz IEEE 802.11ac VHT20: 5180MHz—5825MHz IEEE 802.11ac VHT40: 5190MHz—5795MHz IEEE 802.11ac VHT80: 5210MHz—5775MHz
Modulation:	IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20, HT40: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac (VHT20/40/80): OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)
Data Rate:	IEEE 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps IEEE 802.11n HT20: 14.4, 28.9, 43.3, 57.8, 86.7, 115.6, 130, 144.4 Mbps IEEE 802.11n HT40: 30, 60, 90, 120, 180, 240, 270, 300 Mbps IEEE 802.11ac VHT20: 14.4, 28.9, 43.3, 57.8, 86.7, 115.6, 130, 144.4, 173.3 Mbps IEEE 802.11ac VHT40: 30, 60, 90, 120, 180, 240, 270, 300, 360, 400 Mbps IEEE 802.11ac VHT80: 65, 130, 195, 260, 390, 520, 585, 650, 780, 866.7 Mbps
Antenna Type:	FPC Antenna, MAX. Gain: 5.83 dBi

Antenna Gain:		
MP10-Xenon-V	BT ANT	2.4G: 3.14dBi
	WIFI ANT1	2.4G: 2.67dBi; 5G: 2.89dBi
	WIFI ANT 2	2.4G: 1.96dBi; 5G: 1.37dBi
MP16-Xenon-V	BT ANT	2.4G: 4.90dBi
	WIFI ANT1	2.4G: 3.90dBi; 5G: 3.81dBi
	WIFI ANT 2	2.4G: 4.55dBi; 5G: 3.27dBi
MP24-Xenon-V	BT ANT	2.4G: 5.16dBi
	WIFI ANT1	2.4G: 4.81dBi; 5G: 4.37dBi
	WIFI ANT 2	2.4G: 4.39dBi; 5G: 5.83dBi

Note 1: EUT is the ab. of equipment under test.

Note 2: The antenna gain is declared by the customer and the laboratory is not responsible for the accuracy of the antenna gain.

4.2. Channel List

UNII-1 (For Bandwidth = 20 MHz)		UNII-1 (For Bandwidth = 40 MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190
40	5200	46	5230
44	5220	/	/

48	5240	/	/
UNII-1 (For Bandwidth = 80 MHz)			
Channel		Frequency (MHz)	
42		5210	

UNII-2A (For Bandwidth = 20 MHz)		UNII-2A (For Bandwidth = 40 MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270
56	5280	62	5310
60	5300	/	/
64	5320	/	/
UNII-2A (For Bandwidth = 80 MHz)			
Channel		Frequency (MHz)	
58		5290	

UNII-2C (For Bandwidth = 20 MHz)		UNII-2C (For Bandwidth = 40 MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510
104	5520	110	5550
108	5540	118	5590
112	5560	126	5630
116	5580	134	5670
120	5600	142	5710
124	5620	/	/
128	5640	/	/
132	5660	/	/
136	5680	/	/
140	5700	/	/
144	5720	/	/
UNII-2C (For Bandwidth = 80 MHz)			
Channel		Frequency (MHz)	
106		5530	

122	5610
138	5690

UNII-3 (For Bandwidth = 20 MHz)		UNII-3 (For Bandwidth = 40 MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755
153	5765	159	5795
157	5785	/	/
161	5805	/	/
165	5825	/	/
UNII-3 (For Bandwidth = 80 MHz)			
Channel		Frequency (MHz)	
155		5775	

4.3. Test Channel Configuration

Mode	Data rate (Mbps) (see Note)	Test Channel and Frequency
802.11a TX Mode	6	CH36, 5180
	6	CH44, 5220
	6	CH48, 5240
	6	CH52, 5260
	6	CH60, 5300
	6	CH64, 5320
	6	CH100, 5500
	6	CH116, 5580
	6	CH140, 5700
	6	CH144, 5720
	6	CH149, 5745
	6	CH157, 5785
	6	CH165, 5825
	6	CH165, 5825
802.11n HT20 TX Mode	MCS 8	CH36, 5180
	MCS 8	CH44, 5220
	MCS 8	CH48, 5240
	MCS 8	CH52, 5260
	MCS 8	CH60, 5300
	MCS 8	CH64, 5320
	MCS 8	CH100, 5500
	MCS 8	CH116, 5580
	MCS 8	CH140, 5700
	MCS 8	CH144, 5720
	MCS 8	CH149, 5745
	MCS 8	CH157, 5785
	MCS 8	CH165, 5825
	MCS 8	CH165, 5825
802.11n HT40 TX Mode	MCS 8	CH38, 5190
	MCS 8	CH46, 5230
	MCS 8	CH54, 5270
	MCS 8	CH62, 5310

	MCS 8	CH102, 5510
	MCS 8	CH110, 5550
	MCS 8	CH134, 5670
	MCS 8	CH142, 5710
	MCS 8	CH151, 5755
	MCS 8	CH159, 5795
802.11ac VHT20 TX Mode	MCS 0	CH36, 5180
	MCS 0	CH44, 5220
	MCS 0	CH48, 5240
	MCS 0	CH52, 5260
	MCS 0	CH60, 5300
	MCS 0	CH64, 5320
	MCS 0	CH100, 5500
	MCS 0	CH116, 5580
	MCS 0	CH140, 5700
	MCS 0	CH140, 5720
	MCS 0	CH149, 5745
	MCS 0	CH157, 5785
	MCS 0	CH165, 5825
802.11ac VHT40 TX Mode	MCS 0	CH38, 5190
	MCS 0	CH46, 5230
	MCS 0	CH54, 5270
	MCS 0	CH62, 5310
	MCS 0	CH102, 5510
	MCS 0	CH110, 5550
	MCS 0	CH134, 5670
	MCS 0	CH142, 5710
	MCS 0	CH151, 5755
	MCS 0	CH159, 5795
802.11ac VHT80 TX Mode	MCS 0	CH42, 5210
	MCS 0	CH58, 5290
	MCS 0	CH106, 5530
	MCS 0	CH122, 5610
	MCS 0	CH138, 5690
	MCS 0	CH155, 5775

Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

4.4. Test Environment Conditions

During the measurement the environmental conditions were within the listed ranges:

	Normal Conditions	Extreme Conditions
Temperature range	21-25 °C	0 °C to +40 °C
Humidity range	40-75%	N/A
Pressure range	86-106 kPa	N/A
Power supply	NV: DC 12V from Adapter	N/A

Note: The Extreme temperature range and extreme voltages are declared by the manufacturer.

4.5. The Worse Case Power Setting Parameter

The Worse Case Power Setting Parameter			
Test Software	Adb instruction		
Mode	Channel	Soft set value	
		ANT0	ANT1
802.11a	36	Default	13
	44	Default	13
	48	Default	Default

	52	Default	Default
	60	Default	Default
	64	Default	Default
	100	Default	Default
	116	Default	Default
	140	Default	13
	144	Default	Default
	149	Default	Default
	157	Default	Default
	165	Default	Default
802.11n HT20	36	12	12
	44	12	12
	48	13	13
	52	14	14
	60	13	13
	64	13	13
	100	14	14
	116	14	14
	140	14	14
	144	Default	Default
	149	16	16
	157	16	16
	165	16	16
802.11n HT40	38	Default	Default
	46	Default	Default
	54	Default	Default
	62	Default	Default
	102	Default	Default
	110	Default	Default
	134	12	12
	142	Default	Default
	151	Default	Default
	159	Default	Default
802.11ac VHT20	36	12	12
	44	12	12
	48	Default	Default
	52	Default	Default
	60	Default	Default
	64	14	14
	100	Default	Default
	116	12	12
	140	Default	Default
	144	Default	Default
	149	Default	Default
	157	Default	Default
	165	Default	Default
802.11ac VHT40	38	Default	Default
	46	Default	Default
	54	Default	Default
	62	Default	Default
	102	14	14
	110	Default	Default
	134	12	12
	144	Default	Default
	151	Default	Default
	159	Default	Default
802.11ac VHT80	42	10	10
	58	14	14
	106	12	12
	122	14	14

	138	14	14
	155	14	14

4.6. Description of Available Antennas

Test Mode	Transmit and Receive Mode	Description
802.11a	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11n HT20	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11n HT40	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11ac VHT20	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11ac VHT40	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11ac VHT80	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.

5. Description of Test Setup

5.1. Accessory

Description of Accessories	Manufacturer	Model Number	Description	Remark
/	/	/	/	/

5.2. Support Equipment

Equipment	Brand Name	Model Name	P/N
PC	Lenovo	T480	/
Adapter	SOY	SOY-1200300	/

5.3. Test Setup

The EUT can work in Fixed Frequency mode.

5.4. Setup Diagram for Tests



6. Measurement uncertainty

Test Item	Uncertainty
AC Power Conduction emission	1.37 dB
All Radiated emissions	5.4dB
Conducted emissions	3.09 dB
Occupied Channel Bandwidth	1.1%
Conducted Output power	0.82dB
Power Spectral Density	0.82dB
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k = 2.	

7. Measuring Instrument and Software Used


TS Test System						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	Spectrum Analyzer	Keysight	N9030B	MY56320512	Aug. 22, 2024	Aug. 21, 2025
☒	Spectrum Analyzer	Keysight	N9030B	MY56320512	Jul. 31, 2025	Jul. 30, 2026
☒	Vector Signal Generator	Keysight	N5182B	MY57300334	Aug. 22, 2024	Aug. 21, 2025
☒	Vector Signal Generator	Keysight	N5182B	MY57300334	Jul. 31, 2025	Jul. 30, 2026
☒	Signal Generator	Keysight	N5171B	MY57280639	Aug. 22, 2024	Aug. 21, 2025
☒	Signal Generator	Keysight	N5171B	MY57280639	Jul. 31, 2025	Jul. 30, 2026
☒	DC POWER	Keysight	E342A	MY59020356	Aug. 29, 2024	Aug. 28, 2025
☒	DC POWER	Keysight	E342A	MY59020356	Jul. 31, 2025	Jul. 30, 2026
☒	Incubator thermometer	GWS	EL-02JA	21107288	Aug. 15, 2024	Aug. 14, 2025
☒	Incubator thermometer	GWS	EL-02JA	21107288	Jul. 31, 2025	Jul. 30, 2026
☒	Control unit(Power sensor)	Tonscend	JS0806-2	/	Aug. 23, 2024	Aug. 22, 2025
☒	Control unit(Power sensor)	Tonscend	JS0806-2	/	Jul. 31, 2025	Jul. 30, 2026
☒	Spectrum Analyzer	Keysight	N9020B	MY60112206	Sep. 11, 2024	Sep. 10, 2025
☒	Spectrum Analyzer	Keysight	N9020B	MY60112206	Jul. 31, 2025	Jul. 30, 2026
☒	Control unit(Power sensor)	Tonscend	JS0806-2	21H8060465	Aug. 22, 2024	Aug. 21, 2025
☒	Control unit(Power sensor)	Tonscend	JS0806-2	/	Jul. 31, 2025	Jul. 30, 2026
☒	Spectrum Analyzer	Keysight	N9020B	MY60112811	Aug. 23, 2024	Aug. 22, 2025
☒	Spectrum Analyzer	Keysight	N9020B	MY60112811	Jul. 31, 2025	Jul. 30, 2026
☒	Signal Generator	Keysight	N5173B	MY62220145	Aug. 23, 2024	Aug. 22, 2025

☒	Signal Generator	Keysight	N5173B	MY62220145	Jul. 31, 2025	Jul. 30, 2026
☒	Vector Signal Generator	Keysight	N5182B	MY61252859	Aug. 22, 2024	Aug. 21, 2025
☒	Vector Signal Generator	Keysight	N5182B	MY61252859	Jul. 31, 2025	Jul. 30, 2026
☒	DC POWER	Keysight	E3642A	MY40005294	Aug. 30, 2024	Aug. 29, 2025
☒	DC POWER	Keysight	E3642A	MY40005294	Jul. 31, 2025	Jul. 30, 2026
☒	Control unit(Power sensor)	Tonscend	JS0806-2	24F80620865	Aug. 23, 2024	Aug. 22, 2025
☒	Control unit(Power sensor)	Tonscend	JS0806-2	24F80620865	Aug. 01, 2025	Jul. 31, 2026
Software						
Used	Description	Manufacturer	Name		Version	
☒	Test software	Tonscend	JS1120-3		V3.3.10	
RSE Test System						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	EMI Receiver	R&S	ESR26	101424	Sep. 14, 2024	Sep. 13, 2025
☒	EMI Receiver	R&S	ESR26	101692	Nov. 25, 2025	Nov. 24, 2026
☒	Hybrid Antenna	Schwarzbeck	VULB9163	01361	Sep. 25, 2024	Sep. 24, 2025
☒	Hybrid Antenna	Schwarzbeck	VULB9163	01416	May. 28, 2025	May. 27, 2026
☒	Horn Antenna 1	Schwarzbeck	BBHA 9120 D	02910	Sep. 11, 2024	Sep. 10, 2025
☒	Horn Antenna 1	Schwarzbeck	BBHA 9120 D	02910	Aug. 31, 2025	Aug. 30, 2026
☒	Horn Antenna 2	ETS	BBHA 9170	1090	Sep. 11, 2024	Sep. 10, 2025
☒	Horn Antenna 2	ETS	BBHA 9170	1090	Aug. 31, 2025	Aug. 30, 2026
☒	loop-antenna	Schwarzbeck	FMZB 1513-60	00030	Jan. 12, 2025	Jan. 11, 2026
☒	loop-antenna	Schwarzbeck	FMZB 1513-60	00030	Jan. 11, 2026	Jan. 10, 2027
☒	Test path	/	Path3: WIFI-5.1G 1-6.5GHz	/	Aug. 23, 2024	Aug. 22, 2025
☒	Test path	/	Path3: WIFI-5.1G 1-6.5GHz	/	Jul. 31, 2025	Jul. 30, 2026
☒	Test path	/	Path4: WIFI-5.4G 1-6.5GHz	/	Aug. 23, 2024	Aug. 22, 2025
☒	Test path	/	Path4: WIFI-5.4G 1-6.5GHz	/	Jul. 31, 2025	Jul. 30, 2026
☒	Test path	/	Path5: WIFI-5.8G 1-6.5GHz	/	Aug. 23, 2024	Aug. 22, 2025
☒	Test path	/	Path5: WIFI-5.8G 1-6.5GHz	/	Jul. 31, 2025	Jul. 30, 2026
☒	Test path	/	Path7: ALL PASS 1-18GHz	/	Aug. 23, 2024	Aug. 22, 2025
☒	Test path	/	Path7: ALL PASS	/	Jul. 31, 2025	Jul. 30, 2026

			1-18GHz			
☑	Test path	/	Path10: 6.5GHz High PASS 6.5-18GHz	/	Aug. 23, 2024	Aug. 22, 2025
☑	Test path	/	Path10: 6.5GHz High PASS 6.5-18GHz	/	Jul. 31, 2025	Jul. 30, 2026
☑	Test path	/	Path16: 30MHz-1GHz ALL PASS NO AMP	/	Aug. 23, 2024	Aug. 22, 2025
☑	Test path	/	Path16: 30MHz-1GHz ALL PASS NO AMP	/	Jul. 31, 2025	Jul. 30, 2026
☑	Signal Pre-Amplifier	ETS	3116C-PA	00217677	Sep. 06, 2024	Sep. 05, 2025
☑	Signal Pre-Amplifier	ETS	3116C-PA	00217677	Jul. 31, 2025	Jul. 30, 2026
☑	3m Fully-anechoic Chamber	YIHENG	9m*6m*6m	001	Sep. 05, 2023	Sep. 04, 2026
☑	3m Fully-anechoic Chamber	YIHENG	9m*6m*6m	001	Sep. 05, 2023	Sep. 04, 2026
Software						
Used	Description	Manufacturer	Name		Version	
☑	Test software	Tonscend	TS+		V5.0.0.0	
Conducted Emission Test For AC Power Port						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☑	LISN	R&S	ENV216	102509	Aug. 22, 2024	Aug. 21, 2025
☑	LISN	R&S	ENV216	102509	Aug. 01, 2025	Jul. 31, 2026
☑	EMI Receiver	R&S	ESR	102154	Aug. 22, 2024	Aug. 21, 2025
☑	EMI Receiver	R&S	ESR	102154	Aug. 01, 2025	Jul. 31, 2026
Software						
Used	Description	Manufacturer	Name		Version	
☑	Test software	EZ	EZ-EMC		EMEC-3A1	
Other Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☑	Temperature & Humidity	Temperature	HTC-1	/	Sep. 04, 2024	Sep. 03, 2025
☑	Temperature & Humidity	Temperature	HTC-1	/	Sep. 20, 2025	Sep. 21, 2026

8. Duty Cycle

8.1. Block Diagram of Test Setup

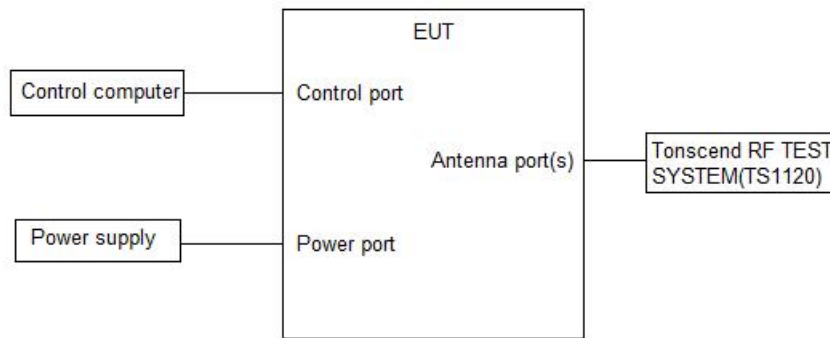

8.2. Limits

None; for reporting purposes only.

8.3. Procedure

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.B.

The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set $RBW \geq EBW$ if possible; otherwise,

set RBW to the largest available value. Set $VBW \geq RBW$.

Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in II.B.1.a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

8.4. Results

Refer to the original report "JCF240131021-004".

9. 26dB Bandwidth and 6dB Bandwidth

9.1. Block Diagram of Test Setup

Same as section 8.1

9.2. Limits

FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Bandwidth	26 dB Bandwidth	5150 - 5250
	26 dB Bandwidth	5250 - 5350
	26 dB Bandwidth	5470 - 5725
	Minimum 500 kHz 6 dB Bandwidth	5725 - 5850

9.3. Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	For 6 dB Bandwidth: RBW=100 kHz For 26 dB Bandwidth: approximately 1% of the emission bandwidth. For 99 % Occupied Bandwidth: approximately 1 % ~ 5 % of the OBW.
VBW	For 6 dB Bandwidth: VBW=300 kHz For 26 dB Bandwidth: >3*RBW For 99 % Bandwidth: >3*RBW
Trace	Max hold
Sweep	Auto couple

(2) Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB and 6 dB relative to the maximum level measured in the fundamental emission.

(3) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.

9.4. Test Result

Refer to the original report "JCF240131021-004".

10. Maximum Output Power

10.1. Block Diagram of Test Setup

Same as section 8.1

10.2. Limits

FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Conducted Output Power	☐ Outdoor Access Point: 1 W (30 dBm)	5150-5250
	☐ Indoor Access Point: 1 W (30 dBm)	
	☐ Fixed Point-To-Point Access Points: 1 W (30 dBm)	
	☒ Client Devices: 250 mW (24 dBm)	
	Shall not exceed the lesser of 250 mW (24dBm) or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz.	5250-5350 5470-5725
	Shall not exceed 1 Watt (30 dBm).	5725-5850

Note: The above limits are based upon the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

10.3. Test Procedure

- (1) Connect each EUT's antenna output to power meter by RF cable and attenuator
- (2) Add each antenna port's results to get the total output power of EUT.

10.4. Test Result

Refer to the original report "JCF240131021-004".

11. Power Spectral Density

11.1. Block Diagram of Test Setup

Same as section 8.1

11.2. Limits

CFR 47 FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Power Spectral Density	☐ Outdoor Access Point: 17 dBm/MHz ☐ Indoor Access Point: 17 dBm/MHz ☐ Fixed Point-To-Point Access Points: 17 dBm/MHz ☒ Client Devices: 11 dBm/MHz	5150-5250
	11 dBm/MHz	5250-5350 5470-5725
	30 dBm/500 kHz	5725-5850

Note: The above limits are based upon the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

11.3. Test Procedure

The transmitter output was connected to a spectrum analyzer. Power density was measured by spectrum analyzer with 1MHz RBW and 3MHz VBW.

Connect the UUT to the spectrum analyzer and use the following settings:

5150 MHz~5250 MHz, 5250 MHz~5350 MHz, 5470 MHz~5725 MHz

Center Frequency	The centre frequency of the channel under test
Detector	RMS
RBW	1MHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto

5725 MHz-5850 MHz

Center Frequency	The centre frequency of the channel under test
Detector	RMS
RBW	500 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto

Note:

1. For UNII-3, according to KdB publication 789033 D02 General U-NII Test Procedures New Rules v02r01, section II.F.5., it is acceptable to set RBW at 1 MHz and VBW at 3 MHz if the spectrum analyzer does not have 500 kHz RBW.

2. The value measured with RBW=1MHz is to be added with $10\log(500\text{kHz}/1\text{MHz})$ which is - 3dB. For example, if the measured value is +30 dBm using RBW=500kHz (that is +30 dBm/500kHz), then the converted value will be +33 dBm/1MHz.

3. Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

11.4. Test Result

Refer to the original report “JCF240131021-004”.

12. Frequency Stability Measurement

12.1. Block Diagram of Test Setup

Same as section 8.1

12.2. Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

12.3. Test Procedures

(1) To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.

(2) The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10 dB lower than the measured peak value.

(3) The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.


12.4. Test Result

Refer to the original report "JCF240131021-004".


13. Radiated Emission

13.1. Block Diagram of Test Setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

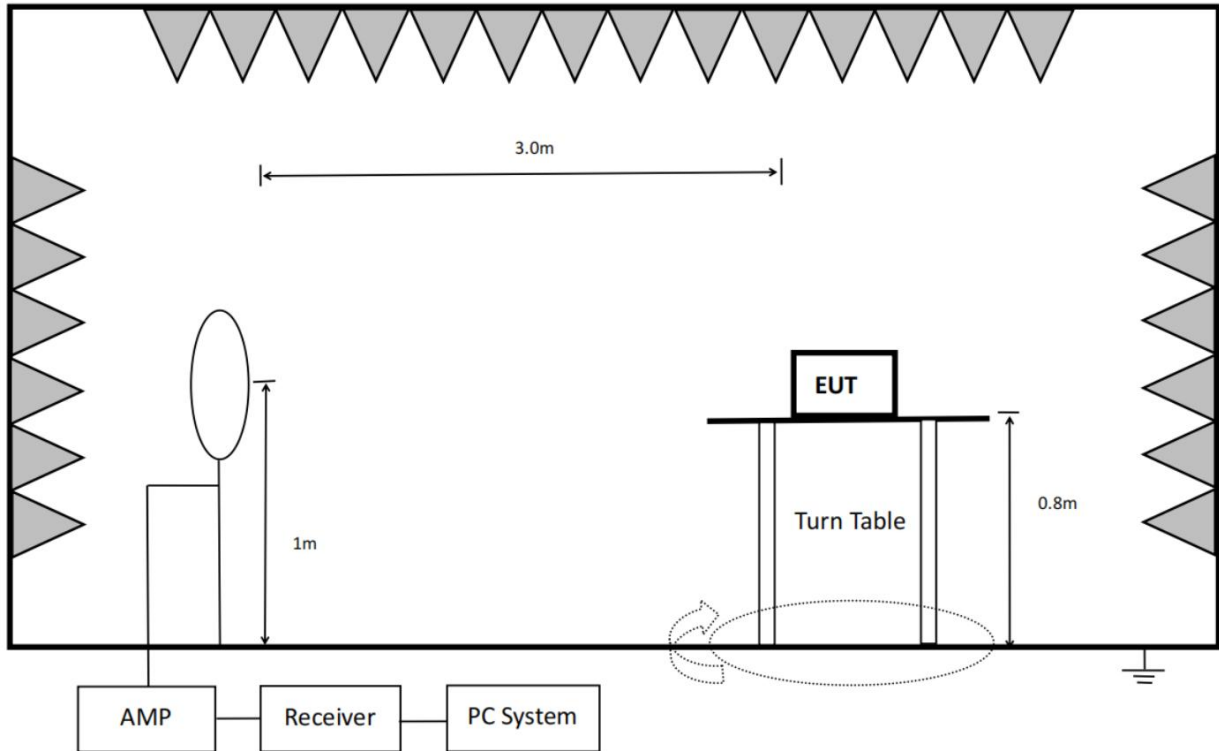

In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

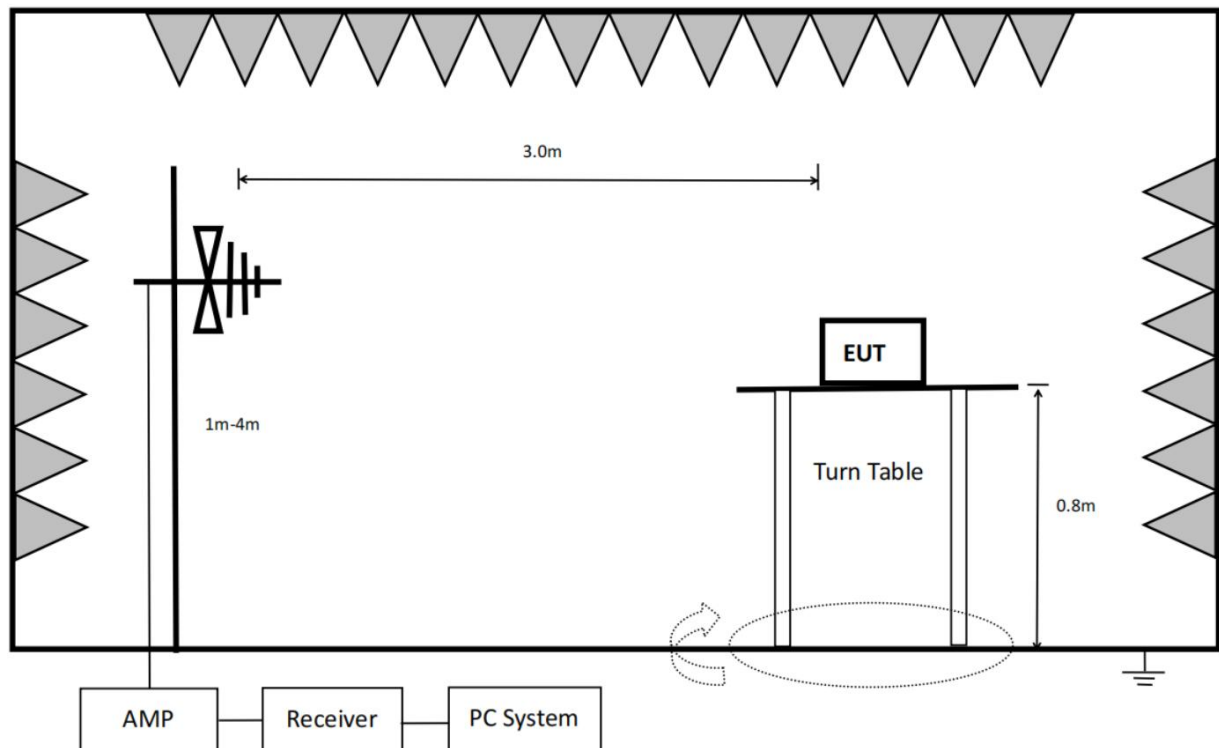

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

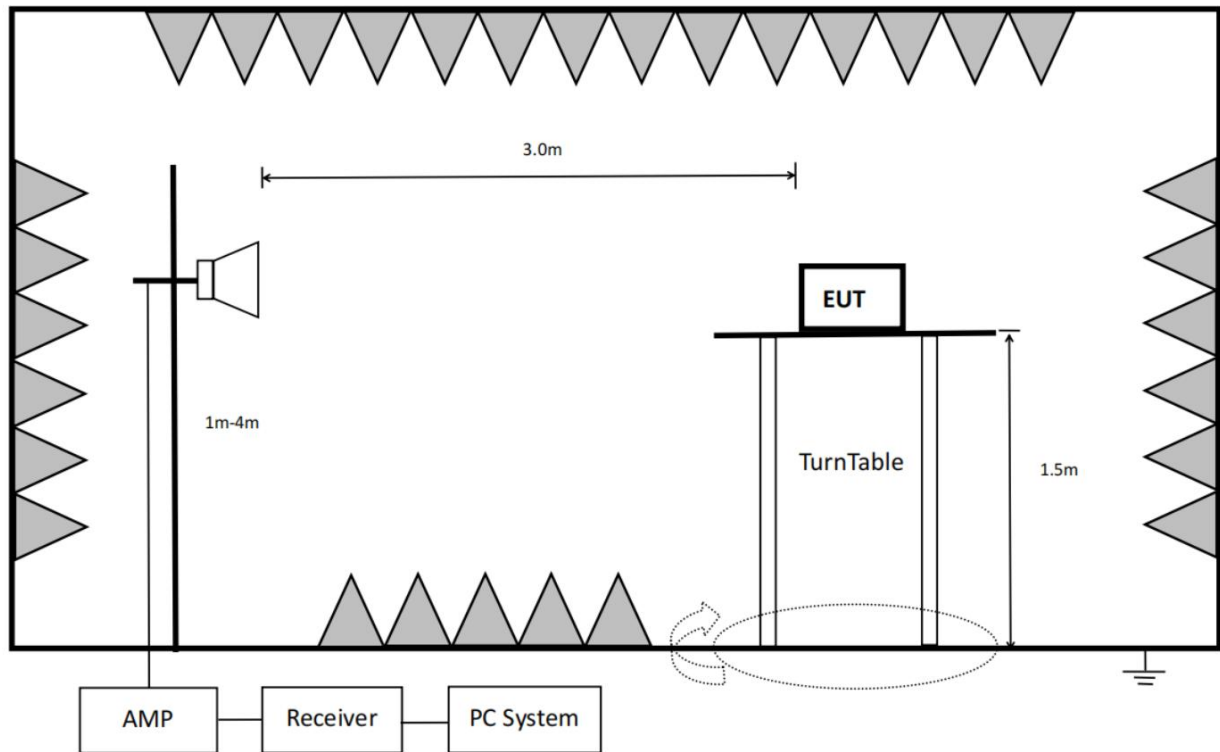

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

13.2. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

(2) FCC 15.209 Limit.

Frequency MHz	Distance Meters	Field strengths limit	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	$2400/\text{F}(\text{kHz})$	$67.6-20\log(\text{F})$
0.490 ~ 1.705	30	$24000/\text{F}(\text{kHz})$	$87.6-20\log(\text{F})$
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm / MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm / MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm / MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm / MHz.

(5) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

(6) The provisions of §15.205 apply to intentional radiators operating under this section.

-27 dBm/MHz Limit = $95.2 + \text{EIRP}(\text{dBm}) = 95.2 - 27 = 68.2 \text{ dB}\mu\text{V}/\text{m}$

Note:

(1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V}/\text{m}) + 40\log(30\text{m}/3\text{m})$$

(3) Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions or comply with 15.209 limits.

13.3. Test Procedure

Below 30 MHz:

The setting of the spectrum Analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013

2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.

3. The EUT was placed on a turntable with 80 cm meter above ground.

4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of 1 meter height antenna tower.

5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore, sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KdB 414788.

Below 1 GHz and above 30 MHz:

The setting of the spectrum Analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.

2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

3. The EUT was placed on a turntable with 80 cm above ground.

4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.

5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz:

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.

2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

3. The EUT was placed on a turntable with 1.5m above ground.

4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.

5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.

6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video

bandwidth with peak detector for AVG measurements. For the Duty Cycle please refer to clause 8.1.ON TIME AND DUTY CYCLE.

7. Restriction band: Investigated frequency range from 5.15-5.25 GHz, 5250-5350 GHz, 5470-5725 GHz, 5.725-5.85 GHz.

All restriction band should comply with 15.209, other emission should be at least 20 dB below the fundamental.

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: The EUT does not support simultaneous transmission.

Note 3: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

13.4. Test Result


Only test worst case for report "JCF240131021-004".

Below 1 GHz and above 30 MHz test data Refer to appendix A

Above 1 GHz test data Refer to appendix B

14. AC Power Line Conducted Emissions

14.1. Block Diagram of Test Setup

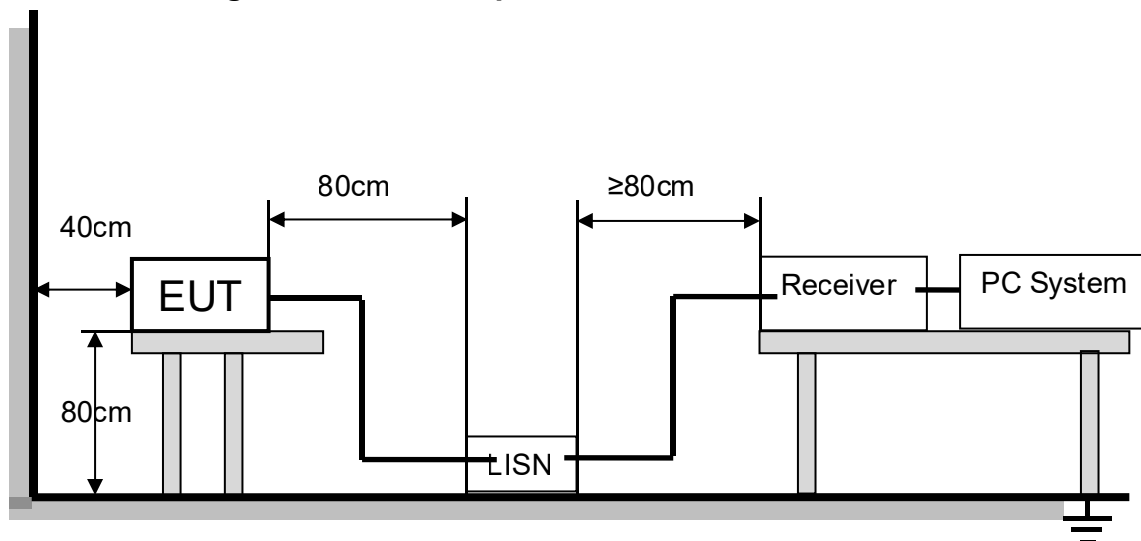

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through an Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

14.2. Limits

Please refer to CFR 47 FCC §15.207 (a).

Frequency (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

14.3. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test equipment as described in clause 10.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

14.4. Test Result

Only test worst case for report "JCF240131021-004".

Below 1 GHz and above 30 MHz test data Refer to appendix A

Above 1 GHz test data Refer to appendix B

15. Dynamic Frequency Selection

15.1. Applicability of DFS Requirements

A U-NII network will employ a DFS function to detect signals from radar systems and to avoid co-channel operation with these systems. This applies to the 5250-5350 MHz and/or 5470-5725 MHz bands.

Within the context of the operation of the DFS function, a U-NII device will operate in either Master Mode or Client Mode. U-NII devices operating in Client Mode can only operate in a network controlled by a U-NII device operating in Master Mode.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	☐ Master	☒ Client Without Radar Detection	☐ Client with Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	☐ Master Device or Client with Radar Detection	☒ Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	☐ Master Device or Client with Radar Detection	☒ Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

15.2. Limit

(1) DFS Detection Thresholds

Table 3: DFS Detection Thresholds for Master Devices and Client Devices with Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KdB Publication 662911 D01.

(2) DFS Response Requirements

Table 4: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required facilitating a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

15.3. Parameters of Radar Test Waveform

This section provides the parameters for required test waveforms, minimum percentage of successful detection, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Table 5 Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μ sec)	PRI (μ sec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A	Roundup $\left\{ \frac{1}{360} \right\}$ $\left\{ \frac{19 \cdot 10^6}{PRI_{\mu\text{SEC}}} \right\}$	60%	30
		Test B			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					
Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a					
Test B: 15 unique PRI values randomly selected within the range of 518-3066 μ sec, with a minimum increment of 1 μ sec, excluding PRI values selected in Test A					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B. Test aggregate is average of the percentage of successful detections of short pulse radar types 1-4

15.4. Calibration of Radar Waveform

Radar Waveform Calibration Procedure:


A 50 ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to place of the master

The interference Radar Detection Threshold Level is $-62\text{dBm} + 0\text{dBi} + 1\text{dB} = -61\text{dBm}$ that had been taken into account the output power range and antenna gain.

The following equipment setup was used to calibrate the conducted radar waveform. A vector signal generator was utilized to establish the test signal level for radar type 0. During this process there were no transmissions by either the master or client device. The spectrum analyzer was switched to the zero spans (time domain) at the frequency of the radar waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz. The spectrum analyzer had offset -1.0dB to compensate RF cable loss 1.0dB.

The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was $-62\text{dBm} + 0\text{dBi} + 1\text{dB} = -61\text{dBm}$. Capture the spectrum analyzer plots on short pulse radar waveform.

Conducted Calibration Setup:

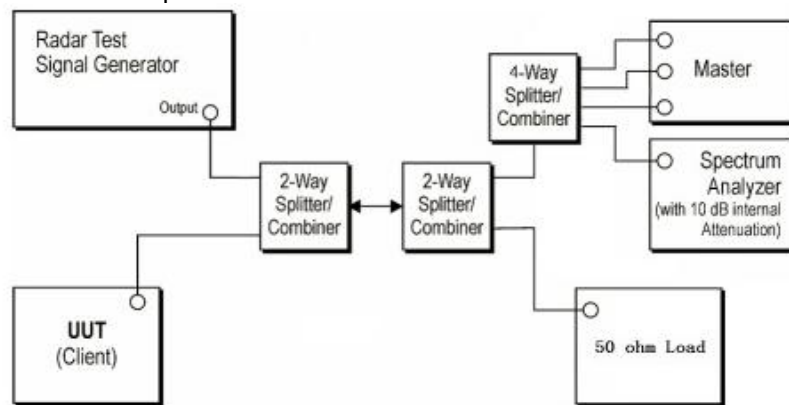

Note: 1. Use the software "Web" to set the frequency channel.

2. EUT is not support TPC and not with Radar detection.

Radar Waveform Calibration Result:

Radar Type 0

15.5. Channel Closing Transmission Time, Channel Move Time and Non-Occupancy Period

Block diagram of test setup Test Procedure:

The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.

The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.

A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.

EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Test Software in order to properly load the network for the entire period of the test.

When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.

Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time).


One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.

Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.

Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

15.6. Test Setup

Setup for Client with injection at the Master

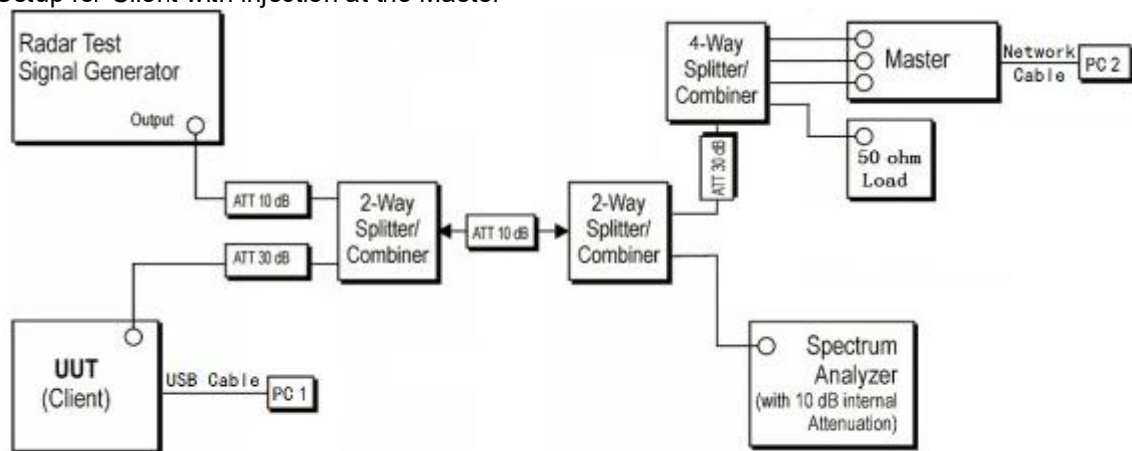

15.7. Test Result

Refer to the original report "JCF240131021-004".

16. Antenna Requirements

16.1. Applicable Requirements

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

16.2. Result

The device support 2T2R MIMO, the antennas both used for this product are dedicated FPC antennas and other than that furnished by the responsible party shall be used with the device, maximum antenna gain is 4.37 dBi for antenna 1, 5.83 dBi for antenna 2.


APPENDIX A – Radiated Emission Below 1GHz Test Data

Test Report

Project Information			
EUT:	Tablet		
Customer:			
Model:	MP24-Xenon1.2-V	SN:	
Mode:	11N20_5825	Voltage:	DC 12V
Environment:	23.1°C 54%	Engineer:	Soho Liu
Remark:			

Start of Test:2025-07-17 17:35:12

Test Graph

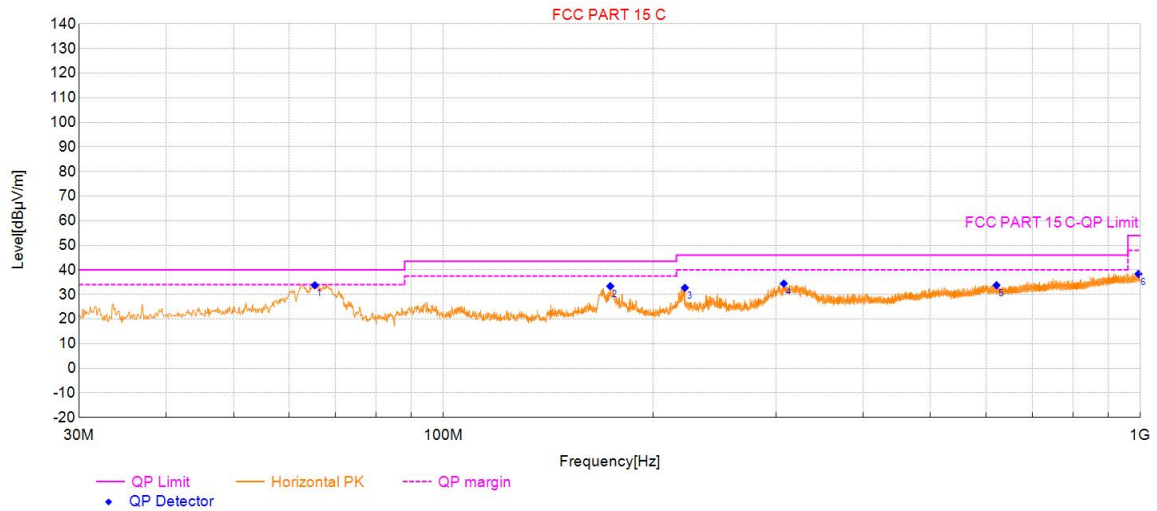

Final Data List

NO.	Freq. (MHz)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	65.41	18.53	33.76	40.00	6.24	100	206	Horizontal	PASS
2	173.57	17.87	33.38	43.50	10.12	100	136	Horizontal	PASS
3	222.08	20.96	32.72	46.00	13.28	100	4	Horizontal	PASS
4	307.93	22.81	34.43	46.00	11.57	100	90	Horizontal	PASS
5	621.76	30.08	33.79	46.00	12.21	100	259	Horizontal	PASS
6	993.79	35.24	38.39	54.00	15.61	100	213	Horizontal	PASS


Note: Margin=QP Limit - QP Value, QP Value=Reading + Factor

Test Report

Project Information			
EUT:	Tablet		
Customer:			
Model:	MP24-Xenon1.2-V	SN:	
Mode:	11N20_5825	Voltage:	DC 12V
Environment:	23.1℃ 54%	Engineer:	Soho Liu
Remark:			

Start of Test:2025-07-17 17:35:47

Test Graph

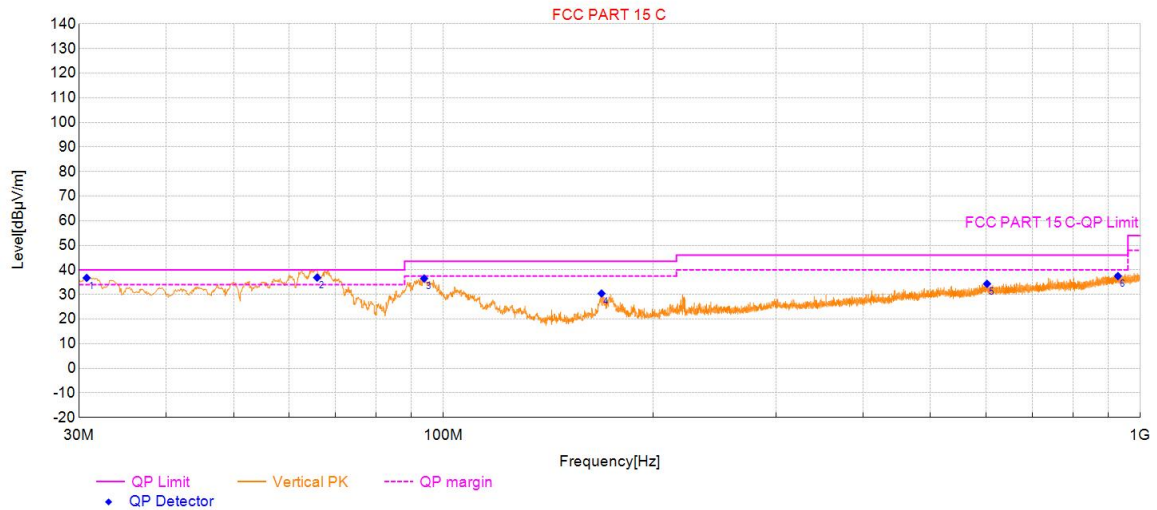

Final Data List

NO.	Freq. (MHz)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	30.78	17.51	36.76	40.00	3.24	100	131	Vertical	PASS
2	65.89	18.39	36.88	40.00	3.12	100	283	Vertical	PASS
3	93.83	18.72	36.52	43.50	6.98	100	107	Vertical	PASS
4	168.63	17.64	30.42	43.50	13.08	100	354	Vertical	PASS
5	602.65	29.98	34.35	46.00	11.65	100	226	Vertical	PASS
6	928.79	34.41	37.50	46.00	8.50	100	59	Vertical	PASS

Note: Margin=QP Limit - QP Value, QP Value=Reading + Factor


APPENDIX B – Radiated Emission Above 1GHz Test Data

Test Report

Project Information			
Customer:	iFIT Inc.		
EUT:			
Model:	MP24-Xenon1.2-V	SN:	
Mode:	11N20_5825	Voltage:	DC 12V
Environment:	23.1℃ 54%	Engineer:	Soho Liu
Remark:			

Start of Test:2025-07-17 16:38:06

Test Graph

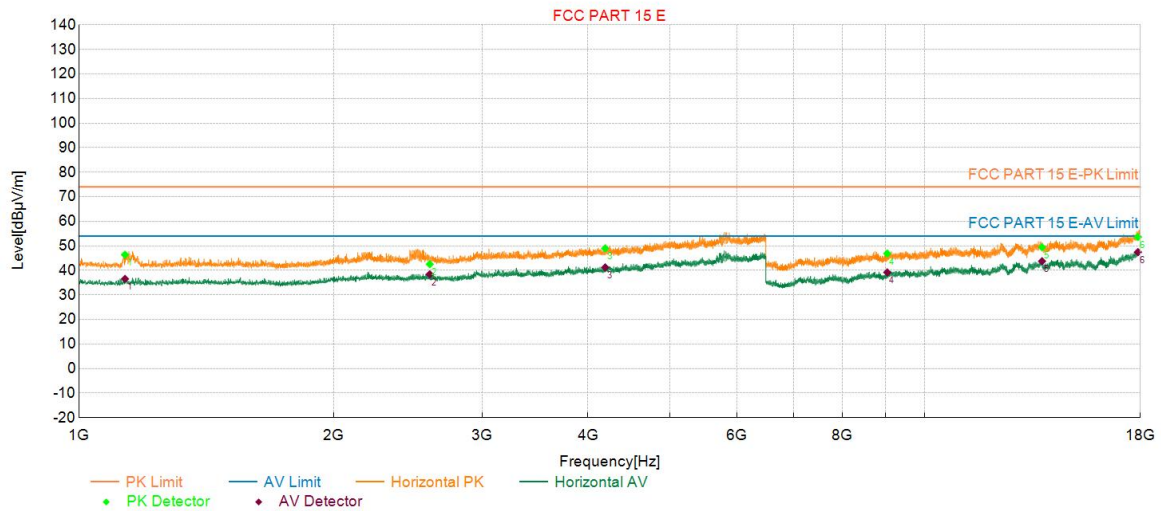

PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1133.66	2.69	46.38	74.00	27.62	150	186	Horizontal
2	2599.56	8.83	42.54	74.00	31.46	150	233	Horizontal
3	4191.42	15.33	48.97	74.00	25.03	150	292	Horizontal
4	9036.00	3.99	46.86	74.00	27.14	150	70	Horizontal
5	13773.33	12.52	49.43	74.00	24.57	150	222	Horizontal
6	17880.39	18.73	53.61	74.00	20.39	150	64	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1133.66	2.69	36.54	54.00	17.46	150	186	Horizontal
2	2599.56	8.83	38.42	54.00	15.58	150	233	Horizontal
3	4191.42	15.33	41.23	54.00	12.77	150	292	Horizontal
4	9036.00	3.99	39.20	54.00	14.80	150	70	Horizontal
5	13773.33	12.52	43.74	54.00	10.26	150	222	Horizontal
6	17880.39	18.73	47.46	54.00	6.54	150	64	Horizontal

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:	iFIT Inc.		
EUT:			
Model:	MP24-Xenon1.2-V	SN:	
Mode:	11N20_5825	Voltage:	DC 12V
Environment:	23.1°C 54%	Engineer:	Soho Liu
Remark:			

Start of Test:2025-07-17 16:39:26

Test Graph

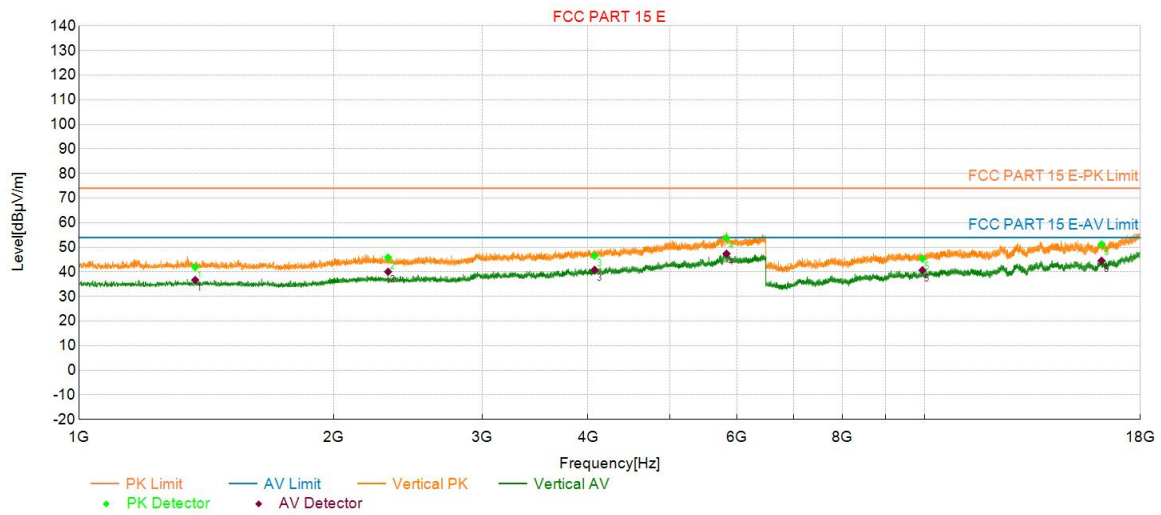

PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1372.39	4.18	42.00	74.00	32.00	150	295	Vertical
2	2320.68	7.88	45.86	74.00	28.14	150	60	Vertical
3	4072.61	14.68	46.56	74.00	27.44	150	110	Vertical
4	5832.23	23.86	53.71	74.00	20.29	150	360	Vertical
5	9944.59	6.47	45.40	74.00	28.60	150	75	Vertical
6	16198.92	13.76	51.20	74.00	22.80	150	39	Vertical

AV Final Data List

NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1372.39	4.18	36.71	54.00	17.29	150	295	Vertical
2	2320.68	7.88	40.07	54.00	13.93	150	60	Vertical
3	4072.61	14.68	40.85	54.00	13.15	150	110	Vertical
4	5832.23	23.86	47.40	54.00	6.60	150	360	Vertical
5	9944.59	6.47	40.70	54.00	13.30	150	75	Vertical
6	16198.92	13.76	44.56	54.00	9.44	150	39	Vertical

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value

Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

END OF REPORT