


Produkte
Products

Prüfbericht - Nr.: 50004841 001		Seite 1 von 39 Page 1 of 39	
<i>Test Report No.:</i>			
Auftraggeber: CATEYE Co., Ltd.			
<i>Client:</i> 2-8-25, Kuwazu, Higashi-Sumiyoshi-Ku, Osaka, 546-0041 Japan			
Gegenstand der Prüfung: HEART RATE SENSOR			
<i>Test Item:</i>			
Bezeichnung: HR-12		Serien-Nr.: No.5 and No.4	
<i>Identification:</i>		<i>Serial No.:</i>	
Wareneingangs-Nr.: A000068916		Eingangsdatum: 2014-06-02	
<i>Receipt No.:</i>		<i>Date of Receipt:</i>	
Zustand des Prüfgegenstandes bei Anlieferung: Good			
<i>Condition of Test Item at Delivery:</i>			
Prüfört: TÜV Rheinland Japan Ltd. – Global Technology Assessment Center			
<i>Testing Location:</i> 4-25-2 Kita-Yamata, Tsuzuki-ku, Yokohama 224-0021, Japan			
Prüfgrundlage: FCC 47 CFR Part 15, Subpart C, Section 15.249 (October 1, 2013)			
<i>Test Specification:</i> ANSI C63.10-2009			
RSS-210 (Issue 8): 2010			
RSS-Gen (Issue 3): 2010			
ANSI C63.10-2009			
Prüfergebnis: Der Prüfgegenstand entspricht oben genannter Prüfgrundlage(n).			
<i>Test Result:</i> The test item passed the test specification(s).			
Prüflaboratorium: TÜV Rheinland Japan Ltd. – Global Technology Assessment Center			
<i>Testing Laboratory:</i> 4-25-2 Kita-Yamata, Tsuzuki-ku, Yokohama 224-0021, Japan			
geprüft/ tested by:		kontrolliert/ reviewed by:	
			
2014-10-14 P. Zhang / Inspector		2014-10-14 R. Meiranke / Reviewer	
Datum	Name/Stellung	Unterschrift	
<i>Date</i>	<i>Name/Position</i>	<i>Signature</i>	
Sonstiges / Other Aspects:			
Abkürzungen: P(ass) = entspricht Prüfgrundlage F(ail) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet		Abbreviations: P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested	
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i>			

Prüfbericht - Nr.:

50004841 001

Test Report No.:

Seite 2 von 39

Page 2 of 39

TEST SUMMARY

5.1.1 SUPPLY VOLTAGE REQUIREMENTS

RESULT: PASS

5.1.2 ANTENNA REQUIREMENTS

RESULT: PASS

5.1.3 RESTRICTED BANDS OF OPERATION

RESULT: PASS

5.2.1 CONDUCTED OUTPUT POWER

5.3.1 DUTY CYCLE

5.3.2 20dB BANDWIDTH

RESULT: PASS

5.3.3 99% BANDWIDTH

5.3.4 FIELD STRENGTH OF FUNDAMENTAL

RESULT: Pass

5.3.5 RADIATED SPURIOUS EMISSIONS OF TRANSMITTER

RESULT: PASS

5.4.1 AC POWER LINE CONDUCTED EMISSION OF TRANSMITTER

RESULT: N/A

Contents

1.	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	5
2.	TEST SITES	5
2.1	TEST FACILITIES	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
2.3	MEASUREMENT UNCERTAINTY	7
3.	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE	8
3.2	SYSTEM DETAILS	8
3.3	CLOCK FREQUENCIES	8
3.4	NOISE SUPPRESSING PARTS	8
4.	TEST SET-UP AND OPERATION MODES	9
4.1	TEST METHODOLOGY	9
4.2	OPERATION MODES	9
4.3	PHYSICAL CONFIGURATION FOR TESTING	9
4.4	TEST SOFTWARE	11
4.5	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	12
4.6	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	12
5.	TEST RESULTS RADIO	13
5.1	TECHNICAL REQUIREMENTS	13
5.1.1	Supply Voltage Requirements	13
5.1.2	Antenna Requirements	13
5.1.3	Restricted Bands of Operation	14
5.2	CONDUCTED MEASUREMENTS AT ANTENNA PORT	15
5.2.1	Conducted Output Power	15
5.3	RADIATED MEASUREMENTS	16
5.3.1	Duty Cycle	16
5.3.2	20dB Bandwidth	18
5.3.3	99% Bandwidth	21
5.3.4	Field Strength of Fundamental	24
5.3.5	Radiated Spurious Emissions of Transmitter	27
5.4	AC POWER LINE CONDUCTED MEASUREMENTS	33
5.4.1	AC Power Line Conducted Emission of Transmitter	33
6.	PHOTOGRAPHS OF THE TEST SETUP	34

Produkte
Products

Prüfbericht - Nr.:	50004841 001	Seite 4 von 39
<i>Test Report No.:</i>		<i>Page 4 of 39</i>
7.	LIST OF TABLES.....	38
8.	LIST OF FIGURES	38
9.	LIST OF PHOTOGRAPHS	39

1. General Remarks

1.1 Complementary Materials

There is no attachment to this test report.

2. Test Sites

2.1 Test Facilities

TÜV Rheinland Japan Ltd. – Global Technology Assessment Center
4-25-2 Kita-Yamata, Tsuzuki-ku, Yokohama 224-0021, Japan

The used test equipment is in accordance with CISPR 16 for measurement of radio interference.

The Federal Communications Commission has reviewed the technical characteristics of the radiated and conducted emission facilities and has found these test sites to be in compliance with the requirements of section 2.948 of the FCC rules. The description of the test facility is listed under FCC registration number 299054.

The Industry Canada has reviewed the technical characteristics of the radiated and conducted emission facilities and has found these test sites to be in compliance with Canadian requirements. The description of the test facility is listed under OATS filing number 3466B-1.

The test facility is accredited by VLAC (member of ILAC) under number VLAC-017 according to ISO/IEC 17025:2005.



TÜV Rheinland Japan Ltd. is accredited by the Federal Communications Commission as a Conformity Assessment Body under Designation Number JP0017 and Test Firm Registration Number 386498.

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Model Name	Serial Number	Equipment ID	Calibrated until
For Antenna Port Conducted Emission					
Receiver	Rohde & Schwarz	ESU 8	100025	RF-0020	2014-09
RF Power Meter	Agilent	N1911A	MY451017 37	RF-0393	2014-11
RF Peak Power Sensor	Agilent	N1921A	MY452422 28	RF-0394	2014-11
For Radiated Emission					
Receiver	Rohde & Schwarz	ESU 8	100025	RF-0020	2014-09
Receiver	Rohde & Schwarz	ESU 40	100029	RF-0021	2015-03
RF Selector (10m Chamber)	Toyo Corporation	NS4900	0703-182	RF-0029	2014-11
Loop Antenna with Amplifier, 9kHz-30MHz	Rohde & Schwarz	HFH2-Z2	100139	RF-0048	2015-02
Trilog Antenna No. 2, 30-1000MHz	Schwarzbeck	VULB9168	9168-475	RF-0462	2015-01
3dB Attenuator	Tamagawa Electronics	CFA-01	-	RF-0265	2014-11
Low Noise Preamplifier, 9kHz-1GHz	TSJ	MLA-10K01-B01-35	1370750	RF-0253	2014-11
Low Pass Filter, DC-1GHz	R&K	LP1000CH3	12104001	RF-0515	2014-11
Horn Antenna, 1-8GHz	Schwarzbeck	BBHA9120D	1059	RF-0553	2015-05
Microwave Preamplifier, 1-8GHz	Toyo Corporation	TPA0108-40	0634	RF-0052	2014-11
Band Reject Filter, 1-8GHz	Nitsuki	NF-49BT	027	RF-0131	2014-11
Horn Antenna with Preamplifier, 8-18GHz	Toyo Corporation	HAP06-18W	00000025	RF-0065	2015-05
High Pass Filter, 8-18GHz	Micro-Tronics	HPM50107	006	RF-0334	2015-05
Horn Antenna with Preamplifier, 18-26.5GHz	Toyo Corporation	HAP18-26N	00000010	RF-0070	2015-05
Power Accessories					
True RMS Multimeter	Fluke	87V	16110176	RF-0414	2014-07

Conformance of the used measurement and test equipment with the requirements of ISO/IEC 17025:2005 has been confirmed before testing.

Prüfbericht - Nr.: 50004841 001
Test Report No.:

Seite 7 von 39
Page 7 of 39

2.3 Measurement Uncertainty

Table 2: Emission Measurement Uncertainty

Measurement Type	Frequency	Uncertainty
Antenna Port Conducted Emission	20Hz - 40GHz	±1.5dB
Radiated Emission	150kHz - 30MHz	±4.7dB
	30MHz - 1GHz	±4.7dB
	> 1GHz	±4.7dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT (Equipment Under Test) is a Bluetooth Smart Heart Rate Sensor. It can transmit speed information to a remote device via Bluetooth.

3.2 System Details

Radio standard:	Bluetooth 4.0 Low Energy
Specified output power:	3.93dBm (Conducted, Peak)
Antenna gain:	-9.16dBi
Antenna type:	Pattern antenna
Antenna mounting type:	On board
Frequency range:	2402 - 2480MHz
Number of channels:	40 $f = 2402\text{MHz} + k \cdot 2\text{MHz}$, where $k=0, 1, \dots, 39$
Channel spacing:	2MHz
Modulation type:	GFSK
FCC classification:	DTS
IC classification:	Bluetooth Device (2400-2483.5 MHz)
Emission designator:	F1D
Rated voltage:	DC 3V (Li coin cell)
Rated current:	Max. 1.0mA
Protection class:	III
Test voltage:	DC 3V

3.3 Clock Frequencies

The highest frequency generated or used by the EUT is 16MHz for the Radio portion. For the details, refer to schematics.

3.4 Noise Suppressing Parts

Refer to schematics.

4. Test Set-up and Operation Modes

4.1 Test Methodology

The test methodology used is based on the requirements of 47 CFR Part 15, Sections 15.31, 15.33, 15.35, 15.205, 15.207, 15.209 and 15.249.

The test methods, which have been used, are based on FCC KDB, ANSI C63.10-2009 and RSS-Gen (Issue 3).

For details, see under each test item.

4.2 Operation Modes

Testing was performed at the lowest operating frequency (2402MHz), at the operating frequency in the middle of the specified frequency band (2442MHz) and at the highest operating frequency (2480MHz).

The basic operation modes used for testing are:

- A. EUT transmits (TX mode), with full power, at lowest channel (2402MHz), a continuous modulated signal streaming with 32.1% duty cycle.
- B. EUT transmits (TX mode), with full power, at middle channel (2442MHz), a continuous modulated signal streaming with 32.1% duty cycle.
- C. EUT transmits (TX mode), with full power, at highest channel (2480MHz), a continuous modulated signal streaming with 32.1% duty cycle.

4.3 Physical Configuration for Testing

The test system was configured in a typical fashion. USB to serial port adaptor and Laptop were connected for testing only.

The justification and manipulation of cables and equipment in order to simulate a worst-case behavior of the test setup has been carried out as prescribed in ANSI C63.10-2009.

Figure 1: Test Setup of Conducted Radio Testing


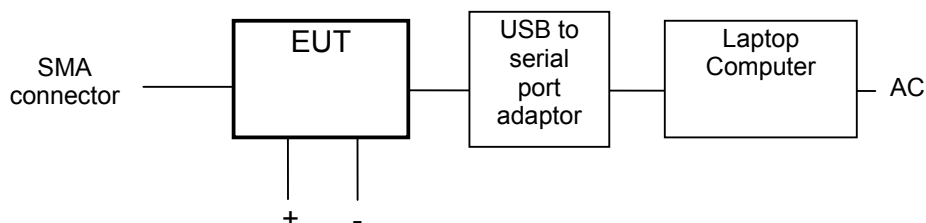


Figure 2: Test Setup of Radiated Radio Testing

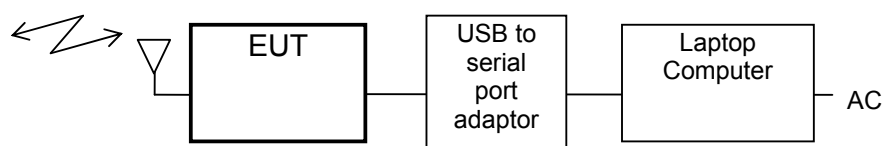

Notes:

USB to serial port adaptor and Laptop computer were disconnected after the test mode setting. These were out of chamber during test.

Serial No.5 was for Conducted Radio Test. Serial No. 4 was for Radiated Radio Test.

Table 3: Interfaces present on the EUT

No.	Interface	Cable Length for Testing, Shielding	Interface Classification
1.	Battery Power Line (Conducted Radio test only)	0.4m, un-shielded	DC input power port
2.	Signal line (Between EUT and USB to serial port adaptor)	0.2m, un-shielded	Signal port

Notes:

For more details, refer to section: Photographs of the Test Set-Up.


4.4 Test Software

The EUT was provided by the manufacturer with suitable software to allow operation in all the required modes.

Software used for testing: nRFgo Studio version 1.16.1.3119 by Nordic Semiconductor ASA.

This software was running on the laptop computer connected to the EUT. It was used to enable the test operation modes listed in section 4.2 as appropriate.

Figure 3: Software Version

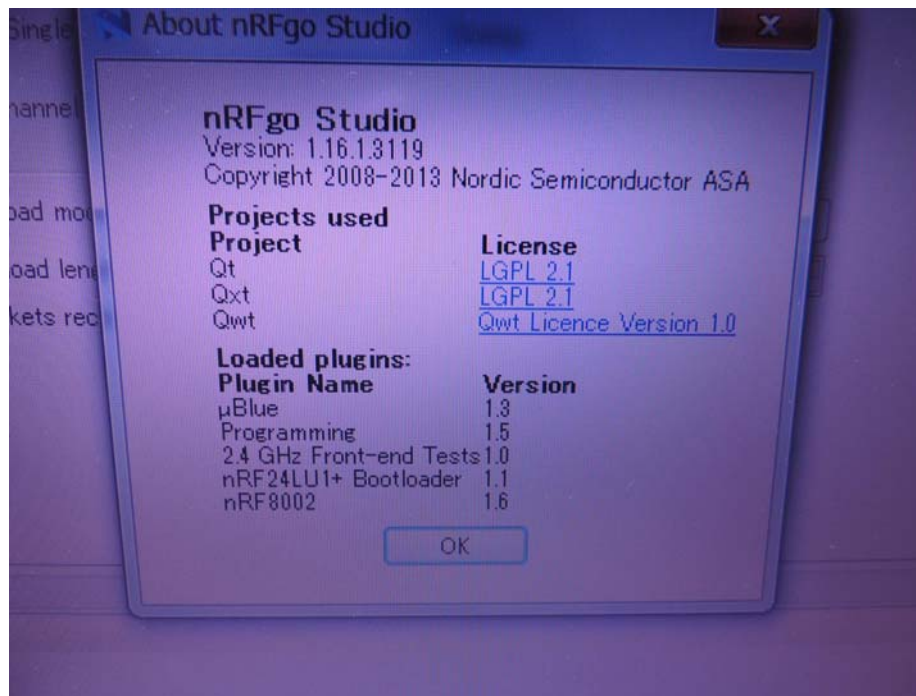

4.5 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

1. Product: Laptop Computer
Manufacturer: Panasonic
Model: CF-T9JWFCPS
Rated Voltage: DC 16V
Protection Class: III
Serial Number: 0DKSA02735
2. Product: AC Adaptor for Laptop Computer
Manufacturer: Panasonic
Model: CF-AA6372A M3
Rated Voltage: 100V-240V
Input Current: 1.5A
Frequency: 50-60Hz
Protection Class: II
Serial Number: 6372AM310201996J
3. Product: Serial Adaptor
Manufacturer: IO DATA
Model: USB-RSAQ3
Rated Voltage: USB 5V
Protection Class: III
Serial Number: V1E0035358BT

4.6 Countermeasures to achieve EMC Compliance

No additional measures were employed to achieve compliance.

5. Test Results RADIO

5.1 Technical Requirements

5.1.1 Supply Voltage Requirements

RESULT: **PASS**

Requirements:

FCC 15.31(e)

For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

Verdict:

The EUT is battery operated and it was tested with a new battery. Hence it complies with the supply voltage requirements.

5.1.2 Antenna Requirements

RESULT: **PASS**

Requirements:

FCC 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Verdict:

The EUT has an internal antenna which is not user accessible. Hence it complies with the antenna requirements.

Prüfbericht - Nr.: 50004841 001

Test Report No.:

Seite 14 von 39

Page 14 of 39

5.1.3 Restricted Bands of Operation

RESULT:

PASS

Requirements:

FCC 15.205 and RSS-Gen 7.2.2

Only spurious emissions are permitted in any of the restricted frequency bands, unless otherwise specified.

Verdict:

The EUT operation frequency range is 2402-2480MHz. Therefore only spurious emissions may be found in the restricted bands of operation and the EUT complies with the restricted frequency band requirement.

5.2 Conducted Measurements at Antenna Port

5.2.1 Conducted Output Power

Date of testing: 2014-07-11

Ambient temperature: 24°C

Relative humidity: 68%

Atmospheric pressure: 998hPa

Requirements:

RSS-Gen (Issue 3) §4.8

Transmitter output power measurements shall be carried out before the unwanted emissions test.

Test procedure:

RSS-Gen (Issue 3) §4.8

The maximum peak output power (conducted) was measured at the antenna connector with a power meter.

Table 4: Conducted Output Power

Frequency [MHz]	Peak Power [dBm]	Average Power [dBm]
2402	3.932	-0.328
2442	3.882	-0.378
2480	3.762	-0.508

5.3 Radiated Measurements

5.3.1 Duty Cycle

Date of testing: 2014-07-07

Ambient temperature: 25°C

Relative humidity: 69%

Atmospheric pressure: 1010hPa

Requirements:

FCC 15.35(c) and RSS-Gen 4.5


Test procedure:

ANSI C63.10-2009

Table 5: Duty Cycle

On Time Duration [us]	Period of the Pulse Train [us]	Total On Time [%]
192.31	628.21	32.14%

Figure 4: Duty Cycle, Mode C (2480MHz)

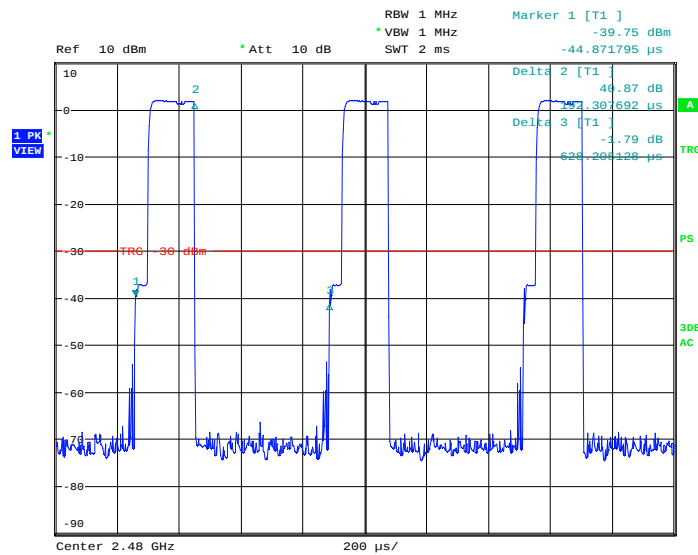

HR-12, Duty Cycle, Mode C
Date: 7.JUL.2014 10:56:16

Prüfbericht - Nr.: 50004841 001

Test Report No.:

Seite 18 von 39

Page 18 of 39

5.3.2 20dB Bandwidth

RESULT:

PASS

Date of testing: 2014-07-01

Ambient temperature: 24°C

Relative humidity: 68%

Atmospheric pressure: 1007hPa

Requirements:

FCC 15.215(c) and FCC 15.249

The 20dB bandwidth of the emission shall be contained within the frequency band designated in the rule section under which the equipment is operated.

Test procedure:

ANSI C63.10-2009.

The EUT was placed on a nonconductive turntable 0.8m above the ground plane. Measurements were made at 3m distance. The EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level.

Measurements were taken using both horizontal and vertical antenna polarizations for 3 EUT orientations (X, Y and Z). The results corresponding to the worst case antenna polarization and EUT orientation are recorded in this report.

Measurements were performed using a spectrum analyzer with a suitable span to encompass the peak of the fundamental and using the following settings: RBW = 100kHz, VBW = 100kHz.


Table 6: 20dB Bandwidth Edge Frequencies

Operating Frequency [MHz]	EUT / Antenna Orient..	Edge Frequency [MHz]	Limit [MHz]	Margin [MHz]
2402	Y / H	2401.4	2400	1.4
2480	Y / H	2480.6	2483.5	2.9

Table 7: 20dB Bandwidth

Operating Frequency [MHz]	EUT / Antenna Orient.	20dB Bandwidth [MHz]
2402	Y / H	1.226
2442	Y / H	1.210
2480	Y / H	1.210


Figure 5: 20dB Bandwidth, Mode A (2402MHz)

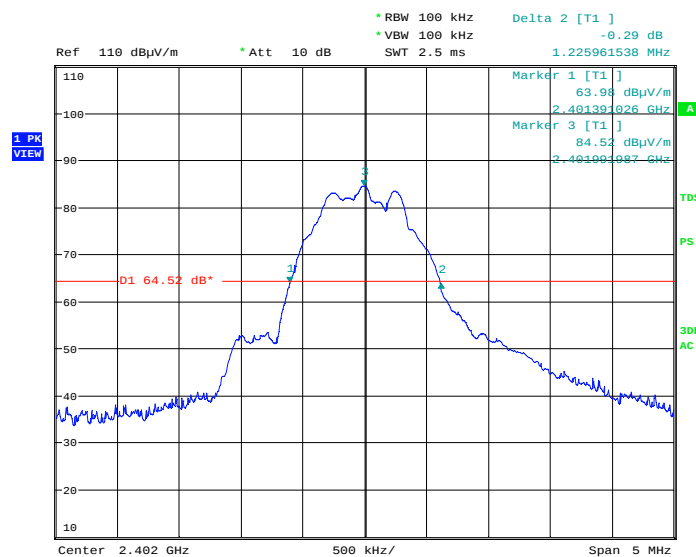

Prüfbericht - Nr.: 50004841 001
Test Report No.:


Seite 20 von 39
Page 20 of 39

Figure 6: 20dB Bandwidth, Mode B (2442MHz)

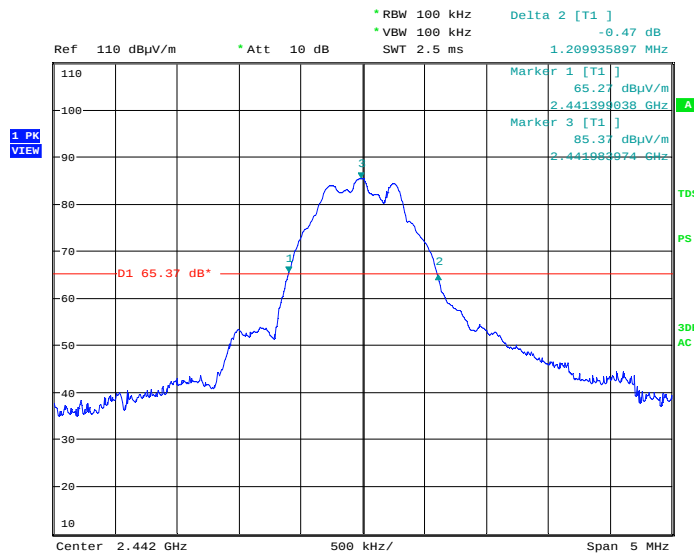

HR-12, 20dB BW, 2.442GHz, Y, Ver
Date: 1.JUL.2014 11:27:13

Figure 7: 20dB Bandwidth, Mode C (2480MHz)

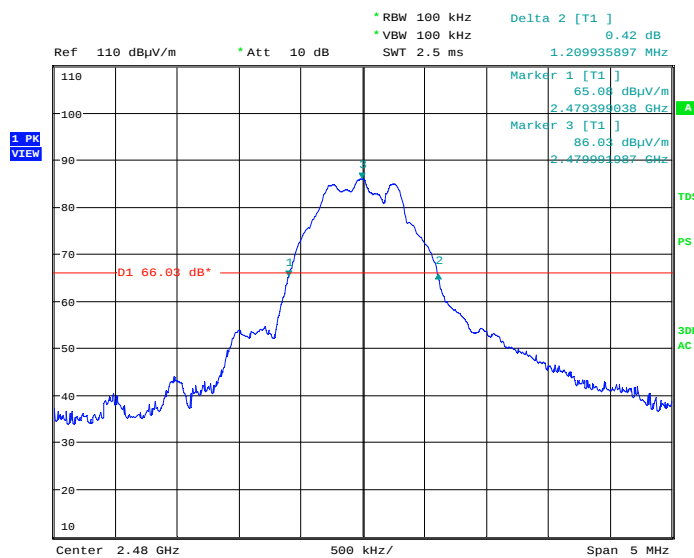

HR-12, 20dB BW, 2.480GHz, Y, Ver
Date: 1.JUL.2014 12:05:43

Prüfbericht - Nr.: 50004841 001

Test Report No.:

Seite 21 von 39

Page 21 of 39

5.3.3 99% Bandwidth

Date of testing: 2014-07-11

Ambient temperature: 24°C

Relative humidity: 68%

Atmospheric pressure: 998hPa

Requirements:

RSS-Gen 4.6.1

The 99% bandwidth shall be reported according to RSS-Gen 4.6.1.

Test procedure:

RSS-Gen 4.6.1.

The measurements were performed using a spectrum analyzer via antenna port with the resolution bandwidth set to 300kHz (1% of the span) and the video bandwidth to 100kHz. The 99% bandwidth was measured by using the OBW function of the analyzer with a 99% coverage setting.

Table 8: 99% Bandwidth

Operating Frequency [MHz]	99% Bandwidth [MHz]
2402	1.058
2442	1.122
2480	1.346

Figure 8: 99% Bandwidth, Mode A (2402MHz)



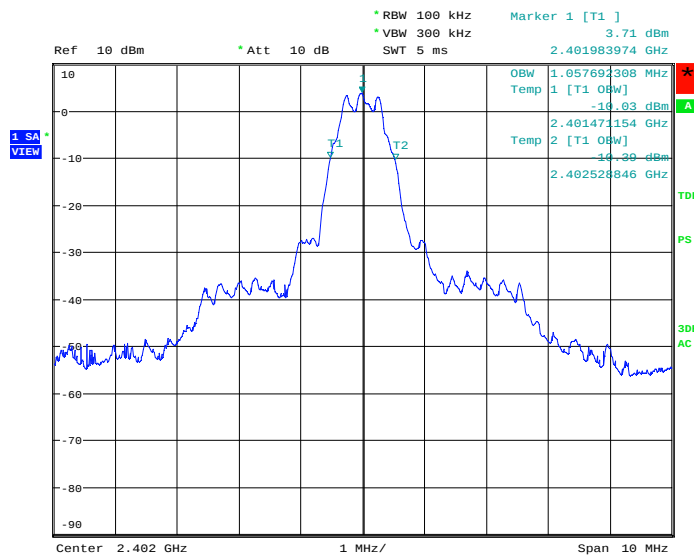


Figure 9: 99% Bandwidth, Mode B (2442MHz)

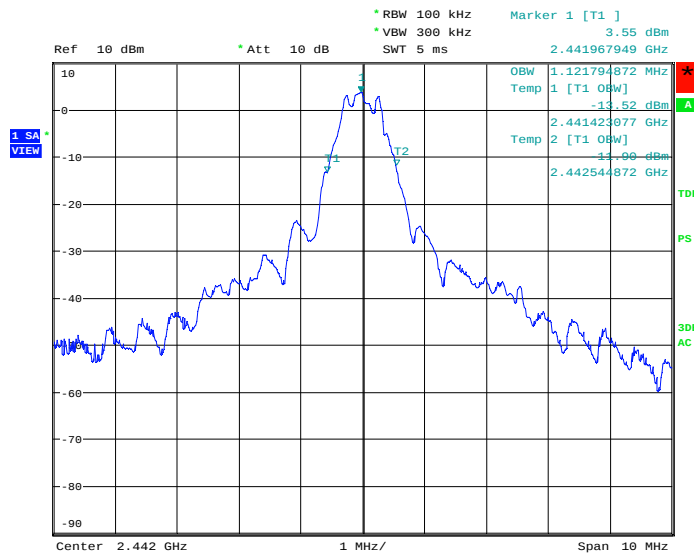

HR-12, 99per BW, 2.442GHz, Conducted
Date: 11.JUL.2014 17:14:39

Figure 10: 99% Bandwidth, Mode C (2480MHz)

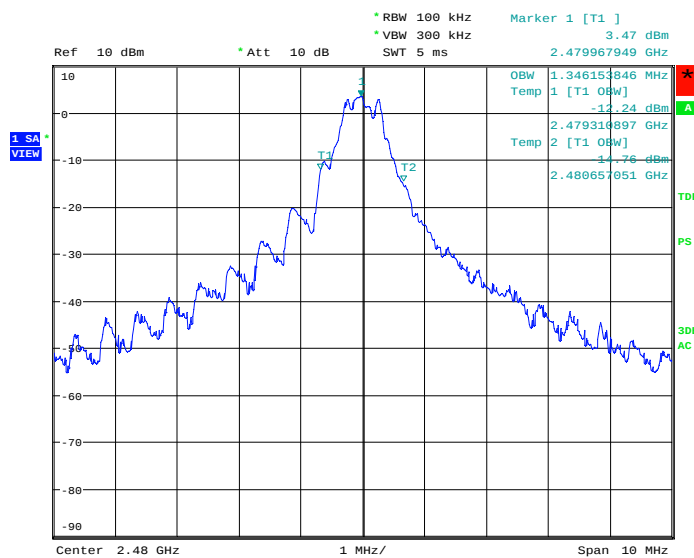

HR-12, 99per BW, 2.480GHz, Conducted
Date: 11.JUL.2014 17:17:25

Prüfbericht - Nr.: 50004841 001

Test Report No.:

Seite 24 von 39

Page 24 of 39

5.3.4 Field Strength of Fundamental

RESULT:

Pass

Date of testing: 2014-07-01

Ambient temperature: 24°C

Relative humidity: 68%

Atmospheric pressure: 1007hPa

Measurement distance: 3m

Kind of test site: Semi Anechoic Chamber

Requirements:

FCC 15.249(a) and RSS 210 A2.9(a)

The field strength of fundamental shall not exceed the level specified in FCC 15.249(a) and RSS-210 A2.9(a).

Test procedure:

ANSI C63.10-2009.

The EUT was placed on a nonconductive turntable 0.8m above the ground plane. Measurements were made at 3m distance. The EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level.

Measurements were taken using both horizontal and vertical antenna polarizations for 3 EUT orientations (X, Y and Z).

Measurements were performed using a spectrum analyzer with a suitable span to encompass the peak of the fundamental and using the following settings: Peak: RBW = 1MHz & VBW = 3MHz, Average: RBW = 1MHz, VBW = 10Hz.

The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report. In the spectra here below, the upper trace corresponds to the peak measurement and the lower trace corresponds to the average measurement.

Table 9: Field Strength of Fundamental

Operating Frequency [MHz]	EUT / Antenna Orient.	Average Value [dBµV/m]	Peak Value [dBµV/m]	Average Limit [dBµV/m]	Peak Limit [dBµV/m]	Average Margin [dB]	Peak Margin [dB]
2402	X / H	71.1	84.7	94.0	114.0	22.9	29.3
2442	X / H	72.1	85.7	94.0	114.0	21.9	28.3
2480	X / H	72.8	86.3	94.0	114.0	21.2	27.7

Notes: Average value was taken as reference as the peak value is significantly below the average limit.
All correction factors (antenna, cable, pre-amplifier) are included in the measurement values.
Average limit in dBµV/m is calculated as follows: Average limit = $20 \times \log(50000 \mu\text{V/m})$.
Peak limit in dBµV/m is calculated as follows: Peak limit = Average limit + 20dB.

Figure 11: Field Strength of Fundamental, Spectral Diagram, Mode A (2402MHz)



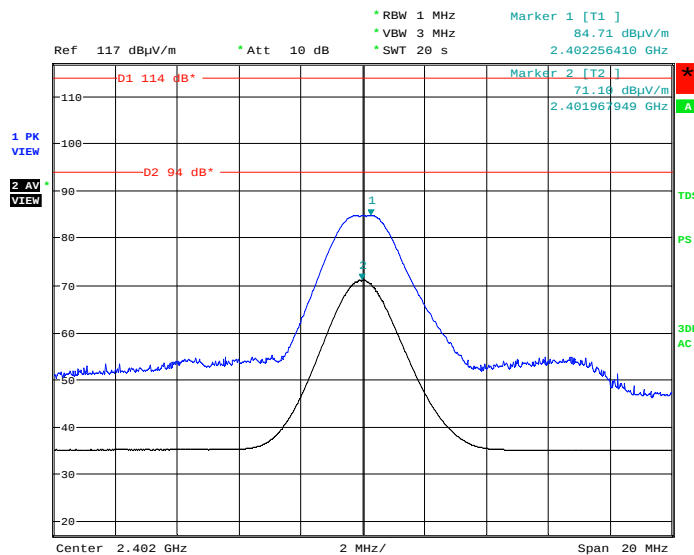


Figure 12: Field Strength of Fundamental, Spectral Diagram, Mode B (2442MHz)

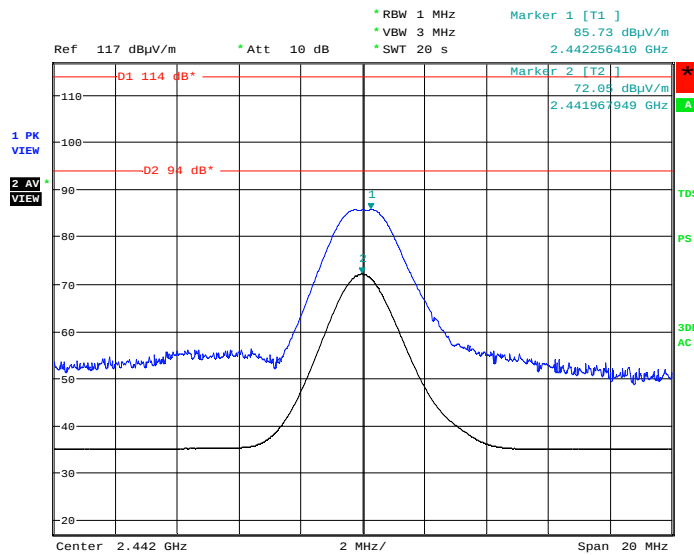

HR-12, FSoF, 2.442GHz, Y, Ver
Date: 1.JUL.2014 11:18:50

Figure 13: Field Strength of Fundamental, Spectral Diagram, Mode C (2480MHz)

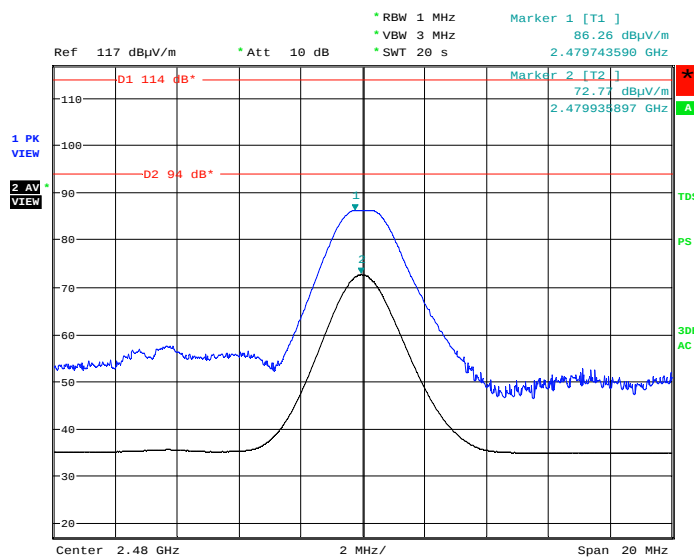

HR-12, FSoF, 2.480GHz, Y, Ver
Date: 1.JUL.2014 12:02:04

5.3.5 Radiated Spurious Emissions of Transmitter

RESULT:

PASS

Date of testing: 2014-06-30, 2014-07-01, 2014-07-02

Ambient temperature: 19, 24, 24°C

Relative humidity: 57, 68, 65%

Atmospheric pressure: 1006, 1007, 1007hPa

Frequency range: 9kHz - 25GHz

Measurement distance: 3m

Kind of test site: Semi Anechoic Chamber

Requirements:

FCC 15.209, FCC 15.249(a), FCC 15.249(d), RSS-Gen 7.2.2 and 7.2.5 and RSS-210 2.1, 2.2, 2.5, A2.9(a) and A2.9(b)

Emission radiated outside the specified frequency bands must comply with the radiated emission limits specified in FCC 15.209(a), FCC 15.249(a), RSS-Gen 7.2.5 (tables 5 and 6) and RSS-210 A2.9(a).

Test procedure:

ANSI C63.10-2009 and RSS-Gen 4.9 and 7.2

The EUT was placed on a nonconductive turntable 0.8m above the ground plane. Before final measurements of radiated emissions were performed, the EUT was scanned to determine its emission spectrum profile. The physical arrangement of the test system, the associated cabling and the EUT orientation (X, Y, Z) were varied in order to ensure that maximum emission amplitudes were attained.

The spectrum was examined from 9kHz to the 10th harmonic of the highest fundamental transmitter frequency (25GHz). Final radiated emission measurements were made at 3m distance.

At each frequency where a spurious emission was found, the EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations.

For emissions between 30MHz and 1GHz, measurements were performed with a test receiver operating in the CISPR quasi-peak detection mode. The receiver's 6dB bandwidth was set to 120kHz. For emissions above 1GHz, measurements were performed with a spectrum analyzer using the following settings: for peak field strength: RBW = 1MHz & VBW ≥ 1MHz; for average field strength: RBW = 1MHz & VBW = 10Hz.

Absorbers have been placed on the floor between the EUT and the measuring antenna for testing above 1GHz.

Prüfbericht - Nr.: 50004841 001

Test Report No.:

Seite 28 von 39

Page 28 of 39

The highest emission amplitudes relative to the appropriate limit were recorded in this report. Emissions other than those mentioned are small or not detectable.

No spurious emission was found in the range 9kHz - 30MHz.

Table 10: Radiated Emissions, Quasi Peak Data, 30MHz - 1GHz, Horizontal and Vertical Antenna Orientations, Mode A (2402MHz)

Freq. [MHz]	EUT / Antenna Orientation	Reading QP [dBμV]	Factor [dB(1/m)]	Level QP [dBμV/m]	Limit [dBμV/m]	Margin QP [dB]	Height [cm]	Angle [°]
32.053	H	39.2	-16.6	22.6	40.0	17.4	100	359
920.274	H	30.4	-1.7	28.7	46.0	17.3	395	292

Note: Level QP = Reading QP + Factor

Table 11: Radiated Emissions, Average Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, Mode A (2402MHz)

Freq. [MHz]	EUT / Antenna Orientation	Reading AV [dBμV]	Factor [dB(1/m)]	Level AV [dBμV/m]	Limit [dBμV/m]	Margin AV [dB]	Height [cm]	Angle [°]
2327.050	V	39.5	-14.0	25.5	54.0	28.5	121	276
7501.332	H	38.4	0.4	38.8	54.0	15.2	102	14

Note: Level AV = Reading AV + Factor

Table 12: Radiated Emissions, Peak Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, Mode A (2402MHz)

Freq. [MHz]	EUT / Antenna Orientation	Reading PK [dBμV]	Factor [dB(1/m)]	Level PK [dBμV/m]	Limit [dBμV/m]	Margin PK [dB]	Height [cm]	Angle [°]
2327.050	V	63.8	-14.0	49.8	74.0	24.2	121	276
7501.332	H	52.8	0.4	53.2	74.0	20.8	102	14

Note: Level PK = Reading PK + Factor

Prüfbericht - Nr.: 50004841 001

Test Report No.:

Seite 29 von 39

Page 29 of 39

Table 13: Radiated Emissions, Quasi Peak Data, 30MHz - 1GHz, Horizontal and Vertical Antenna Orientations, Mode B (2442MHz)

Freq. [MHz]	EUT / Antenna Orientation	Reading QP [dBμV]	Factor [dB(1/m)]	Level QP [dBμV/m]	Limit [dBμV/m]	Margin QP [dB]	Height [cm]	Angle [°]
32.053	H	39.1	-16.6	22.5	40.0	17.5	101	5
945.975	H	30.3	-1.1	29.2	46.0	16.8	385	131

Note: Level QP = Reading QP + Factor

Table 14: Radiated Emissions, Average Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, Mode B (2442MHz)

Freq. [MHz]	EUT / Antenna Orientation	Reading AV [dBμV]	Factor [dB(1/m)]	Level AV [dBμV/m]	Limit [dBμV/m]	Margin AV [dB]	Height [cm]	Angle [°]
1700.013	V	39.9	-16.7	23.2	54.0	30.8	162	337
5328.733	H	37.8	-6.7	31.1	54.0	22.9	172	55
7427.034	H	38.2	0.6	38.8	54.0	15.2	131	161

Note: Level AV = Reading AV + Factor

(*) The measured result is below the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to determine compliance at a level of confidence of 95%. However, the measured result indicates a high probability that the tested product complies with the specification limit.

Table 15: Radiated Emissions, Peak Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, Mode B (2442MHz)

Freq. [MHz]	EUT / Antenna Orientation	Reading PK [dBμV]	Factor [dB(1/m)]	Level PK [dBμV/m]	Limit [dBμV/m]	Margin PK [dB]	Height [cm]	Angle [°]
1700.013	V	53.5	-16.7	36.8	74.0	37.2	162	337
5328.733	H	51.9	-6.7	45.2	74.0	28.8	172	55
7427.034	H	53.1	0.6	53.7	74.0	20.3	131	161

Note: Level PK = Reading PK + Factor

Prüfbericht - Nr.: 50004841 001

Test Report No.:

Seite 30 von 39

Page 30 of 39

Table 16: Radiated Emissions, Quasi Peak Data, 30MHz - 1GHz, Horizontal and Vertical Antenna Orientations, Mode C (2480MHz)

Freq. [MHz]	EUT / Antenna Orientation	Reading QP [dBμV]	Factor [dB(1/m)]	Level QP [dBμV/m]	Limit [dBμV/m]	Margin QP [dB]	Height [cm]	Angle [°]
30.563	H	35.4	-16.7	18.7	40.0	21.3	100	157
32.057	H	39.2	-16.6	22.6	40.0	17.4	100	359
948.976	H	30.4	-1.0	29.4	46.0	16.6	171	14

Note: Level QP = Reading QP + Factor

Table 17: Radiated Emissions, Average Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, Mode C (2480MHz)

Freq. [MHz]	EUT / Antenna Orientation	Reading AV [dBμV]	Factor [dB(1/m)]	Level AV [dBμV/m]	Limit [dBμV/m]	Margin AV [dB]	Height [cm]	Angle [°]
2445.438	V	39.9	-14.4	25.5	54.0	28.5	103	338
2511.780	V	39.5	-14.6	24.9	54.0	29.1	177	239
2571.668	V	39.4	-14.6	24.8	54.0	29.2	103	282
7347.295	H	38.3	0.6	38.9	54.0	15.1	183	197

Note: Level AV = Reading AV + Factor

Table 18: Radiated Emissions, Peak Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, Mode C (2480MHz)

Freq. [MHz]	EUT / Antenna Orientation	Reading PK [dBμV]	Factor [dB(1/m)]	Level PK [dBμV/m]	Limit [dBμV/m]	Margin PK [dB]	Height [cm]	Angle [°]
2445.438	V	70.5	-14.4	56.1	74.0	17.9	103	338
2511.780	V	67.2	-14.6	52.6	74.0	21.4	177	239
2571.668	V	67.2	-14.6	52.7	74.0	21.3	103	282
7347.295	H	52.6	0.6	53.2	74.0	20.8	183	197


Note: Level PK = Reading PK + Factor

Table 19: Radiated Emissions at Band Edge, Average and Peak Data, Horizontal and Vertical Antenna Orientations, Modes A (2402MHz) and C (2480MHz)

Frequency [MHz]	EUT / Antenna Orientation	Level AV [dBµV/m]	Level PK [dBµV/m]	Limit AV [dBµV/m]	Limit PK [dBµV/m]	Margin AV [dB]	Margin PK [dB]
2384.13	Y / V	35.1	54.8	54.0	74.0	18.9	19.2
2483.50	Y / V	36.2	54.2	54.0	74.0	17.8	19.8

Notes: All correction factors (antenna, cable, pre-amplifier) are included in the measurement values.
Average limit in dBµV/m is calculated as follows: Average limit = 20 x log(500µV/m).
Peak limit in dBµV/m is calculated as follows: Peak limit = Average limit + 20dB.


Figure 14: Radiated Emissions at Band Edge, Spectral Diagram, Mode A (2402MHz)

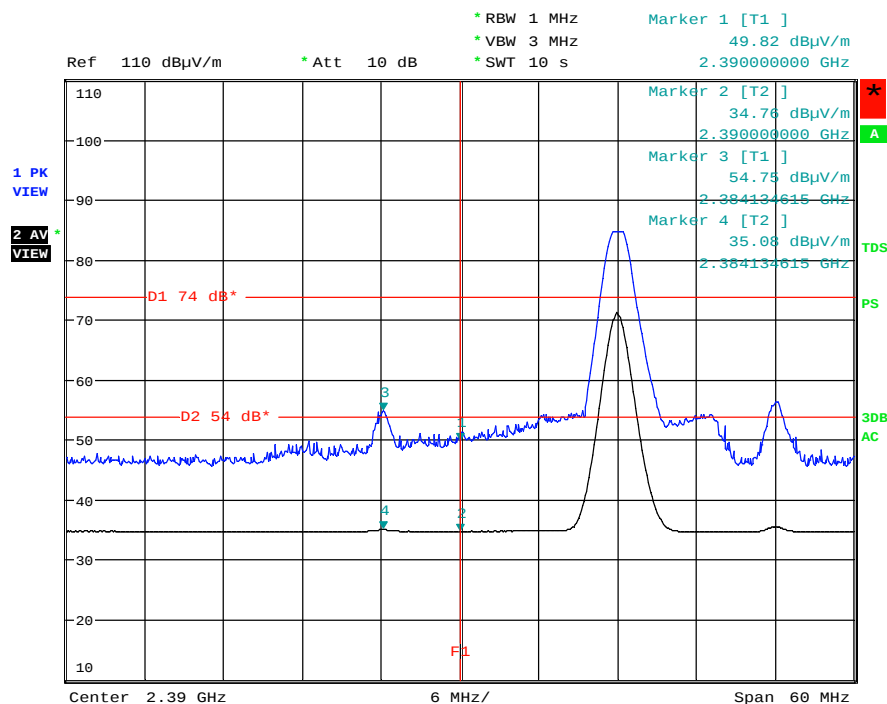

HR-12, BE, 2.39GHz, Y, Ver
Date: 1.JUL.2014 10:27:28

Note: The upper trace shows the peak value and the lower trace shows the average value.

Figure 15: Radiated Emissions at Band Edge, Spectral Diagram, Mode C (2480MHz)

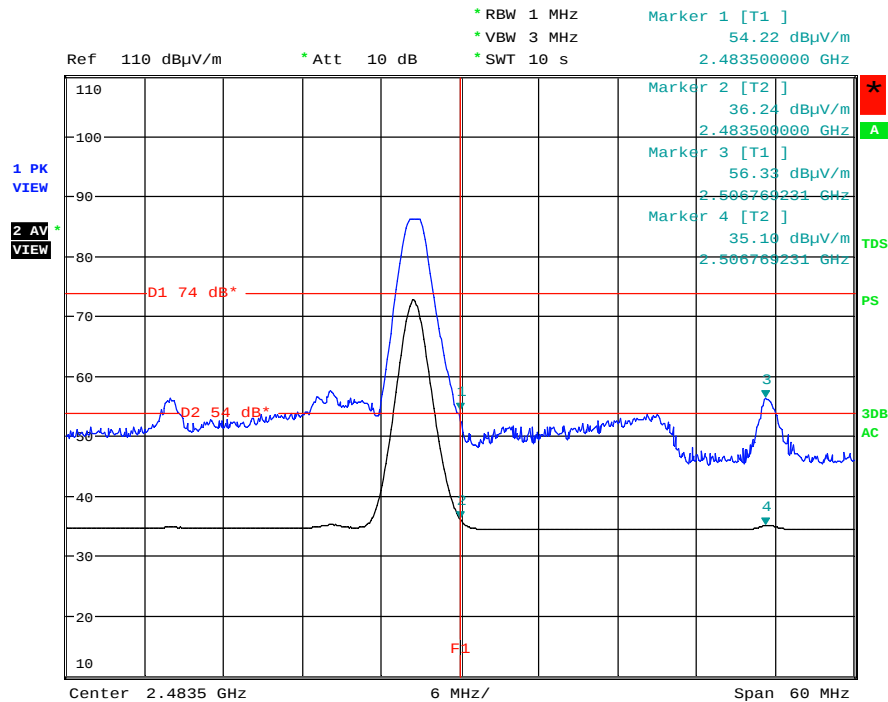

HR-12, BE, 2.4835GHz, Y, Ver
Date: 1.JUL.2014 11:56:32

Note: The upper trace shows the peak value and the lower trace shows the average value.

Prüfbericht - Nr.: 50004841 001
Test Report No.:

Seite 33 von 39
Page 33 of 39

5.4 AC Power Line Conducted Measurements

5.4.1 AC Power Line Conducted Emission of Transmitter

RESULT:

N/A

Frequency range: 0.15 - 30MHz

Requirements:

FCC 15.207 and RSS-Gen 7.2.4

Note:

It is not applicable as the product is battery operated.

7. List of Tables

Table 1: List of Test and Measurement Equipment.....	6
Table 2: Emission Measurement Uncertainty.....	7
Table 3: Interfaces present on the EUT	10
Table 4: Conducted Output Power.....	15
Table 5: Duty Cycle	16
Table 6: 20dB Bandwidth Edge Frequencies.....	19
Table 7: 20dB Bandwidth.....	19
Table 8: 99% Bandwidth.....	22
Table 9: Field Strength of Fundamental.....	25
Table 10: Radiated Emissions, Quasi Peak Data, 30MHz - 1GHz, Horizontal and Vertical Antenna Orientations, Mode A (2402MHz).....	28
Table 11: Radiated Emissions, Average Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, Mode A (2402MHz).....	28
Table 12: Radiated Emissions, Peak Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, Mode A (2402MHz).....	28
Table 13: Radiated Emissions, Quasi Peak Data, 30MHz - 1GHz, Horizontal and Vertical Antenna Orientations, Mode B (2442MHz).....	29
Table 14: Radiated Emissions, Average Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, Mode B (2442MHz).....	29
Table 15: Radiated Emissions, Peak Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, Mode B (2442MHz).....	29
Table 16: Radiated Emissions, Quasi Peak Data, 30MHz - 1GHz, Horizontal and Vertical Antenna Orientations, Mode C (2480MHz)	30
Table 17: Radiated Emissions, Average Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, Mode C (2480MHz)	30
Table 18: Radiated Emissions, Peak Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, Mode C (2480MHz)	30
Table 19: Radiated Emissions at Band Edge, Average and Peak Data, Horizontal and Vertical Antenna Orientations, Modes A (2402MHz) and C (2480MHz).....	31

8. List of Figures

Figure 1: Block Diagram	10
Figure 2: 20dB Bandwidth, Mode A (2412MHz).....	19
Figure 3: 20dB Bandwidth, Mode B (2437MHz).....	20
Figure 4: 20dB Bandwidth, Mode C (2462MHz).....	20
Figure 5: 99% Bandwidth, Mode A (2412MHz).....	22
Figure 6: 99% Bandwidth, Mode B (2437MHz).....	23
Figure 7: 99% Bandwidth, Mode C (2462MHz).....	23
Figure 8: Field Strength of Fundamental, Spectral Diagram, Mode A (2412MHz).....	25
Figure 9: Field Strength of Fundamental, Spectral Diagram, Mode B (2437MHz).....	26
Figure 10: Field Strength of Fundamental, Spectral Diagram, Mode C (2462MHz)	26
Figure 11: Radiated Emissions at Band Edge, Spectral Diagram, Mode A (2412MHz).....	31
Figure 12: Radiated Emissions at Band Edge, Spectral Diagram, Mode C (2462MHz)	32

Produkte
Products

Prüfbericht - Nr.: 50004841 001
Test Report No.:

Seite 39 von 39
Page 39 of 39

9. List of Photographs

Photograph 1: Set-up for RF Conducted test at Antenna Port34
Photograph 2: Set-up for Radiated Emission of Transmitter, Front View35
Photograph 3: Set-up for Radiated Emission of Transmitter, Rear View.....35
Photograph 4: Set-up for Radiated Emission, EUT Configuration X-Axis.....36
Photograph 5: Set-up for Radiated Emission, EUT Configuration Y-Axis.....36
Photograph 6: Set-up for Radiated Emission, EUT Configuration Z-Axis.....37