

## TABLE OF CONTENTS LIST

APPLICANT: HC TELECOM CO., LTD.

FCC ID: ON7DS815

### TEST REPORT:

|      |            |                                            |
|------|------------|--------------------------------------------|
| PAGE | 1.....     | SECURITY CODING INFORMATION                |
| PAGE | 2-3.....   | TEST PROCEDURE AND TEST EQUIPMENT LIST     |
| PAGE | 4.....     | POWER LINE CONDUCTED INTERFERENCE          |
| PAGE | 5-8.....   | POWER LINE CONDUCTED PLOTS                 |
| PAGE | 9.....     | OCCUPIED BANDWIDTH AND PEAK POWER OUTPUT   |
| PAGE | 10-11..... | 6 dB BANDWIDTH PLOTS                       |
| PAGE | 12.....    | RADIATED SPURIOUS EMISSIONS BASE           |
| PAGE | 13.....    | RADIATED SPURIOUS EMISSIONS HANDSET        |
| PAGE | 14.....    | POWER SPECTRAL DENSITY AND PROCESSING GAIN |
| PAGE | 15-20..... | POWER SPECTRAL DENSITY PLOTS               |

### EXHIBITS:

|         |           |                                         |
|---------|-----------|-----------------------------------------|
| EXHIBIT | 1.....    | FCC ID LABEL SAMPLES                    |
| EXHIBIT | 2A-2B.... | SKETCH OF LABEL LOCATIONS               |
| EXHIBIT | 3.....    | BLOCK DIAGRAM                           |
| EXHIBIT | 4A-4B.... | SCHEMATICS - BASE                       |
| EXHIBIT | 5.....    | SCHEMATIC - HANDSET                     |
| EXHIBIT | 6A.....   | EXTERNAL PHOTO - FRONT VIEW - BASE      |
| EXHIBIT | 6B.....   | EXTERNAL PHOTO - BOTTOM VIEW - BASE     |
| EXHIBIT | 6C.....   | EXTERNAL PHOTO - FRONT VIEW - HANDSET   |
| EXHIBIT | 6D.....   | EXTERNAL PHOTO - BOTTOM VIEW - HANDSET  |
| EXHIBIT | 6E.....   | INTERNAL COMPONENT SIDE PHOTO - BASE    |
| EXHIBIT | 6F.....   | INTERNAL SOLDER SIDE PHOTO - BASE       |
| EXHIBIT | 6G.....   | INTERNAL COMPONENT SIDE PHOTO - HANDSET |
| EXHIBIT | 6H.....   | INTERNAL SOLDER SIDE PHOTO - HANDSET    |
| EXHIBIT | 7A-7P.... | INSTRUCTION MANUAL                      |
| EXHIBIT | 8A-8B.... | CIRCUIT DESCRIPTION                     |
| EXHIBIT | 9A.....   | RADIATED TEST SET UP PHOTO - BASE       |
| EXHIBIT | 9B.....   | RADIATED TEST SET UP PHOTO - HANDSET    |
| EXHIBIT | 9C.....   | POWERLINE CONDUCTED TEST SET UP PHOTO   |
| EXHIBIT | 10A-10C.. | PROCESSING GAIN TEST DATA               |

APPLICANT: HC TELECOM CO., LTD.

FCC ID: ON7DS815

REPORT #: H\HCT\679WCK1\679WCK1TestReport.doc

PAGE #: TABLE OF CONTENTS

APPLICANT: HC TELECOM CO., LTD.  
FCC ID: ON7DS815

**15.214(d) THIS DEVICE COMPLIES WITH THE SECURITY CODE REQUIREMENTS  
OF 15.214(d)(1)(2) AND (3) BY MEANS OF THE FOLLOWING:**

THE EPROM IS CAPABLE OF 16 MILLION DIGIT CODING AND THE FACTORY WRITES THE  
SERIES IN PRODUCTION. THIS MEANS THAT EACH OF 16 MILLION INDIVIDUAL SECURITY  
CODES ARE REPEATED ONLY ONCE IN ANY CONSECUTIVELY PRODUCED UNIT.

APPLICANT: HC TELECOM CO., LTD.  
FCCID : ON7DS815

#### TEST EQUIPMENT LIST

1. Spectrum Analyzer: HP 8566B-Opt 462, S/N 3138A07786, w/ preselector HP 85685A, S/N 3221A01400, Quasi-Peak Adapter HP 85650A, S/N 3303A01690 & Preamplifier HP 8449B-OPT H02, S/N 3008A00372
2. Biconnical Antenna: Eaton Model 94455-1, S/N 1057
3. Biconnical Antenna: Electro-Metrics Model BIA-25, S/N 1171
4. Log-Periodic Antenna: Electro-Metrics Model EM-6950, S/N 632
5. Log-Periodic Antenna: Electro-Metrics Model LPA-30, S/N 409
6. Double-Ridged Horn Antenna: Electro-Metrics Model RGA-180, 1-18 GHz, S/N 2319
7. 18-26.3GHz Systron Donner Standard Gain Horn #DBE-520-20
8. Horn 40-60GHz: ATM Part #19-443-6R
9. Line Impedance Stabilization Network: Electro-Metrics Model ANS-25/2, S/N 2604
10. Temperature Chamber: Tenney Engineering Model TTRC, S/N 11717-7
11. Frequency Counter: HP Model 5385A, S/N 3242A07460
12. Peak Power Meter: HP Model 8900C, S/N 2131A00545
13. Open Area Test Site #1-3meters
14. Signal Generator: HP 8640B, S/N 2308A21464
15. Signal Generator: HP 8614A, S/N 2015A07428
16. Passive Loop Antenna: EMC0 Model 6512, 9KHz to 30MHz, S/N 9706-1211
17. Dipole Antenna Kit: Electro-Metrics Model TDA-30/1-4, S/N 153
18. AC Voltmeter: HP Model 400FL, S/N 2213A14499
19. Digital Multimeter: Fluke Model 8012A, S/N 4810047
20. Digital Multimeter: Fluke Model 77, S/N 43850817
21. Oscilloscope: Tektronix Model 2230, S/N 300572

#### TEST PROCEDURE

**GENERAL:** This report shall NOT be reproduced except in full without the written approval of TIMCO ENGINEERING, INC. Shielded interface cables were used in all cases except for cables connecting to the telephone line and the power cords. A test program was run which simulated a normal data transmission on a network.

**POWER LINE CONDUCTED INTERFERENCE:** The procedure used was ANSI STANDARD C63.4-1992 using a 50uH LISN. Both lines were observed. The bandwidth of the spectrum analyzer was 10kHz with an appropriate sweep speed. The ambient temperature of the UUT was 74°F with a humidity of 44%.

**BANDWIDTH 6.0dB:** The measurements were made with the spectrum analyzer's resolution bandwidth(RBW)=100kHz and the video bandwidth(VBW)=300KHz and the span set as shown on plot.

**APPLICANT : HC TELECOM CO., LTD.**

**FCC ID : ON7DS815**

**TEST PROCEDURES CONTINUED**

**POWER OUTPUT:** The RF power output was measured at the antenna feed point by removing the permanent antenna and connecting the UUT to a peak power meter, HP Model No. 8900C.

**RADIATION INTERFERENCE:** The test procedure used was ANSI STANDARD C63.4-1992 using a HEWLETT PACKARD spectrum analyzer with a pre-selector. The bandwidth(RBW) of the spectrum analyzer was 100kHz up to 1GHz and 1.0MHz above 1GHz with an appropriate sweep speed. The VBW above 1.0GHz was = 1.0MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The ambient temperature of the UUT was 82°F with a humidity of 37%.

**15.247(d) POWER SPECTRAL DENSITY.** The peak within the pass band was located with a RBW set to 30Khz and a span of 5MHz, slightly greater than the 6dB bandwidth, then the emission was centered on the display and the span and RBW reduced. A 1.5MHz span, 3kHz RBW, and a sweep time to sweep time set to 500 seconds. Since spectral line spacing could not be resolved, the noise power density method was used. The response was then plotted, a correction factor of 35dB and any attenuation used was added.

**15.247(e): PROCESSING GAIN,** This gain is supplied by the manufacturer of the UUT.

**2.1033(b)(4)**

**ANTENNA AND GROUND SYSTEM:**

This unit uses a short, antenna element for the base unit and the handset. The antenna is permanently attached to the unit and no provision is made for connection to an external antenna.

No ground connection is provided. The only ground in use is the ground plane on the printed circuit board.

**APPLICANT:** HC TELECOM CO., LTD.

**FCC ID:** ON7DS815

**NAME OF TEST:** POWER LINE CONDUCTED INTERFERENCE

**RULES PART NUMBER:** 15.207

| MINIMUM REQUIREMENTS: | FREQUENCY<br>MHz | LEVEL<br>dBuV     |
|-----------------------|------------------|-------------------|
|                       | 0.450-30         | 48 dBuV or 250 uV |

**TEST PROCEDURE:** ANSI STANDARD C63.4-1992

**OFF HOOK**

THE HIGHEST EMISSION READ FOR LINE 1 WAS 12.9 uV @ 21.49 MHz.

THE HIGHEST EMISSION READ FOR LINE 2 WAS 4.37 uV @ 1.57 MHz.

**ON HOOK**

THE HIGHEST EMISSION READ FOR LINE 1 WAS 3.31 uV @ 1.40 MHz.


THE HIGHEST EMISSION READ FOR LINE 2 WAS 17.2 uV @ 21.43 MHz.

THE GRAPHS ON THE FOLLOWING PAGES REPRESENT THE EMISSIONS READ FOR POWERLINE CONDUCTED FOR THIS DEVICE.

TEST RESULTS: Both lines were observed with the UUT transmitting. The measurements indicate that the unit DOES appear to meet the FCC requirements for this class of equipment.

PERFORMED BY: JOE SCOGLIO

DATE: 10/8/01

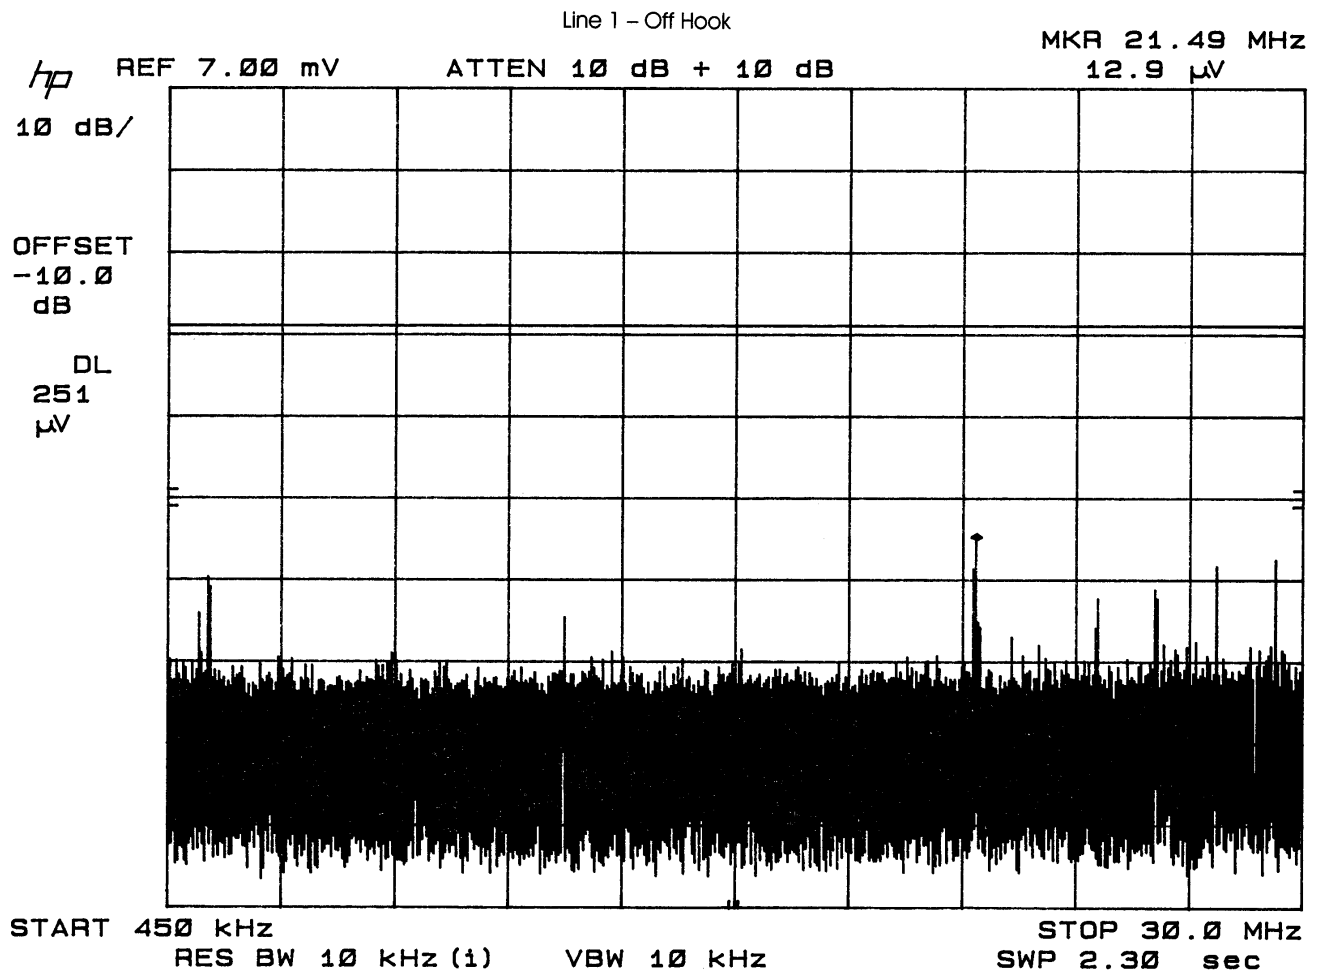


APPLICANT: HC TELECOM CO., LTD.

FCC ID: ON7DS815

REPORT #: H\HCT\679WCK1\679WCK1TestReport.doc

PAGE #: 5 OF 20

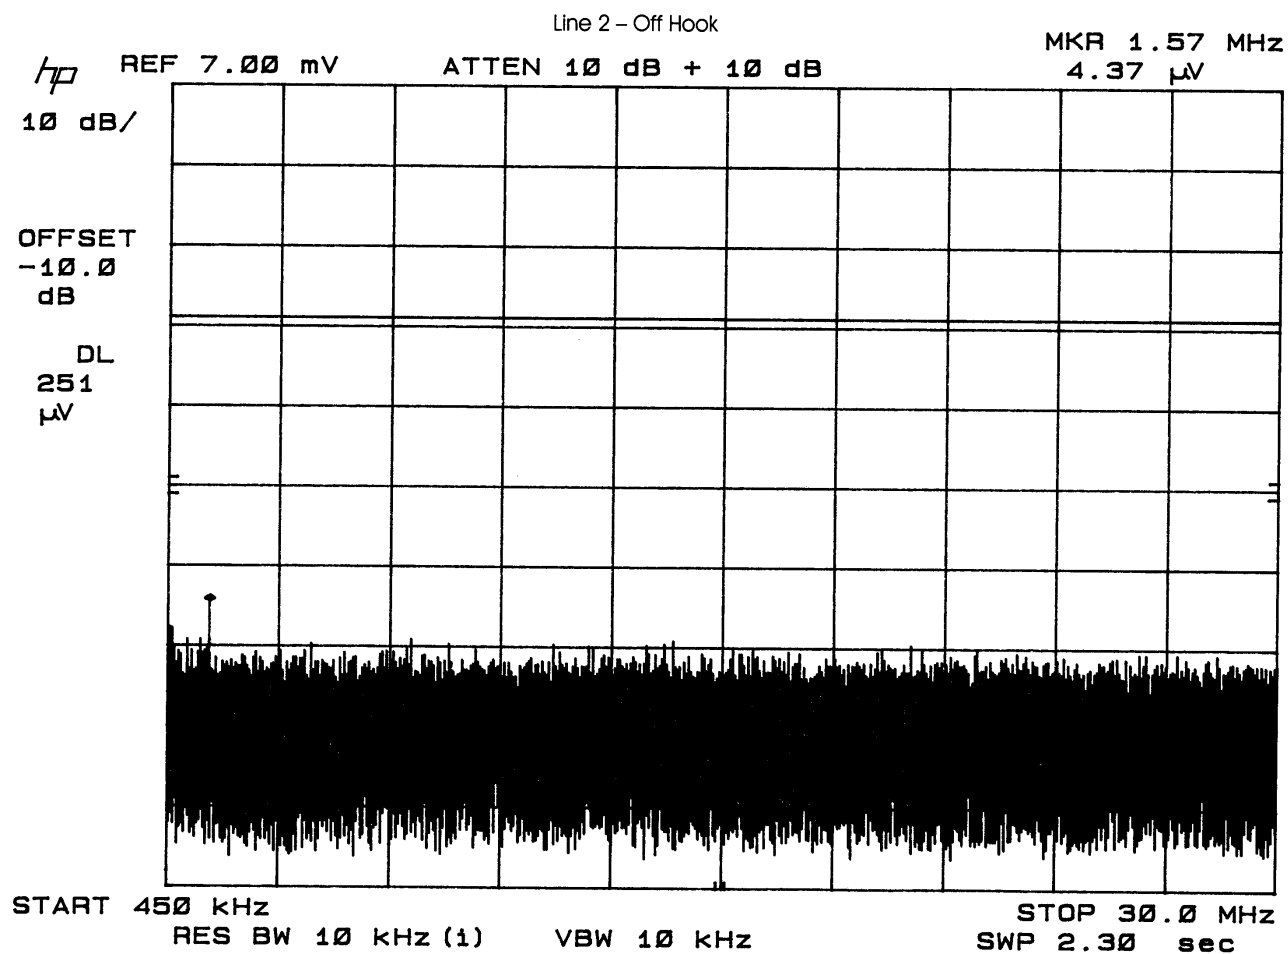


APPLICANT: HC TELECOM CO., LTD.

FCC ID: ON7DS815

REPORT #: H\HCT\679WCK1\679WCK1TestReport.doc

PAGE #: 6 OF 20

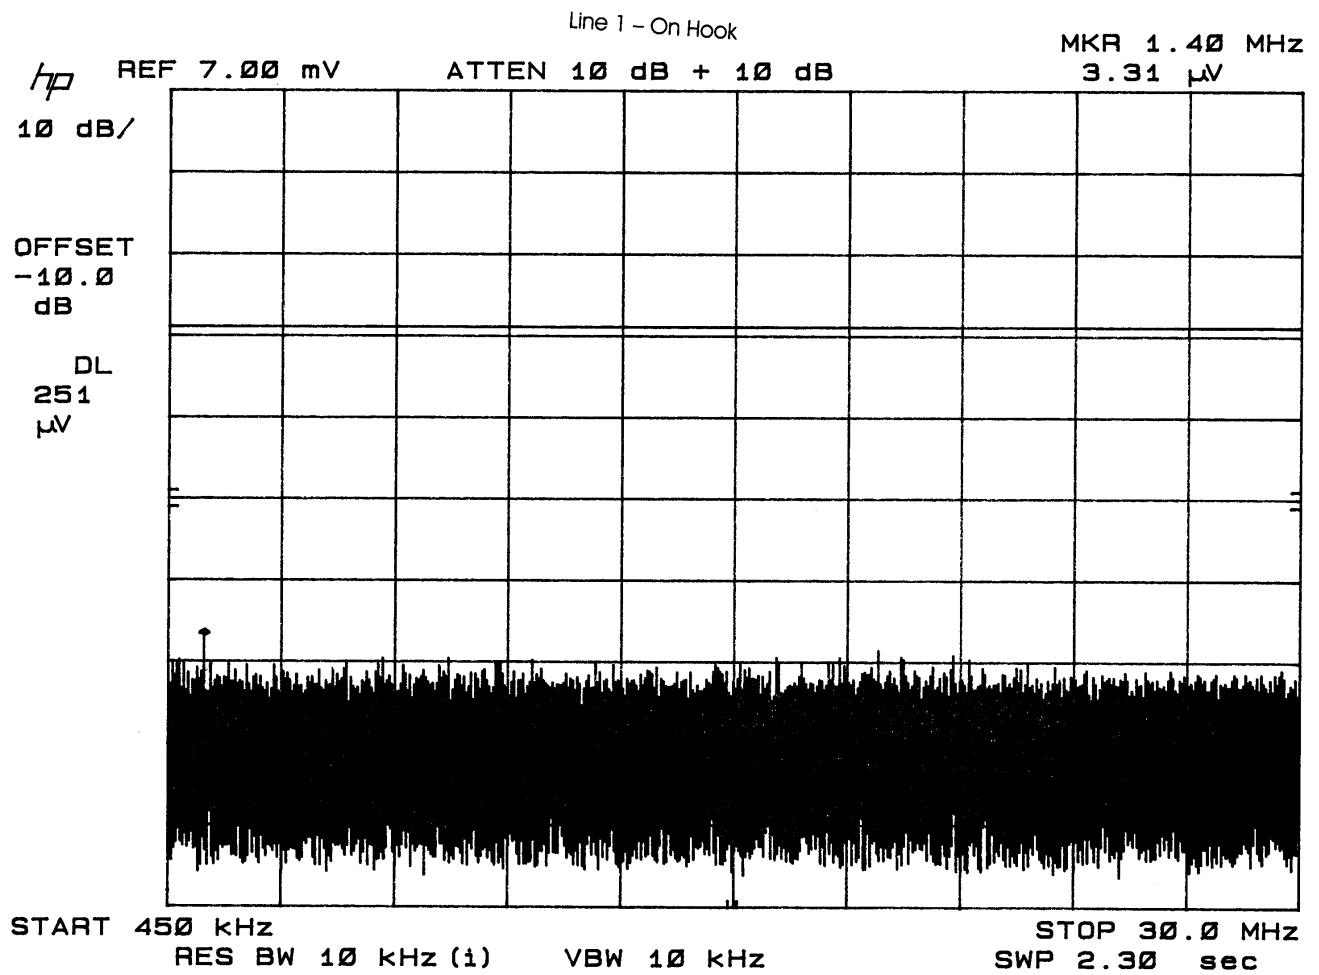


APPLICANT: HC TELECOM CO., LTD.

FCC ID: ON7DS815

REPORT #: H\HCT\679WCK1\679WCK1TestReport.doc

PAGE #: 7 OF 20

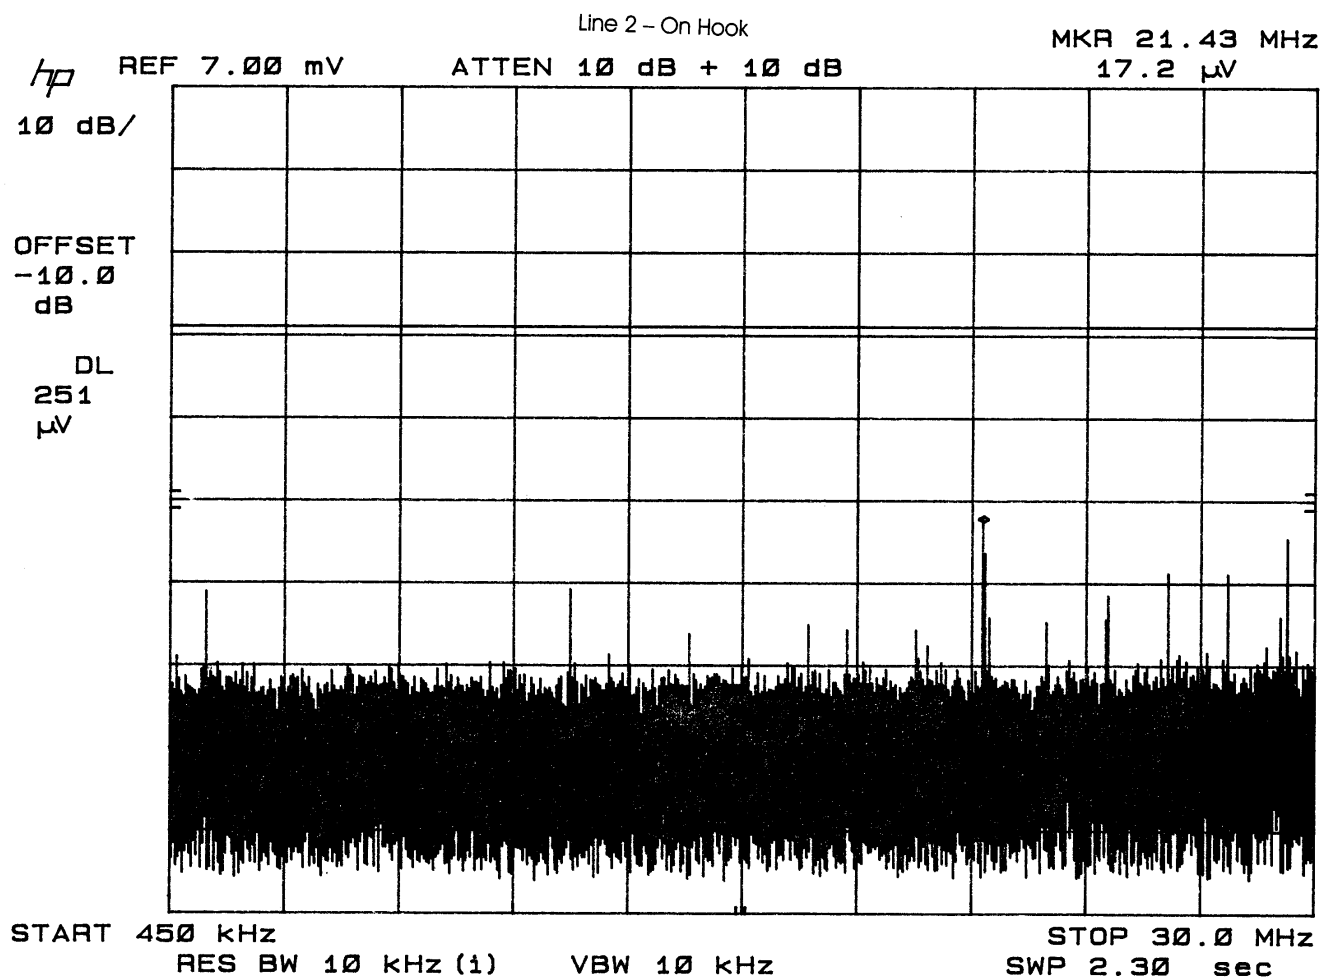

APPLICANT: HC TELECOM CO., LTD.

FCC ID: ON7DS815

REPORT #: H\HCT\679WCK1\679WCK1TestReport.doc

PAGE #: 8 OF 20

**APPLICANT:** HC TELECOM CO., LTD.

**FCC ID:** ON7DS815

**NAME OF TEST:** OCCUPIED BANDWIDTH

**RULES PART NUMBER:** 15.247

**15.247(a)(2)**

6dB bandwidth shall be at least 500 kHz. As shown in the accompanying plots. The bandwidth was measured at three places in the band and the narrowest is reported below.

Base 6dB Bandwidth = 965 kHz

Handset 6 dB Bandwidth = 995 kHz

**15.247(B) PEAK POWER OUTPUT**


The maximum peak output power shall not exceed 1 watt (30 dBm). If directional transmitting antennas with a gain of more than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Both the base and handset have a maximum power output of less than +30 dBm. Power was measured by disconnecting the antennas and measuring across a 50 ohm load as recommended by the manufacturer using a HP peak power meter Model 8900C. The antennas are non directional and do not exceed 6 dBi gain. The power output was measured at three places in the band highest is reported below.

POWER OUTPUT - LIMIT +30 dBm

BASE PEAK POWER OUTPUT = .061 mWatts

HANDSET PEAK POWER OUTPUT = .037 mWatts

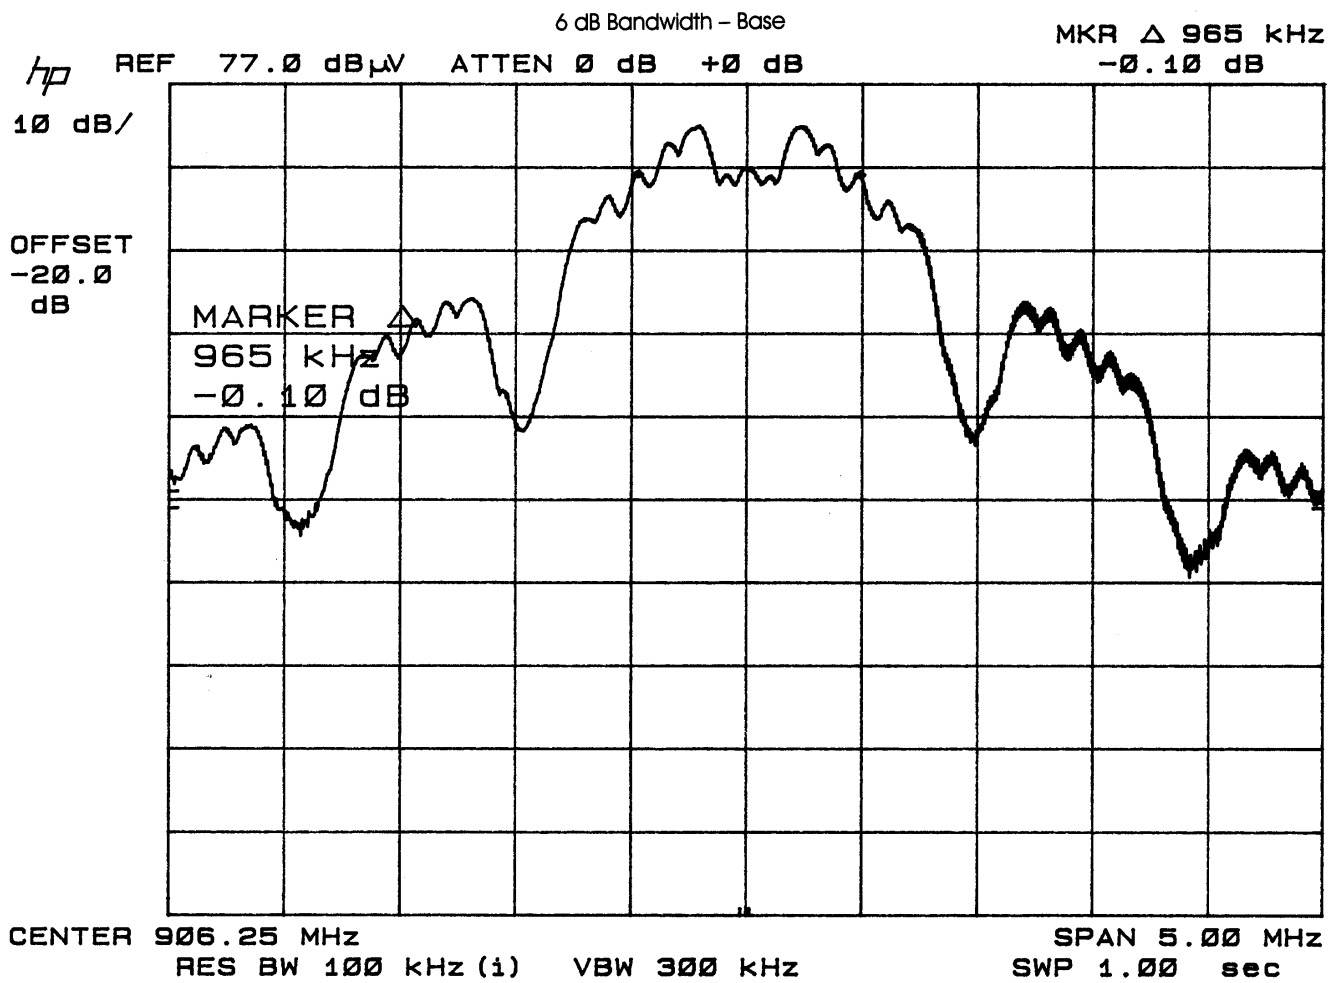


APPLICANT: HC TELECOM CO., LTD.

FCC ID: ON7DS815

REPORT #: H\HCT\679WCK1\679WCK1TestReport.doc

PAGE #: 10 OF 20

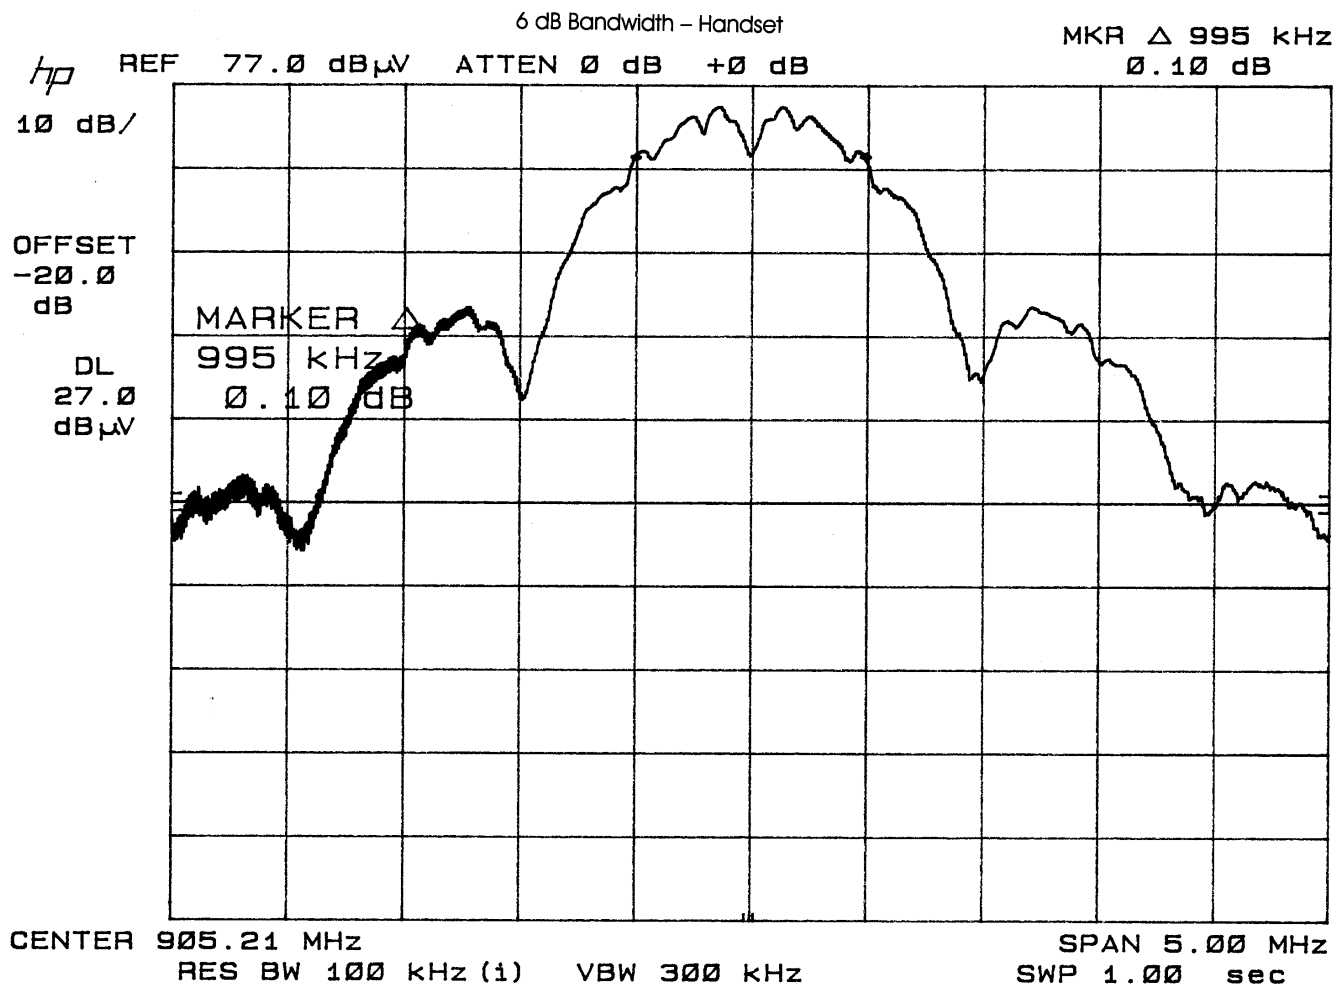

APPLICANT: HC TELECOM CO., LTD.

FCC ID: ON7DS815

REPORT #: H\HCT\679WCK1\679WCK1TestReport.doc

PAGE #: 11 OF 20

**APPLICANT:** HC TELECOM CO., LTD.

**FCC ID:** ON7DS815

**NAME OF TEST:** RADIATED SPURIOUS EMISSIONS - BASE

**RULES PART NUMBER:** 15.247(c)

**REQUIREMENTS:** Emissions that fall in the restricted bands (15.205). These emissions must be less than or equal to 500 uV/m (54 dBuV/m). Spurious not in a restricted band must be 20dBc.

**TEST DATA:**

| <b>Tuned<br/>Frequency<br/>MHz</b> | <b>Emission<br/>Frequency<br/>MHz</b> | <b>Meter<br/>Reading<br/>dBuV</b> | <b>Ant.<br/>Polarity</b> | <b>Coax<br/>Loss<br/>dB</b> | <b>Correction<br/>Factor<br/>dB</b> | <b>Field<br/>Strength<br/>dBuV/m</b> | <b>Margin<br/>dB</b> |
|------------------------------------|---------------------------------------|-----------------------------------|--------------------------|-----------------------------|-------------------------------------|--------------------------------------|----------------------|
| 907.3                              | 907.30                                | 56.3                              | V                        | 4.04                        | 24.81                               | 85.15                                | 42.23                |
| 907.3                              | 1,814.60                              | 20.3                              | V                        | 2.81                        | 28.42                               | 51.53                                | 13.62                |
| 907.3                              | 2,721.90R                             | 7.4                               | V                        | 3.58                        | 29.78                               | 40.76                                | 13.24                |
| 913.3                              | 913.70                                | 56.6                              | V                        | 3.89                        | 24.74                               | 85.23                                | 42.15                |
| 913.3                              | 1,827.50                              | 16.3                              | V                        | 2.82                        | 28.43                               | 47.55                                | 17.68                |
| 913.3                              | 2,741.30R                             | 9.0                               | V                        | 3.59                        | 29.85                               | 42.44                                | 11.56                |
| 922.3                              | 922.30                                | 54.6                              | V                        | 3.70                        | 24.63                               | 82.93                                | 44.45                |
| 922.3                              | 1,844.70                              | 16.3                              | V                        | 2.84                        | 28.44                               | 47.58                                | 15.35                |
| 922.3                              | 2,767.00R                             | 6.3                               | V                        | 3.61                        | 29.94                               | 39.85                                | 14.15                |

APPLICANT: HC TELECOM CO., LTD.

FCC ID: ON7DS815

REPORT #: H\HCT\679WCK1\679WCK1TestReport.doc

PAGE #: 12 OF 20

**APPLICANT:** HC TELECOM CO., LTD.

**FCC ID:** ON7DS815

**NAME OF TEST:** RADIATED SPURIOUS EMISSIONS - HANDSET

**RULES PART NUMBER:** 15.247(c)

**REQUIREMENTS:** Emissions that fall in the restricted bands (15.205). These emissions must be less than or equal to 500 uV/m (54 dBuV/m). Spurious not in a restricted band must be 20dBc.

**TEST DATA CONTINUED:**

| Emission Frequency MHz | Meter Reading dBuV | Ant. Polarity | Coax Loss dB | Correction Factor dB | Field Strength dBuV/m | Margin dB |
|------------------------|--------------------|---------------|--------------|----------------------|-----------------------|-----------|
| <b>HANDSET</b>         |                    |               |              |                      |                       |           |
| 907.30                 | 54.2               | V             | 1.95         | 24.81                | 83.05                 | 44.33     |
| 1,814.60               | 23.1               | V             | 3.00         | 28.42                | 54.33                 | 8.72      |
| 2,722.00R              | 8.1                | V             | 3.80         | 29.78                | 41.46                 | 12.54     |
|                        |                    |               |              |                      |                       |           |
| 913.70                 | 54.3               | V             | 1.95         | 24.74                | 82.93                 | 44.45     |
| 1,827.50               | 23.9               | V             | 3.00         | 28.43                | 55.15                 | 7.78      |
|                        |                    |               |              |                      |                       |           |
| 922.30                 | 53.2               | V             | 1.95         | 24.63                | 81.53                 | 45.85     |
| 1,844.60               | 22.3               | V             | 3.00         | 28.44                | 53.58                 | 7.95      |
| 2,767.00R              | 9.7                | V             | 3.80         | 29.94                | 43.25                 | 10.75     |

**SAMPLE CALCULATION:** FSdBuV/m = MR(dBuV) + ACFdB + COAX+ C.F.

**METHOD OF MEASUREMENT:** The procedure used was ANSI STANDARD C63.4-1992. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The spectrum was scanned from 30 MHz to 10 GHz using a Hewlett Packard Model 8566B Spectrum Analyzer, Hewlett Packard Model 85685A Preselector, Hewlett Packard Model 85650A Quasi-Peak Adaptor, and an appropriate antenna. Low loss coax was used above 1 GHz. Measurements were made at Timco Engineering, Inc. 849 NW State Road 45 Newberry, Fl.

**TEST RESULTS:** The unit DOES meet the FCC requirements.

**PERFORMED BY:** Joseph Scoglio

**DATE:** 10/8/01

APPLICANT: HC TELECOM CO., LTD.

FCC ID: ON7DS815

REPORT #: H\HCT\679WCK1\679WCK1TestReport.doc

PAGE #: 13 OF 20

**APPLICANT:** HC TELECOM CO., LTD.

**FCC ID:** ON7DS815

**NAME OF TEST:** POWER SPECTRAL DENSITY

**RULES PART NUMBER:** 15.247(d)

**REQUIREMENTS:** The power spectral density averaged over any 1 second interval shall not be greater than 8 dBm in any 3 kHz bandwidth within these bands.

**TEST DATA:**

The spectrum line spacing could not be resolved so the noise power density was measured;

**Measurement Method:**

Starting from the settings that were used for the 6 dB bandwidth the peak signal was located and the span was reduced and the sweep time increased in a manner to maintain calibration and to keep the peak emission in the display, then the sweep time was increased to 500seconds at 1.5MHz span and a RBW changed to 3 kHz. The spectrum analyzer was put into the noise power mode and the plots made.

**BASE**

|                        |                        |                        |
|------------------------|------------------------|------------------------|
| @ 905.410 MHz          | @ 914.658 MHz          | @ 925.486 MHz          |
| 6.90 dBuV              | 7.70 dBuV              | 4.700 dBuV             |
| 30.00 dB ATTN          | 30.00 dB ATTN          | 30.00 dB ATTN          |
| 35.00 dB CF            | 35.00 dB CF            | 35.00 dB CF            |
| <hr/> 71.90 dBuV       | <hr/> 72.70 dBuV       | <hr/> 69.70 dBuV       |
| -107.00 dBuV to dBm    | -107.00 dBuV to dBm    | -107.00 dBuV to dBm    |
| <hr/> TOTAL -35.10 dBm | <hr/> TOTAL -34.30 dBm | <hr/> TOTAL -37.30 dBm |

**HANDSET**

|                        |                        |                        |
|------------------------|------------------------|------------------------|
| @ 904.988 MHz          | @ 915.065 MHz          | @ 925.775 MHz          |
| -11.30 dBuV            | 6.90 dBuV              | 5.60 dBuV              |
| 50.00 dB ATTN          | 30.00 dB ATTN          | 30.00 dB ATTN          |
| 35.00 dB CF            | 35.00 dB CF            | 35.00 dB CF            |
| <hr/> 73.70 dBuV       | <hr/> 71.90 dBuV       | <hr/> 70.60 dBuV       |
| -107.00 dBuV to dBm    | -107.00 dBuV to dBm    | -107.00 dBuV to dBm    |
| <hr/> TOTAL -32.70 dBm | <hr/> TOTAL -35.10 dBm | <hr/> TOTAL -36.40 dBm |

**NAME OF TEST:** PROCESSING GAIN

**RULES PART NUMBER:** 15.247(e)

**REQUIREMENTS:** The processing gain shall be at least 10 dB.

**TEST DATA:**


The processing gain of this unit is at least 10.2 dB. This information was provided by the manufacturer, and data included as in exhibits 10A-10C.

APPLICANT: HC TELECOM CO., LTD.

FCC ID: ON7DS815

REPORT #: H\HCT\679WCK1\679WCK1TestReport.doc

PAGE #: 14 OF 20

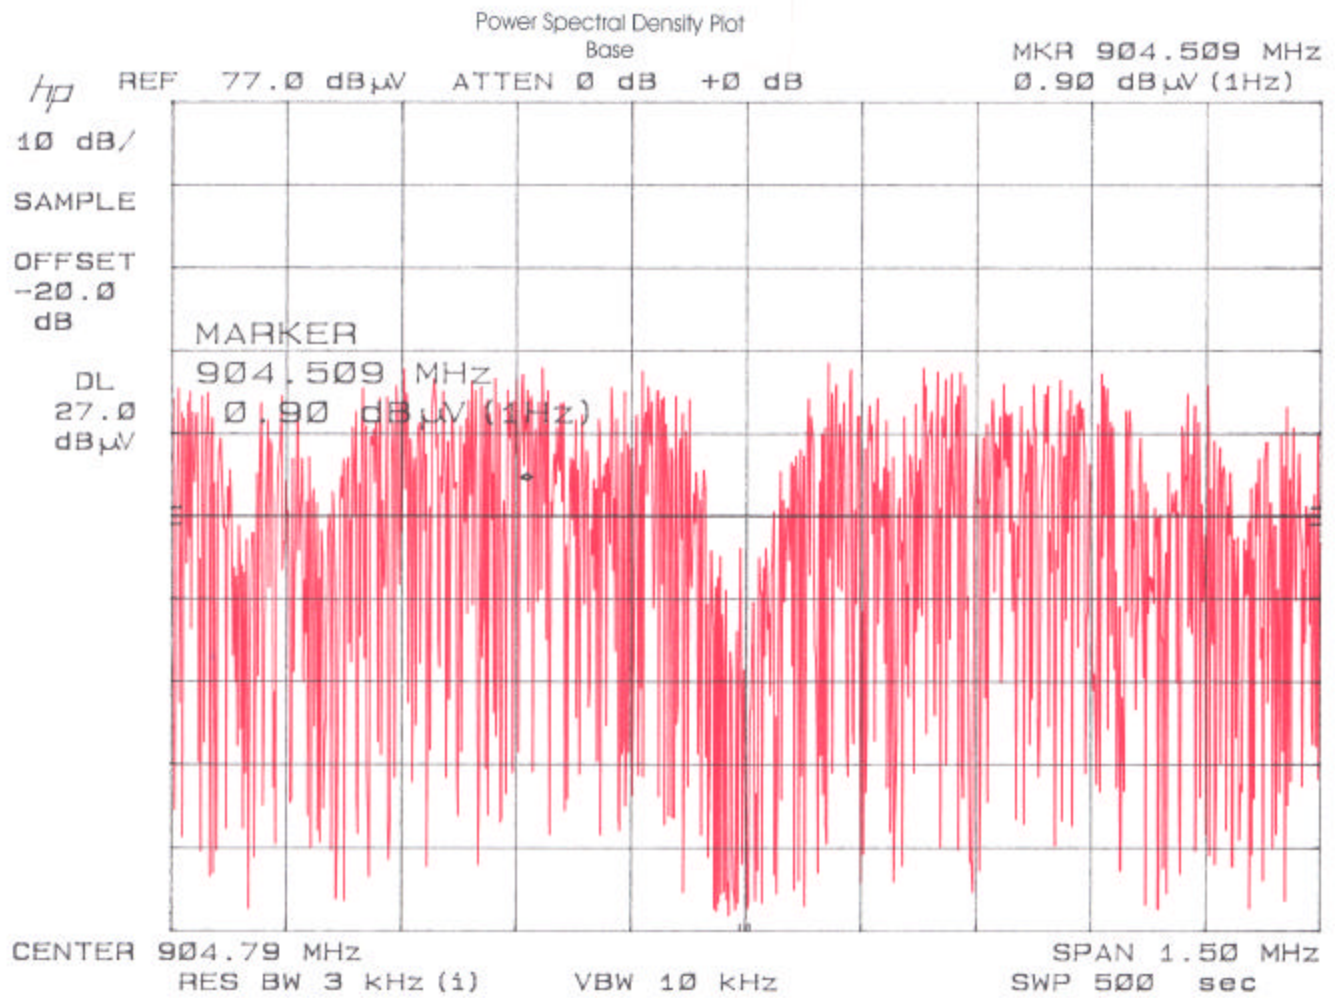


APPLICANT: HC TELECOM CO., LTD.

FCC ID: ON7DS815

REPORT #: H\HCT\679WCK1\679WCK1TestReport.doc

PAGE #: 15 OF 20

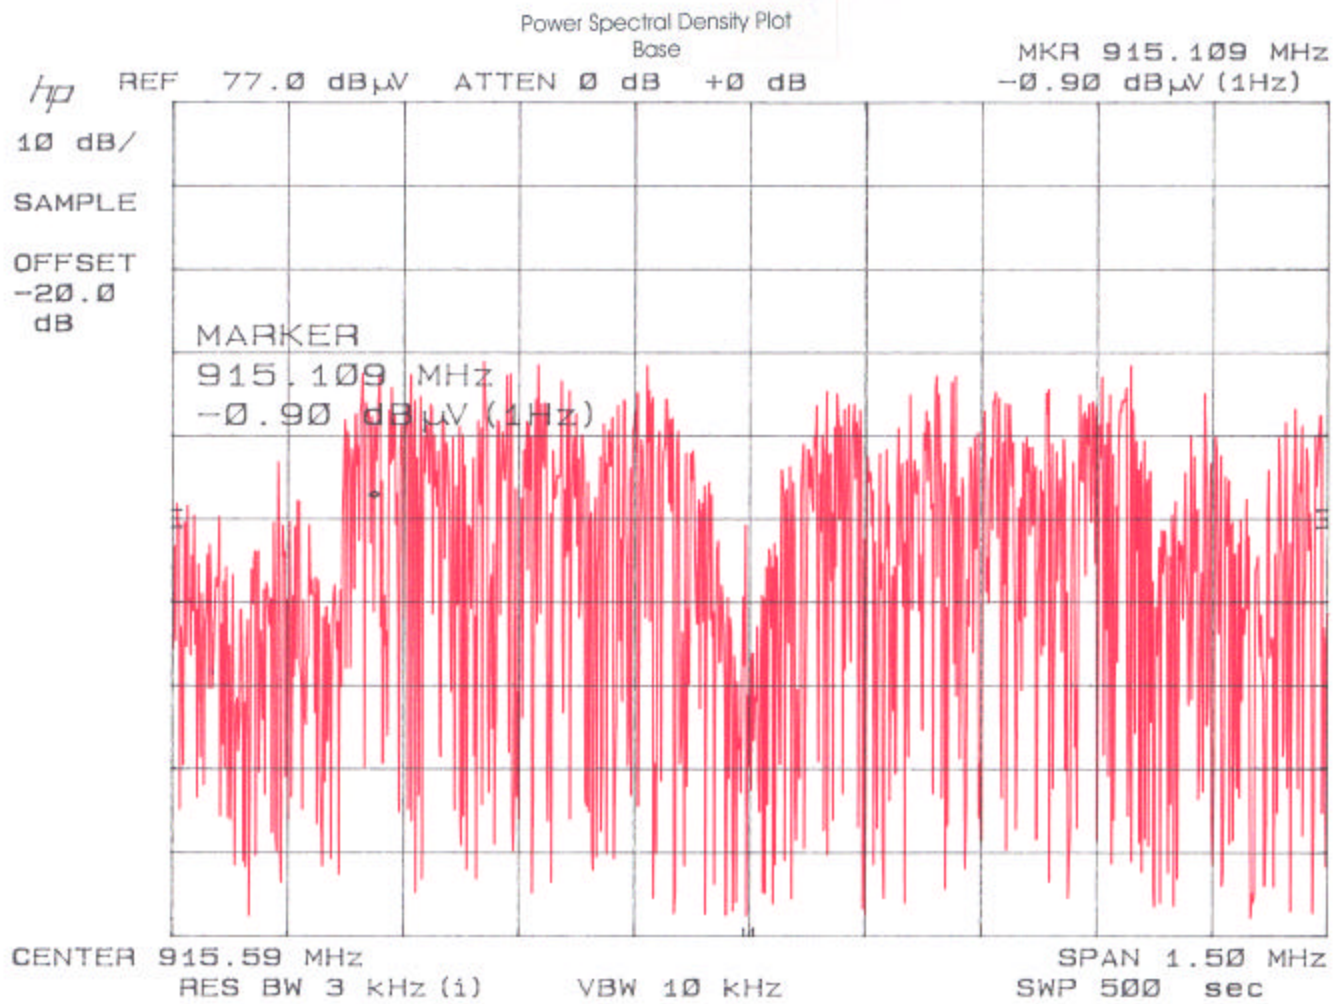


APPLICANT: HC TELECOM CO., LTD.

FCC ID: ON7DS815

REPORT #: H\HCT\679WCK1\679WCK1TestReport.doc

PAGE #: 16 OF 20

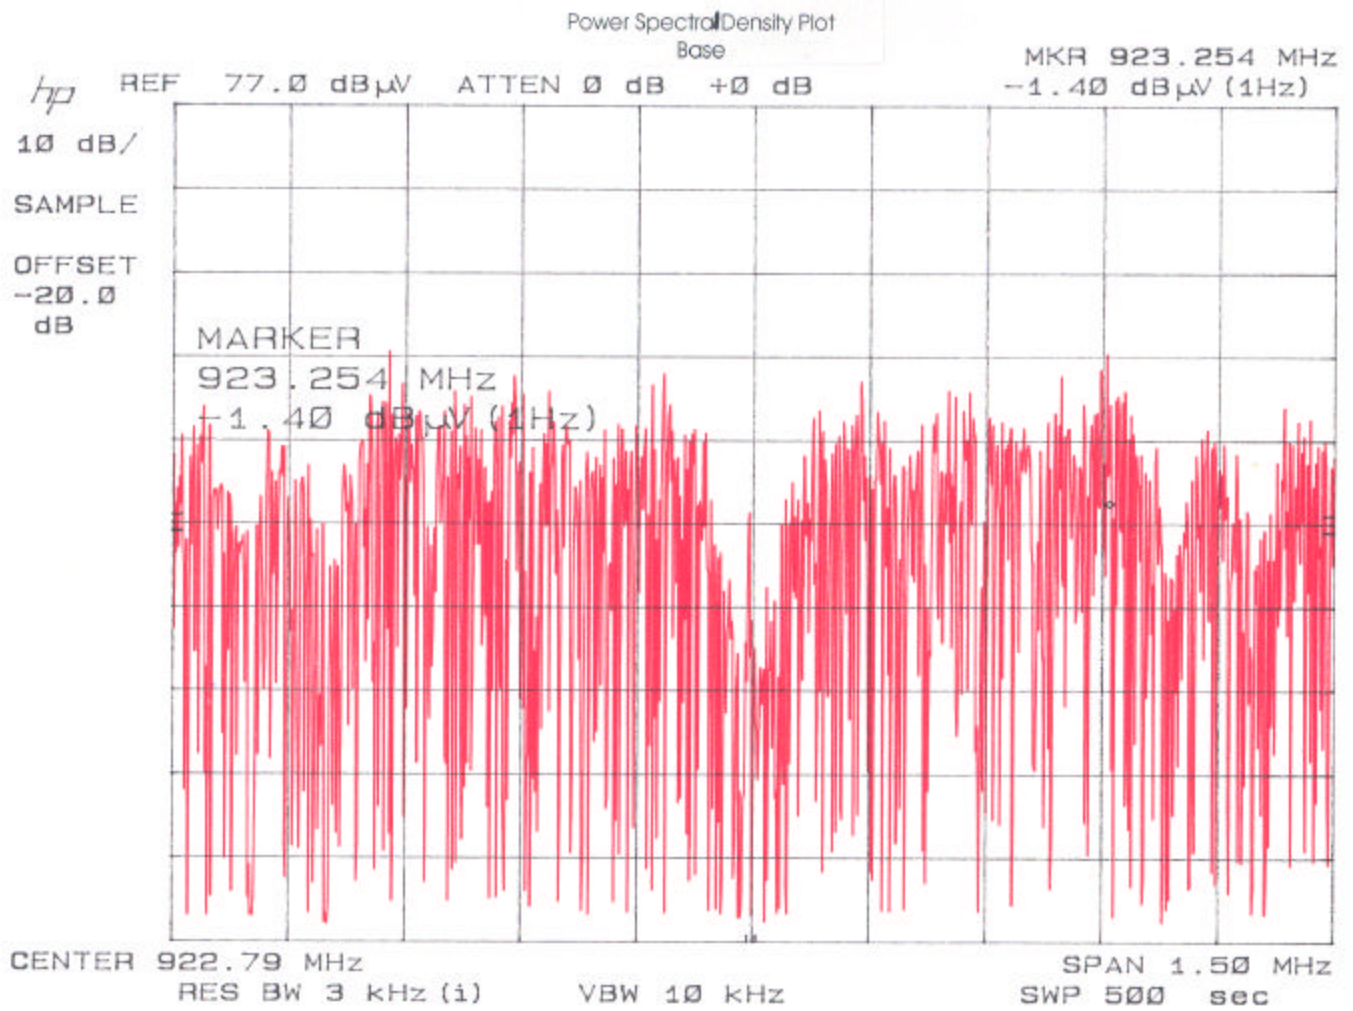


APPLICANT: HC TELECOM CO., LTD.

FCC ID: ON7DS815

REPORT #: H\HCT\679WCK1\679WCK1TestReport.doc

PAGE #: 17 OF 20

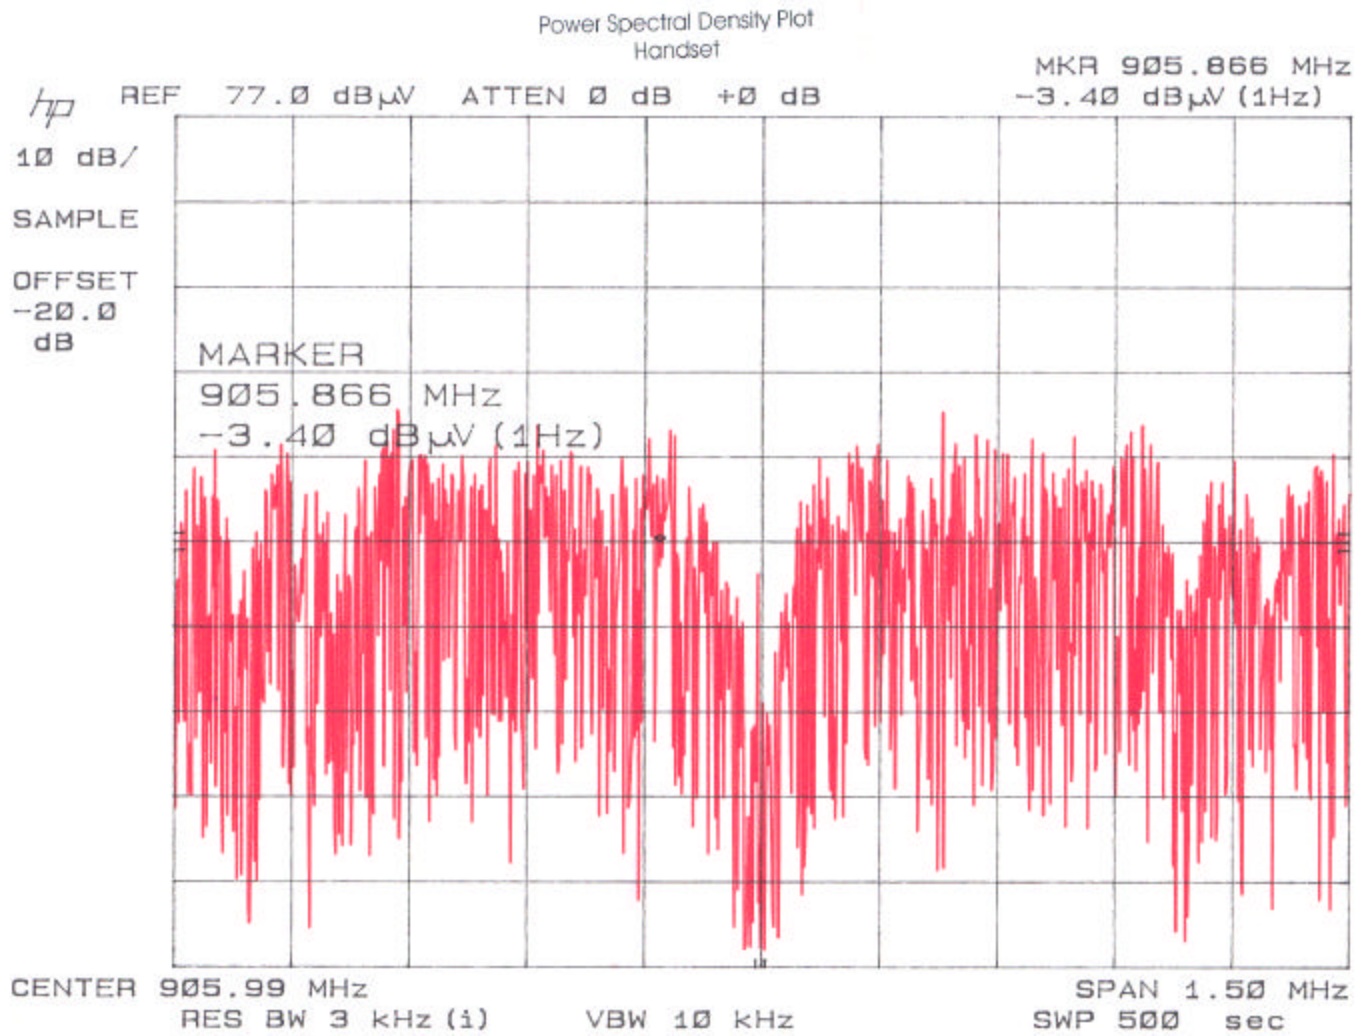


APPLICANT: HC TELECOM CO., LTD.

FCC ID: ON7DS815

REPORT #: H\HCT\679WCK1\679WCK1TestReport.doc

PAGE #: 18 OF 20

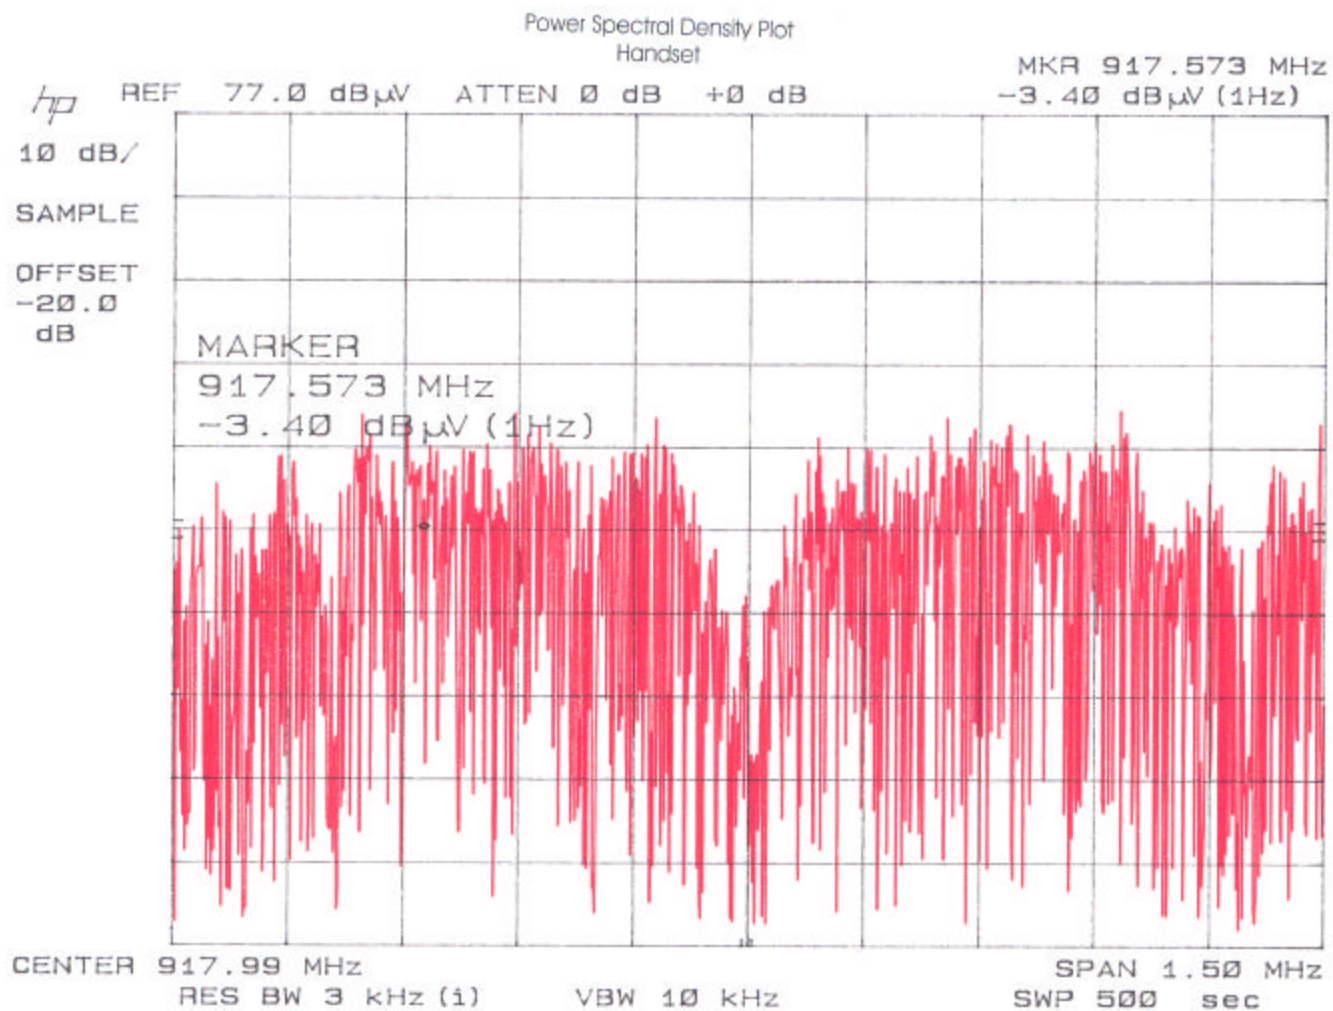


APPLICANT: HC TELECOM CO., LTD.

FCC ID: ON7DS815

REPORT #: H\HCT\679WCK1\679WCK1TestReport.doc

PAGE #: 19 OF 20

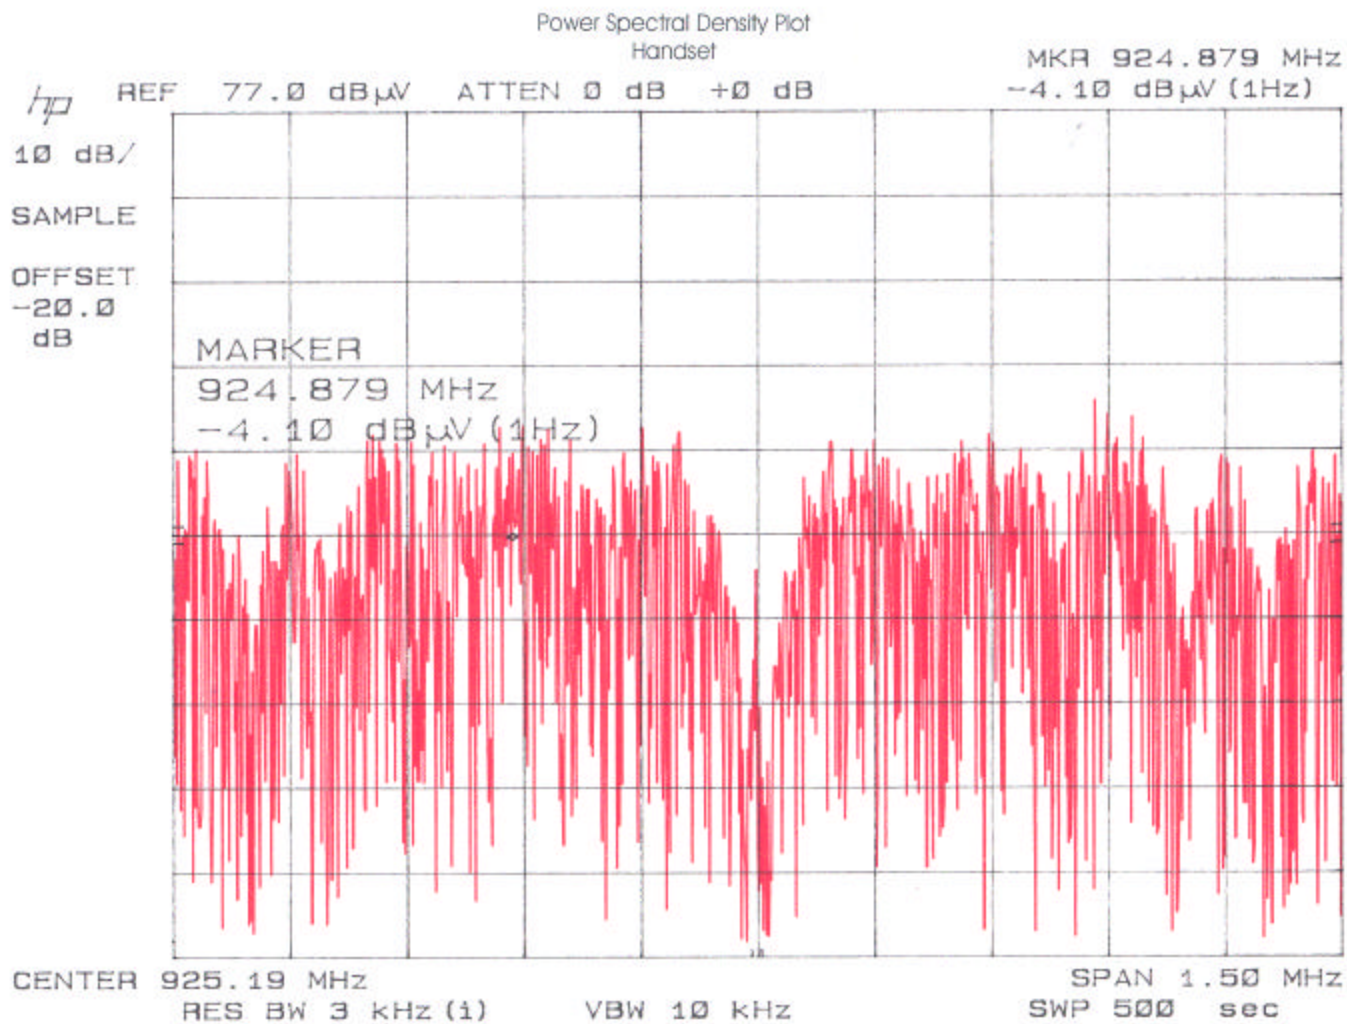

APPLICANT: HC TELECOM CO., LTD.

FCC ID: ON7DS815

REPORT #: H\HCT\679WCK1\679WCK1TestReport.doc

PAGE #: 20 OF 20