



Certification Test Report

**FCC ID: ONTJETIR900US
IC: 10491A-JETIR900US**

**FCC Rule Part: 15.247
ISED Canada's Radio Standards Specification: RSS-247**

Report Number: BO72128518.100

Applicant: Esprit Model Inc.

Model(s): JETIR900US

**Test Begin Date: June 16, 2017
Test End Date: June 30, 2017**

Report Issue Date: September 25, 2017



FOR THE SCOPE OF ACCREDITATION UNDER CERTIFICATE NUMBER AT-1533

This report must not be used by the client to claim product certification, approval, or endorsement by ANAB, ANSI, or any agency of the Federal Government.

Prepared by:

**Thierry Jean-Charles
Team Lead
TÜV SÜD America, Inc.**

Reviewed by:

**Ryan McGann
Senior Engineer
TÜV SÜD America, Inc.**

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of TÜV SÜD America, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains 39 pages

TABLE OF CONTENTS

1	GENERAL	3
1.1	Purpose	3
1.2	Applicant Information	3
1.3	Product Description	3
1.4	Test Methodology and Considerations	3
2	TEST FACILITIES	4
2.1	Location	4
2.2	Laboratory Accreditations/Recognitions/Certifications.....	4
2.3	Radiated & Conducted Emissions Test Site Description	5
2.3.1	Semi-Anechoic Chamber Test Site	5
2.3.2	Conducted Emissions Test Site Description.....	6
3	APPLICABLE STANDARD REFERENCES	7
4	LIST OF TEST EQUIPMENT	8
5	SUPPORT EQUIPMENT	9
6	EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM.....	10
7	SUMMARY OF TESTS	11
7.1	Antenna Requirement – FCC: Section 15.203.....	11
7.2	6 dB Bandwidth - FCC: Section 15.247(a)(2); ISED Canada: RSS-247 5.2(a); 99% Bandwidth ISED Canada: RSS-GEN 6.6.....	11
7.2.1	Measurement Procedure	11
7.2.2	Measurement Results	11
7.3	Peak Output Power – FCC: Section 15.247(b)(3); ISED Canada: RSS-247 5.4(d)	19
7.3.1	Measurement Procedure (Conducted Method)	19
7.3.2	Measurement Results	19
7.4	Band-Edge and Spurious Emissions	23
7.4.1	Band-Edge Compliance of RF Conducted Emissions – FCC: Section 15.247(d); ISED Canada: RSS-247 5.5.....	23
7.4.2	RF Conducted Spurious Emissions – FCC: Section 15.247(d); ISED Canada: RSS-247 5.5.....	26
7.4.3	Radiated Spurious Emissions into Restricted Frequency Bands – FCC: Sections 15.205, 15.209; ISED Canada: RSS-Gen 8.9, 8.10	30
7.5	Power Spectral Density – FCC: Section 15.247(e); ISED Canada: RSS-247 5.2(b)	34
7.5.1	PSD Measurement Procedure (Conducted Method).....	34
7.5.2	Measurement Results	34
8	MEASUREMENT UNCERTAINTIES	38
9	CONCLUSION.....	39

1 GENERAL

1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations Section 15.247 and Innovation Science and Economic Development Canada's Radio Standards Specification RSS-247 for the tests documented herein.

1.2 Applicant Information

Esprit Model Inc.
4253 Pinewood Road
Melbourne, FL 32934

1.3 Product Description

The Esprit Model Inc. JETIR900US is a 900 MHz transceiver for remote control toys.

Technical Details

Mode of Operation:	IEEE 802.15.4
Frequency Range:	905.96 - 923.96 MHz
Number of Channels:	16
Channel Separation:	1.125 MHz
Modulations:	O-QPSK
Antenna Type/Gain:	PCB Antenna, 1.2 dBi
Input Power:	5 VDC

Model Number: JETIR900US

Test Sample Serial Number(s): 21846 (Radiated), 21847 (RF Conducted)

Test Sample Condition: The samples were received in good condition, with no physical damage.

1.4 Test Methodology and Considerations

The EUT was evaluated for radiated and RF conducted measurements. The EUT is intended to be used in battery operated equipment only and does not offer any provision for connection to the AC mains. The EUT is exempted from the power line conducted emissions requirements.

The EUT was evaluated using the test software attenuation setting 7. The two antennas are incapable of transmitting simultaneously. The evaluation was performed on each antenna path.

Preliminary radiated emissions measurements were performed for the EUT in three orthogonal orientations. The worst case orientation was determined to be the EUT set flat on the tabletop. The worst orientation was used for both antenna chains.

For the RF conducted measurements, the EUT was configured with cables at the antenna ports to allow direct coupling to the RF test equipment.

The EUT was evaluated as well for unintentional emissions. The results are documented in a separate test report.

2 TEST FACILITIES

2.1 Location

The radiated and conducted emissions test sites are located at the following address:

TÜV SÜD America, Inc.
3998 FAU Blvd, Suite 310
Boca Raton, Florida 33431
Phone: (561) 961-5585
Fax: (561) 961-5587
<http://www.tuv-sud-america.com>

2.2 Laboratory Accreditations/Recognitions/Certifications

TÜV SÜD America, Inc. is accredited to ISO/IEC 17025 by ANSI-ASQ National Accreditation Board under their ANAB program and has been issued certificate number AT-1533 in recognition of this accreditation. Unless otherwise specified, all test methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

FCC Test Firm Registration #: 475089
Innovation, Science and Economic Development Canada Lab Code: 4175C

2.3 Radiated & Conducted Emissions Test Site Description

2.3.1 Semi-Anechoic Chamber Test Site

The EMC radiated test facility consists of an RF-shielded enclosure. The interior dimensions of the indoor semi-anechoic chamber are approximately 48 feet (14.6 m) long by 36 feet (10.8 m) wide by 24 feet (7.3 m) high and consist of rigid, 1/8 inch (0.32 cm) steel-clad, wood core modular panels with steel framing. In the shielded enclosure, the faces of the panels are galvanized and the chamber is self-supporting. 8-foot RF absorbing cones are installed on 4 walls and the ceiling. The steel-clad ground plane is covered with vinyl flooring.

The turntable is driven by pneumatic motor, which can support a 2000 lb. load. The turntable is flush with the chamber floor which it is connected to, around its circumference, with a continuous metallic loaded spring. An EMCO Model 1060 Multi-device controller controls the turntable position.

A pneumatic motor is used to control antenna polarizations and height relative to the ground. The height information is displayed on the control unit EMCO Model 1050.

The control room is an RF shielded enclosure attached to the semi-anechoic chamber with two bulkhead panels for connecting RF, and control cables. The dimension of the room is 7.3 m x 4.9 m x 3 m high and the entrance doors of both control and conducted rooms are 3 feet (0.91 m) by 7 feet (2.13 m).

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3.1-1 below:

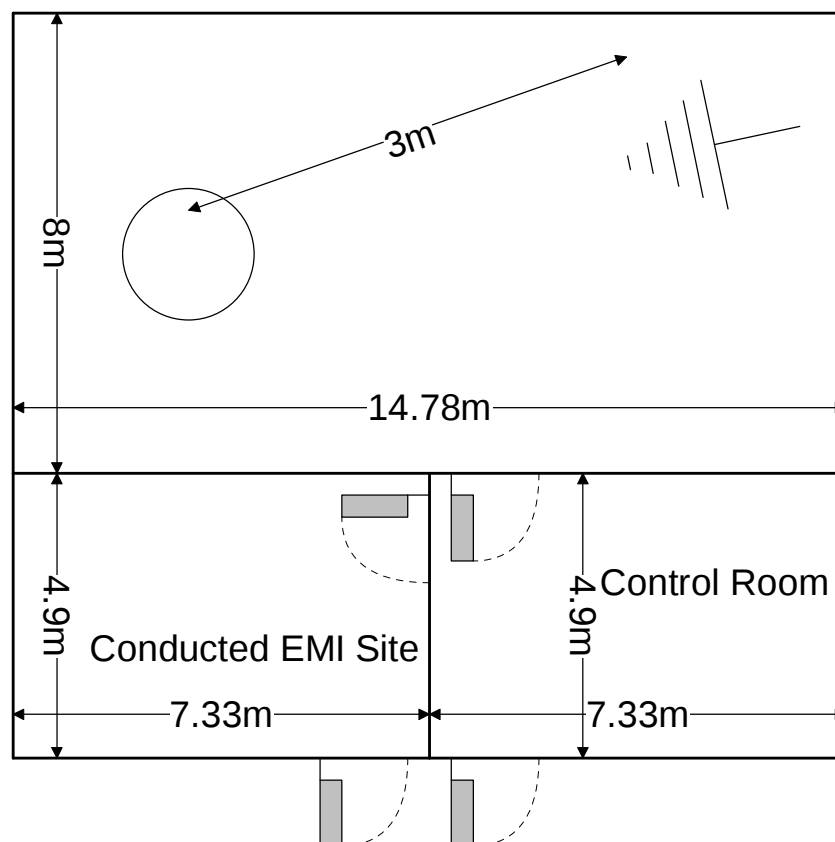


Figure 2.3.1-1: Semi-Anechoic Chamber Test Site

2.3.2 Conducted Emissions Test Site Description

The dimensions of the shielded conducted room are 7.3 x 4.9 x 3 m³. The power line conducted emission site includes two LISNs: a Solar Model 8028-50 50 Ω /50 μ H and an EMCO Model 3825/2R, which are installed as shown in the figure below. For evaluations requiring 230 V, 50 Hz AC input, a Polarad LISN (S/N 879341/048) is used in conjunction with a California Instruments signal generator Model 2001RP-OP1.

A diagram of the room is shown below in figure 2.3.2-1:

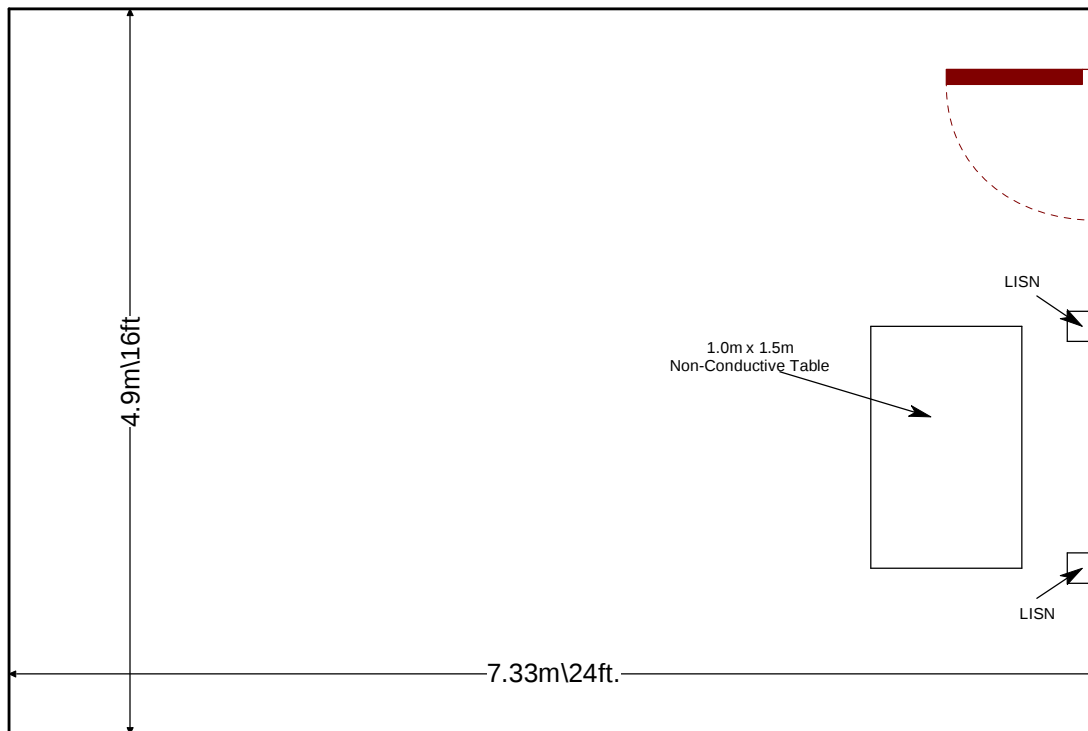


Figure 2.3.2-1: AC Mains Conducted EMI Site

3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2017.
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2017
- ❖ FCC KDB 558074 D01 DTS Meas Guidance v04 - Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247, April 5, 2017.
- ❖ Innovation, Science and Economic Development Canada Radio Standards Specification: RSS-247 — Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSS) and Licence-Exempt Local Area Network (LE-LAN) Devices, Issue 2, February 2017.
- ❖ Innovation, Science and Economic Development Canada Radio Standards Specification: RSS-GEN – General Requirements for Compliance of Radio Apparatus, Issue 4, November 2014.

4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

Table 4-1: Test Equipment List

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
78	EMCO	6502	Antennas	9104-2608	5/11/2016	5/11/2018
283	Rohde & Schwarz	FSP40	Spectrum Analyzers	1000033	7/21/2016	7/21/2018
523	Agilent	E7405	Spectrum Analyzers	MY45103293	12/9/2016	12/9/2018
2002	EMCO	3108	Antennas	2147	11/19/2015	11/19/2017
2004	EMCO	3146	Antennas	1385	11/19/2015	11/19/2017
2006	EMCO	3115	Antennas	2573	4/7/2017	4/7/2019
2011	Hewlett-Packard	HP 8447D	Amplifiers	2443A03952	11/2/2016	11/2/2017
2071	Trilithic, Inc.	4HC1400-1-KK	Filter	9643263	11/1/2016	11/1/2017
2086	Merrimac	FAN-6-10K	Attenuators	23148-83-1	11/2/2016	11/2/2017
2089	Agilent Technologies, Inc.	83017A	Amplifiers	3123A00214	12/2/2016	12/2/2017
2095	ETS Lindgren	TILE4! - Version 4.2.A	Software	85242	NCR	NCR
2111	Aeroflex Inmet	40AH2W-20	Attenuator	2111	7/20/2016	7/20/2017
2121	ACS Boca	Radiated Cable Set	Cable Set	2121	8/1/2016	8/1/2017


Note: NCR=No Calibration Required

5 SUPPORT EQUIPMENT**Table 5-1: EUT and Support Equipment Description**

Item #	Type Device	Manufacturer	Model/Part #	Serial #
1	EUT	Esprit Model Inc.	JETIR900US	21846
2	3xServo Motors	HiTec	HS-225BB	N/A
3	DC Power Supply	MPJA	HY5003	003700278

Table 5-2: Cable Description

Cable #	Cable Type	Length	Shield	Termination
A	Power Leads	2.2 m	No	EUT to Power Supply
B	3xRC Servo Cable	0.32 m	No	Servo Motors to EUT
C	Power Cable	2.3 m	No	Power Supply to AC Mains

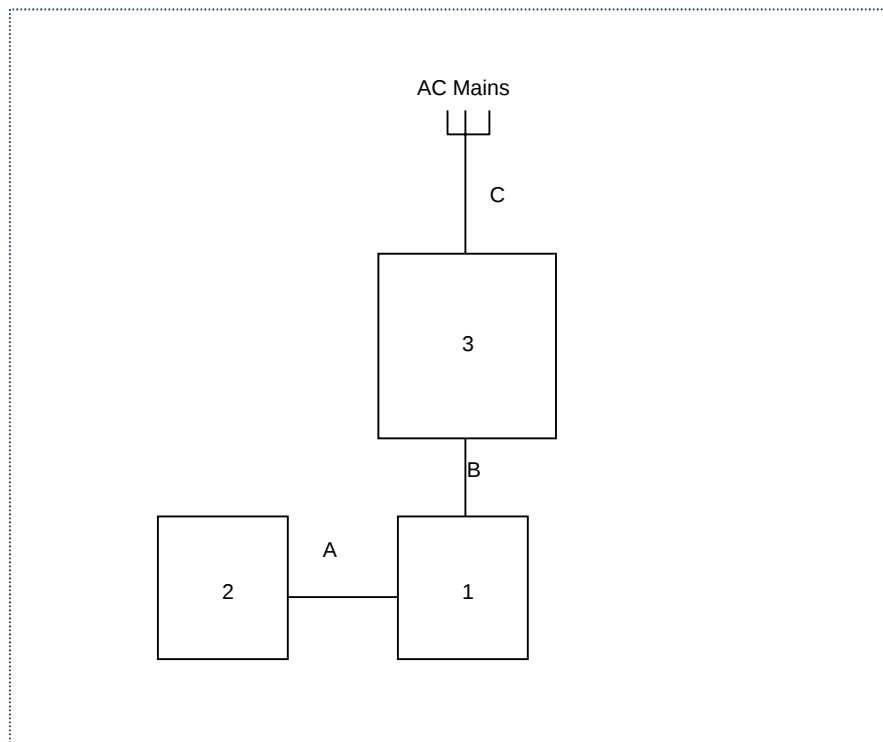6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM**Figure 6-1: EUT and Support Equipment Description**

7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

7.1 Antenna Requirement – FCC: Section 15.203

The EUT uses 2 PCB antennas using 20 cm coaxial cables that are directly soldered to the EUT printed circuit board. The antenna gain is 1.2 dBi. The antennas are not removable and therefore meet the requirements of FCC 15.203

7.2 6 dB Bandwidth - FCC: Section 15.247(a)(2); ISED Canada: RSS-247 5.2(a); 99% Bandwidth ISED Canada: RSS-GEN 6.6

7.2.1 Measurement Procedure

The 6dB bandwidth was measured in accordance with the FCC KDB 558074 D01 DTS Meas Guidance v04 Section 8.1 Option 2. The RBW of the spectrum analyzer was set to 100 kHz and VBW 300 kHz. The Span was set large enough to capture the emissions and >> RBW. A peak detector was used for the measurements.


The 99% occupied bandwidth was measured with the spectrum analyzer span set to fully display the emission. The RBW was set to 1% to 5% of the approximated bandwidth. The occupied 99% bandwidth was measured by using 99% bandwidth equipment function of the spectrum analyzer using a peak detector.

7.2.2 Measurement Results

Performed by: Thierry Jean-Charles


Table 7.2.2-1: 6dB / 99% Bandwidth – Antenna 1

Frequency [MHz]	6dB Bandwidth [kHz]	99% Bandwidth [kHz]
905.96	836	1230
914.36	836	1220
923.96	836	1220

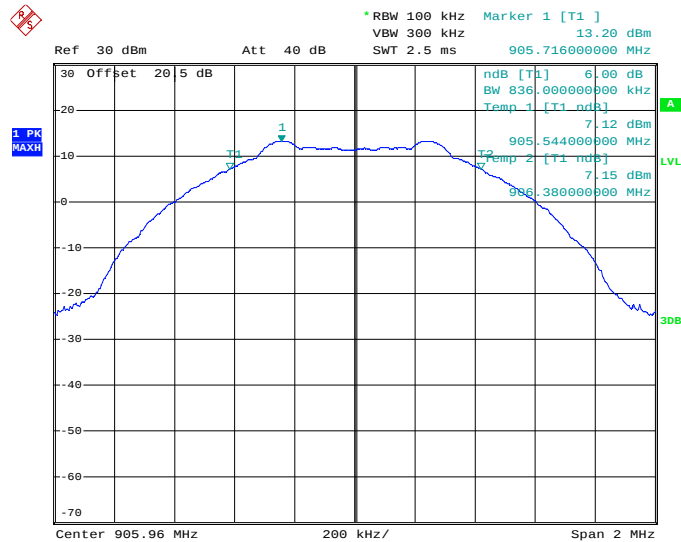


Date: 30.JUN.2017 13:24:38

Figure 7.2.2-1: 6dB BW - Low Channel – Antenna 1

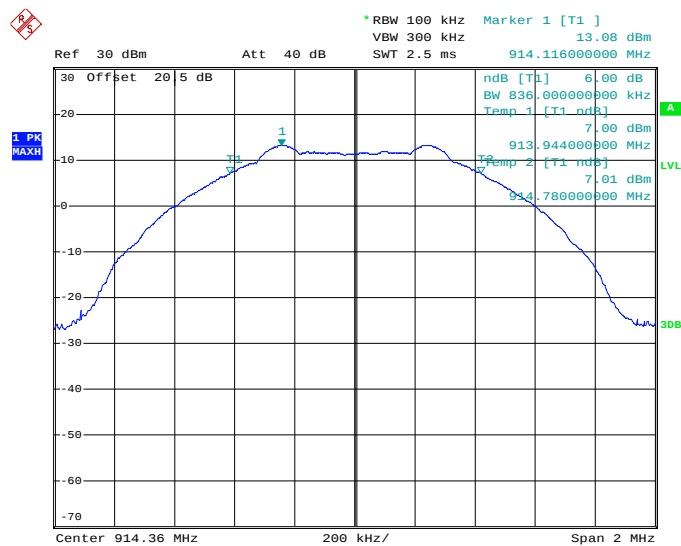


Date: 30.JUN.2017 13:50:00

Figure 7.2.2-2: 6dB BW - Middle Channel – Antenna 1

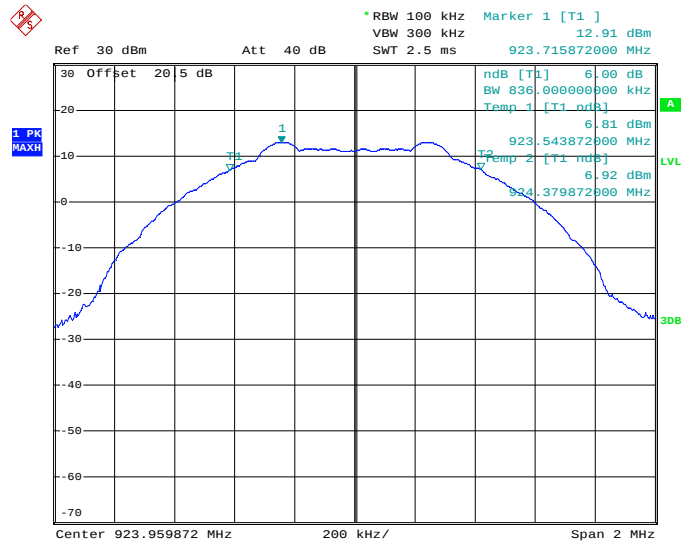


Date: 30.JUN.2017 14:04:21

Figure 7.2.2-3: 6dB BW - High Channel – Antenna 1

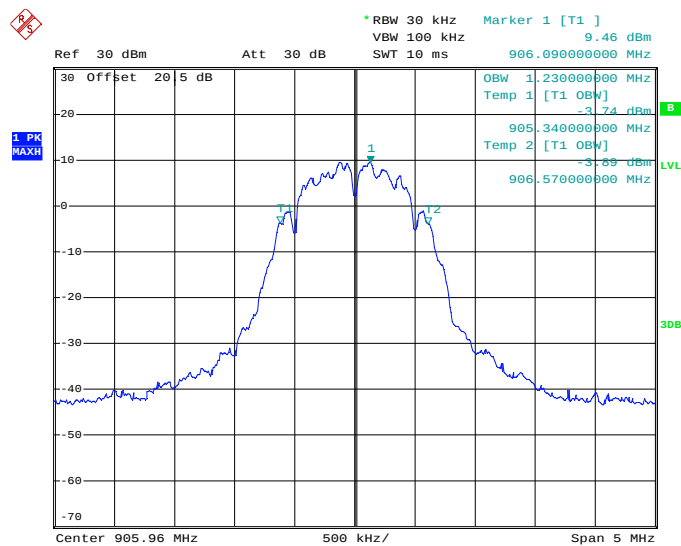


Date: 30.JUN.2017 13:33:23

Figure 7.2.2-4: 99% OBW - Low Channel – Antenna 1

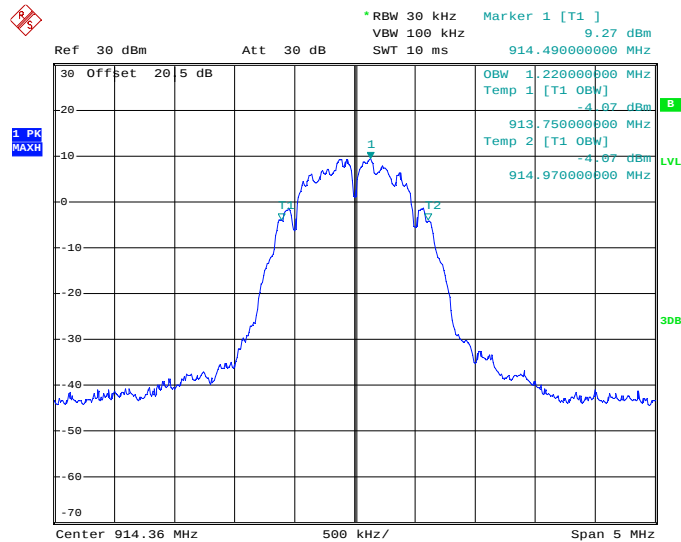

Date: 30.JUN.2017 13:48:12

Figure 7.2.2-5: 99% OBW - Middle Channel – Antenna 1

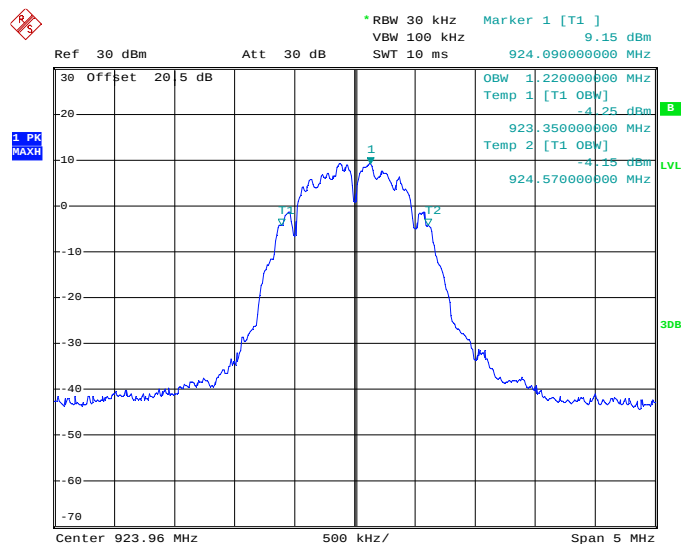


Date: 30.JUN.2017 14:01:58

Figure 7.2.2-6: 99% OBW - High Channel – Antenna 1


Table 7.2.2-2: 6dB / 99% Bandwidth – Antenna 2

Frequency [MHz]	6dB Bandwidth [kHz]	99% Bandwidth [kHz]
905.96	832	1230
914.36	832	1230
923.96	836	1220

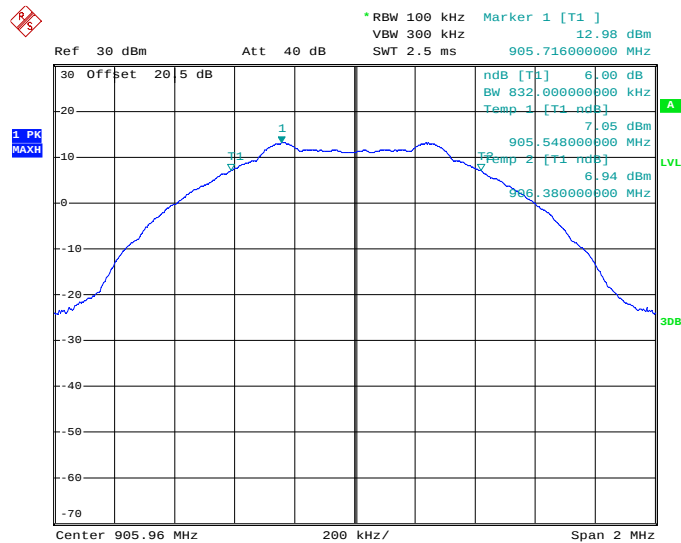


Date: 30.JUN.2017 14:19:21

Figure 7.2.2-7: 6dB BW - Low Channel – Antenna 2

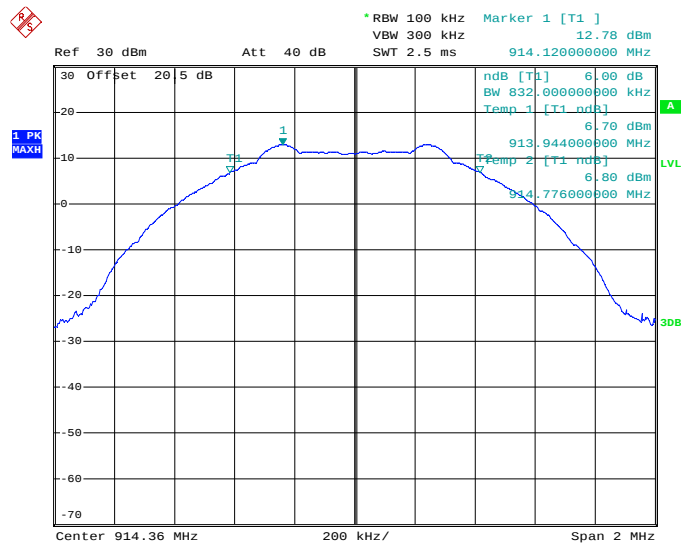


Date: 30.JUN.2017 14:59:59

Figure 7.2.2-8: 6dB BW - Middle Channel – Antenna 2

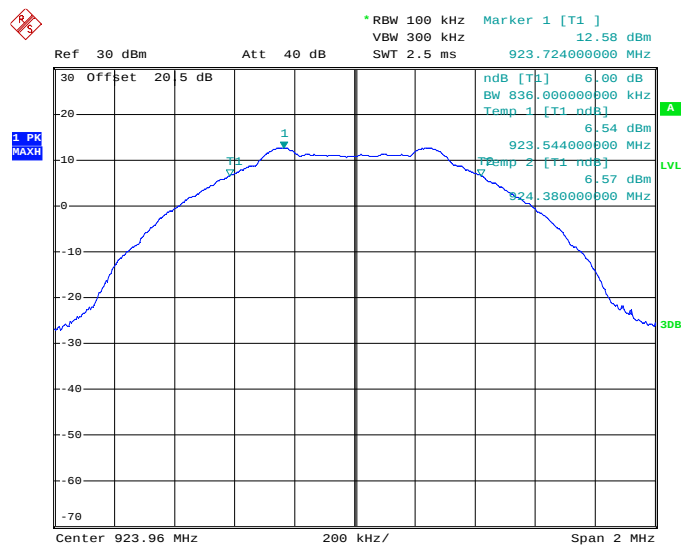


Date: 30.JUN.2017 15:36:12

Figure 7.2.2-9: 6dB BW - High Channel – Antenna 2

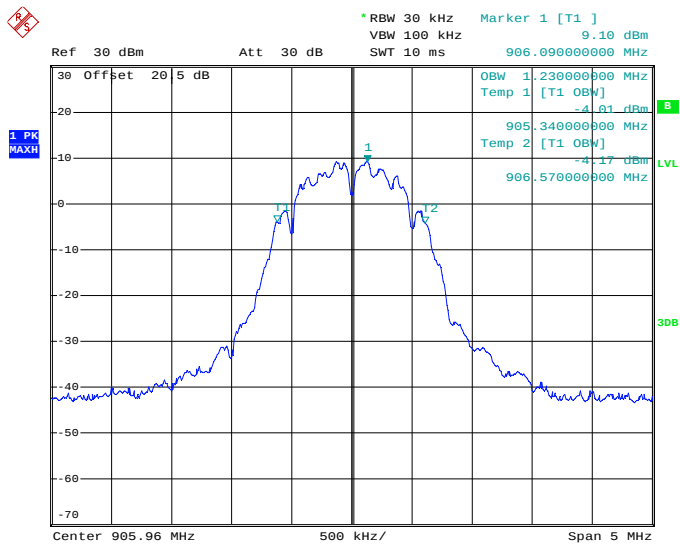


Date: 30.JUN.2017 14:31:48

Figure 7.2.2-10: 99% OBW - Low Channel – Antenna 2

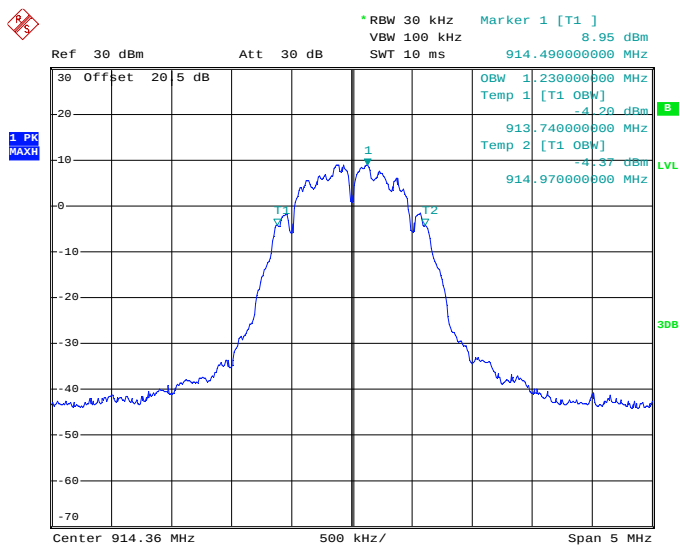

Date: 30.JUN.2017 15:02:28

Figure 7.2.2-11: 99% OBW - Middle Channel – Antenna 2

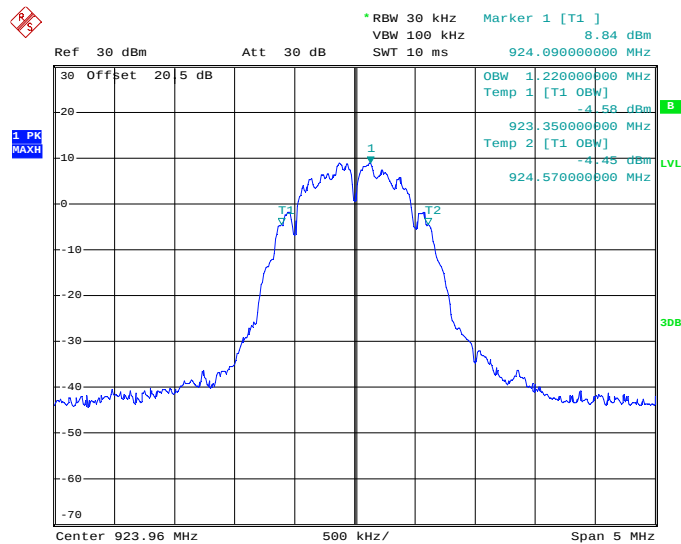

Date: 30.JUN.2017 15:32:10

Figure 7.2.2-12: 99% OBW - High Channel – Antenna 2

7.3 Peak Output Power – FCC: Section 15.247(b)(3); ISED Canada: RSS-247 5.4(d)

7.3.1 Measurement Procedure (Conducted Method)


The fundamental emission output power was measured in accordance with the FCC KDB 558074 D01 DTS Meas Guidance v04 Section 9.1.1 RBW $\geq$ DTS bandwidth. The RF output of the equipment under test was directly connected to the input of the spectrum analyzer through suitable attenuation.

7.3.2 Measurement Results

Performed by: Thierry Jean-Charles


Table 7.3.2-1: RF Output Power – Antenna 1

Frequency [MHz]	Level [dBm]
905.96	15.78
914.36	15.63
923.96	15.48

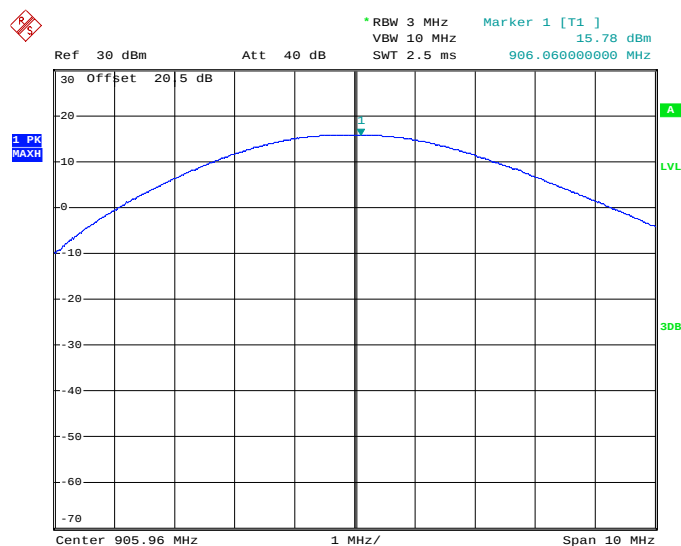


Date: 30 JUN 2017 13:41:06

Figure 7.3.2-1: RF Output Power - Low Channel – Antenna 1

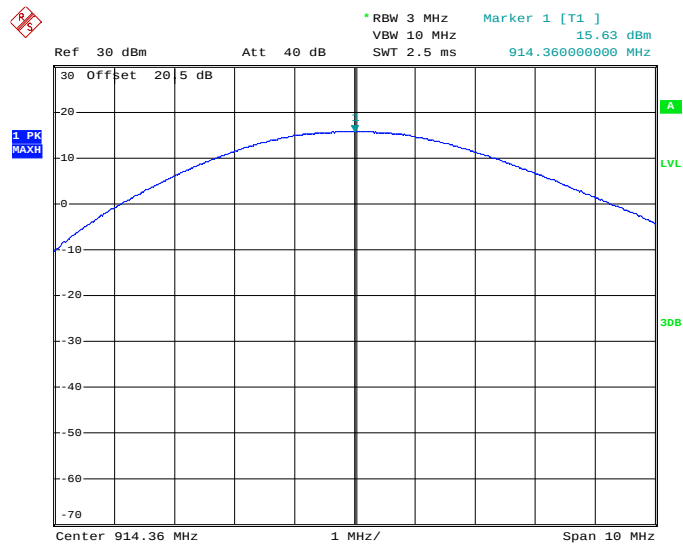

Date: 30.JUN.2017 13:46:05

Figure 7.3.2-2: RF Output Power - Middle Channel – Antenna 1

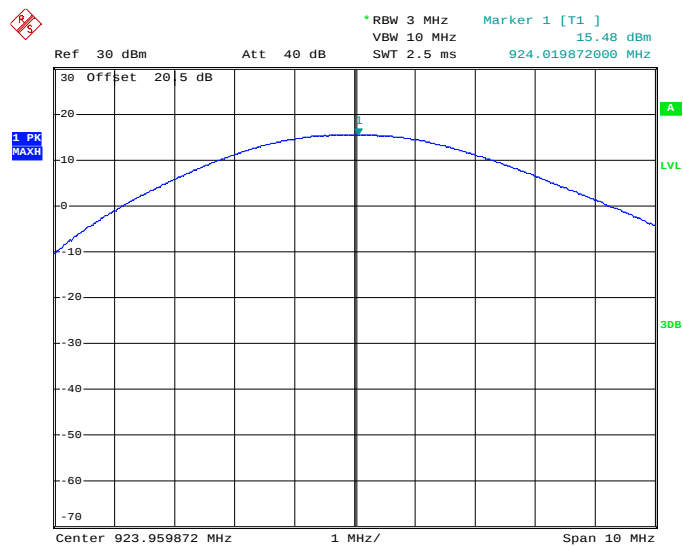


Date: 30.JUN.2017 13:58:24

Figure 7.3.2-3: RF Output Power - High Channel – Antenna 1


Table 7.3.2-2: RF Output Power – Antenna 2

Frequency [MHz]	Level [dBm]
905.96	15.39
914.36	15.27
923.96	15.11

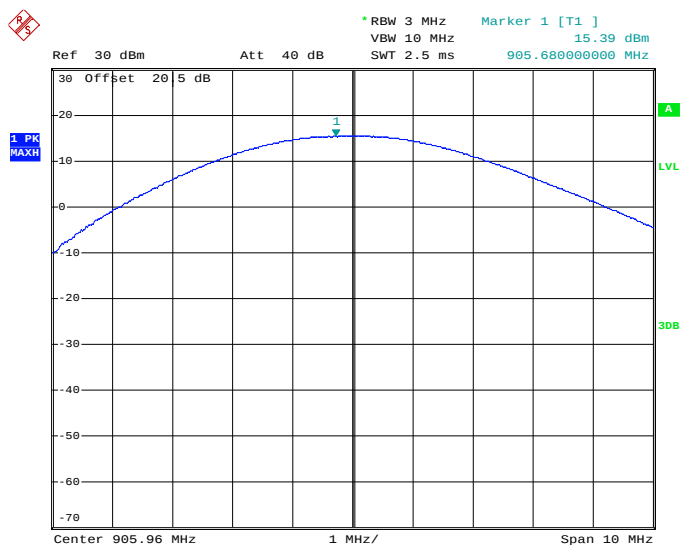


Date: 30 JUN 2017 14:35:22

Figure 7.3.2-4: RF Output Power - Low Channel – Antenna 2

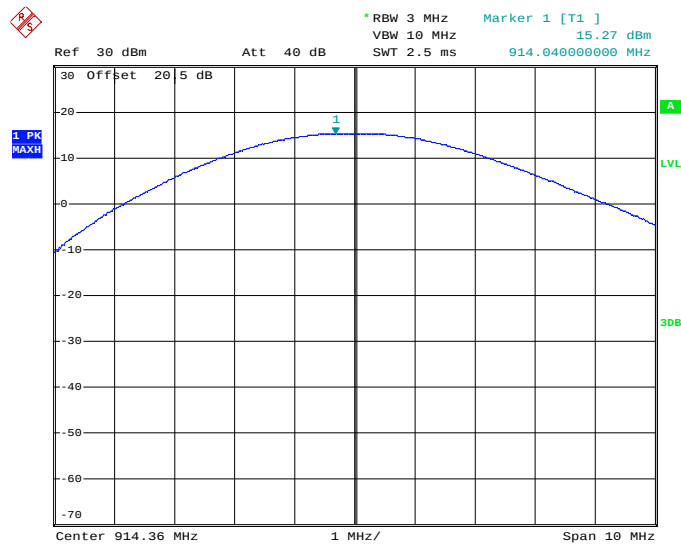

Date: 30.JUN.2017 15:04:15

Figure 7.3.2-5: RF Output Power - Middle Channel – Antenna 2

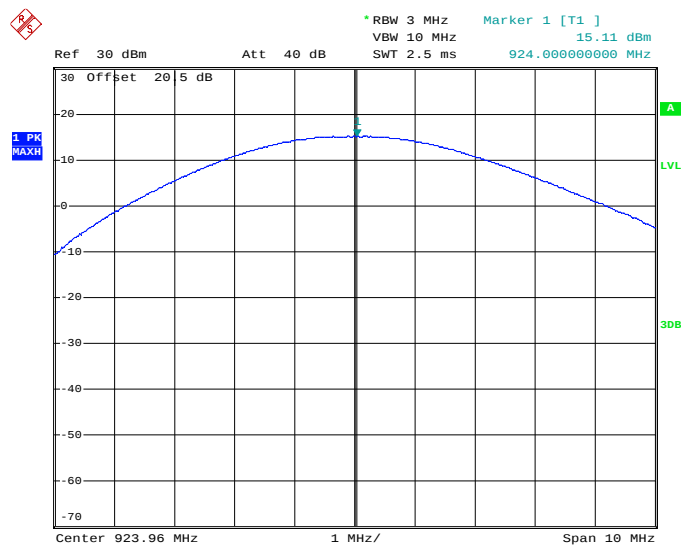

Date: 30.JUN.2017 15:35:08

Figure 7.3.2-6: RF Output Power - High Channel – Antenna 2

7.4 Band-Edge and Spurious Emissions


7.4.1 Band-Edge Compliance of RF Conducted Emissions – FCC: Section 15.247(d); ISCED Canada: RSS-247 5.5

7.4.1.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer via suitable attenuation. The EUT was investigated at the lowest and highest channel available to determine band-edge compliance. For each measurement, the spectrum analyzer's RBW was set to 100 kHz, and the VBW was set to 300 kHz.


7.4.1.2 Measurement Results

Performed by: Thierry Jean-Charles

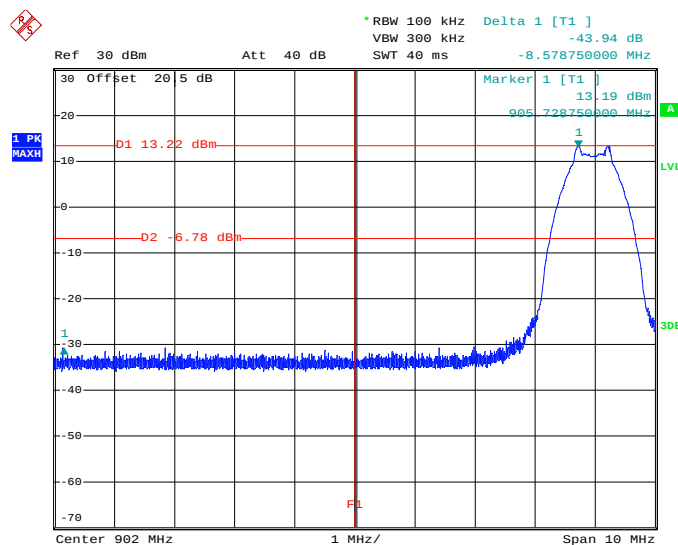


Date: 30.JUN.2017 18:37:12

Figure 7.4.1.2-1: Lower Band-edge – Antenna 1

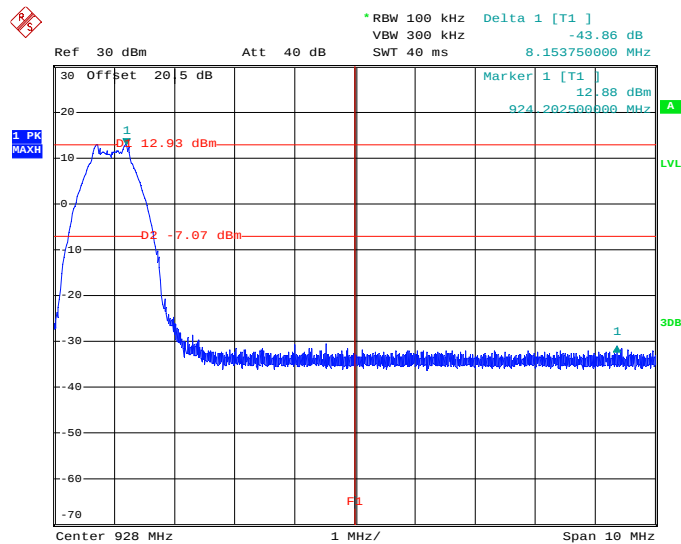


Date: 30.JUN.2017 18:59:20

Figure 7.4.1.2-2: Upper Band-edge – Antenna 1

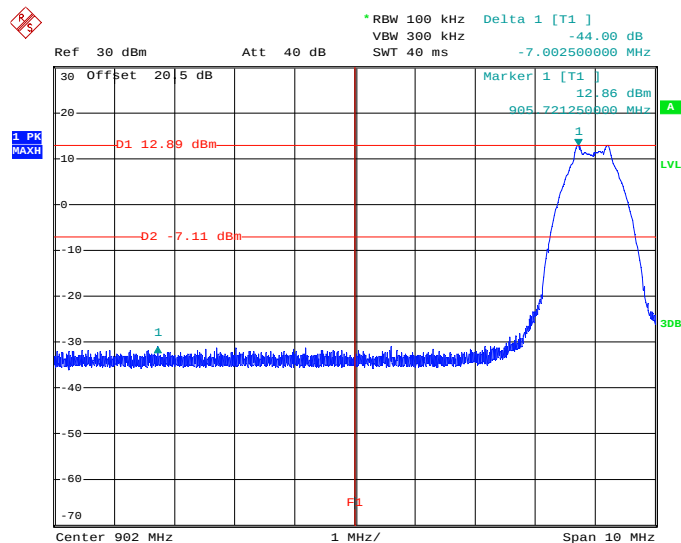

Date: 30.JUN.2017 18:33:23

Figure 7.4.1.2-3: Lower Band-edge – Antenna 2

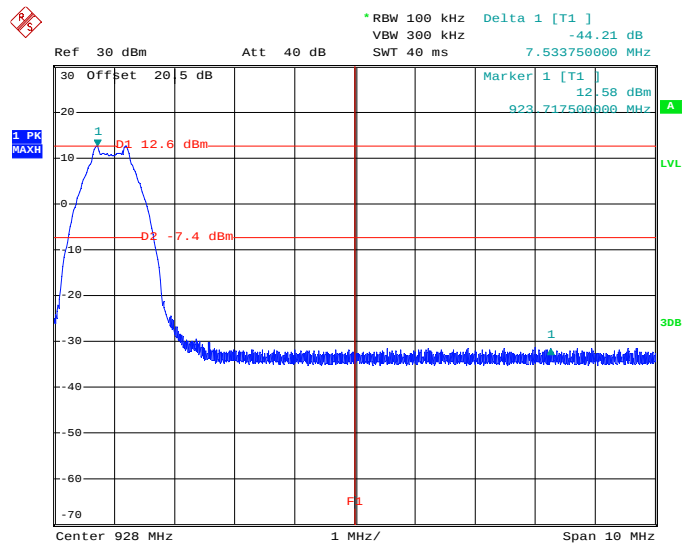

Date: 30.JUN.2017 17:44:36

Figure 7.4.1.2-4: Upper Band-edge – Antenna 2


7.4.2 RF Conducted Spurious Emissions – FCC: Section 15.247(d); ISCED Canada: RSS-247 5.5

7.4.2.1 Measurement Procedure

The RF Conducted Spurious Emissions were measured in accordance with the FCC KDB 558074 D01 DTS Meas Guidance v04 Section 11.3 Emission level measurement. The RF output port of the equipment under test was directly connected to the input of the spectrum analyzer. The EUT was investigated for conducted spurious emissions from 30 MHz to 10 GHz, 10 times the highest fundamental frequency. Measurements were made at the low, center and high channels of the EUT. For each measurement, the spectrum analyzer's RBW was set to 100 kHz and the VBW was set to 300 kHz. The peak Max Hold function of the analyzer was utilized. The reference level was determined by measuring the Peak PSD level in any 100-kHz bandwidth within the DTS channel bandwidth.


7.4.2.2 Measurement Results

Performed by: Thierry Jean-Charles

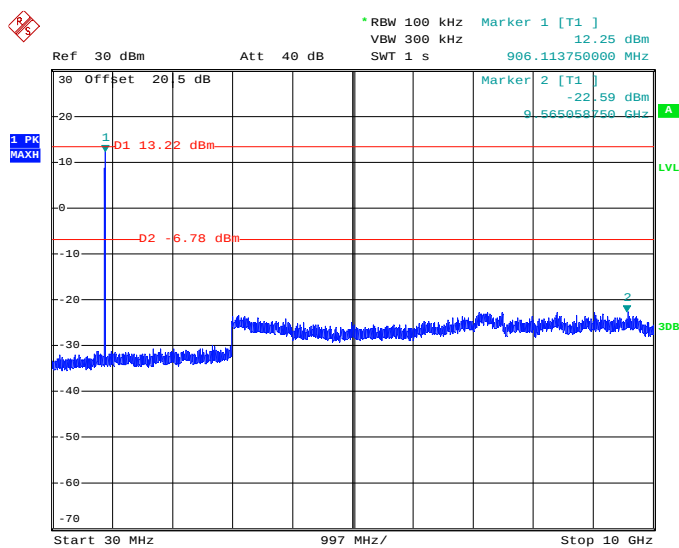


Date: 30 JUN 2017 18:45:00

Figure 7.4.2.2-1: 30 MHz – 10 GHz – Low Channel – Antenna 1

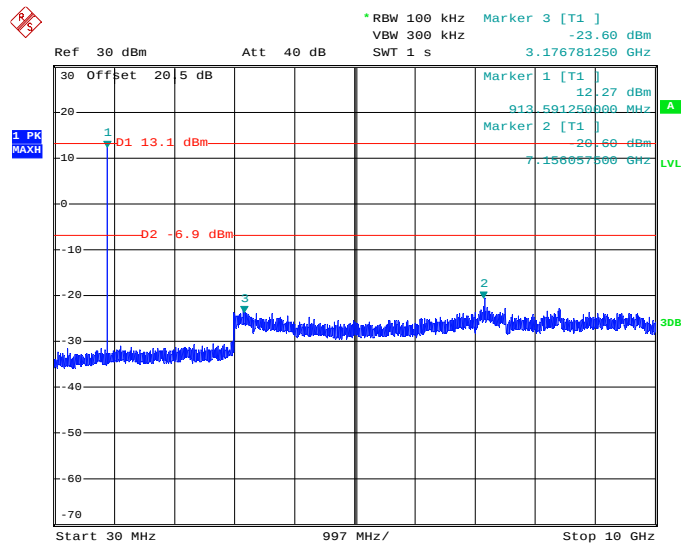


Date: 30.JUN.2017 18:48:56

Figure 7.4.2.2-2: 30 MHz – 10 GHz –Middle Channel – Antenna 1

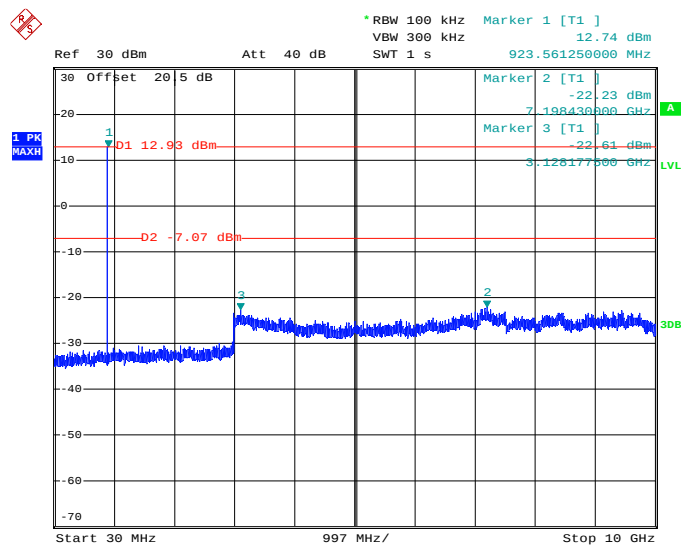


Date: 30.JUN.2017 18:57:14

Figure 7.4.2.2-3: 30 MHz – 10 GHz – High Channel – Antenna 1

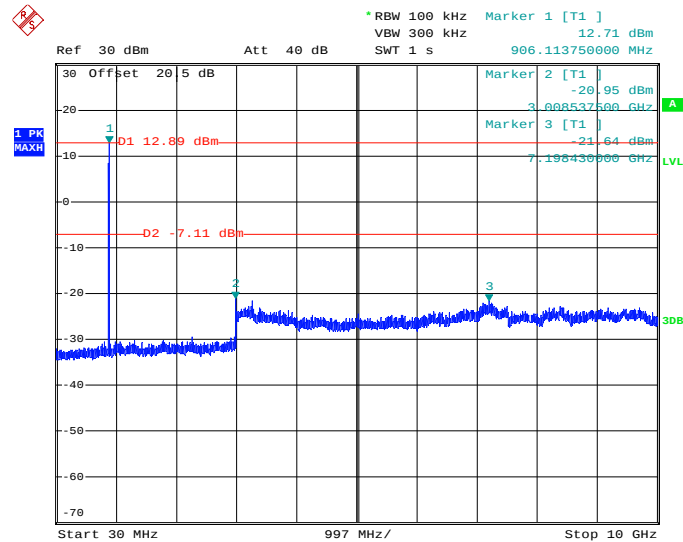


Date: 30.JUN.2017 18:30:18

Figure 7.4.2.2-4: 30 MHz – 10 GHz – Low Channel – Antenna 2

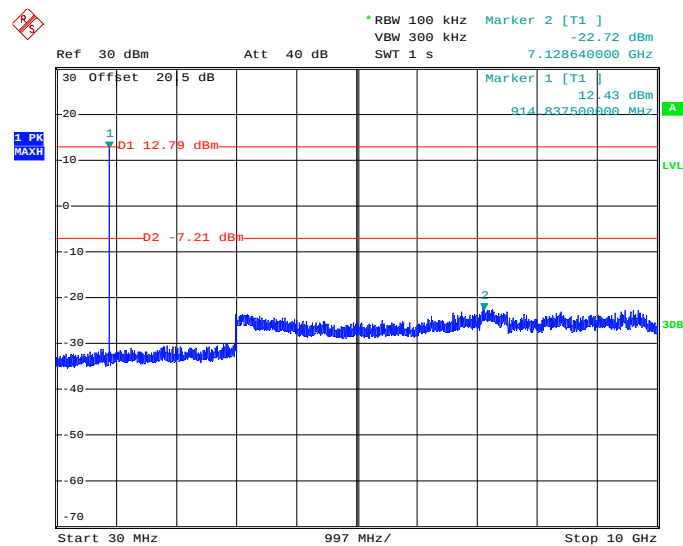

Date: 30.JUN.2017 17:53:05

Figure 7.4.2.2-5: 30 MHz – 10 GHz –Middle Channel – Antenna 2

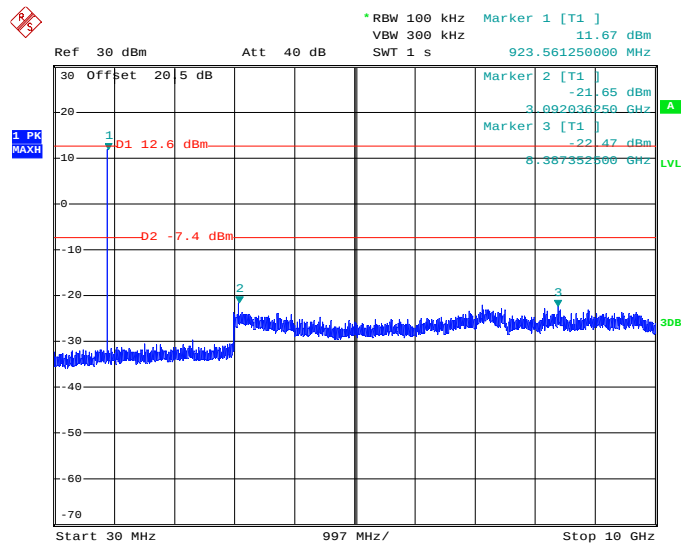

Date: 30.JUN.2017 17:39:36

Figure 7.4.2.2-6: 30 MHz – 10 GHz – High Channel – Antenna 2

7.4.3 Radiated Spurious Emissions into Restricted Frequency Bands – FCC: Sections 15.205, 15.209; ISED Canada: RSS-Gen 8.9, 8.10**7.4.3.1 Measurement Procedure**

Radiated emissions tests were made over the frequency range of 9 kHz to 10 GHz, 10 times the highest fundamental frequency. Each emission found to be in a restricted band as defined by section 15.205, including any emission at the operational band-edge, was compared to the radiated emission limits as defined in Section 15.209.

For measurements below 30 MHz, the receive antenna height was set to 1m and the EUT was rotated through 360 degrees. The resolution bandwidth was set to 200 Hz below 150 kHz and to 9 kHz above 150 kHz.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000 MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 120 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000 MHz, peak measurements are made with RBW of 1 MHz and VBW of 3 MHz. Average measurements are performed in the linear scale using VBW of 30 Hz.

7.4.3.2 Duty Cycle

A duty cycle correction factor of $20 \cdot \log(2/100) = -33.98$ dB was used for the average measurements. The justification for the duty cycle correction factor is provided in the Theory of Operation exhibit

7.4.3.3 Measurement Results

Performed by: Jean Rene

Radiated band-edge and spurious emissions found in the restricted frequency bands of 9 kHz to 10 GHz are reported in the tables below.

Table 7.4.3.3-1: Radiated Spurious Emissions Tabulated Data – Antenna 1

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel										
2717.88	66.81	60.43	H	-3.45	63.36	23.00	74.0	54.0	10.6	31.0
2717.88	62.02	55.13	V	-3.45	58.57	17.70	74.0	54.0	15.4	36.3
3623.84	54.16	47.90	H	0.09	54.25	14.01	74.0	54.0	19.8	40.0
3623.84	52.29	44.21	V	0.09	52.38	10.32	74.0	54.0	21.6	43.7
4529.8	50.13	40.11	H	2.38	52.51	8.51	74.0	54.0	21.5	45.5
4529.8	49.79	39.01	V	2.38	52.17	7.41	74.0	54.0	21.8	46.6
5435.76	46.30	34.10	H	5.21	51.51	5.33	74.0	54.0	22.5	48.7
5435.76	46.03	33.73	V	5.21	51.24	4.96	74.0	54.0	22.8	49.0
8153.64	42.67	29.51	H	9.88	52.55	5.41	74.0	54.0	21.5	48.6
8153.64	43.02	30.02	V	9.88	52.90	5.92	74.0	54.0	21.1	48.1
9059.6	42.46	28.97	H	10.82	53.28	5.81	74.0	54.0	20.7	48.2
9059.6	42.94	28.87	V	10.82	53.76	5.71	74.0	54.0	20.2	48.3
Middle Channel										
2743.08	67.88	61.39	H	-3.33	64.55	24.08	74.0	54.0	9.5	29.9
2743.08	64.42	57.83	V	-3.33	61.09	20.52	74.0	54.0	12.9	33.5
3657.44	56.34	48.29	H	0.23	56.57	14.54	74.0	54.0	17.4	39.5
3657.44	51.73	46.17	V	0.23	51.96	12.42	74.0	54.0	22.0	41.6
4571.8	50.55	40.44	H	2.53	53.08	8.99	74.0	54.0	20.9	45.0
4571.8	49.25	38.78	V	2.53	51.78	7.33	74.0	54.0	22.2	46.7
7314.88	53.00	43.29	H	9.20	62.20	18.51	74.0	54.0	11.8	35.5
7314.88	52.02	41.94	V	9.20	61.22	17.16	74.0	54.0	12.8	36.8
8229.24	43.60	30.31	H	10.05	53.65	6.38	74.0	54.0	20.3	47.6
8229.24	44.26	30.84	V	10.05	54.31	6.91	74.0	54.0	19.7	47.1
9143.6	42.03	29.00	H	10.97	53.00	5.99	74.0	54.0	21.0	48.0
9143.6	42.49	29.63	V	10.97	53.46	6.62	74.0	54.0	20.5	47.4
High Channel										
2771.88	67.32	60.95	H	-3.19	64.13	23.78	74.0	54.0	9.9	30.2
2771.88	62.87	56.17	V	-3.19	59.68	19.00	74.0	54.0	14.3	35.0
3695.84	55.00	47.18	H	0.39	55.39	13.59	74.0	54.0	18.6	40.4
3695.84	52.60	46.07	V	0.39	52.99	12.48	74.0	54.0	21.0	41.5
4619.8	48.77	37.93	H	2.72	51.49	6.67	74.0	54.0	22.5	47.3
4619.8	47.88	37.25	V	2.72	50.60	5.99	74.0	54.0	23.4	48.0
7391.68	53.03	42.84	H	9.30	62.33	18.16	74.0	54.0	11.7	35.8
7391.68	53.07	42.79	V	9.30	62.37	18.11	74.0	54.0	11.6	35.9
8315.64	43.34	30.00	H	10.25	53.59	6.27	74.0	54.0	20.4	47.7
8315.64	42.87	30.38	V	10.25	53.12	6.65	74.0	54.0	20.9	47.4

Notes:

All emissions above 9.2 GHz were attenuated below the limits and the noise floor of the measurement equipment.

The average measurements are further corrected using a duty cycle correction factor of $20 \cdot \log(2/100) = -33.98$ dB.

Table 7.4.3.3-2: Radiated Spurious Emissions Tabulated Data – Antenna 2

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel										
2717.88	66.43	60.03	H	-3.45	62.98	22.60	74.0	54.0	11.0	31.4
2717.88	60.62	53.88	V	-3.45	57.17	16.45	74.0	54.0	16.8	37.5
3623.84	53.68	48.53	H	0.09	53.77	14.64	74.0	54.0	20.2	39.4
3623.84	50.85	44.27	V	0.09	50.94	10.38	74.0	54.0	23.1	43.6
4529.8	50.30	40.40	H	2.38	52.68	8.80	74.0	54.0	21.3	45.2
4529.8	49.30	38.86	V	2.38	51.68	7.26	74.0	54.0	22.3	46.7
5435.76	45.84	33.80	H	5.21	51.05	5.03	74.0	54.0	23.0	49.0
5435.76	45.39	33.03	V	5.21	50.60	4.26	74.0	54.0	23.4	49.7
8153.64	42.79	29.61	H	9.88	52.67	5.51	74.0	54.0	21.3	48.5
8153.64	43.18	30.08	V	9.88	53.06	5.98	74.0	54.0	20.9	48.0
9059.6	42.88	29.12	H	10.82	53.70	5.96	74.0	54.0	20.3	48.0
9059.6	42.82	28.99	V	10.82	53.64	5.83	74.0	54.0	20.4	48.2
Middle Channel										
2743.08	66.38	59.97	H	-3.33	63.05	22.66	74.0	54.0	11.0	31.3
2743.08	63.54	56.92	V	-3.33	60.21	19.61	74.0	54.0	13.8	34.4
3657.44	55.45	47.90	H	0.23	55.68	14.15	74.0	54.0	18.3	39.9
3657.44	50.76	44.56	V	0.23	50.99	10.81	74.0	54.0	23.0	43.2
4571.8	50.29	40.22	H	2.53	52.82	8.77	74.0	54.0	21.2	45.2
4571.8	49.09	38.38	V	2.53	51.62	6.93	74.0	54.0	22.4	47.1
7314.88	51.18	41.13	H	9.20	60.38	16.35	74.0	54.0	13.6	37.7
7314.88	52.48	42.21	V	9.20	61.68	17.43	74.0	54.0	12.3	36.6
8229.24	43.45	30.00	H	10.05	53.50	6.07	74.0	54.0	20.5	47.9
8229.24	43.63	30.68	V	10.05	53.68	6.75	74.0	54.0	20.3	47.2
9143.6	42.28	29.04	H	10.97	53.25	6.03	74.0	54.0	20.8	48.0
9143.6	42.44	29.71	V	10.97	53.41	6.70	74.0	54.0	20.6	47.3
High Channel										
2771.88	67.39	60.98	H	-3.19	64.20	23.81	74.0	54.0	9.8	30.2
2771.88	64.27	57.57	V	-3.19	61.08	20.40	74.0	54.0	12.9	33.6
3695.84	57.39	50.22	H	0.39	57.78	16.63	74.0	54.0	16.2	37.4
3695.84	53.33	47.84	V	0.39	53.72	14.25	74.0	54.0	20.3	39.8
4619.8	49.46	39.11	H	2.72	52.18	7.85	74.0	54.0	21.8	46.2
4619.8	47.20	35.89	V	2.72	49.92	4.63	74.0	54.0	24.1	49.4
7391.68	52.05	41.74	H	9.30	61.35	17.06	74.0	54.0	12.7	36.9
7391.68	52.94	42.46	V	9.30	62.24	17.78	74.0	54.0	11.8	36.2
8315.64	43.30	30.56	H	10.25	53.55	6.83	74.0	54.0	20.5	47.2
8315.64	44.01	30.74	V	10.25	54.26	7.01	74.0	54.0	19.7	47.0

Notes:

All emissions above 9.2 GHz were attenuated below the limits and the noise floor of the measurement equipment.

The average measurements are further corrected using a duty cycle correction factor of $20 \cdot \log(2/100) = -33.98$ dB.

7.4.3.4 Sample Calculation:

$$R_C = R_U + CF_T$$

Where:

CF_T = Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)

R_U = Uncorrected Reading

R_C = Corrected Level

AF = Antenna Factor

CA = Cable Attenuation

AG = Amplifier Gain

DC = Duty Cycle Correction Factor

Example Calculation: Peak

Corrected Level: $66.81 + (-3.45) = 63.36 \text{ dB}\mu\text{V/m}$

Margin: $74 \text{ dB}\mu\text{V/m} - 63.36 \text{ dB}\mu\text{V/m} = 10.6 \text{ dB}$

Example Calculation: Average

Corrected Level: $60.43 + (-3.45) - 33.98 = 23.0 \text{ dB}\mu\text{V/m}$

Margin: $54 \text{ dB}\mu\text{V/m} - 23.0 \text{ dB}\mu\text{V/m} = 31.0 \text{ dB}$

7.5 Power Spectral Density – FCC: Section 15.247(e); ISED Canada: RSS-247 5.2(b)

7.5.1 PSD Measurement Procedure (Conducted Method)

The power spectral density was measured in accordance with the FCC KDB 558074 D01 DTS Meas Guidance v04 Section 10.2 Method PKPSD (peak PSD). The RF output port of the EUT was directly connected to the input of the spectrum analyzer. Offset values were input for cable and external attenuation. The spectrum analyzer RBW was set to 3 kHz and VBW 10 kHz. Span was adjusted to 1.5 times the DTS bandwidth and the sweep time was set to auto.


7.5.2 Measurement Results

Performed by: Thierry Jean-Charles

Results are shown below.


Table 7.5.2-1: Power Spectral Density – Antenna 1

Frequency [MHz]	PSD [dBm]	Limit [dBm]	Margin [dB]
905.96	4.38	8.0	3.62
914.36	4.26	8.0	3.74
923.96	4.11	8.0	3.89

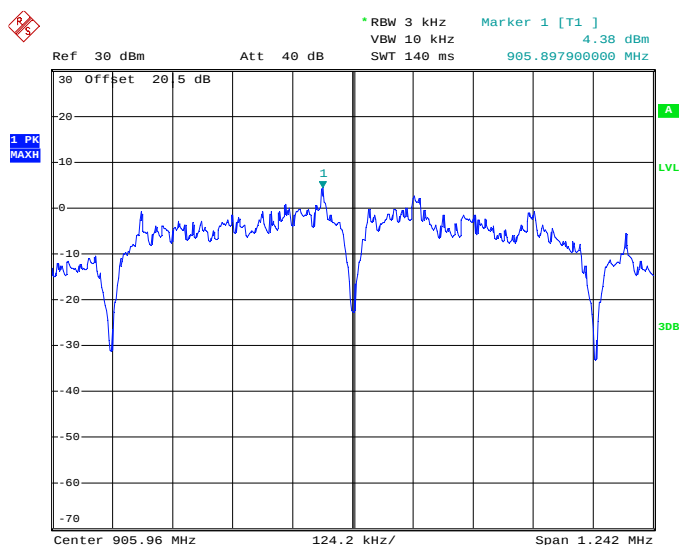


Date: 30.JUN.2017 13:39:30

Figure 7.5.2-1: Power Spectral Density - Low Channel – Antenna 1

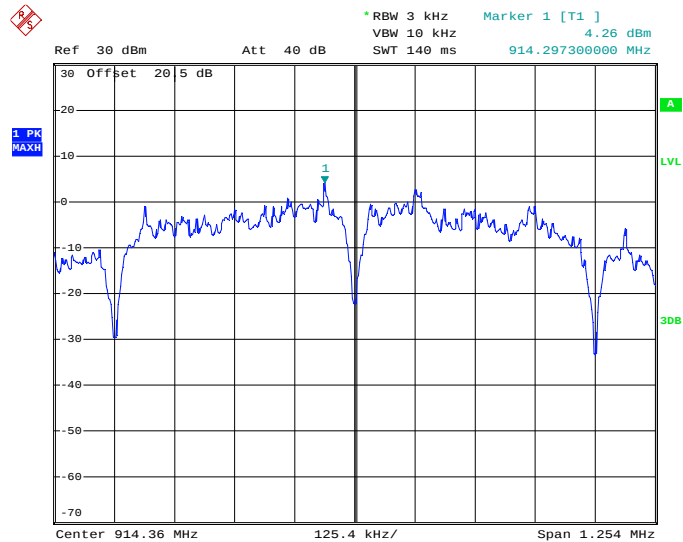

Date: 30.JUN.2017 13:53:40

Figure 7.5.2-2: Power Spectral Density - Middle Channel – Antenna 1

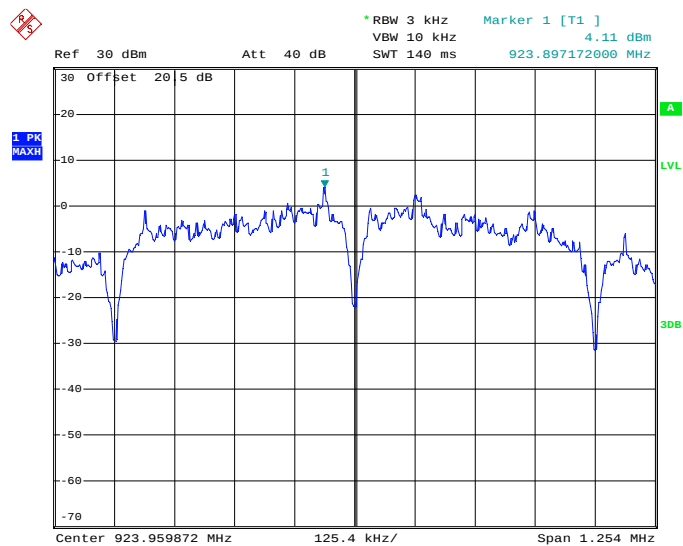


Date: 30.JUN.2017 14:11:43

Figure 7.5.2-3: Power Spectral Density – High Channel – Antenna 1


Table 7.5.2-2: Power Spectral Density – Antenna 2

Frequency [MHz]	PSD [dBm]	Limit [dBm]	Margin [dB]
905.96	4.10	8.0	3.90
914.36	3.95	8.0	4.05
923.96	3.78	8.0	4.22

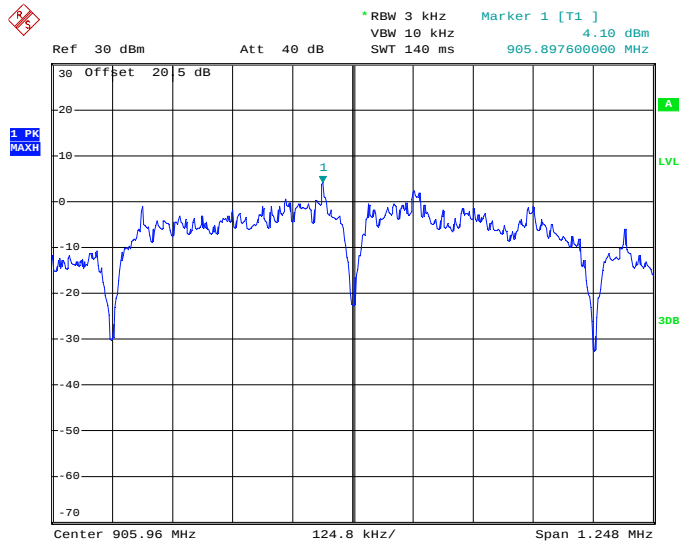


Date: 30.JUN.2017 14:42:03

Figure 7.5.2-4: Power Spectral Density - Low Channel – Antenna 2

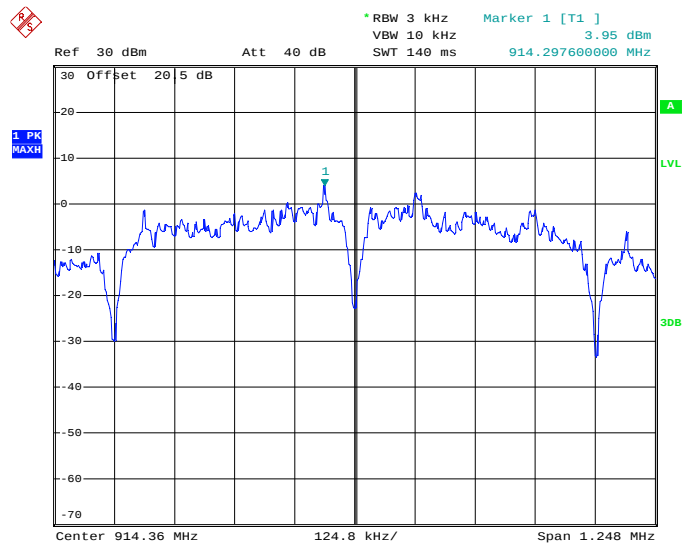

Date: 30.JUN.2017 15:10:21

Figure 7.5.2-5: Power Spectral Density - Middle Channel – Antenna 2

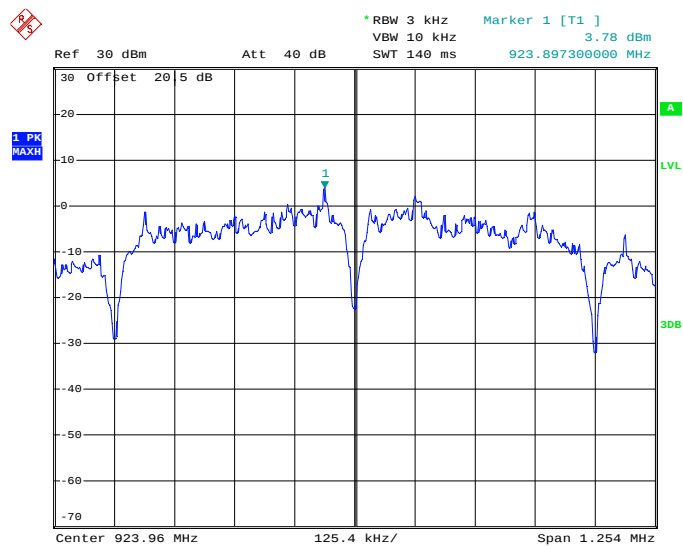

Date: 30.JUN.2017 15:41:30

Figure 7.5.2-6: Power Spectral Density – High Channel – Antenna 2

8 MEASUREMENT UNCERTAINTIES

The expanded laboratory measurement uncertainty figures (U_{Lab}) provided below correspond to an expansion factor (coverage factor) $k = 1.96$ which provide confidence levels of 95%.

Parameter	U_{lab}
Occupied Channel Bandwidth	$\pm 0.009 \%$
RF Conducted Output Power	$\pm 0.349 \text{ dB}$
Power Spectral Density	$\pm 0.372 \text{ dB}$
Antenna Port Conducted Emissions	$\pm 1.264 \text{ dB}$
Radiated Emissions $\leq 1\text{GHz}$	$\pm 3.93 \text{ dB}$
Radiated Emissions $> 1\text{GHz}$	$\pm 5.814 \text{ dB}$
Temperature	$\pm 0.860 \text{ }^{\circ}\text{C}$
Radio Frequency	$\pm 2.832 \times 10^{-8}$
AC Power Line Conducted Emissions	$\pm 2.93 \text{ dB}$

9 CONCLUSION

In the opinion of TÜV SÜD America, Inc. the model JETIR900US, manufactured by Esprit Model Inc., meets the requirements of FCC Part 15.247 and Industry Canada's Radio Standards Specification RSS-247 for the tests documented herein.

END REPORT