



TEST REPORT

FROM

Ensemble Communications Inc.

Test of the Fiberless™ 3900 Series Outdoor Unit - Base Station (BS) and Customer Premises Equipment (CPE)

To CFR 47 part 101, subpart C (Oct 1998)

Test Report Serial No.: Radio-TR-001-v0.1

This report supersedes: NONE

Remarks:

Equipment complied with the specification	☒
Equipment did not comply with the specification	☐
Results were within measurement uncertainties	☐

This Test Report is Issued Under the Authority of:

A handwritten signature in black ink, appearing to read "Sam Liu", written over a horizontal line.

.....
Sam Liu, Director of Hardware Development

A handwritten signature in black ink, appearing to read "Jason Greenwood", written over a horizontal line.

.....
Tested by Jason Greenwood

A handwritten signature in black ink, appearing to read "Sam Liu", written over a horizontal line.

.....
Checked by Sam Liu

Copy No:

Issue date: 12 February 2002

Issue to: Ensemble Communications, Inc.
9890 Towne Centre Drive
San Diego, California 92121

This page has been intentionally left blank.

CONTENTS

1	Executive Summary	5
2	Technical Details	7
3	Tests Required.....	9
4	Measurements, Examinations and Derived Results	10
4.1	General observations.....	10
4.2	Test Results	10
4.2.1	Transmitter characteristics	10
5	Test Equipment Used	21
6	Summary Of Test Results	21
7	Test set-up illustrations	22
7.1	Base Station (BS) Test Configuration.....	22
7.2	Customer Premises Equipment (CPE) Test Configuration	24
8	Graphical Results	26

This page has been intentionally left blank.

1 Executive Summary

Purpose

The purpose of this test program was to demonstrate compliance of the Ensemble Fiberless 3900 (CPE ODU) and the Fiberless 39XXX (Base Station ODU, where XXX are used to define the sector size and polarization) 39 GHz LMDS outdoor unit (ODU) transceivers against the current FCC technical standards for digital radio relay system authorization requirements. The ODU transceiver demonstrated compliance against the standard "FCC CFR 47, part 101, Subpart C (1998-10).

EUT Description

Consisting of four major components - the 16200 Series BS-IDU, 320 Series CPE-IDU, 3900 Series ODU transceivers, and the Fiberless Management System (FMS) - the Ensemble Fiberless™ System represents the highest functionality, the most flexible, and most easily deployable system on the market today.



The 16200 Series Base Station Indoor Unit and 320 Series Customer Premises Equipment Indoor Unit operate with a range of outdoor unit transceivers in the range of 10 to 45 GHz. The configuration tested operates in the 38.65 to 39.8GHz frequency band. Both the 16200 Series BS-IDU and the 320 Series CPE-IDU are connected to the 3900 Series ODU transceivers by a single RG-6 coaxial cable and can be separated by up to 1000 feet.

The 16200 Series Base Station indoor unit, a 19" or 23" rack mountable, 10U box, features hot swappable cards for easy servicing and growth. It is designed to support up to eighteen

25 MHz carriers with network interfaces ranging from a single DS-3/E3 up to multiple OC-3s/STM-1s. Overall, a single base station rack can terminate up to 1.2 Gbit/s of backhaul network capacity supplied from TDM, IP, or ATM networks.

The 320 series CPE indoor unit is a compact 1.5U high, rackable/stackable box supporting up to 12 service ports. Combining the functionality of a broadband, burst modem and a multiservice access concentrator, the unit is customisable and scalable through deployment of different types of cards in three expansion slots. Interfaces offered include the full range for voice and data connections including T1/E1, 10/100BT, and V.35. Available services include TDM, Frame Relay, Ethernet, Native IP, FXO and FXS. Flexible deployment schemes allow multiple subscribers to be connected to a single CPE indoor unit or multiple CPE indoor units to be connected to a single CPE outdoor unit.

The 3900 Series outdoor unit comes in two form factors, the BS-ODU and the CPE-ODU. The form factors differ to accommodate the different BS and CPE antennas while the internal electronics remain the same. The 3900 Series BS-ODU is an integrated radio and antenna in a single, compact form factor that supports flexible, modular deployments of multiple sectorization schemes ranging from 3 to 90 degrees. Like the BS-ODU, the CPE-ODU is an integrated radio and parabolic antenna in a compact design of approximately 10 inches square.

The Fiberless system uses Ensemble's patented Adaptix technology for the air interface, which comprises an advanced feature set incorporating Adaptive Time Division Duplexing (Adaptive TDD), Adaptive Time Division Multiple Access (Adaptive TDMA) and Adaptive Modulation technologies. The Fiberless system allocates a time slot on demand to a specific customer, upstream or downstream at any modulation scheme at variable bandwidth amounts based on demand or service level agreement resulting in the most efficient air interface in the industry. As a result, Fiberless allows carriers to lead the market with both existing and new services while minimizing deployment and operation costs.

The Fiberless system uses its patented Adaptive TDD to support contiguous, asymmetrical spectrum band allocations. Adaptive TDD supports real-time asymmetry in a single channel to maximize efficiency and reduce capital and operational expenses. This innovative technology flexibly allocates upstream and downstream capacity on demand to ensure efficient use of channel bandwidth. The operational benefits result from no field activity related to changes in asymmetry on a channel, as an FDD system would require.

The Fiberless system uses Adaptive TDMA to allocate bandwidth instantaneously in variable packet sizes for each user's specific need while maintaining quality of service (QoS) on each link. Compared to first generation BWA systems that have a fixed frequency bandwidth allocation for each user, Adaptive TDMA can increase a carrier's revenues by a factor of 4 or more through the over-subscription of facilities while enabling market-leading, differentiated services.

The Fiberless system also uses Adaptive Modulation, which selects QPSK, QAM 16, and QAM 64 automatically on each burst, every one millisecond depending on the distance to the customer, environmental and other RF conditions. By automatically selecting the most efficient modulation scheme possible for each customer transmission, Ensemble's Adaptive Modulation technology maximizes both system range and capacity simultaneously. Maximum range is achieved by using QPSK while maximum capacity is achieved by using QAM 16 and QAM 64 for bursts where link conditions allow.

2 Technical Details

Purpose	To verify the 3900 and 390XX Transceivers against the specification by means of a type test.
Applicant / Client	Ensemble Communications, Inc. 9890 Towne Centre Drive San Diego, CA 92129
Manufacturer	Ensemble Communications, Inc.
Laboratory performing the tests	Ensemble Communications, Inc. 9890 Towne Centre Drive San Diego, CA 92129
Test report reference number	Radio-TR-001-v0.1
Standard applied	CFR 47 part 101, subpart C (Oct 1998)
Dates of test (from - to)	November 29, 2001 - January 16, 2002
No of Units:	two
Equipment Category:	Microwave Fixed Link
Trade Name:	Fiberless 16200 / Fiberless 320
Type No:	M/A-Comm
Technical Variants:	Base Station (BS) / CPE
ITU Emission Code(s):	25 M0D7W

Unit No 1

Type of Unit:	Non-protected Base Station Outdoor Unit (NP ODU) Fiberless 390XX
Power Characteristics:	Nominal Output Power +17 dBm
Modulation:	QPSK, 16QAM, 64QAM
Transceiver Frequency Range:	38.65 GHz to 39.8 GHz Tx
Filter Frequency Range:	1.15 GHz (38.65 GHz - 39.8 GHz)
Temperature Range:	-40 to +55 degrees C

Unit No 2

Type of Unit:	Non-protected CPE Outdoor Unit (NP ODU) Fiberless 3900
Power Characteristics:	Nominal Output Power +17 dBm
Modulation:	QPSK, 16QAM, 64QAM
Transceiver Frequency Range:	38.65 GHz to 39.8 GHz Tx
Filter Frequency Range:	1.15 GHz (38.65 GHz - 39.8 GHz)
Temperature Range:	-40 to +55 degrees C

Unit No 3

Type of Unit: Non-Protected Indoor Base Station Unit (IDU)
Voltage Range: Nominal 48 V DC,
Extremes -36Vdc to -72 Vdc.
Temperature Range: 0 degrees C to +50 degrees C

Unit No 4

Type of Unit: Non-Protected Indoor CPE Unit (IDU)
Voltage Range: Nominal 110 Vac/240 Vac,
Extremes 90 Vac to 264 Vac
Temperature Range: 0 degrees C to +50degrees C

3 Tests Required

PARAMETER	COMPLIANT
TRANSMITTER CHARACTERISTICS	
RF power output	Yes
Modulation characteristics	Yes
Occupied bandwidth	Yes
Spurious emissions at antenna terminals	Yes
Field strength of spurious radiation	Yes
Frequency stability	N/A ^{note 1}

Notes:

1. *Equipment operating in the 38.6 GHz-40GHz band is exempt from the frequency tolerance requirement found in part 101 of the FCC rules.*

4 Measurements, Examinations and Derived Results

4.1 General observations

Equipment serial number(s)

MODULE:	SERIAL NUMBER:
16200 BS indoor unit (IDU) – MIC BOARD	304200390036
16200 BS outdoor unit (ODU)	C0007601420004
320 CPE indoor unit (IDU)	113101040002
320 CPE outdoor unit (ODU)	C0007501360005

4.2 Test Results

4.2.1 Transmitter characteristics

4.2.1.1 RF power output

Ambient temperature: **25.0 °C**

Relative humidity: **35.0 %**

Radio Parameters:

TX frequencies: Lower #1 38.6625GHz, lower #2 38.6875 GHz, middle #1 39.2125GHz, middle #2 39.2375GHz, Upper #1 39.7625 GHz, Upper #2 39.7875 GHz

Voltage= -48Vdc

OP power: +17 dBm

Results:

TABLE OF OUTPUT POWER RESULTS (Base Station-ODU)

Transmitter Power (dBm)						
Modulation	Low Channels		Mid Channels		High Channels	
	38.6625 GHz	38.6875 GHz	39.2125 GHz	39.2375 GHz	39.7625 GHz	39.7875 GHz
QPSK	15.98	16.10	16.68	16.40	16.12	16.07
16QAM	13.48	13.64	14.22	13.93	13.64	13.60
64QAM	12.40	12.58	13.16	12.85	12.57	12.55

TABLE OF OUTPUT POWER RESULTS (CPE-ODU)

Transmitter Power (dBm)						
Modulation	Low Channels		Mid Channels		High Channels	
	38.6625 GHz	38.6875 GHz	39.2125 GHz	39.2375 GHz	39.7625 GHz	39.7875 GHz
QPSK	16.20	15.89	16.25	16.35	16.19	16.10
16QAM	13.27	13.39	13.74	13.85	13.88	13.89
64QAM	12.18	12.29	12.65	12.75	12.78	12.80

Specification:

Rated output power: +17 dBm

LIMITS CLAUSE:

Maximum Power (dBm)	+55 dBW EIRP ¹
---------------------	---------------------------

Note 1: Base station antenna gain: 21 dBi typical. Subscriber antenna gain: 35 dBi typical.

Test Equipment Used:

#	INSTRUMENT	MANUFACTURER	MODEL #	SERIAL #	CALIBRATION DATE / DUE
1	Power Meter	Agilent	E4418B	MY40330474	28/04/02
2	Power Sensor	Agilent	8487A	MY41090136	28/04/02
3	High Freq. Cables	Megaphase			

4.2.1.2 Modulation characteristics

Ambient temperature: 25.0°C

Relative humidity: 35.0%

Data Rate: QPSK; 40 Mbit/s, 16-QAM; Mbit/s, 64-QAM; Mbit/s O/P Power: +25 dBm

Results:

All of the plots take into account the cable losses associated with the test set up.

SPECTRUM MASK PLOTS (CPE-ODU)

Reference to plot in Annex B-Graphical Results						
Modulation	Low Channels		Mid Channels		High Channels	
	38.6625 GHz	38.6875 GHz	39.2125 GHz	39.2375 GHz	39.7625 GHz	39.7875 GHz
QPSK	CPE001 CPE002	CPE051 CPE052	CPE066 CPE067	CPE082 CPE083	CPE096 CPE097	CPE113 CPE114
16QAM	CPE040 CPE041 CPE043	CPE056 CPE057 CPE059	CPE072 CPE074 ^{note 1} CPE075 ^{note 1}	CPE086 CPE087 CPE089 ^{note 1}	CPE100 CPE101 CPE103 CPE104 CPE105	CPE117 ^{note 1} CPE118 ^{note 1} CPE120 ^{note 1} CPE121 ^{note 1}
64QAM	CPE046 CPE047 CPE049	CPE061 CPE062 CPE064	CPE077 CPE078 CPE080	CPE091 CPE092 CPE094	CPE107 CPE108 CPE110 CPE111	CPE123 CPE124 CPE126 CPE127

SPECTRUM MASK PLOTS (Base Station-ODU)

Reference to plot in Annex B-Graphical Results						
Modulation	Low Channels		Mid Channels		High Channels	
	38.6625 GHz	38.6875 GHz	39.2125 GHz	39.2375 GHz	39.7625 GHz	39.7875 GHz
QPSK	BS005 BS001 BS004 BS006	BS060 BS062 BS064	BS077 BS078 BS080	BS095 BS096 BS098	BS110 BS111 BS113 BS114	BS128 ^{note 1} BS129 ^{note 1} BS131 ^{note 1} BS132 ^{note 1}
16QAM	BS050 BS052 BS054	BS065 BS066 BS069	BS082 BS083 BS086 ^{note 1} BS087 ^{note 1}	BS100 ^{note 1} BS101 ^{note 1} BS102 ^{note 1}	BS116 BS117 BS119 BS120	BS134 ^{note 1} BS135 ^{note 1} BS137 ^{note 1} BS138 ^{note 1}
64QAM	BS055 BS056 BS059	BS071 BS072 BS074 BS075	BS089 BS090 BS092 BS093	BS103 BS105 BS106 BS108	BS122 BS123 BS125 BS126	BS140 ^{note 1} BS141 ^{note 1} BS143 ^{note 1}

Note 1: An addition 4 dB attenuation was added to the input signal from the ODU in order to allow the internal attenuation in the spectrum analyser to be reduced thus lowering the noise floor of the spectrum analyser.

Specification:

LIMITS CLAUSE: 101.111

Per CFR 47, Part 101.111 (a)(2)(ii), for operating frequencies above 15 GHz, in any 1 MHz band, the center frequency of which is removed from the assigned frequency by more than 50 percent up to and including 250 percent of the authorized bandwidth, the mean power of emissions must be attenuated below the mean output power of the transmitter as specified by the following equation but in no event less than 11 decibels:

$$A = 11 + 0.4(P - 50) + 10 \log_{10} B. \text{ (Attenuation greater than 56 decibels is not required.)}$$

where:

A = Attenuation (in decibels) below the mean output power level.

P = Percent removed from the carrier frequency.

B = Authorized bandwidth in MHz

These masks are calculated at the maximum transmitter output power only.

Test Equipment Used:

#	INSTRUMENT	MANUFACTURER	MODEL #	SERIAL #	CALIBRATION DATE / DUE
1	Spectrum Analyser	HP	8564E	3943A01770	05/18/02
2	High Freq. Cables	Megaphase	TM40 K1K1 38	16071GVT4	
3	High Freq. Cables	Megaphase	TM40 K1K1 38	1424GVT4	

4.2.1.3 Occupied bandwidth

Ambient temperature: **25.0 °C**

Relative humidity: **35.0 %**

Results:

TABLE OF OCCUPIED BANDWIDTH RESULTS (Base Station-ODU)

TEST CONDITIONS		TRANSMITTER OCCUPIED BANDWIDTH (MHZ)		
		QPSK	16 QAM	64 QAM
T nom (25.0°C) V nom (-48V)	Low Band	BS002 BS063	BS053 BS067	BS058 BS073
	Mid Band	BS079 BS097	BS084 BS102	BS091 BS107
	High Band	BS112 BS130	BS118 BS136	BS124 BS142
Maximum occupied bandwidth observed (MHz)		22.48	22.33	22.33
Minimum occupied bandwidth observed (MHz)		22.17	22.17	22.17
Variation in occupied bandwidth observed (MHz)		.31	.16	.16

TABLE OF OCCUPIED BANDWIDTH RESULTS (CPE-ODU)

TEST CONDITIONS		TRANSMITTER OCCUPIED BANDWIDTH (MHZ)		
		QPSK	16 QAM	64 QAM
T nom (25.0°C) V nom (-48V)	Low Band	CPE003 CPE053	CPE042 CPE058	CPE048 CPE063
	Mid Band	CPE068 CPE084	CPE073 CPE088	CPE079 CPE093
	High Band	CPE098 CPE115	CPE102 CPE119	CPE109 CPE125
Maximum occupied bandwidth observed (MHz)		22.50	22.33	22.33
Minimum occupied bandwidth observed (MHz)		22.17	22.17	22.17
Variation in occupied bandwidth observed (MHz)		.33	.16	.16

Specification:

LIMITS CLAUSE: 101.109

Maximum authorized bandwidth	50 MHz
------------------------------	--------

Test Equipment Used:

#	INSTRUMENT	MANUFACTURER	MODEL #	SERIAL #	CALIBRATION DATE / DUE
1	Spectrum Analyser	HP	8564E	3943A01770	05/18/02
2	High Freq. Cables	Megaphase	TM40 K1K1 38	16071GVT4	

4.2.1.4 Spurious emissions at antenna terminals

Ambient temperature: 25.0 °C Relative humidity: 35.0%

Transmission Frequency: 38.6625 GHz

O/P Power: 17 dBm

Results: SPURIOUS EMISSION PLOTS (CPE-ODU)

Frequency (GHz)	Highest Level Observed (dBm)	Reference to plot in Annex B
9 kHz-50 kHz	-78.97	CPE006
50 kHz-100 kHz	-79.47	CPE007
100 kHz-150 kHz	-80.13	CPE008
150.0 kHz-1.0 MHz	-71.63	CPE010
1.0 MHz -10.0 MHz	-72.63	CPE011
10.0 MHz -30.0 MHz	-69.63	CPE012
30.0 MHz -200 MHz	-65.63	CPE015
200 MHz -500 MHz	-56.63	CPE016
500 MHz -800 MHz	-65.63	CPE017
800 MHz-1.0GHz	-70.63	CPE014
1.0 GHz -2.5 GHz	-56.97	CPE020
2.5 GHz -5.0 GHz	-54.13	CPE021
5.0 GHz -7.5 GHz	-51.30	CPE022
7.5 GHz -10.0 GHz	-54.97	CPE024
10.0 GHz -13.0 GHz	-56.97	CPE025
13.0 GHz -15.0 GHz	-50.47	CPE027
15.0 GHz -17.0 GHz	-51.97	CPE028
17.0 GHz -20.0 GHz	-53.47	CPE029
20.0 GHz -22.5 GHz	-49.13	CPE031
22.5 GHz -25.0 GHz	-48.80	CPE032
25.0 GHz -27.5 GHz	-56.30	CPE033
27.5 GHz -30.0 GHz	-49.13	CPE034
30.0 GHz -32.5 GHz	-48.80	CPE035
32.5 GHz -35.0 GHz	-45.13	CPE036
35.0 GHz -38.5 GHz	-43.13	CPE037
38.75 GHz -40.0 GHz	-42.63	CPE038
40.0 GHz -60.0 GHz	>30dB below limit (Note 1) (Note2)	CPE200
60.0 GHz -90.0 GHz	-50.0(Note2)	CPE201
90.0 GHz -110.0 GHz	-53.67(Note2)	CPE202
110.0 GHz -200.0 GHz	-53.17(Note2)	CPE203

Note1: A comparison was done using a signal generator to determine if the signals in the 40GHz-60GHz range were actual signals or if they were signals created in the mixer. From this it was determined that there were no observable spurious emissions from the radio in this range. See plots BS204, BS205, BS206 and BS207. The plots read dBuV but the actual measurement is in dBm. This is due to a limitation in the software used to capture the plots.

Note2: Measurements for this frequency range were conducted with the Radio in CW mode, which gives the worst possible case for harmonic emissions. The plots read dBuV but the actual measurement is in dBm. This is due to a limitation in the software used to capture the plots.

SPURIOUS EMISSION PLOTS (BS-ODU)

Frequency (GHz)	Highest Level Observed (dBm)	Reference to plot in Annex B-Graphical Results
10 kHz-50 kHz	-79.17	BS007a
50 kHz-100kHz	-78.83	BS007b
100kHz-150kHz	-79.17	BS007c
150kHz-1.0MHz	-76.33	BS008a
1.0MHz-10.0MHz	-77.33	BS008b
10.0MHz-30.0MHz	-75.5	BS008c
30.0MHz-100.0MHz	-64.67	BS012
100.0MHz-500.0MHz	-67.33	BS013
500MHz-800.0MHz	-68.00	BS014
800MHz-1.0GHz	-67.33	BS015
1.0 GHz-1.5 GHz	-57.00	BS020
1.5 GHz-2.0 GHz	-57.67	BS021
2.0 GHz-2.5 GHz	-57.17	BS022
2.5 GHz-3.0 GHz	-54.33	BS023
3.0 GHz-3.5 GHz	-57.50	BS024
3.5 GHz-4.0 GHz	-57.00	BS025
4.0 GHz-4.5 GHz	-56.67	BS026
4.5 GHz-5.0 GHz	-58.33	BS027
5.0 GHz-5.5 GHz	-59.17	BS028
5.5 GHz -6.0 GHz	-55.67	BS029
6.0 GHz -6.5 GHz	-56.83	BS030
6.5 GHz -7.0 GHz	-56.33	BS031
7.0 GHz -7.5 GHz	-52.33	BS032
7.5 GHz -8.0 GHz	-54.00	BS033
8.0 GHz -8.5 GHz	-53.50	BS034
8.5 GHz -9.0 GHz	-53.00	BS035
9.0 GHz -9.5 GHz	-52.50	BS035a
9.5 GHz -10.0 GHz	-55.33	BS036
10.0 GHz-10.5 GHz	-54.17	BS037
10.5 GHz -11.0 GHz	-53.67	BS038
11.0 GHz -12.0 GHz	-53.33	BS039
12.0 GHz -13.0 GHz	-52.33	BS040
13.0 GHz -15.0 GHz	-53.17	BS041
15.0 GHz -17.0 GHz	-54.67	BS042
17.0 GHz -20.0 GHz	-52.33	BS043

Frequency (GHz)	Highest Level Observed (dBm)	Reference to plot in Annex B-Graphical Results
20.0 GHz -25.0 GHz	-46.67	BS044
25.0 GHz -30.0 GHz	-48.83	BS045
30.0 GHz -35.0 GHz	-45.87	BS047
35.0 GHz -38.5 GHz	-42.50	BS048
38.7 GHz -40.0 GHz	-41.50	BS049
40.0 GHz -60.0 GHz	>30dB below limit (note 1) (Note2)	BS200
60.0 GHz -90.0 GHz	-55.83 (Note2)	BS201
90.0 GHz -110.0 GHz	-55.33 (Note2)	BS202
110.0 GHz -200.0 GHz	-53.5 (Note2)	BS203

Note1: a comparison was done using a signal generator to determine if the signals in the 40GHz-60GHz range were actual signals or if they were signals created in the mixer. From this it was determined that there were no observable spurious emissions from the radio in this range. See plots BS204, BS205, BS206 and BS207. The plots read dBuV but the actual measurement is in dBm. This is due to a limitation in the software used to capture the plots.

Note2: Measurements for this frequency range were conducted with the Radio in CW mode, which gives the worst possible case for harmonic emissions. The plots read dBuV but the actual measurement is in dBm. This is due to a limitation in the software used to capture the plots.

Specification:

LIMITS CLAUSE: 101.111

FREQUENCY RANGE	REQUIRED ATTENUATION (DB)
10 kHz to 38.65 GHz	$43+10*\log_{10}$ (mean output power in Watts) decibels
38.8 GHz to 200 GHz	$43+10*\log_{10}$ (mean output power in Watts) decibels

Note 1: In any 4 kHz band, the center frequency of which is removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43+10\log_{10}$ (mean output power in Watts) decibels, or 80 decibels, whichever is the lesser attenuation.*

Test Equipment Used:

#	INSTRUMENT	MANUFACTURER	MODEL #	SERIAL #	CALIBRATION DATE / DUE
1	Spectrum Analyser	HP	8564EC	4111A00506	01/15/03
2	Mixer 40-60GHz	Oleson Microwave			
3	Mixer 60-90GHz	Oleson Microwave			
4	Mixer 90-110GHz	Oleson Microwave			
5	Mixer 110-200GHz	Oleson Microwave			
6	High Freq. Cables	Megaphase	TM40 K1K1 38	16071GVT4	

4.2.1.5 Frequency stability

Ambient temperature: 25.0°C

Relative humidity: 35.0 %

Results:

Equipment operating in the 38.6 GHz-40 GHz band is exempt from the frequency tolerance requirement found in part 101 of the FCC rules, therefore the Fiberless 3900 radios were not tested to this requirement.

Specification:

LIMITS **CLAUSE:** 101.107 (a)

Maximum frequency error (%)	±0.001
-----------------------------	--------

Test Equipment Used:

#	INSTRUMENT	MANUFACTURER	MODEL #	SERIAL #	CALIBRATION DATE / DUE
1	N/A				

4.2.1.6 Automatic Transmit Power Control

ITEM	YES	NO
Equipment has ATPC:	√	
ATPC is a fixed permanent feature:	√	
ATPC range:	45dB	
ATPC step size:	0.2dB	
Output power tolerance across ATPC range:	±2dB	

4.2.1.7 RF Safety Evaluation

#	ITEM	VALUE
1	Maximum TX power	17dBm or 50mW
2	Highest gain CPE antenna	35 dBi
3	Max EIRP	52 dBm or 158.5 W

The Max EIRP value of 158.5 W is well below 1640W. Therefore, an RF warning label is not required.

4.2.1.8 Field Strength of Spurious Emissions

There were no observable Radiated emissions from the Transceiver portion of the EUT in the 30MHz-5 GHz range. All of the measurable radiated emissions are related to the digital device portion of the EUT, and thus are compared to the 47CFR 15 Class B field strength limit.

The highest measurable spurious emission was -40.60 dBm at 39.6035 GHz for the CPE ODU and -33.40 dBm at 39.6035GHz for the Base station ODU, which translates into a field strength at 3m of 54.63 dBuV/m and 61.83 dBuV/m respectively (See calculations below). These field strengths are more than 20dB below the field strength of 82.23 dBuV/m that would be generated by a -13dBm source.

Spur Field Strength Based on Isotropic Radiation Pattern (Base Station ODU)

$P_{spur} =$	-33.40	dBm	Worst Case Spur Power @ 100KHz - 1.0 GHz Radiated emission
$G_{ant} =$	0	dB	Antenna Gain (Assume Isotropic Radiation Pattern)
$d =$	3	m	Distance
$P_{out} =$	4.57E-07	W	Spur Power
$G_{ant} =$	1		Antenna Gain
EIRP =	4.57E-07	W	$P_{out} * G_{ant}$
$S_r =$	4.04E-09	W/m ²	Received Power Density = $EIRP / (4\pi r^2)$
$E_r =$	1.23E-03	V/m	Received Electric Field Strength = $(S_r * 120\pi)^{1/2}$
$E_{spur} =$	61.83	dBuV/m	Field strength in dBuV/M = $20*\log(E_r / 1e-6)$

Spur Field Strength Based on Isotropic Radiation Pattern (CPE ODU)

$P_{spur} =$	-40.60	dBm	Worst Case Spur Power @ 100KHz - 1.0 GHz Radiated emission
$G_{ant} =$	0	dB	Antenna Gain (Assume Isotropic Radiation Pattern)
$d =$	3	m	Distance
$P_{out} =$	8.71E-08	W	Spur Power
$G_{ant} =$	1		Antenna Gain
EIRP =	8.71E-08	W	$P_{out} * G_{ant}$
$S_r =$	7.70E-10	W/m ²	Received Power Density = $EIRP / (4\pi r^2)$
$E_r =$	5.39E-04	V/m	Received Electric Field Strength = $(S_r * 120\pi)^{1/2}$
$E_{spur} =$	54.63	dBuV/m	Field strength in dBuV/M = $20*\log(E_r / 1e-6)$

FCC Emission Mask Converted to Received Field Strength

$P_{max} =$	-13	dBm	Max Spur Level (a constant: 30 - 43 = -13)
$G_{ant} =$	0	dB	Antenna Gain (Assume Isotropic Radiation Pattern)
$d =$	3	m	Distance
$P_{out} =$	5.01E-05	W	Spur Power
$G_{ant} =$	1		Antenna Gain
EIRP =	5.01E-05	W	$P_{out} * G_{ant}$

Title: Test of the Fiberless™ 3900 Series Outdoor Unit - Base Station (BS) and Customer Premises Equipment (CPE)
To CFR 47 part 101, subpart C (Oct 1998)

Report#: Radio-TR-001-v0.1
Issue Date: 12 February 2002
Page: 20 of 144

$S_r =$	4.43E-07	W/m ²	Received Power Density = $EIRP / (4\pi r^2)$
$E_r =$	0.012925	V/m	Received Electric Field Strength = $(S_r * 120\pi)^{1/2}$
$E_{max} =$	82.23	dBuV/m	Field strength in dBuV/M = $20*\log(E_r / 1e-6)$

5 Test Equipment Used

Nominal Test Temperature: 25C, Humidity: 35%

#	INSTRUMENT	MANUFACTURER	MODEL #	SERIAL #	CALIBRATION DATE / DUE
1	Power Meter	Agilent	E4418B	MY40330474	28/04/02
2	Power Sensor	Agilent	8487A	MY41090136	28/04/02
3	Spectrum Analyser	HP	8564E	3943A01770	05/18/02
4	Spectrum Analyser	HP	8564EC	4111A00506	01/15/03
5	Mixer 40-60GHz	Oleson Microwave			
6	Mixer 60-90GHz	Oleson Microwave			
7	Mixer 90-110GHz	Oleson Microwave			
8	Mixer 110-200GHz	Oleson Microwave			
9	High Freq. Cables	Megaphase	TM40 K1K1 38	16071GVT4	
10	High Freq. Cables	Megaphase	TM40 K1K1 38	1424GVT4	

6 Summary Of Test Results

PARAMETER	C	NC	NT	NA	REFERENCE TO REMARK
TRANSMITTER CHARACTERISTICS					
RF power output	X				
Modulation characteristics	X				
Occupied bandwidth	X				
Spurious emissions at antenna terminals	X				
Field strength of spurious radiation	X				
Frequency stability				X	

Note: C: The parameter is compliant with the requirements.
NC: The parameter is not compliant with the requirements.
NT: The parameter is not tested.
NA: The test of this parameter is not applicable.

7 Test set-up illustrations

7.1 Base Station (BS) Test Configuration

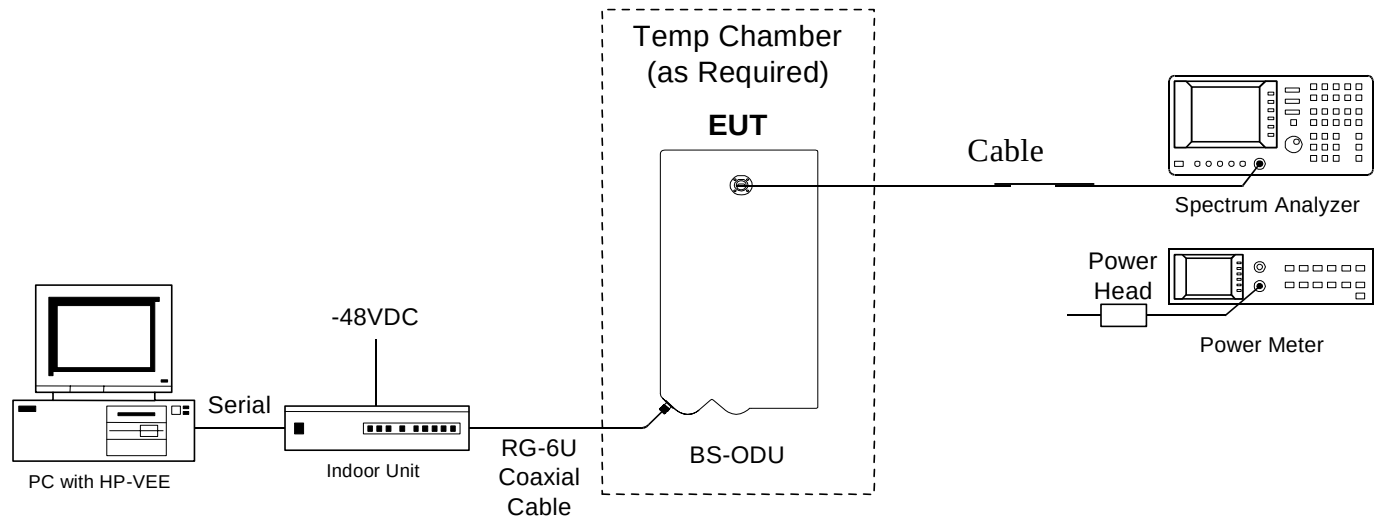


Figure 1 Base Station ODU Test Set Up Drawing



Figure 2 Base Station ODU 9kHz-40GHz Test Set Up

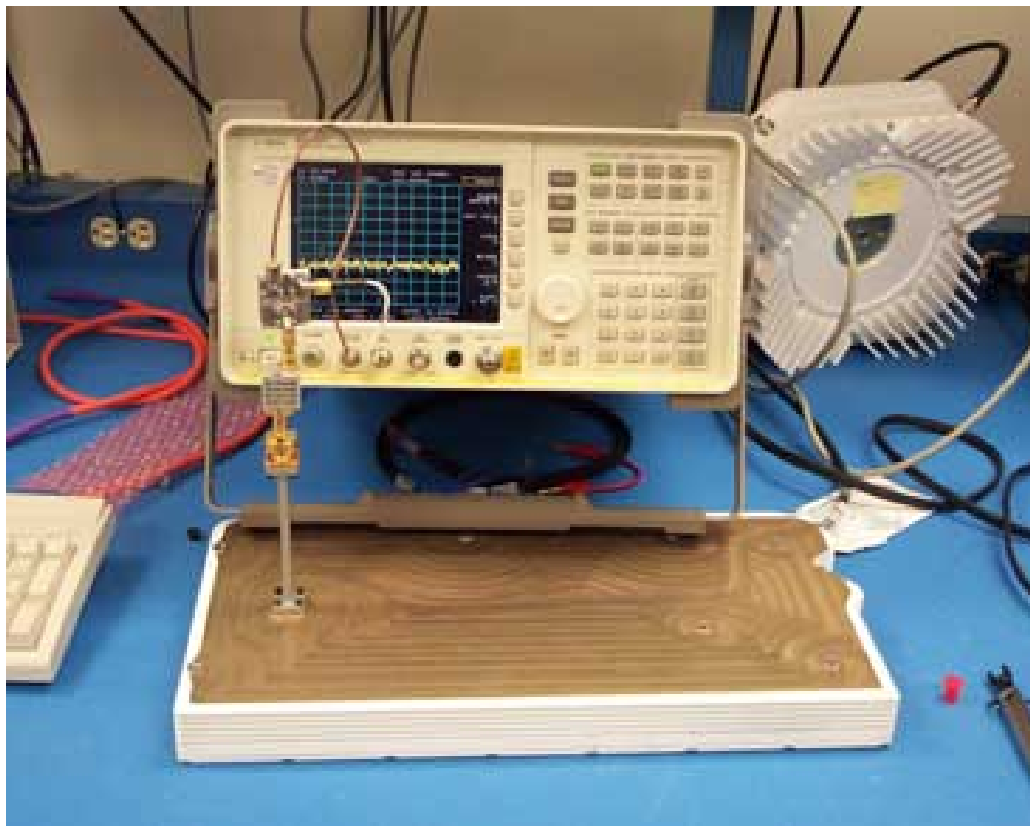


Figure 3 Base Station ODU 40 GHz-200 GHz Test Set Up

7.2 Customer Premises Equipment (CPE) Test Configuration

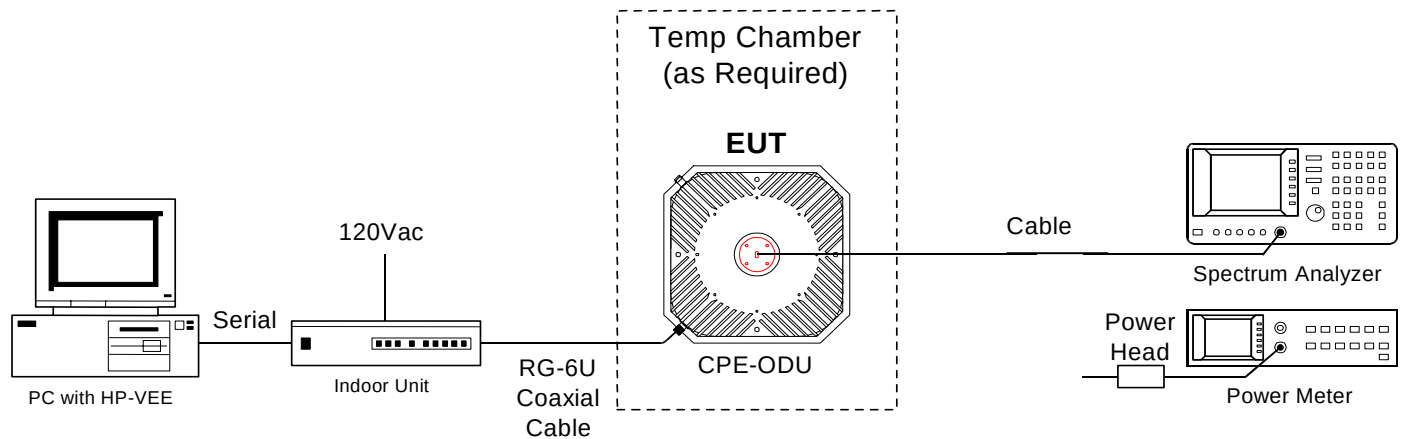


Figure 4 CPE ODU Test Set UP Drawing



Figure 5 CPE ODU 9 kHz-200 GHz Test Set Up

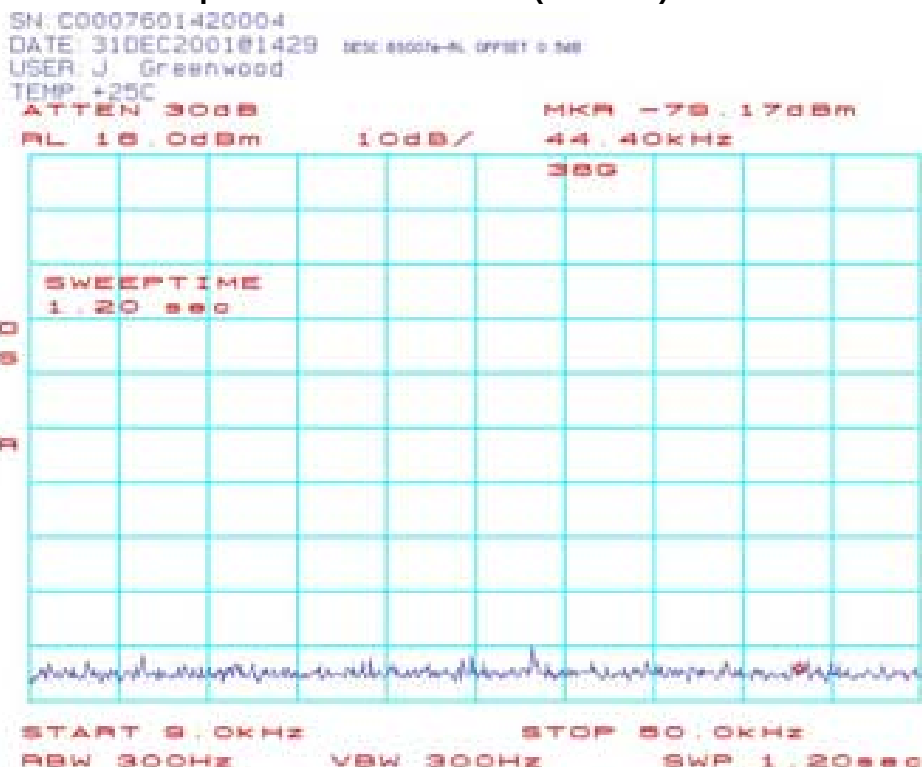


Figure 6 CPE ODU 40 GHz-200 GHz Test Set Up

8 Graphical Results


This report is accompanied by the following graphs indicated in the tables in Section 4.2 above.

BS007a: Spurious Emission Plots (BS-ODU) 10 kHz-50 kHz



File C:\Documents and Settings\jag\Backup\39 GHz FCC Plans\C0007601420004\BS007a.plt

BS007b: Spurious Emission Plots (BS-ODU) 50 kHz-100 kHz

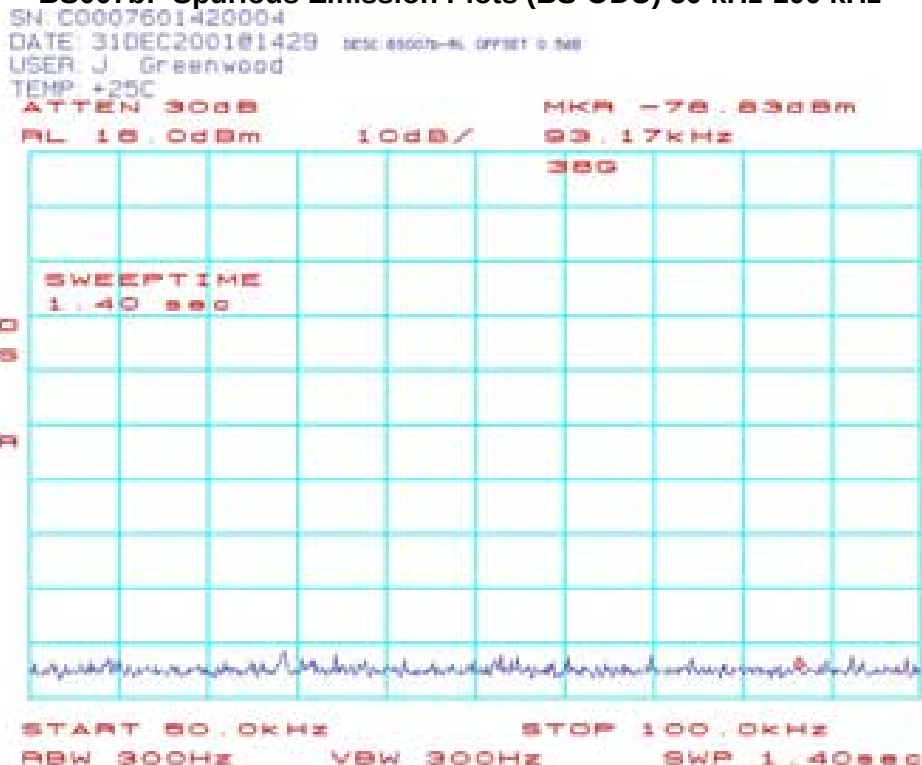


File C:\Documents and Settings\jag\Backup\39 GHz FCC Plans\C0007601420004\BS007b.plt

BS007c: Spurious Emission Plots (BS-ODU) 100 kHz-150 kHz




File: C:\Documents and Settings\joe\Desktop\39 GHz FCC Plans\C0007601420004\BS007c.plt

BS008a: Spurious Emission Plots (BS-ODU) 150 kHz-1.0 MHz

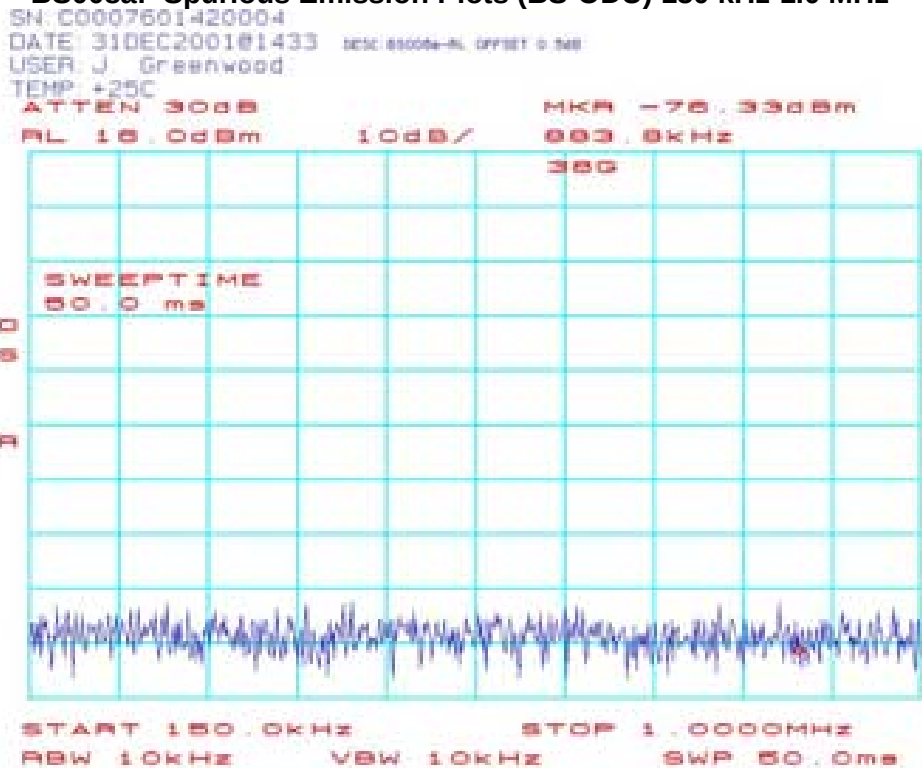


File: C:\Documents and Settings\joe\Desktop\39 GHz FCC Plans\C0007601420004\BS008a.plt


BS008b: Spurious Emission Plots (BS-ODU) 1.0 MHz-10.0 MHz

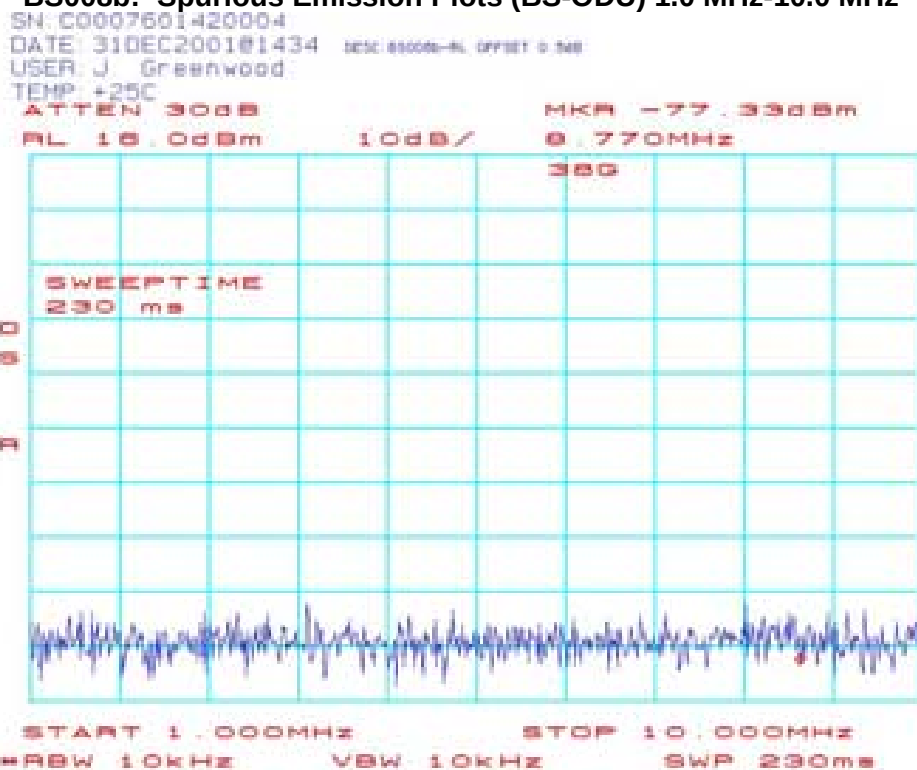

BS008c: Spurious Emission Plots (BS-ODU) 10.0 MHz-30.0 MHz

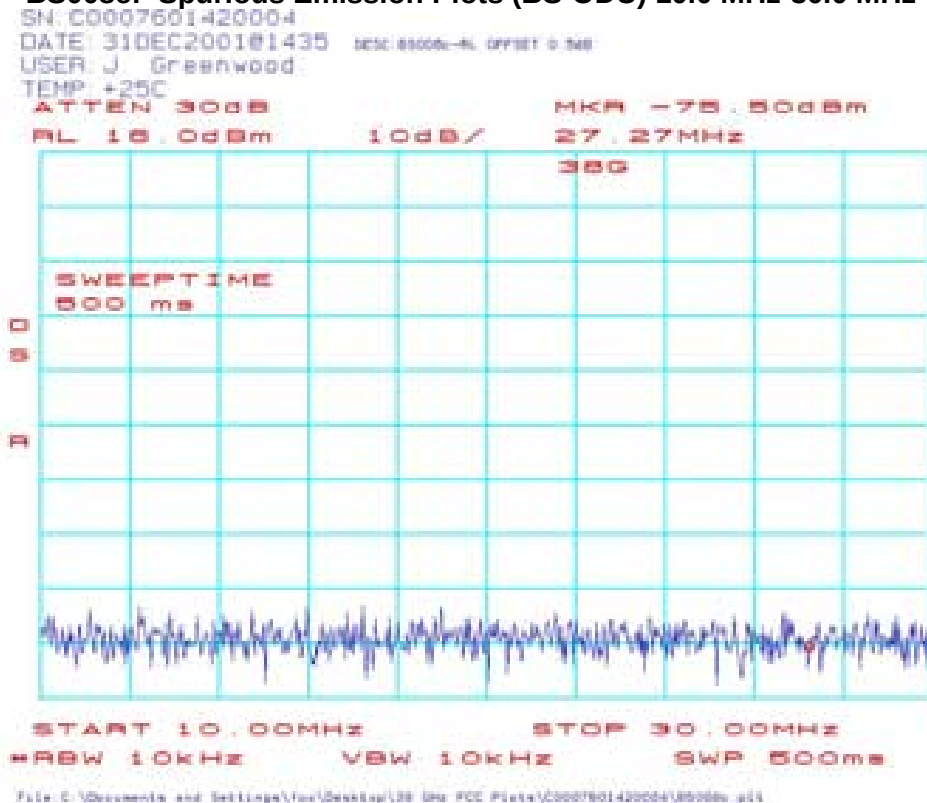


BS012: Spurious Emission Plots (BS-ODU) 30.0 MHz-100.0 MHz

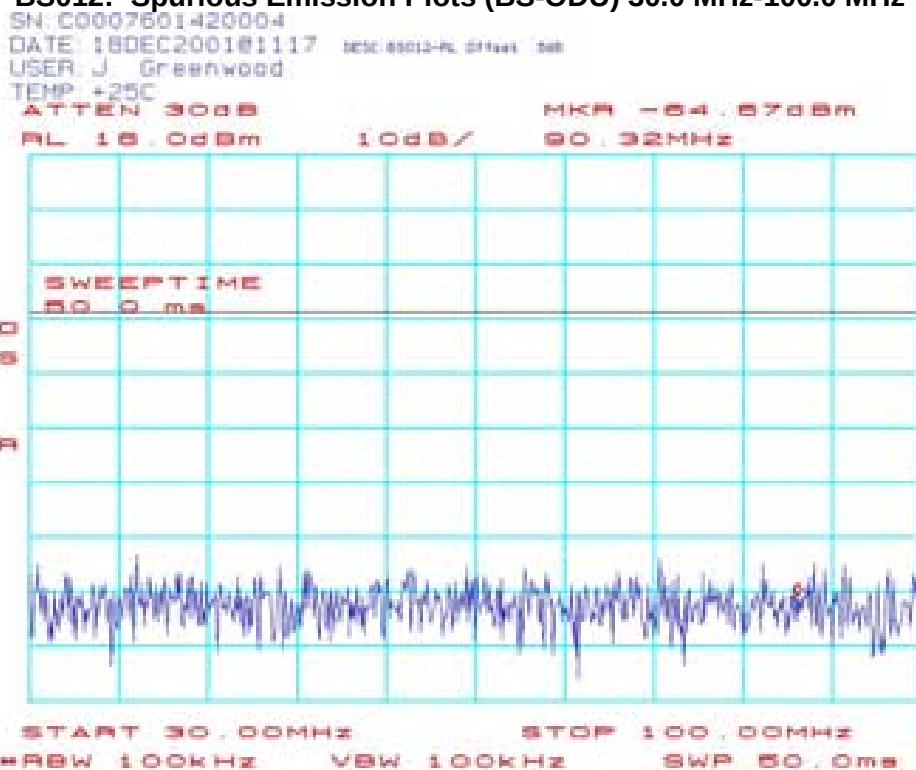


File: C:\Documents and Settings\jag\Desktop\3900 GHz FCC Plans\C0007601420004\BS012.plt

BS013: Spurious Emission Plots (BS-ODU) 100.0-500.0 MHz

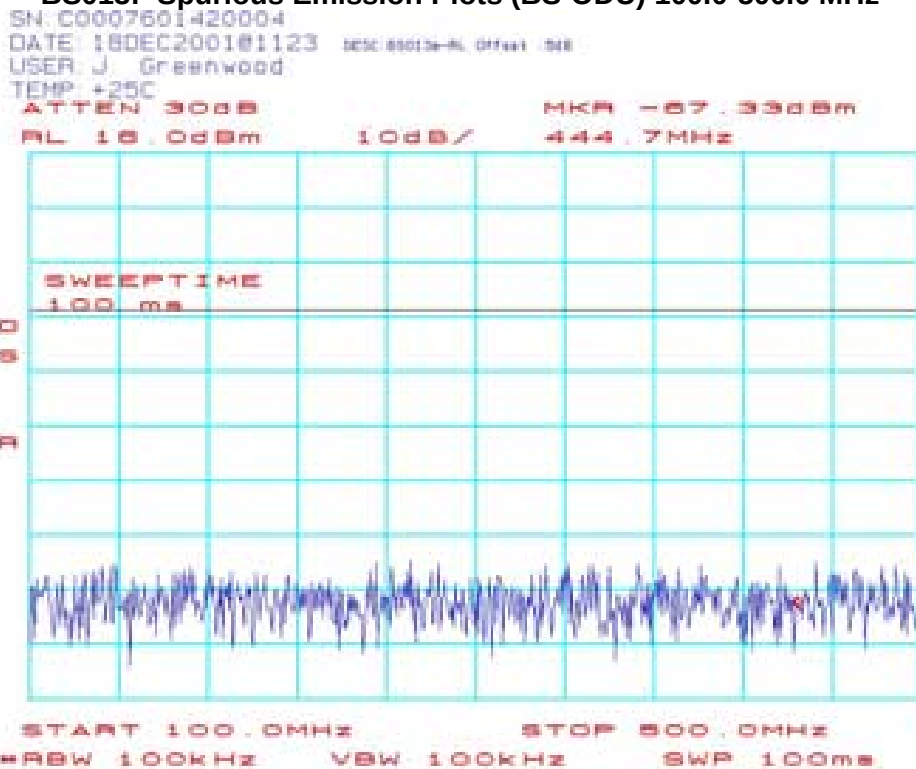


File: C:\Documents and Settings\jag\Desktop\3900 GHz FCC Plans\C0007601420004\BS013.plt


BS014: Spurious Emission Plots (BS-ODU) 500.0-800.0 MHz

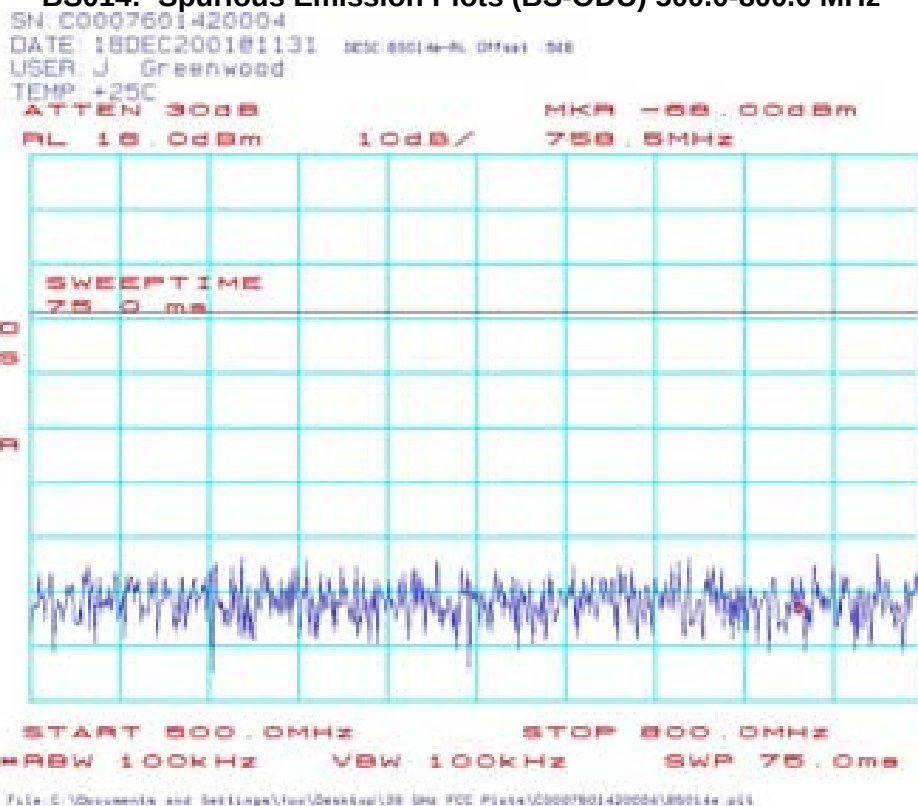

BS015: Spurious Emission Plots (BS-ODU) 800.0 MHz-1.0 GHz

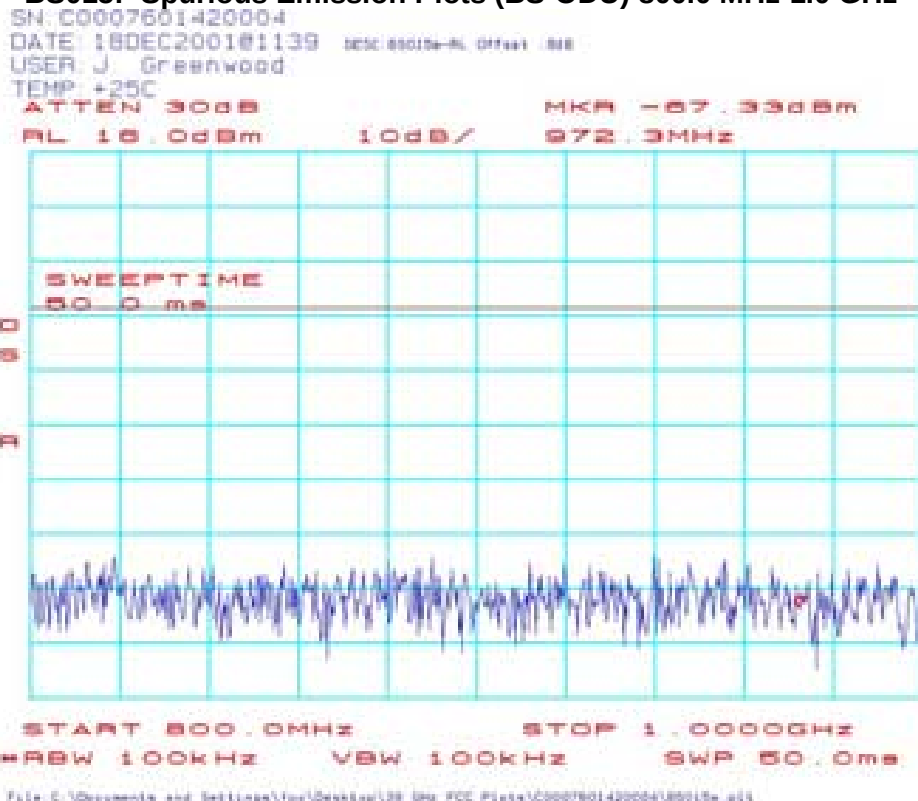


BS020: Spurious Emission Plots (BS-ODU) 1.0-1.5 GHz

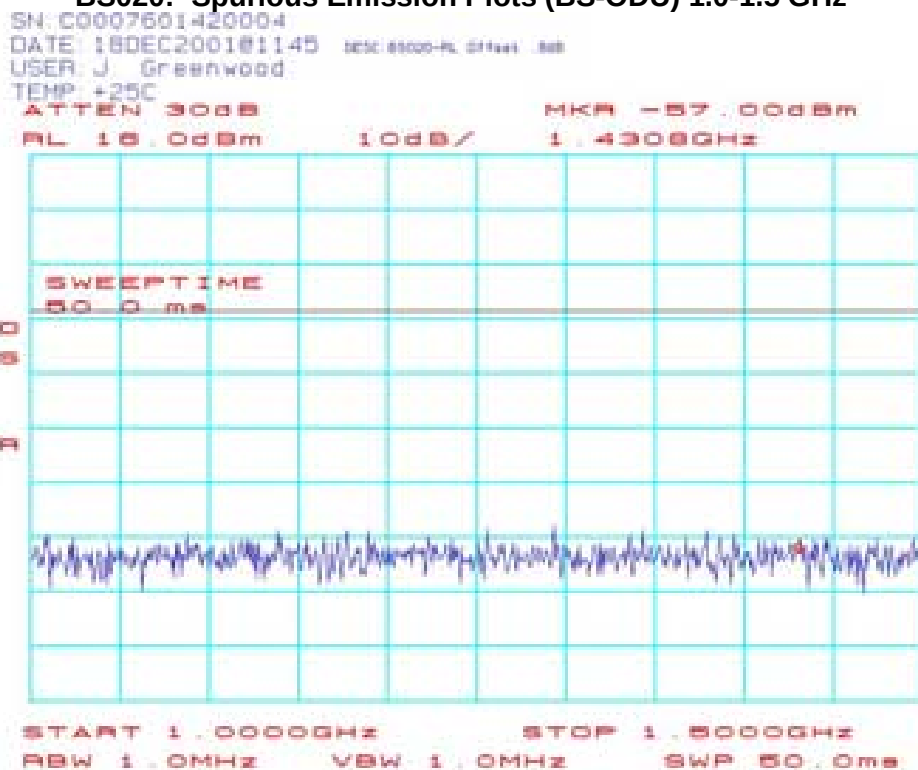


File: C:\Documents and Settings\jag\Desktop\39 GHz FCC Plans\C0007601420004\BS020-RL Offset .5dB.gif

BS021: Spurious Emission Plots (BS-ODU) 1.5-2.0 GHz

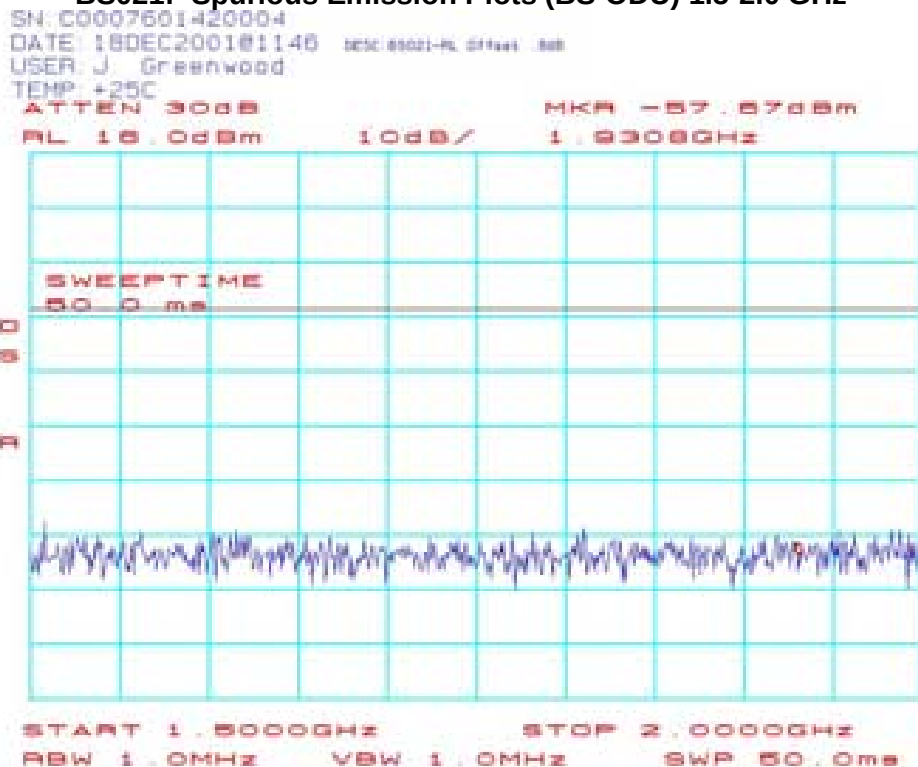


File: C:\Documents and Settings\jag\Desktop\39 GHz FCC Plans\C0007601420004\BS021.gif


BS022: Spurious Emission Plots (BS-ODU) 2.0-2.5 GHz

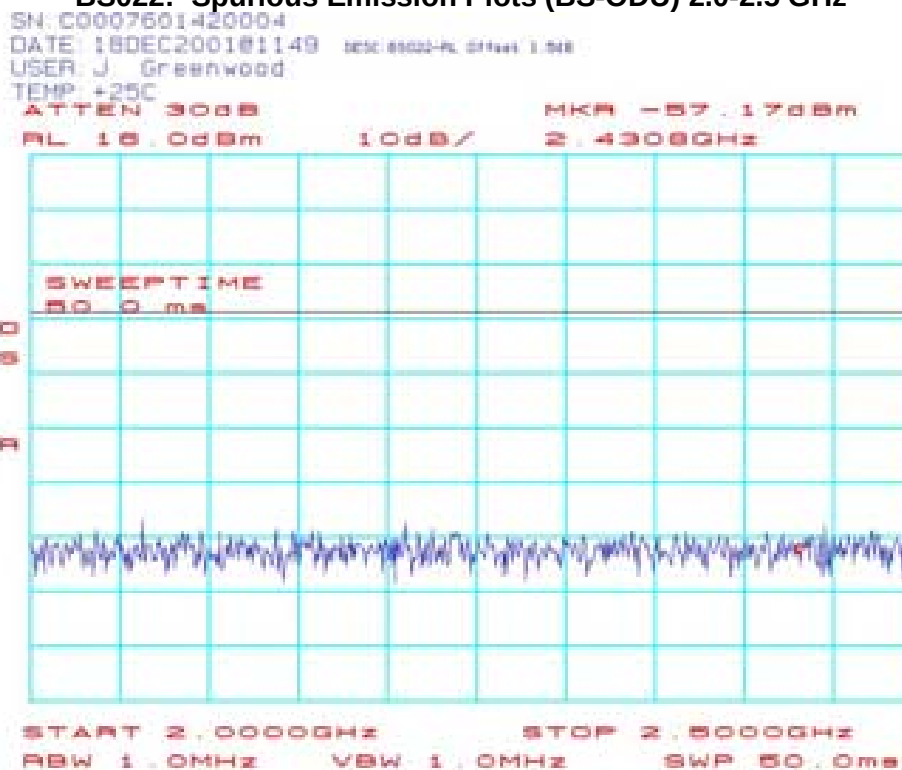

BS023: Spurious Emission Plots (BS-ODU) 2.5-3.0 GHz

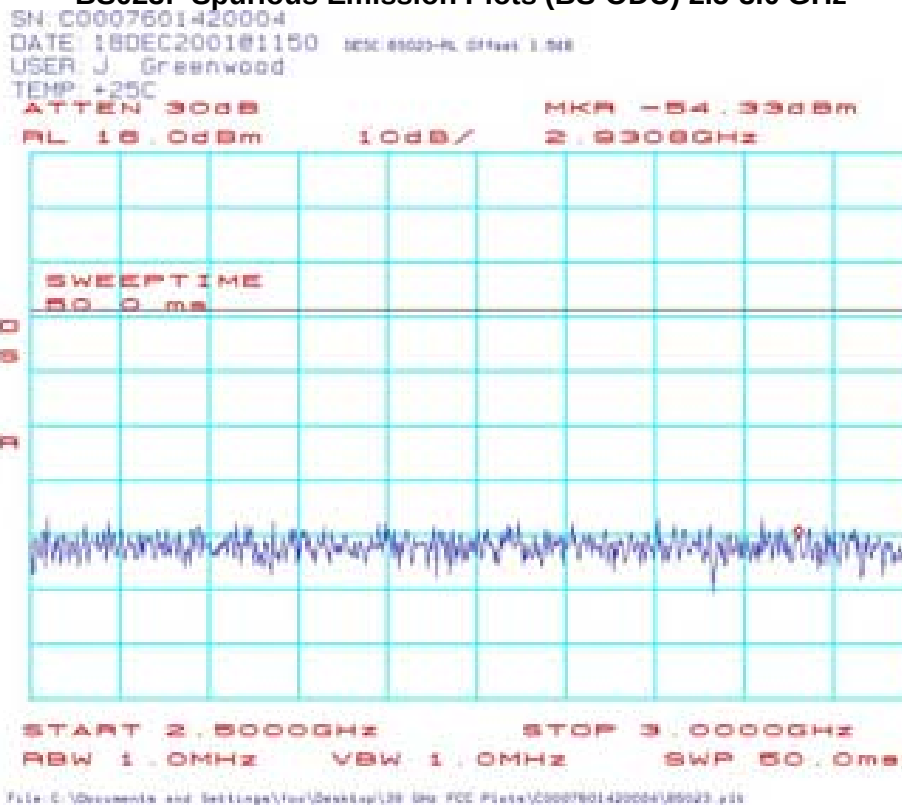


BS024: Spurious Emission Plots (BS-ODU) 3.0-3.5 GHz

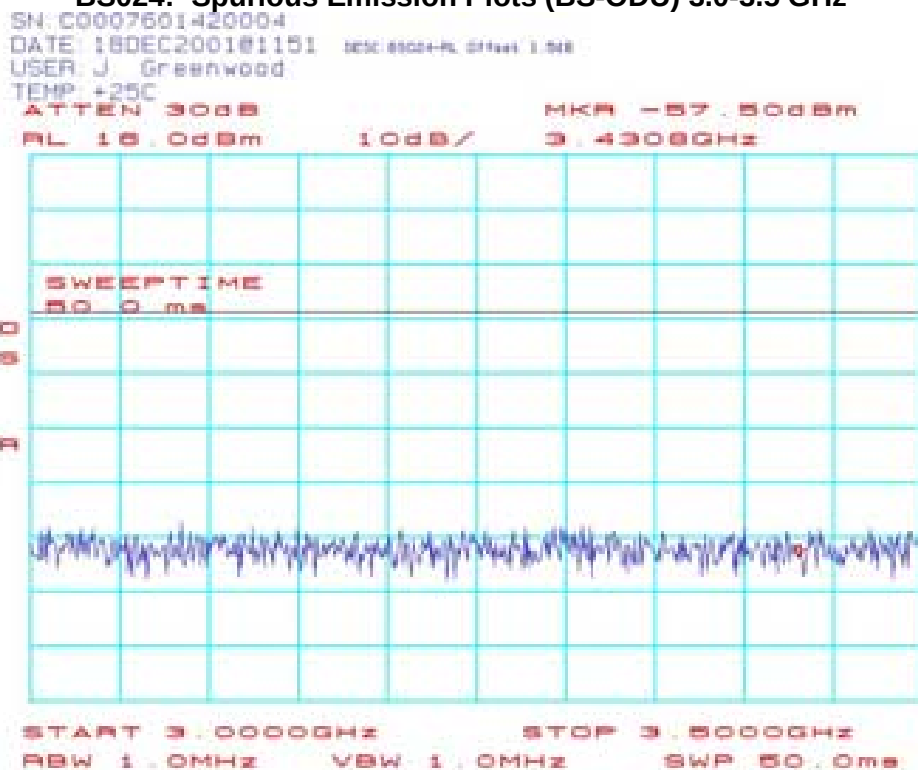


File: C:\Documents and Settings\jag\Desktop\39 GHz FCC Plans\C0007601420004\BS024.yds

BS025: Spurious Emission Plots (BS-ODU) 3.5-4.0 GHz

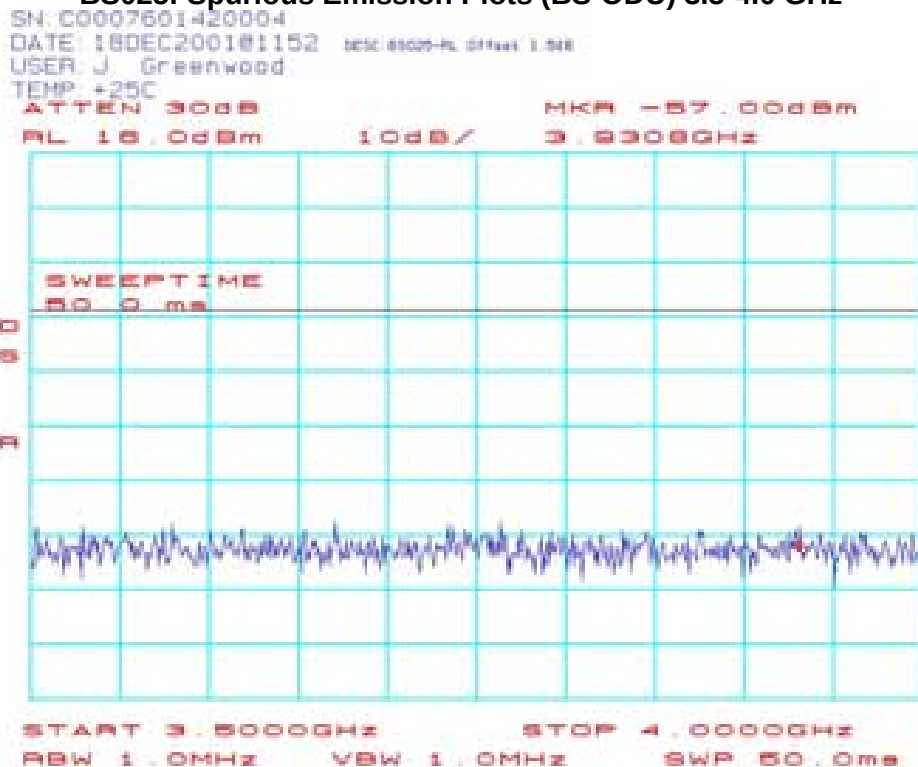


File: C:\Documents and Settings\jag\Desktop\39 GHz FCC Plans\C0007601420004\BS025.yds

BS026: Spurious Emission Plots (BS-ODU) 4.0-4.5 GHz

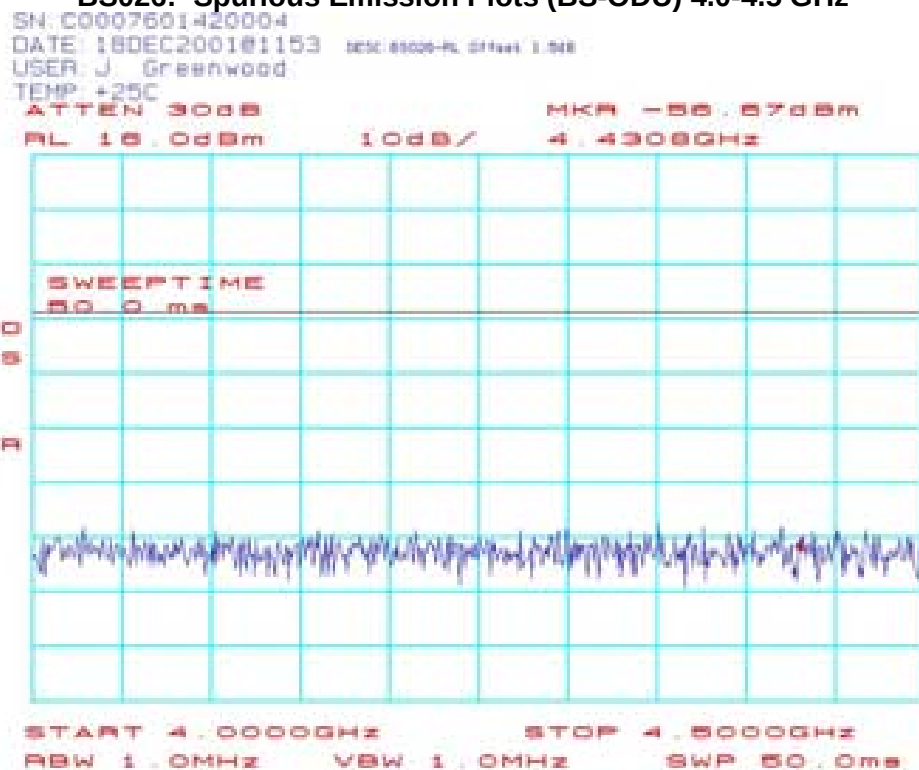


File: C:\Documents and Settings\jag\Desktop\39 GHz FOC Plans\C0007601420004\BS026.plt

BS027: Spurious Emission Plots (BS-ODU) 4.5-5.0 GHz

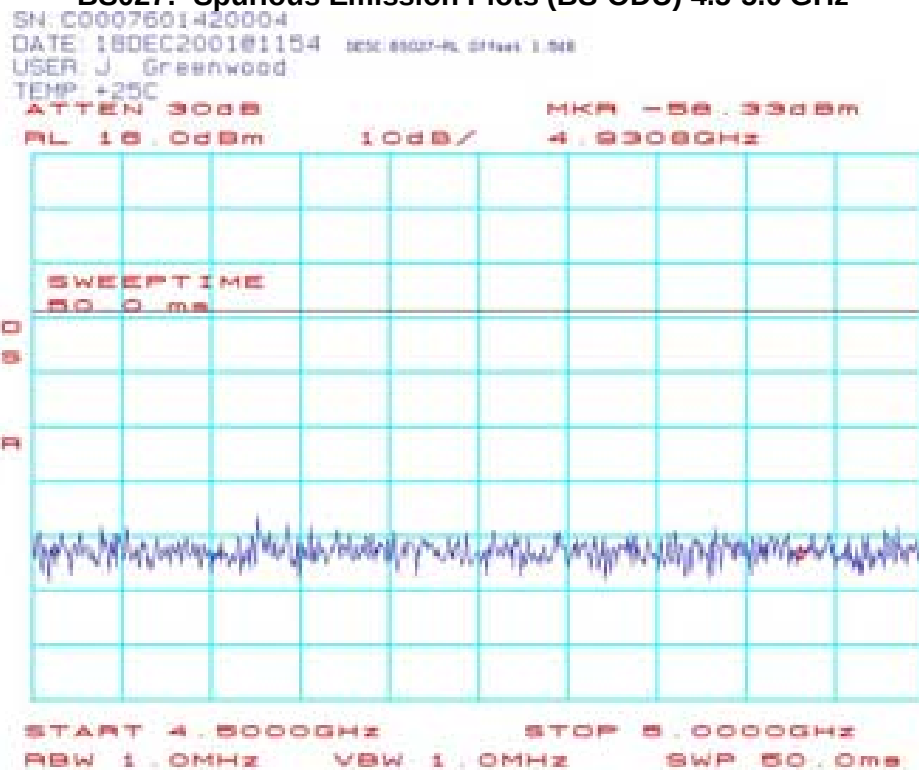


File: C:\Documents and Settings\jag\Desktop\39 GHz FOC Plans\C0007601420004\BS027.plt

BS028: Spurious Emission Plots (BS-ODU) 5.0-5.5 GHz

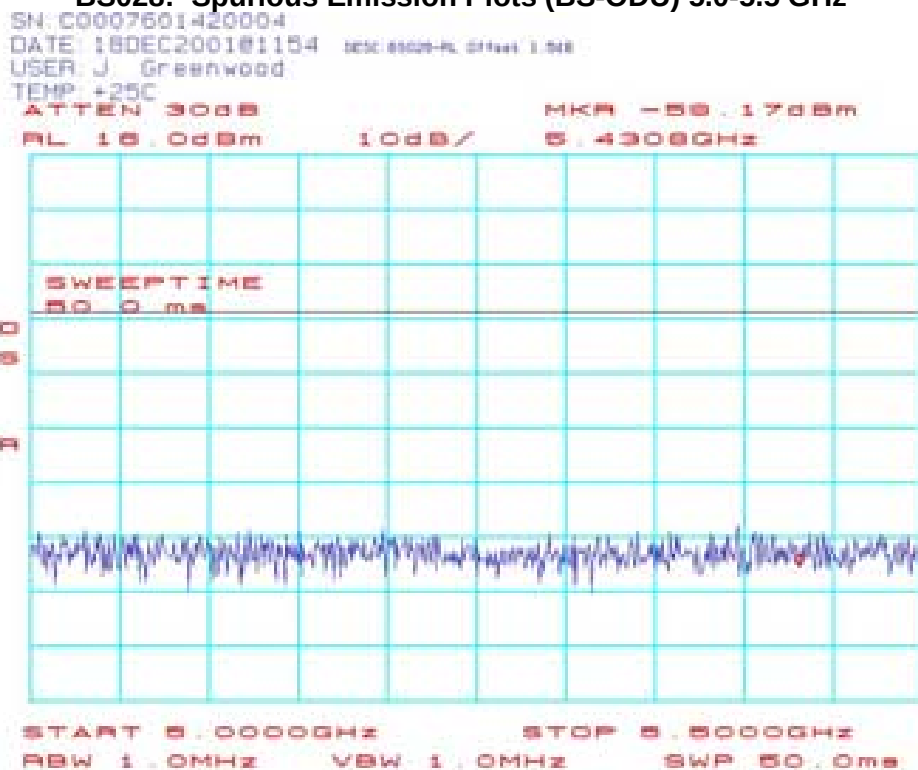


File: C:\Documents and Settings\jag\Desktop\39 GHz FOC Plans\C0007601420004\BS028.yds

BS029: Spurious Emission Plots (BS-ODU) 5.5-6.0 GHz

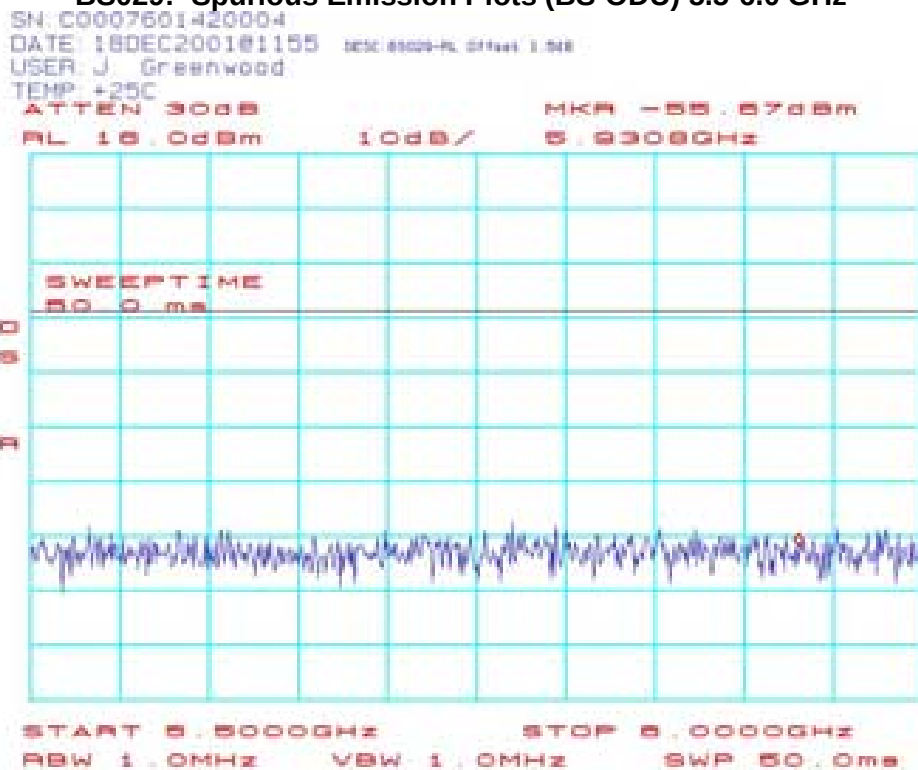


File: C:\Documents and Settings\jag\Desktop\39 GHz FOC Plans\C0007601420004\BS029.yds

BS030: Spurious Emission Plots (BS-ODU) 6.0-6.5 GHz

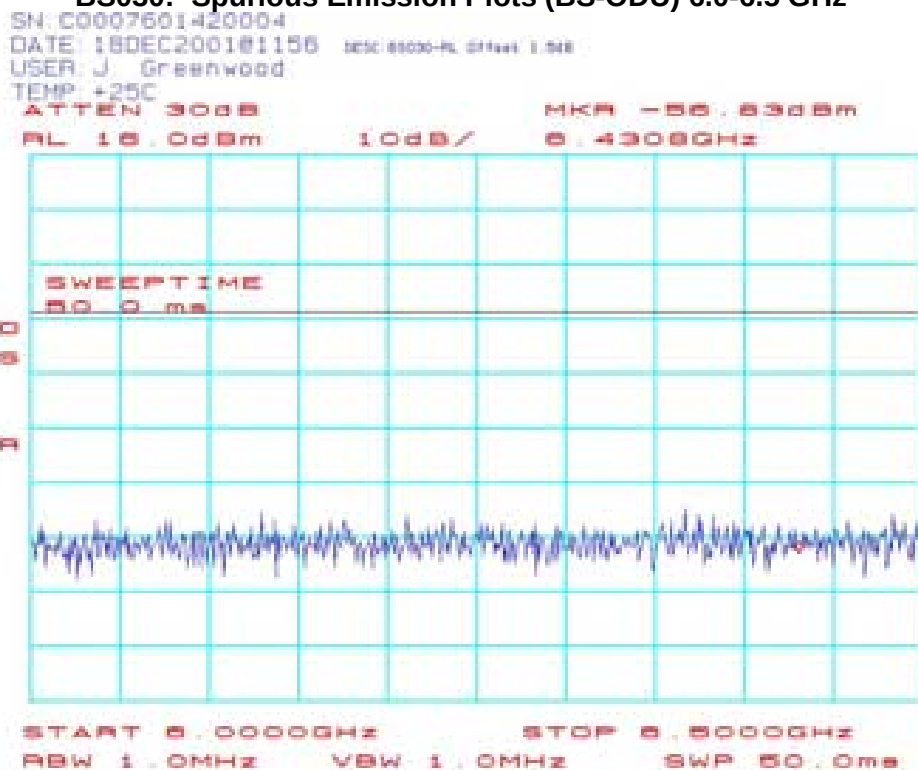


File: C:\Documents and Settings\jag\Desktop\39 GHz FCE Plans\C0007601420004\BS030.yds

BS031: Spurious Emission Plots (BS-ODU) 6.5-7.0 GHz

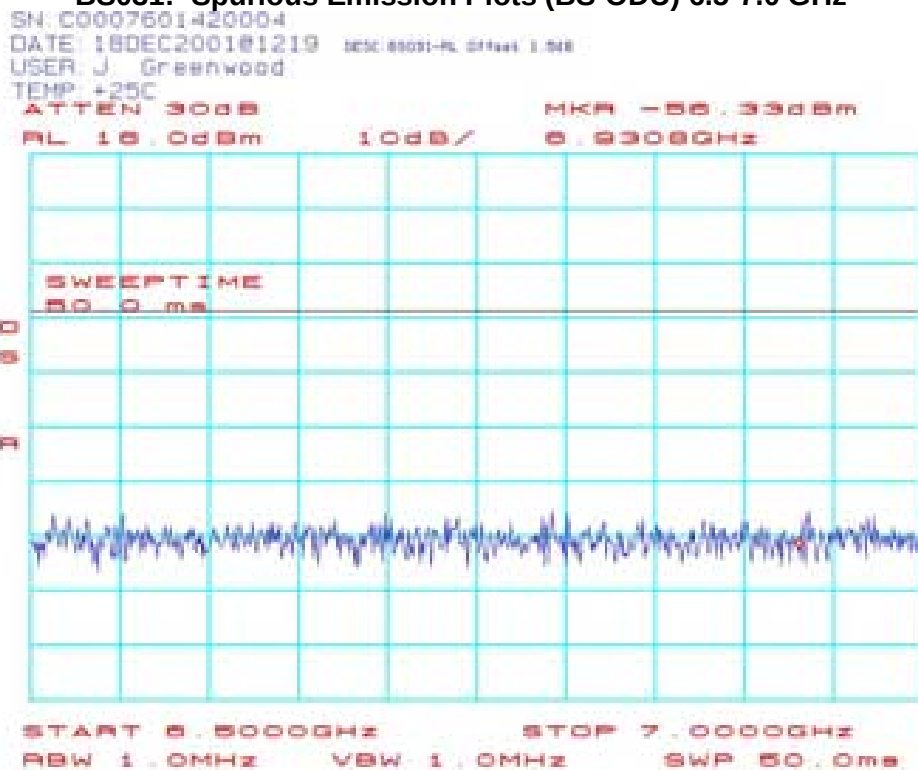


File: C:\Documents and Settings\jag\Desktop\39 GHz FCE Plans\C0007601420004\BS031.yds


BS032: Spurious Emission Plots (BS-ODU) 7.0-7.5 GHz

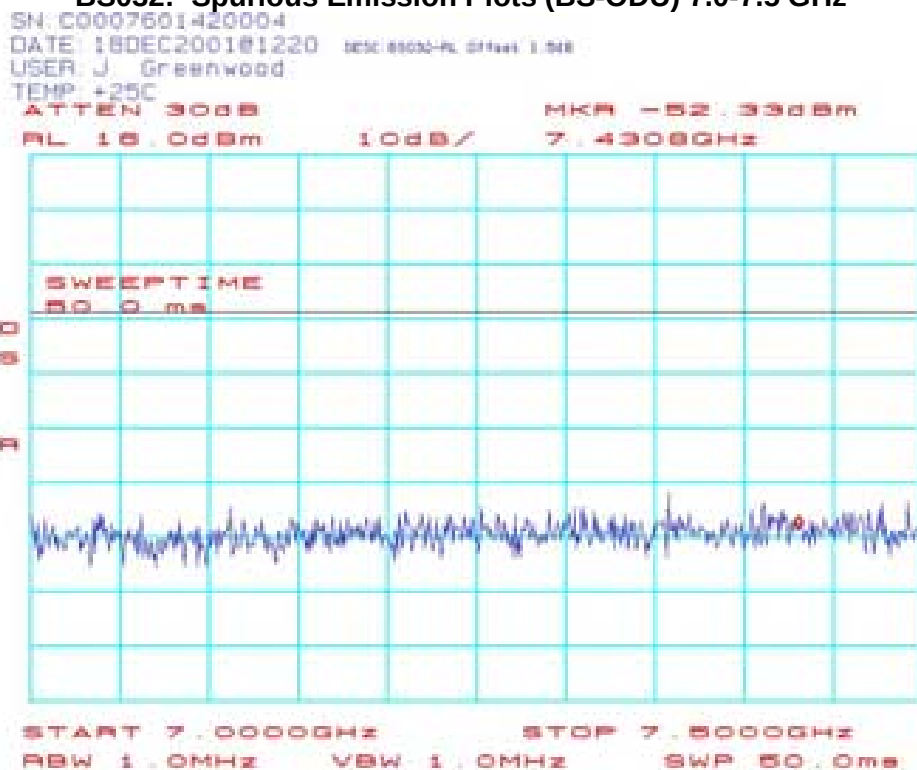

BS033: Spurious Emission Plots (BS-ODU) 7.5-8.0 GHz

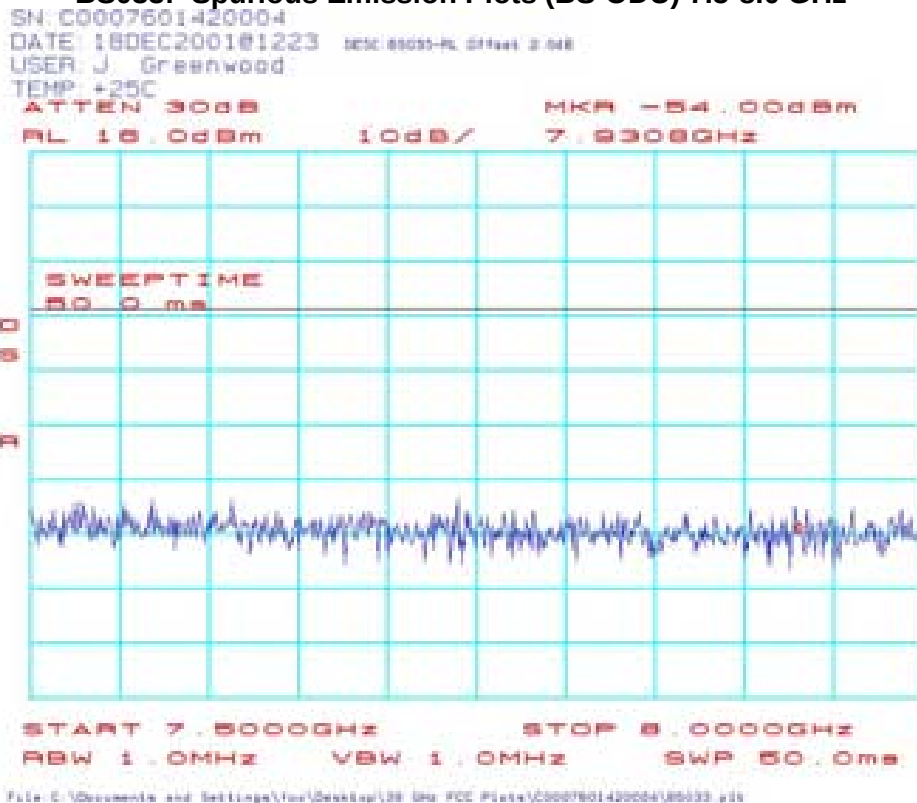


BS034: Spurious Emission Plots (BS-ODU) 8.0-8.5 GHz

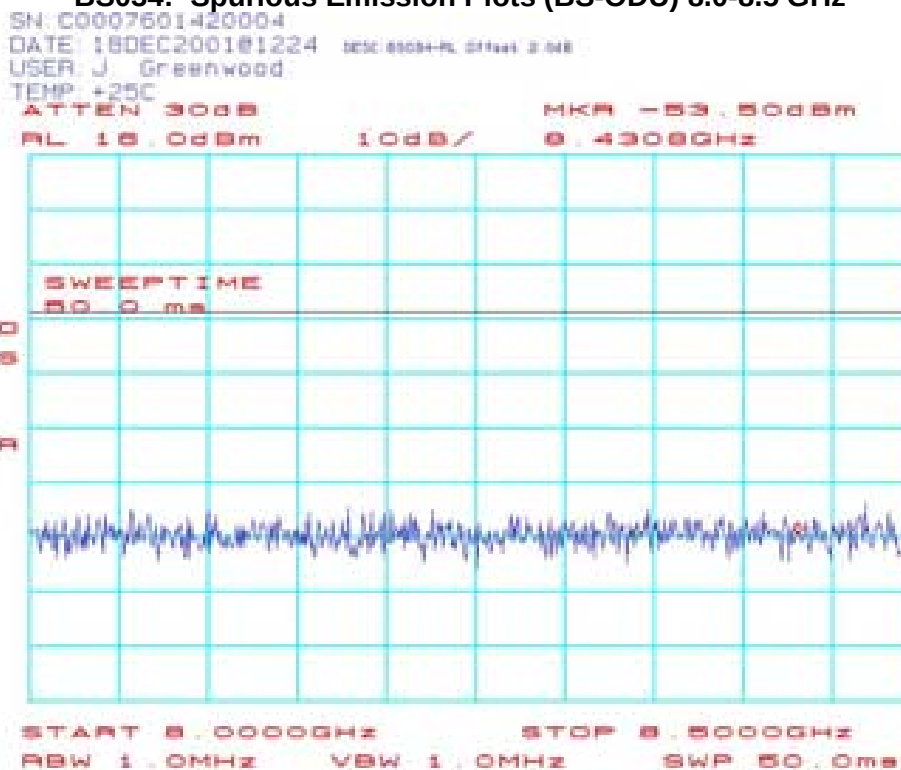


File: C:\Documents and Settings\jag\Desktop\39 GHz FOC Plans\C0007601420004\BS034.yds

BS035: Spurious Emission Plots (BS-ODU) 8.5-9.0 GHz

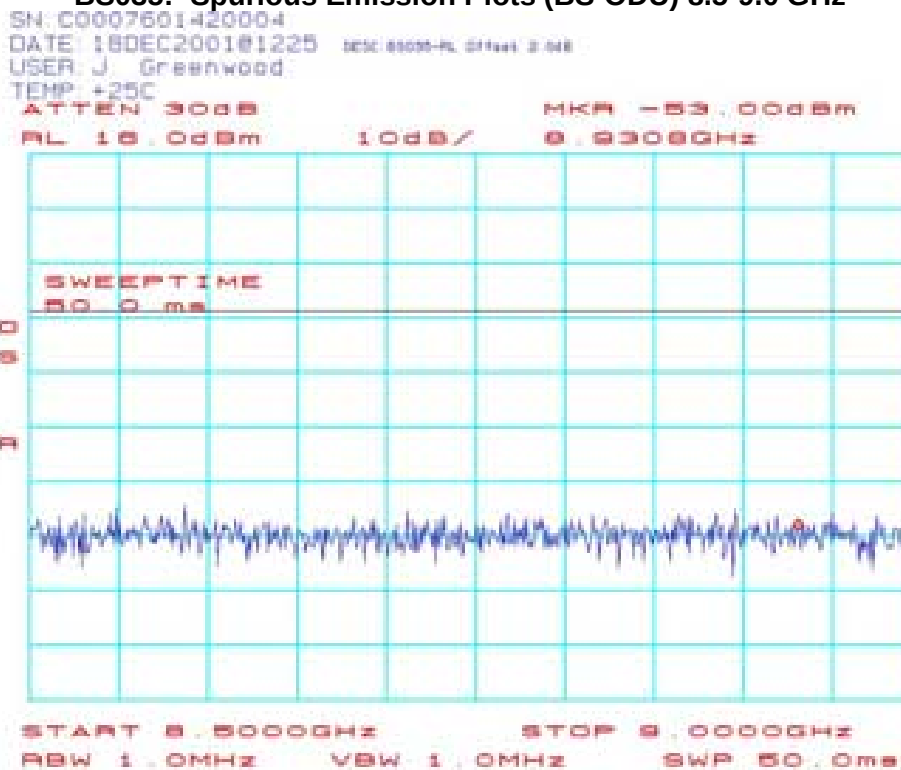


File: C:\Documents and Settings\jag\Desktop\39 GHz FOC Plans\C0007601420004\BS035.yds


BS035a: Spurious Emission Plots (BS-ODU) 9.0-9.5 GHz

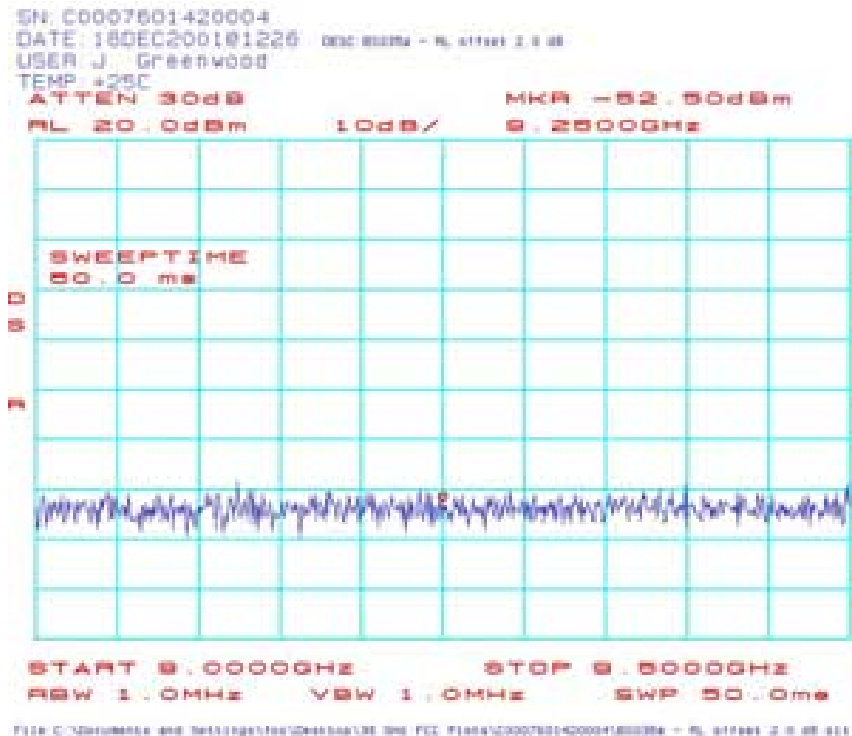


BS036: Spurious Emission Plots (BS-ODU) 9.5-10.0 GHz

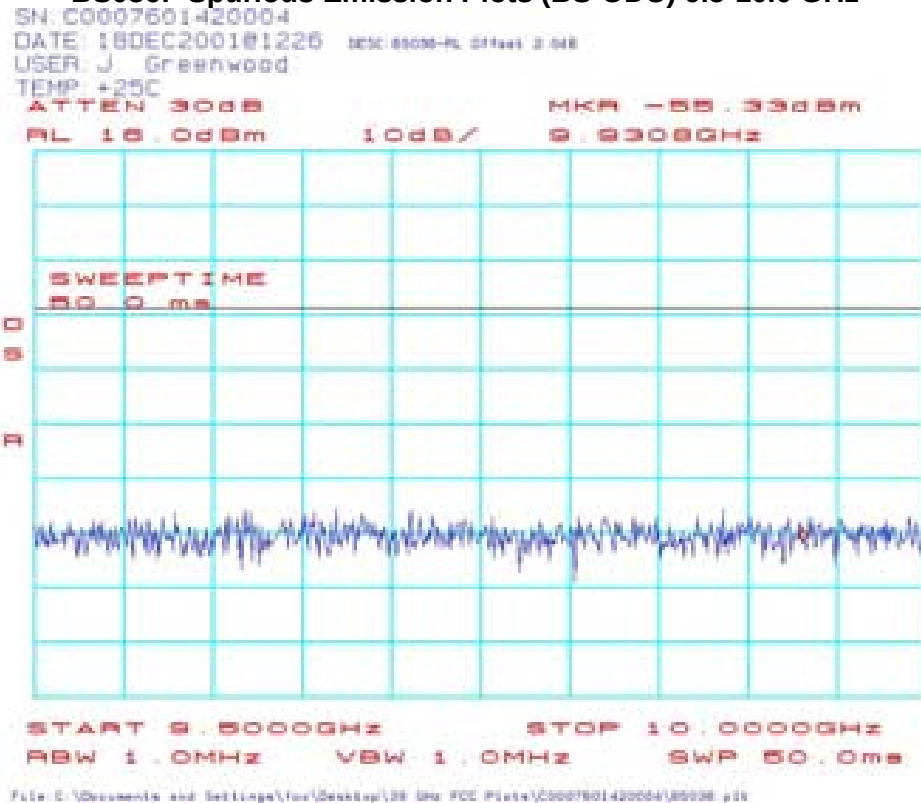


BS037: Spurious Emission Plots (BS-ODU) 10.0-10.5 GHz

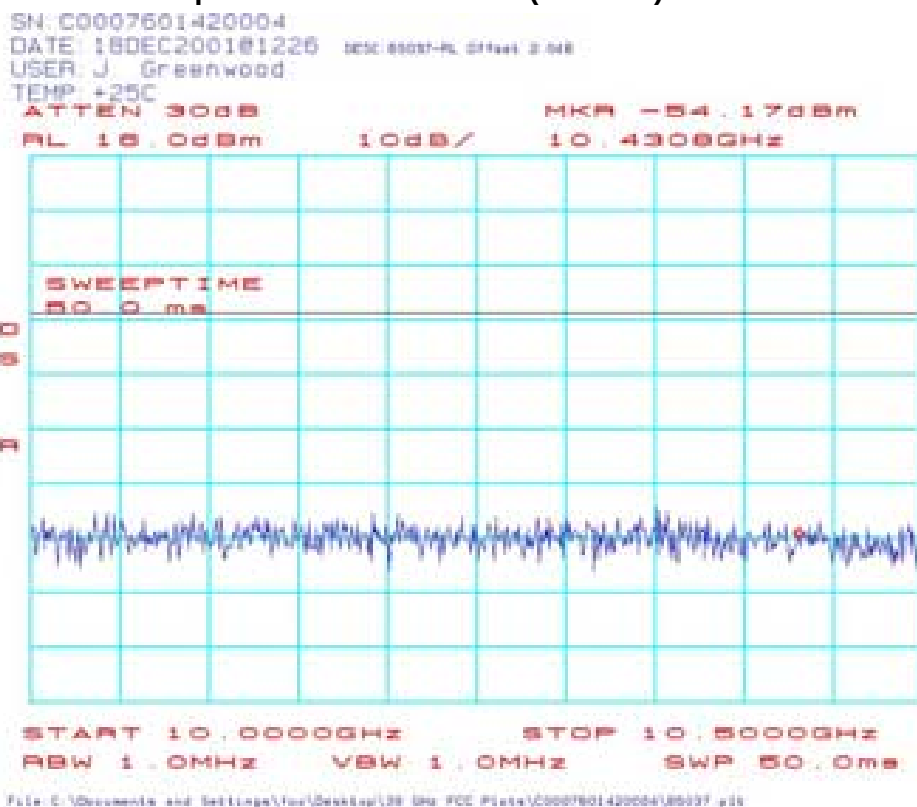

BS038: Spurious Emission Plots (BS-ODU) 10.5-11.0 GHz

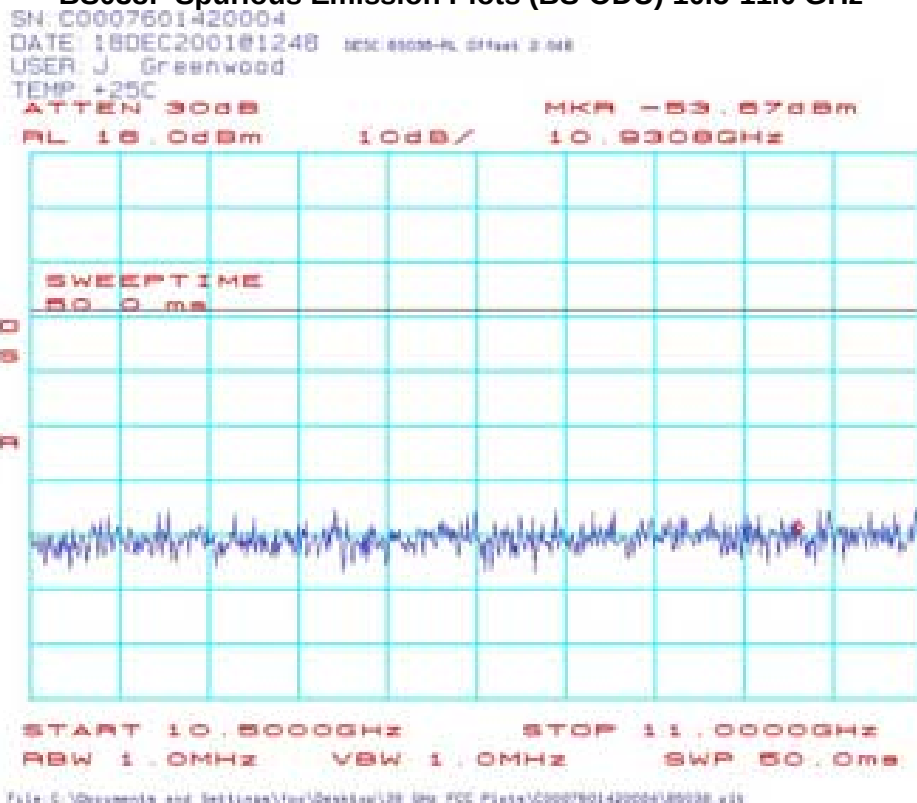


BS039: Spurious Emission Plots (BS-ODU) 11.0-12.0 GHz

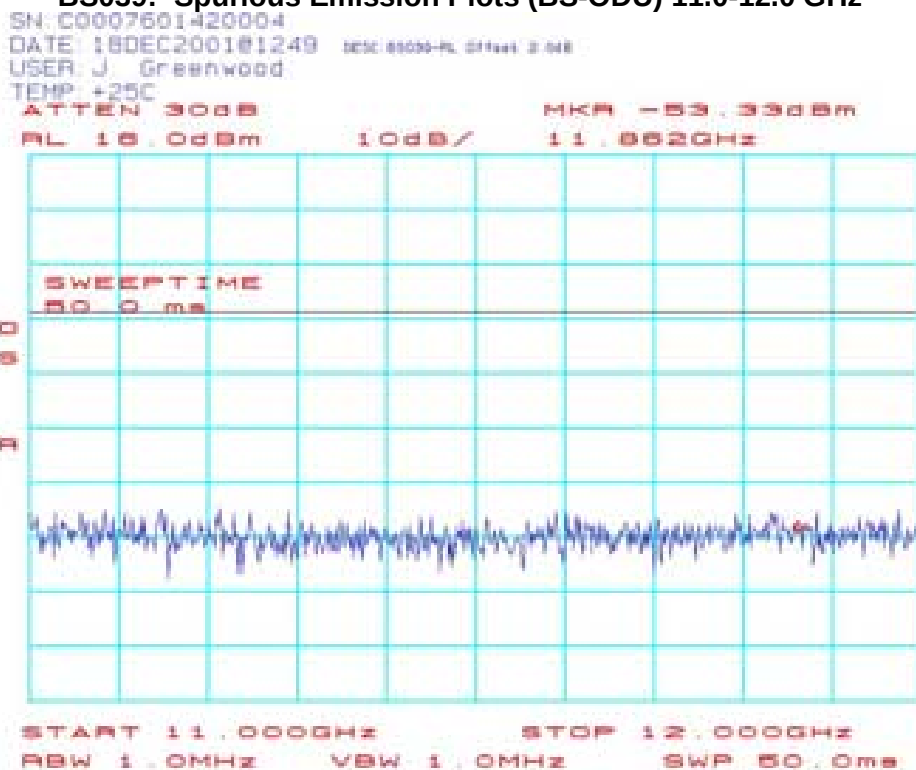


File: C:\Documents and Settings\jag\Desktop\39 GHz FOC Plots\C0007601420004\BS039.plt

BS040: Spurious Emission Plots (BS-ODU) 12.0-13.0 GHz

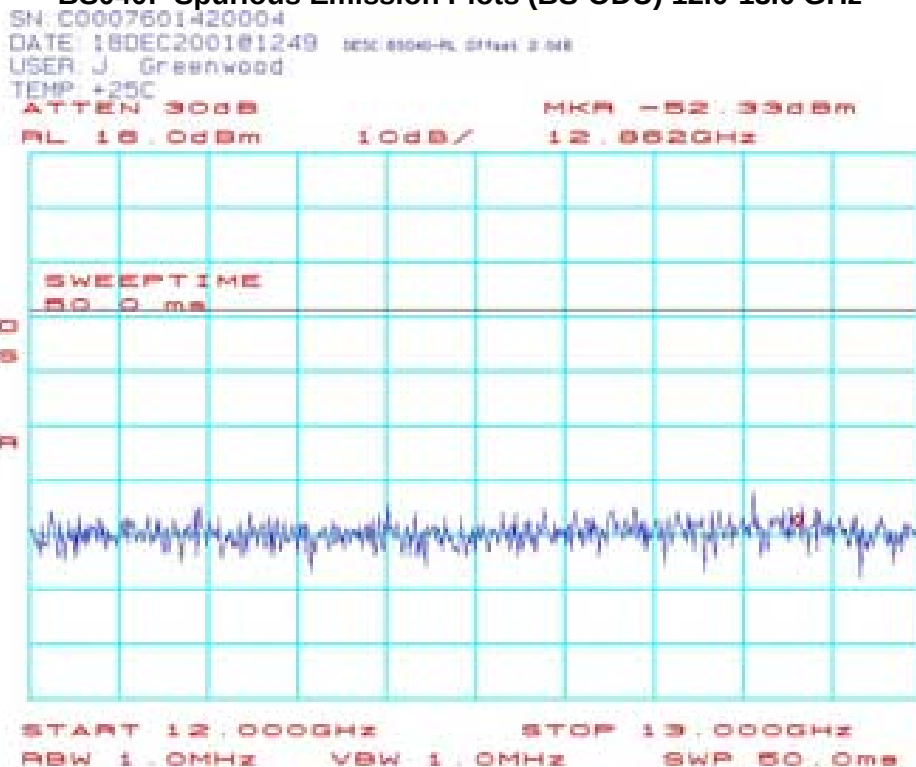


File: C:\Documents and Settings\jag\Desktop\39 GHz FOC Plots\C0007601420004\BS040.plt

BS041: Spurious Emission Plots (BS-ODU) 13.0-15.0 GHz

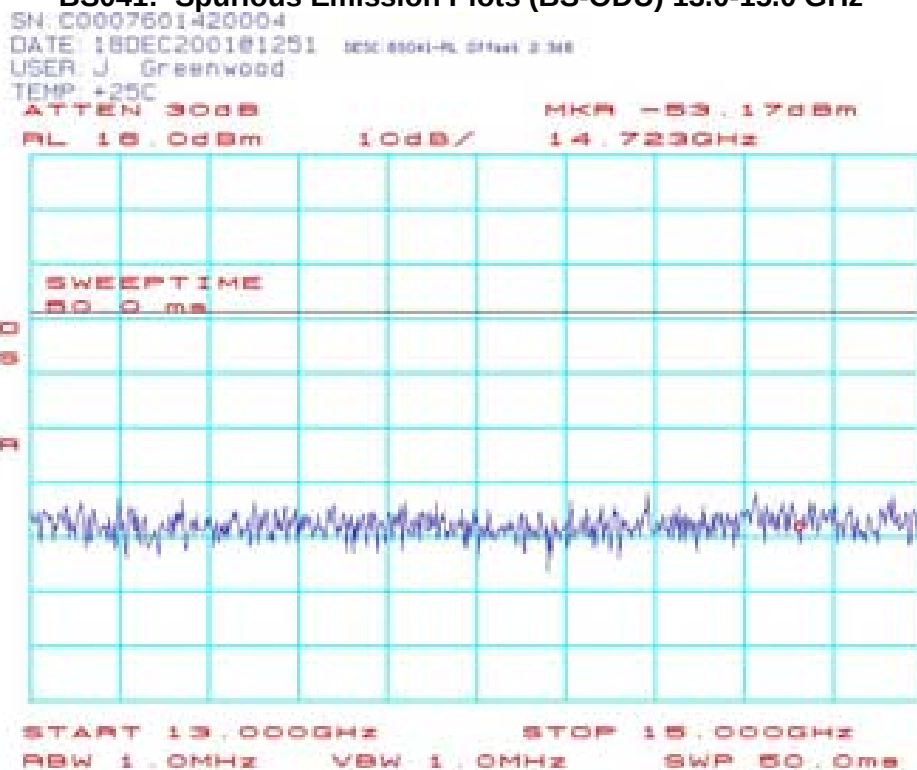


File: C:\Documents and Settings\jag\Desktop\39 GHz FCE Plans\C0007601420004\BS041.y00

BS042: Spurious Emission Plots (BS-ODU) 15.0-17.0 GHz

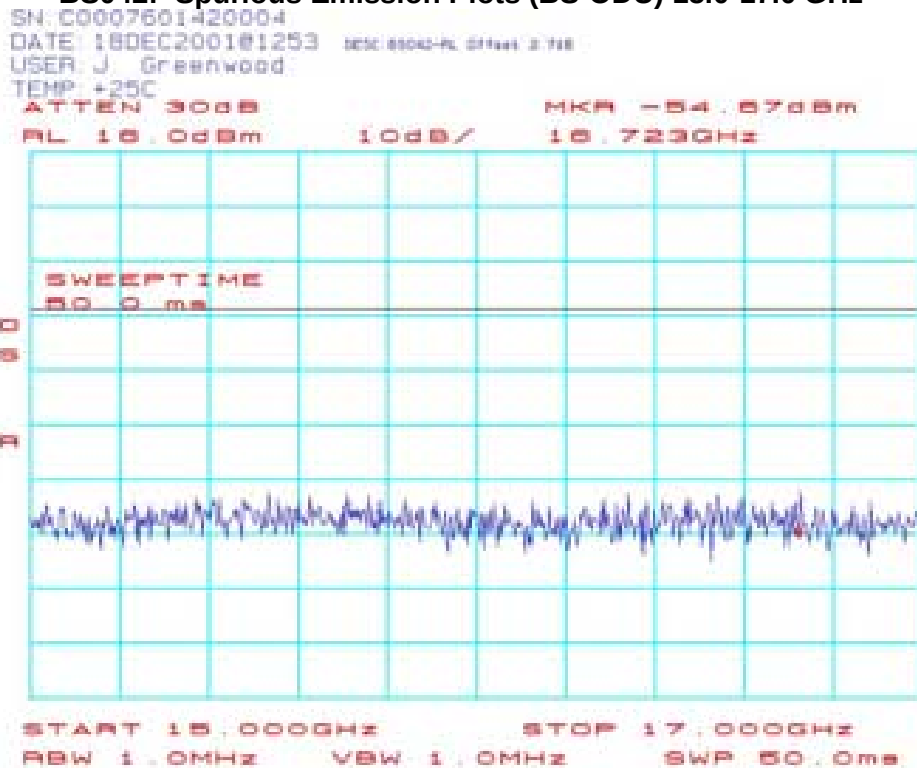


File: C:\Documents and Settings\jag\Desktop\39 GHz FCE Plans\C0007601420004\BS042.y00

BS043: Spurious Emission Plots (BS-ODU) 17.0-20.0 GHz

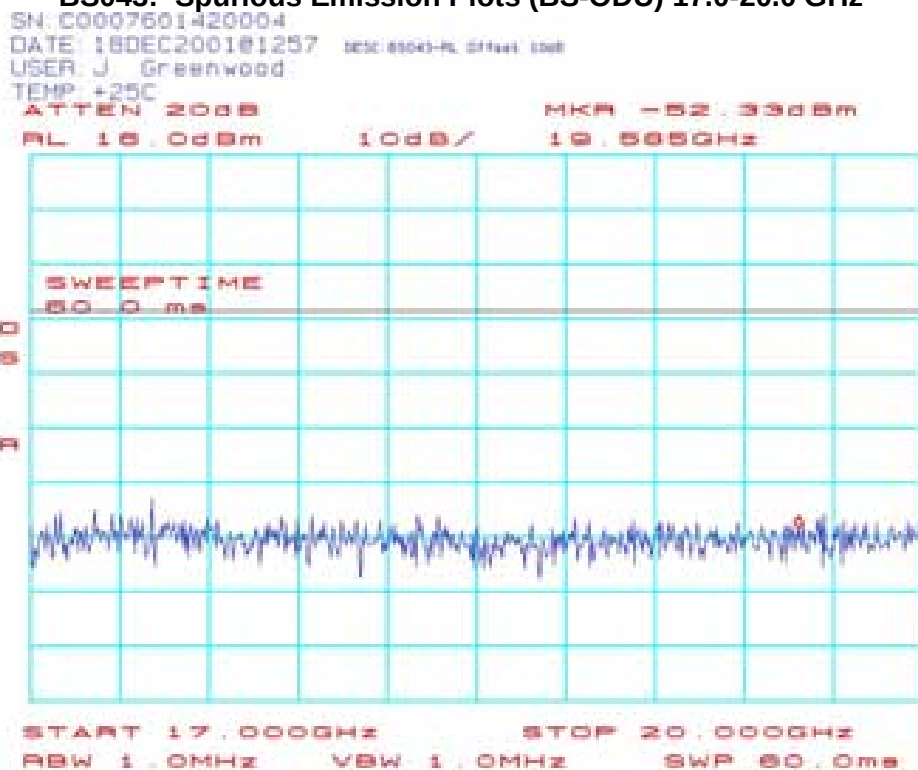


File: C:\Documents and Settings\jag\Desktop\18 GHz FCE Files\C0007601420004\BS043.y00


BS044: Spurious Emission Plots (BS-ODU) 20.0-25.0 GHz

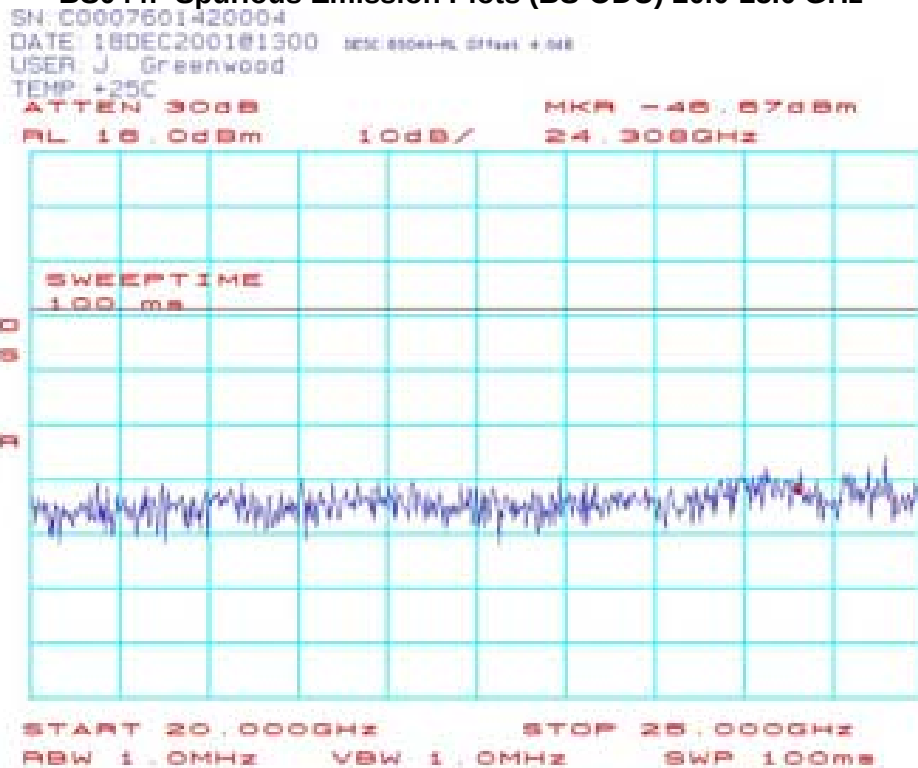


File: C:\Documents and Settings\jag\Desktop\18 GHz FCE Files\C0007601420004\BS044.y00

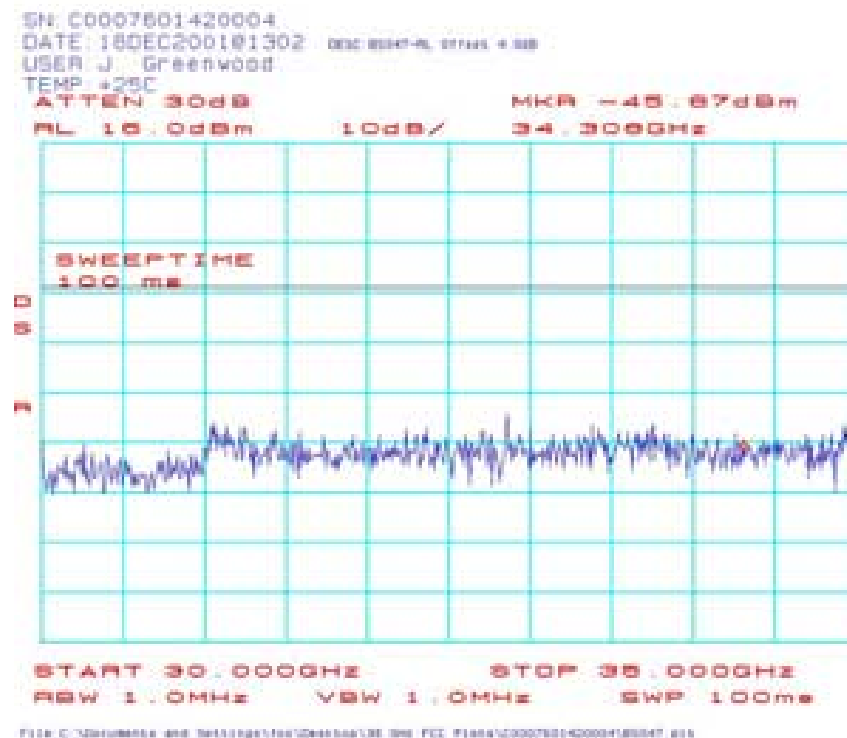


BS048: Spurious Emission Plots (BS-ODU) 35.0-38.5 GHz

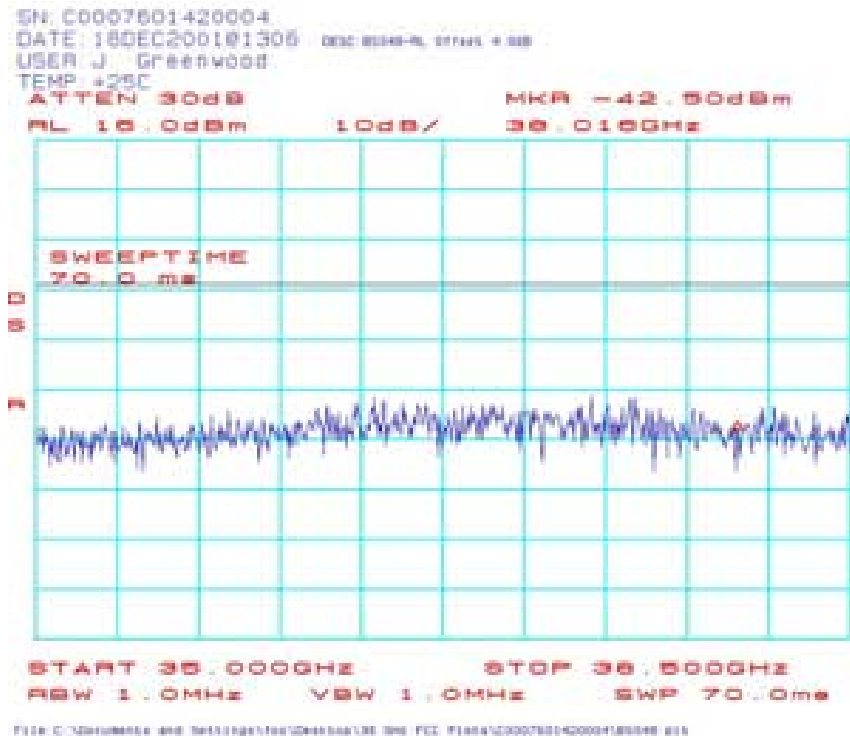

BS049: Spurious Emission Plots (BS-ODU) 38.7-40.0 GHz

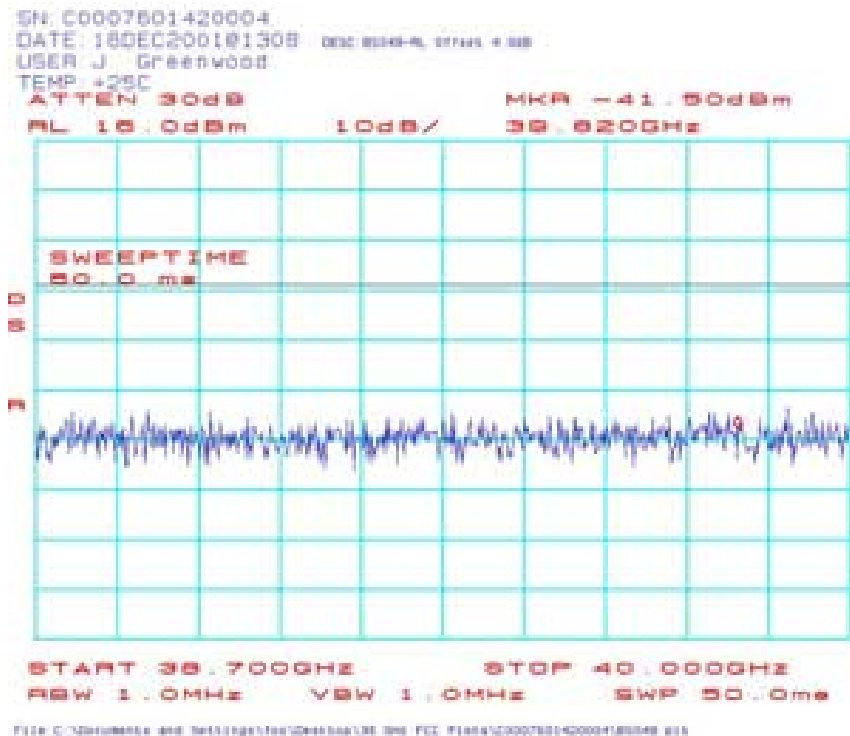


BS200: Spurious Emission Plots (BS-ODU) 40-60.0 GHz

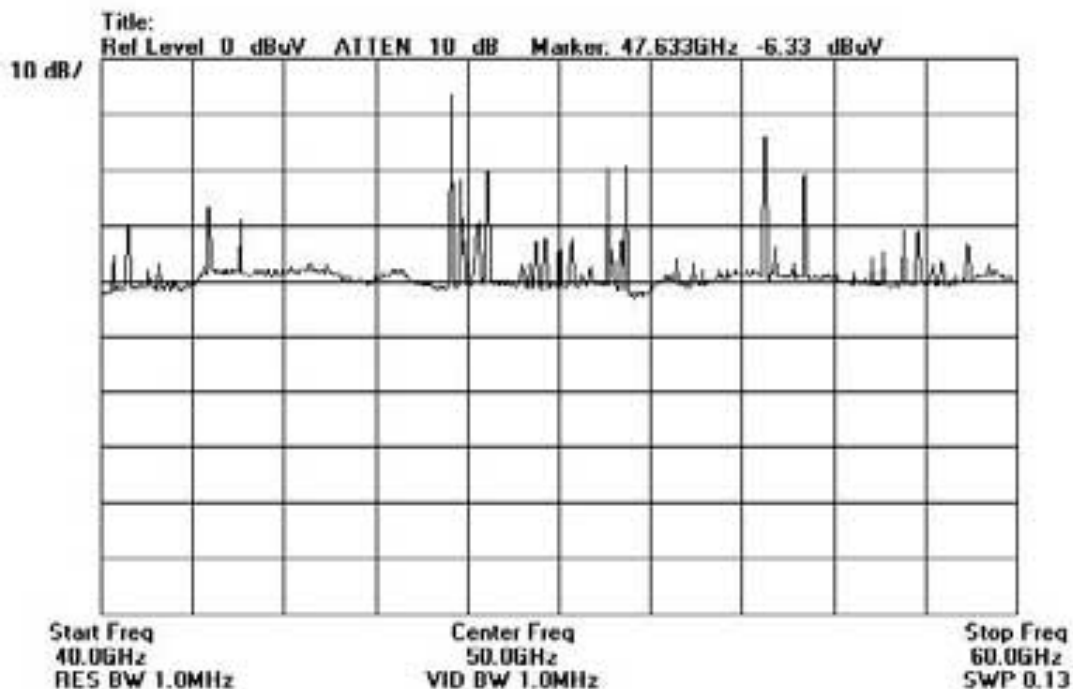


Note: the plots read dBuV but the actual measurement is in dBm. This is due to a limitation in the software used to capture the plots.

BS204: Spurious Emission Plots with signal from a signal generator 40-60.0 GHz

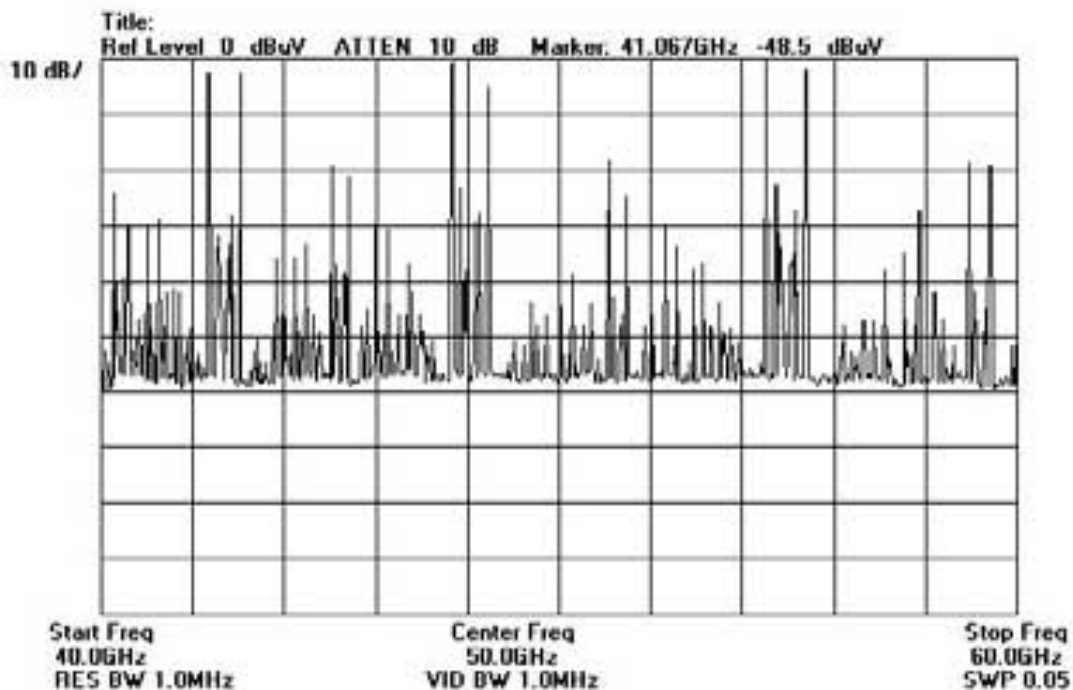


Note: the plots read dBuV but the actual measurement is in dBm. This is due to a limitation in the software used to capture the plots.

BS205: Spurious Emission Plots with signal from a signal generator 47.5-48.5.0 GHz

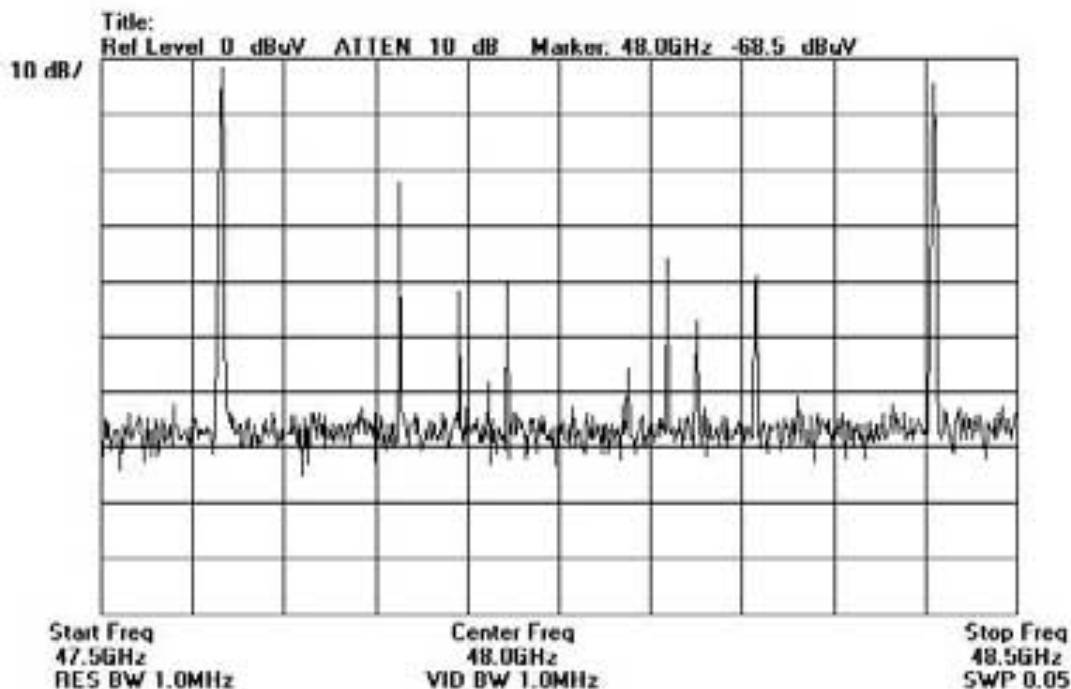


Note: the plots read dBuV but the actual measurement is in dBm. This is due to a limitation in the software used to capture the plots.

BS206: Spurious Emission Plots with signal from a signal generator 50.948-51.948 GHz

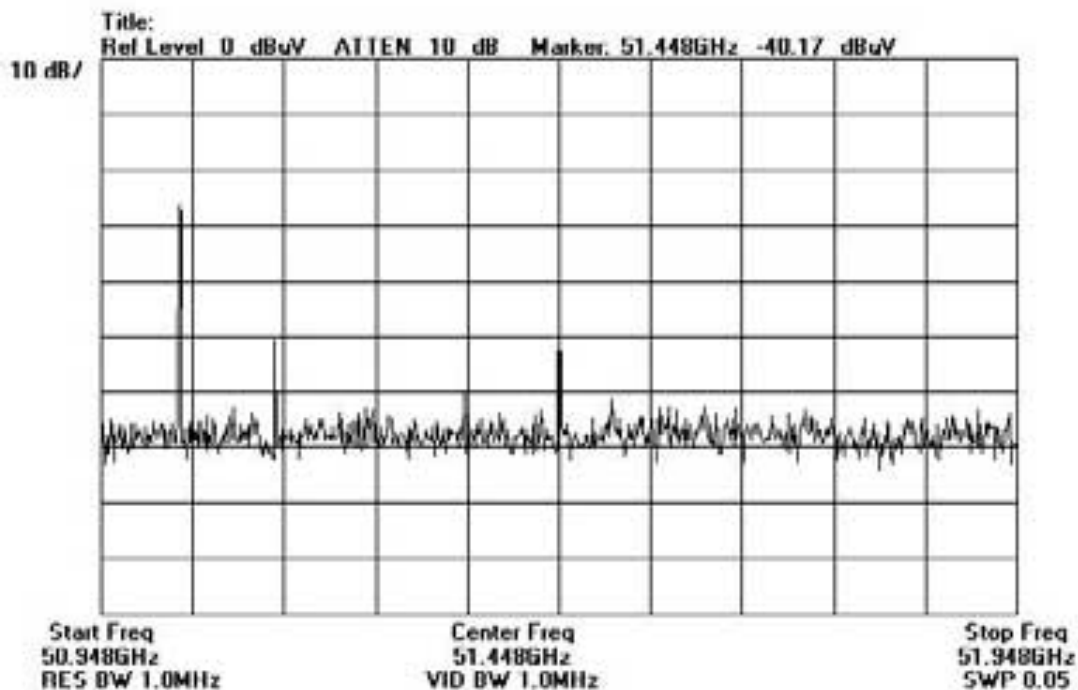


Note: the plots read dBuV but the actual measurement is in dBm. This is due to a limitation in the software used to capture the plots.

BS207: Spurious Emission Plots with signal from a signal generator 53.98-54.98 GHz

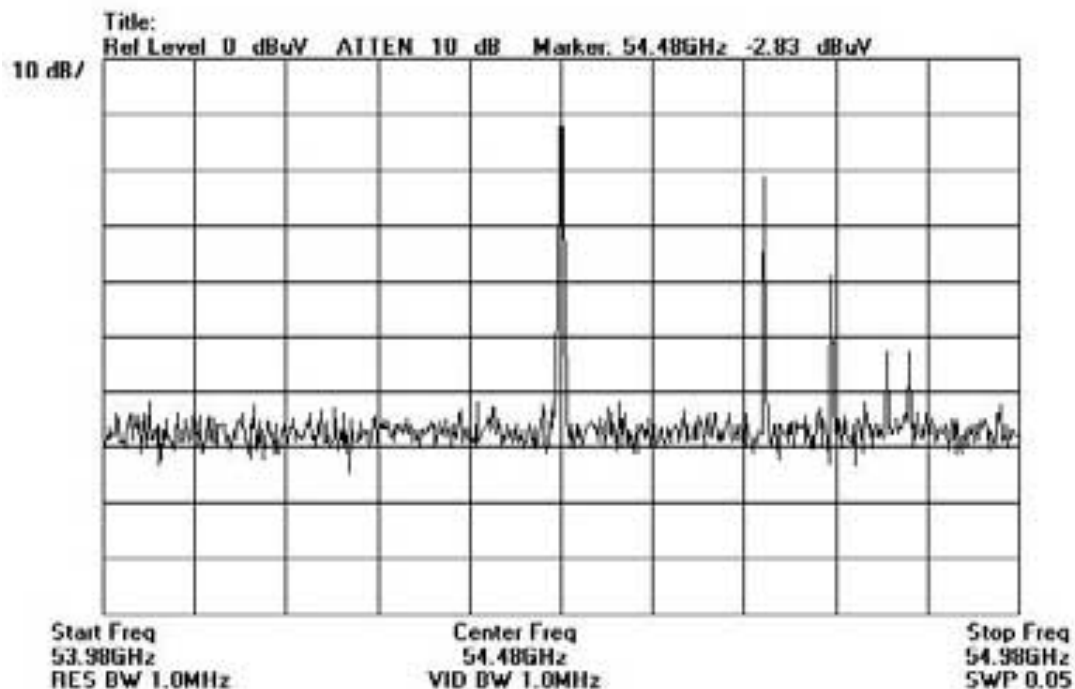


Note: the plots read dBuV but the actual measurement is in dBm. This is due to a limitation in the software used to capture the plots.

BS201: Spurious Emission Plots (BS-ODU) 60-90.0 GHz

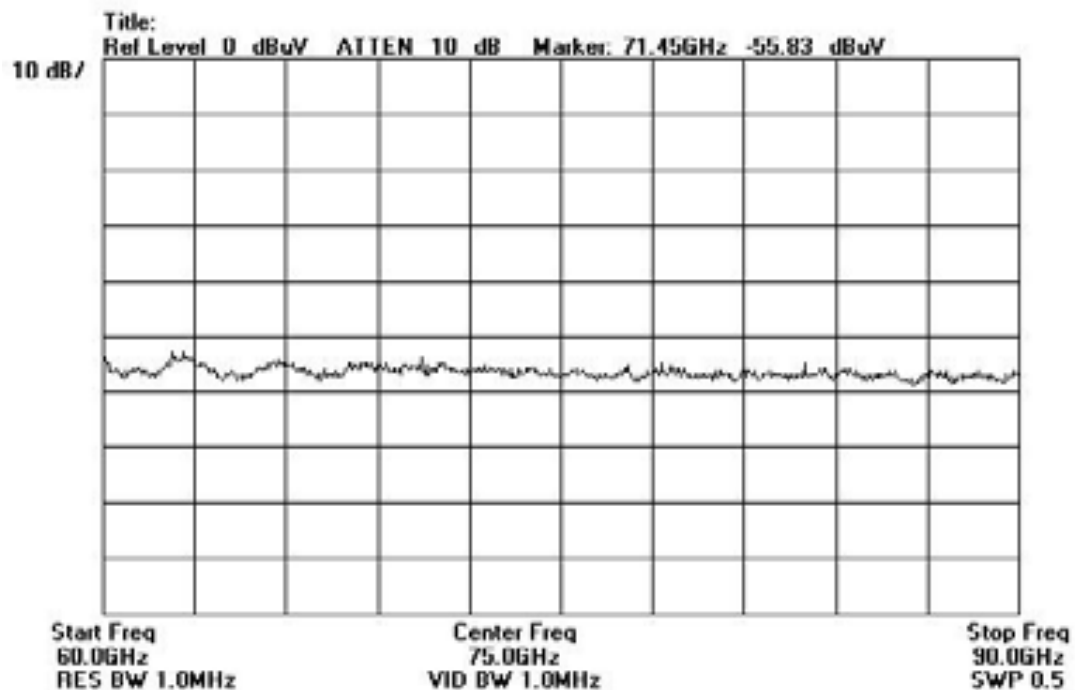


Note: the plots read dBuV but the actual measurement is in dBm. This is due to a limitation in the software used to capture the plots.

BS202: Spurious Emission Plots (BS-ODU) 90-110.0 GHz

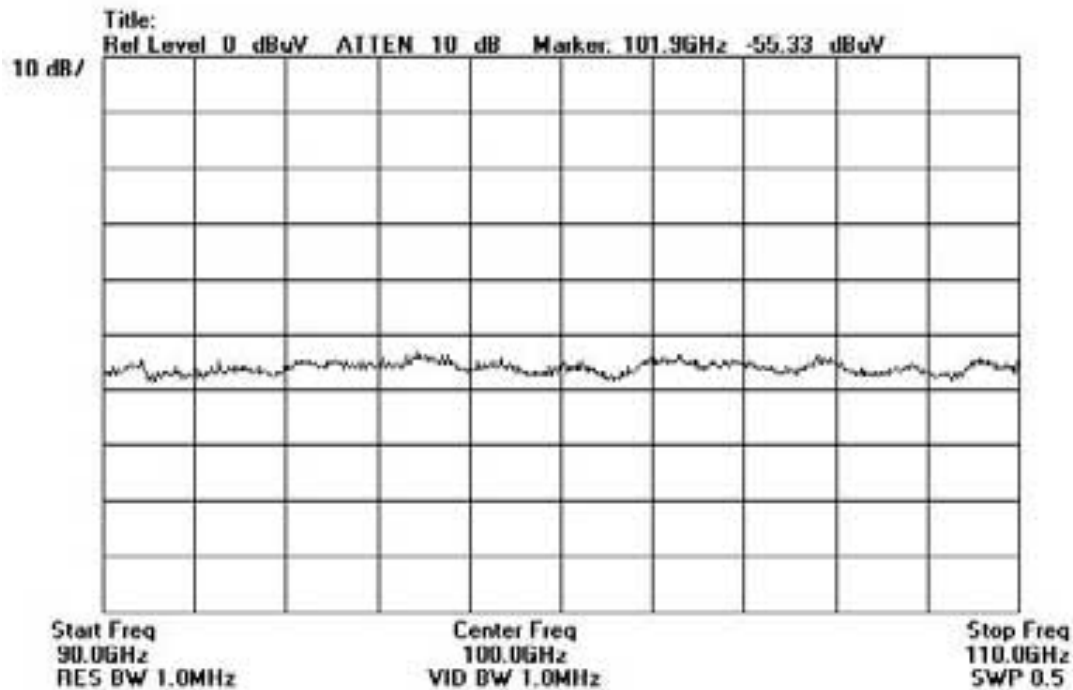


Note: the plots read dBuV but the actual measurement is in dBm. This is due to a limitation in the software used to capture the plots.

BS203: Spurious Emission Plots (BS-ODU) 110-200.0 GHz

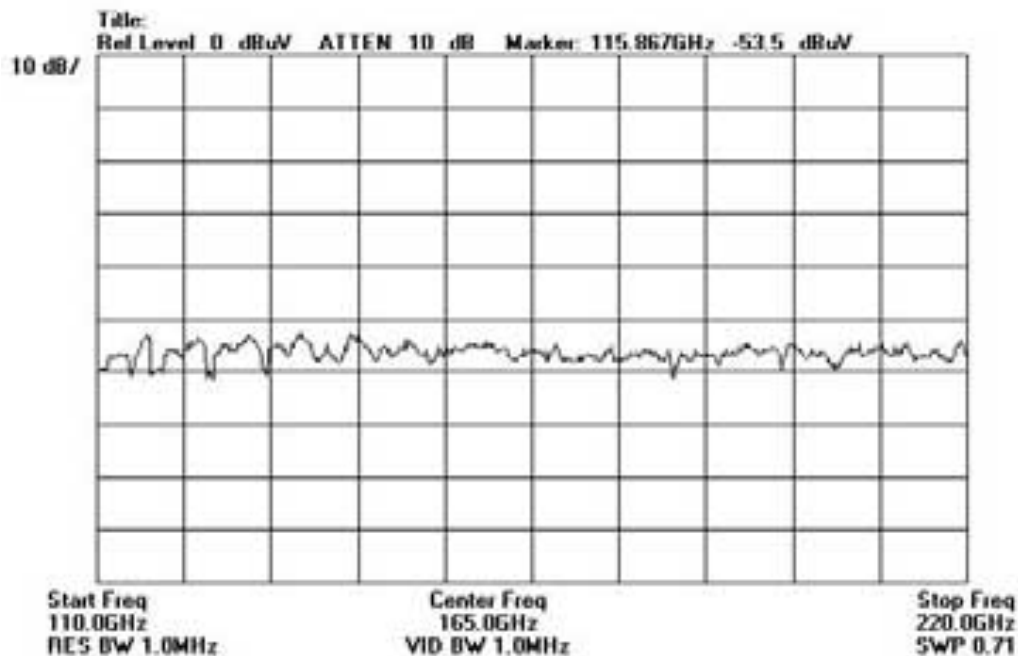


Note: the plots read dBuV but the actual measurement is in dBm. This is due to a limitation in the software used to capture the plots.


BS005: Spectrum Mask Plots (BS-ODU) 38.6625 GHz QPSK:

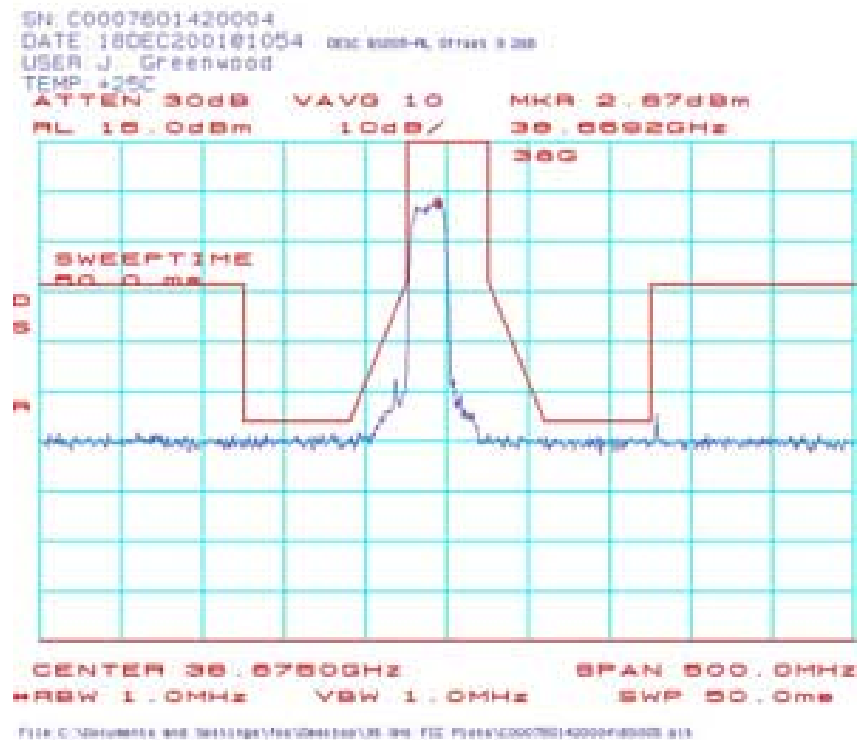

BS001: Spectrum Mask Plots (BS-ODU) 38.6625 GHz QPSK:

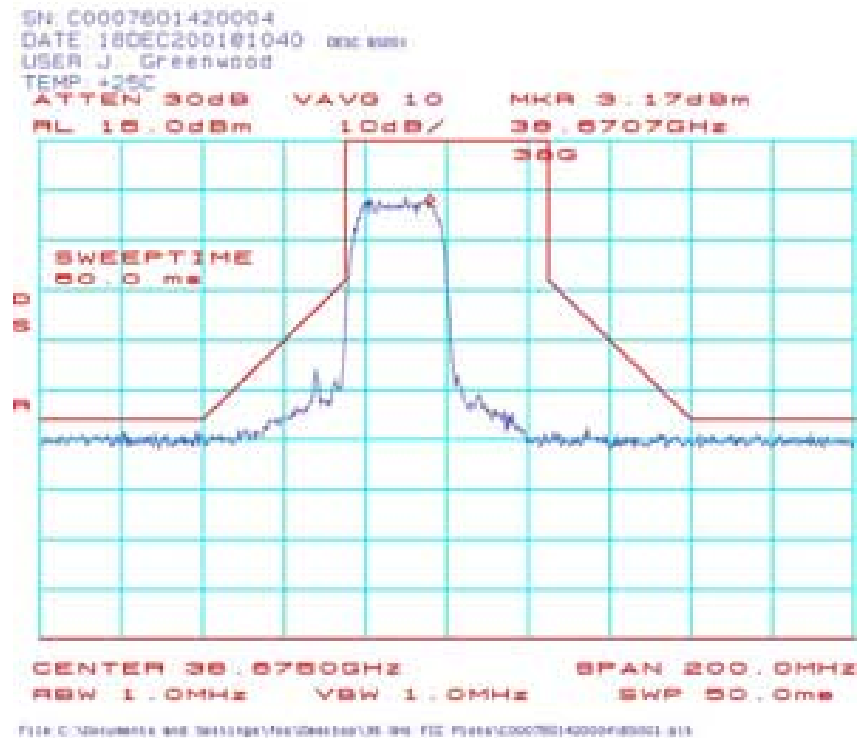


BS004: Spectrum Mask Plots (BS-ODU) 38.6625 GHz QPSK:

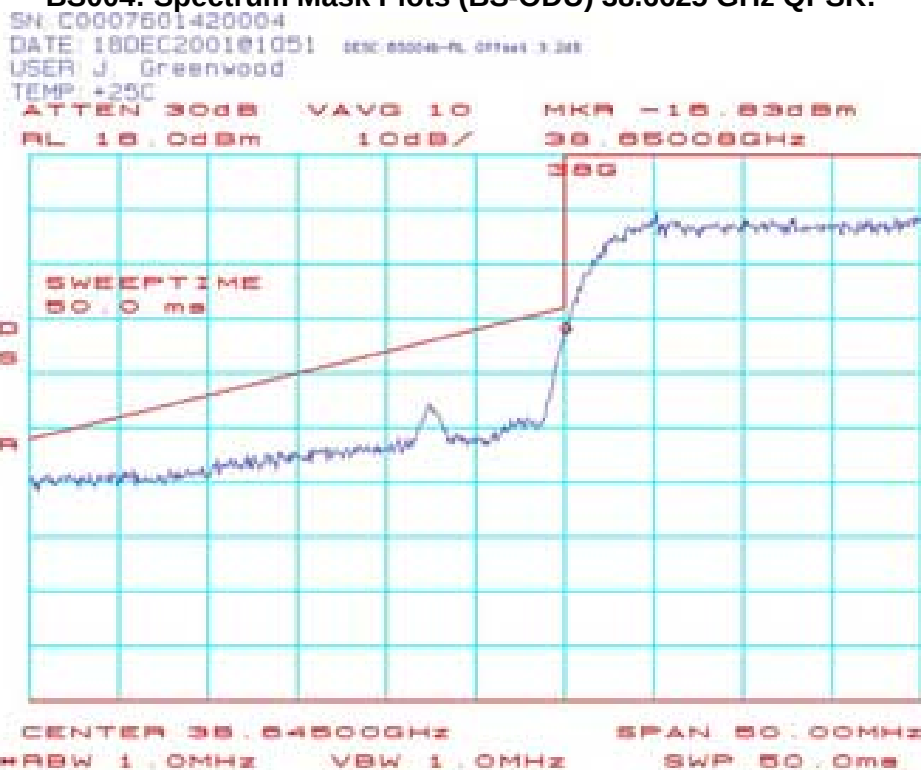


File: C:\Documents and Settings\jag\Desktop\38 GHz FCC Plots\C0007601420004\BS004b.gif

BS006: Spectrum Mask Plots (BS-ODU) 38.6625 GHz QPSK:

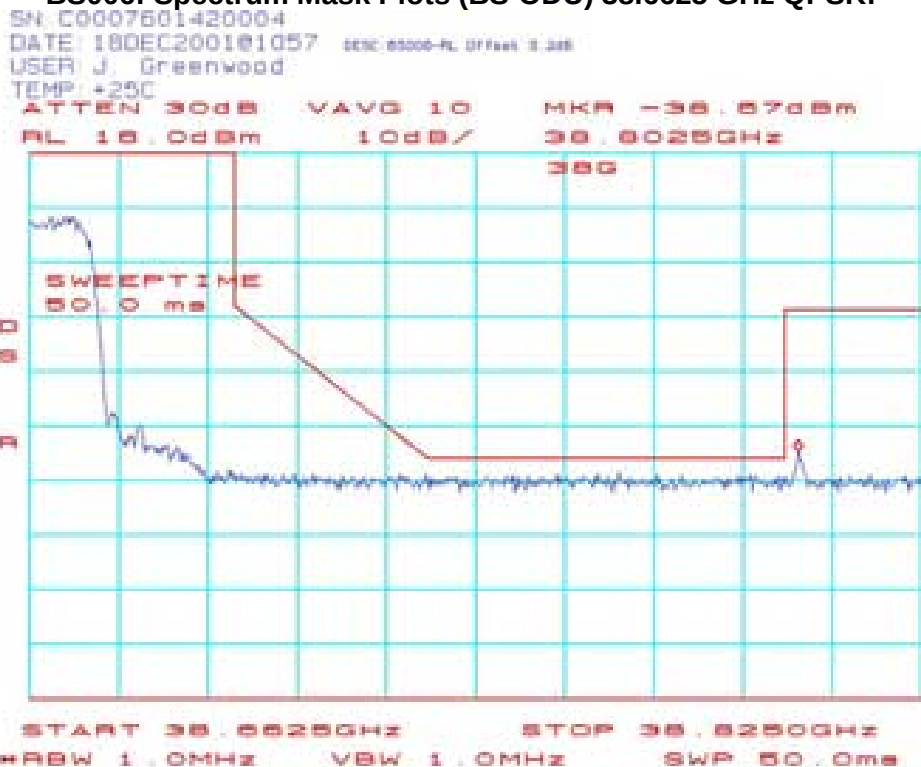



File: C:\Documents and Settings\jag\Desktop\38 GHz FCC Plots\C0007601420004\BS006-RL Offset: 3.2dB.gif

BS050: Spectrum Mask Plots (BS-ODU) 38.6625 GHz 16QAM:

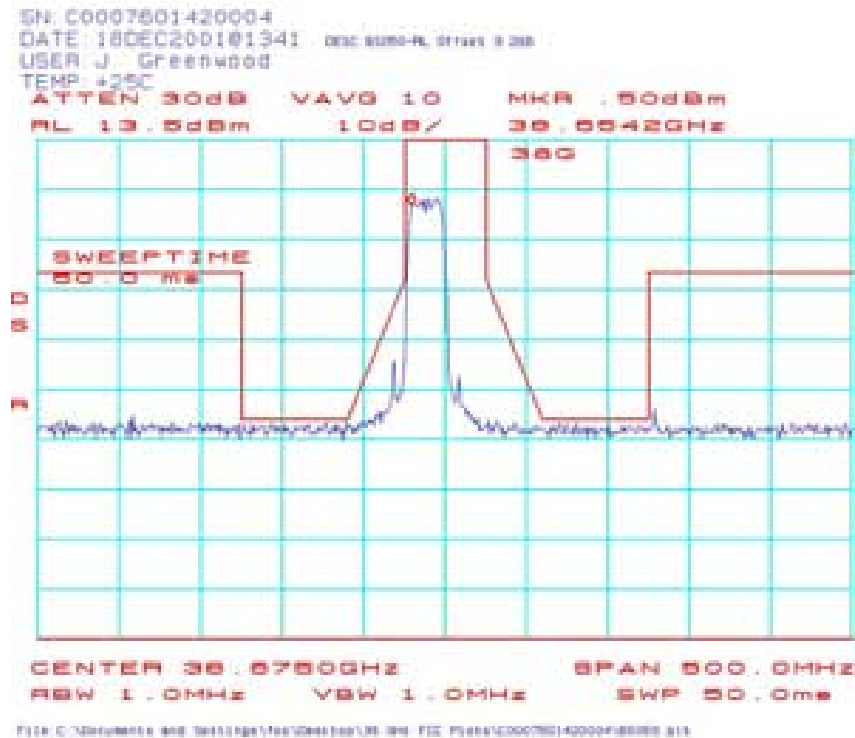


BS052: Spectrum Mask Plots (BS-ODU) 38.6625 GHz 16QAM:

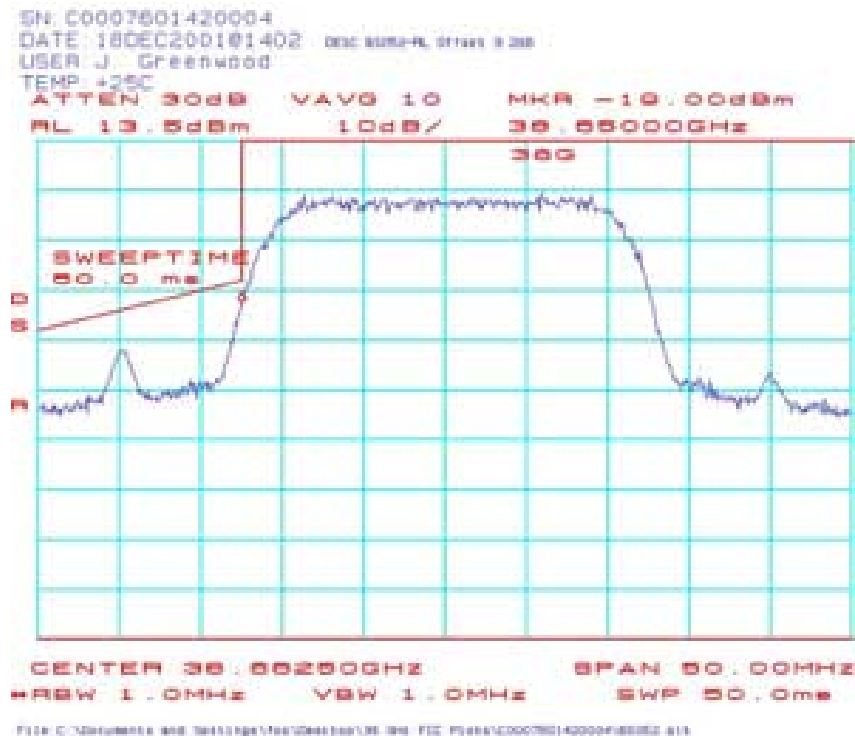


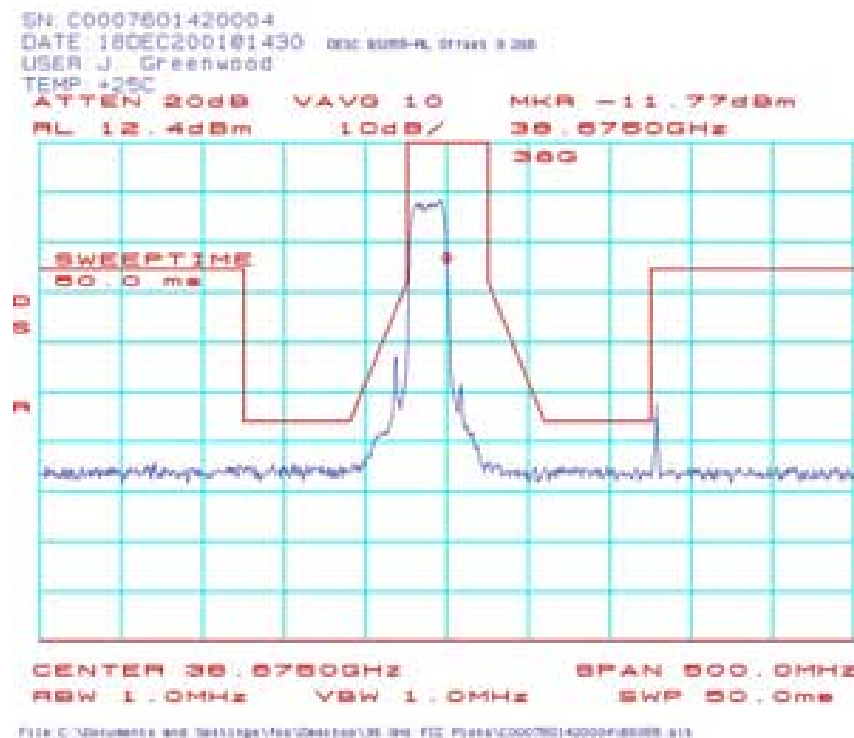


BS056: Spectrum Mask Plots (BS-ODU) 38.6625 GHz 64QAM:

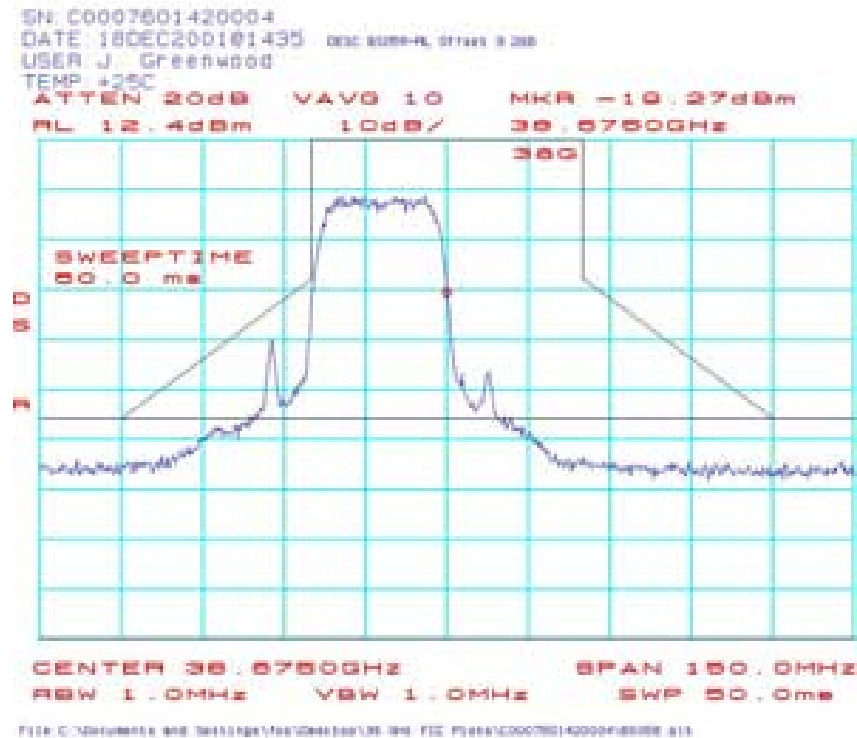


BS059: Spectrum Mask Plots (BS-ODU) 38.6625 GHz 64QAM:

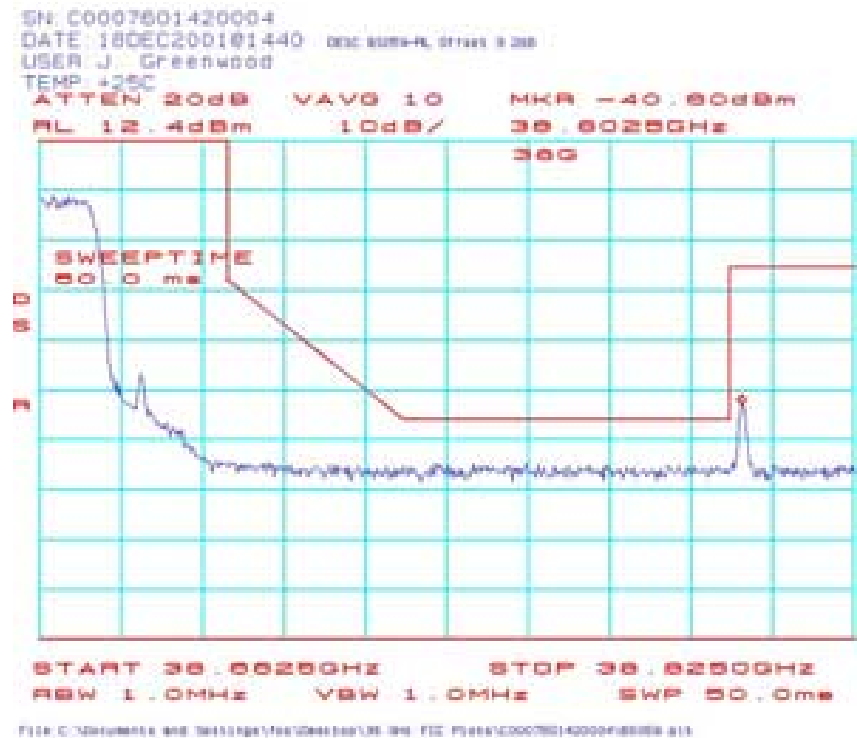


BS060: Spectrum Mask Plots (BS-ODU) 38.6875 GHz QPSK:

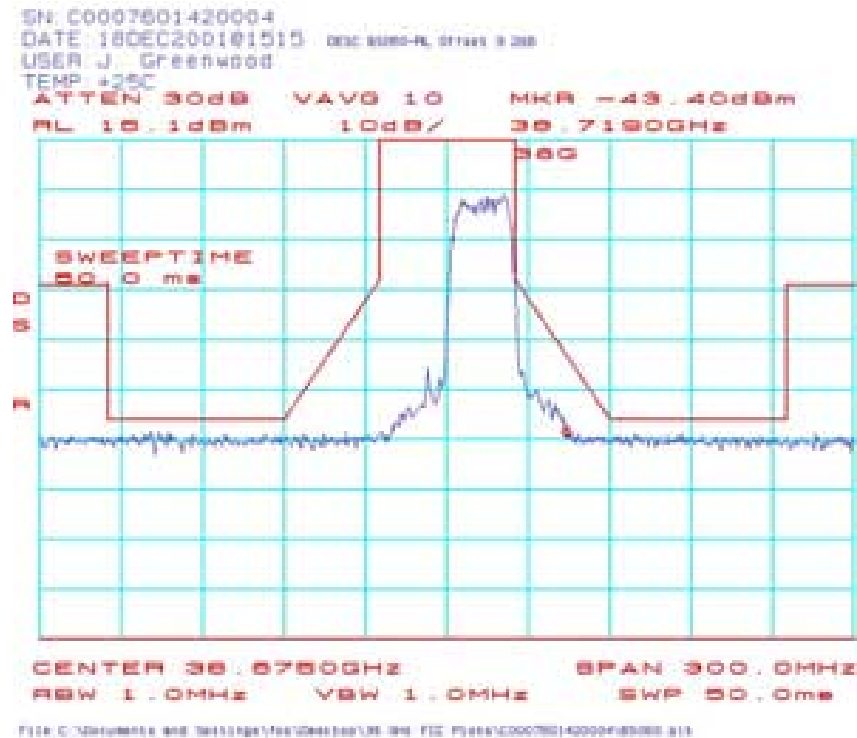


BS062: Spectrum Mask Plots (BS-ODU) 38.6875 GHz QPSK:

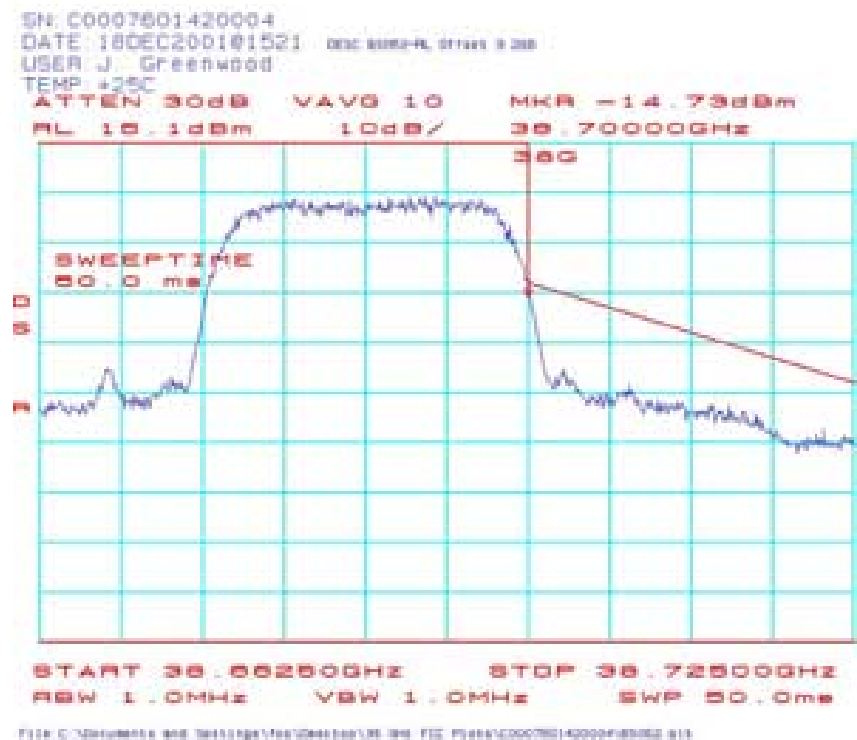


BS064: Spectrum Mask Plots (BS-ODU) 38.6875 GHz QPSK:

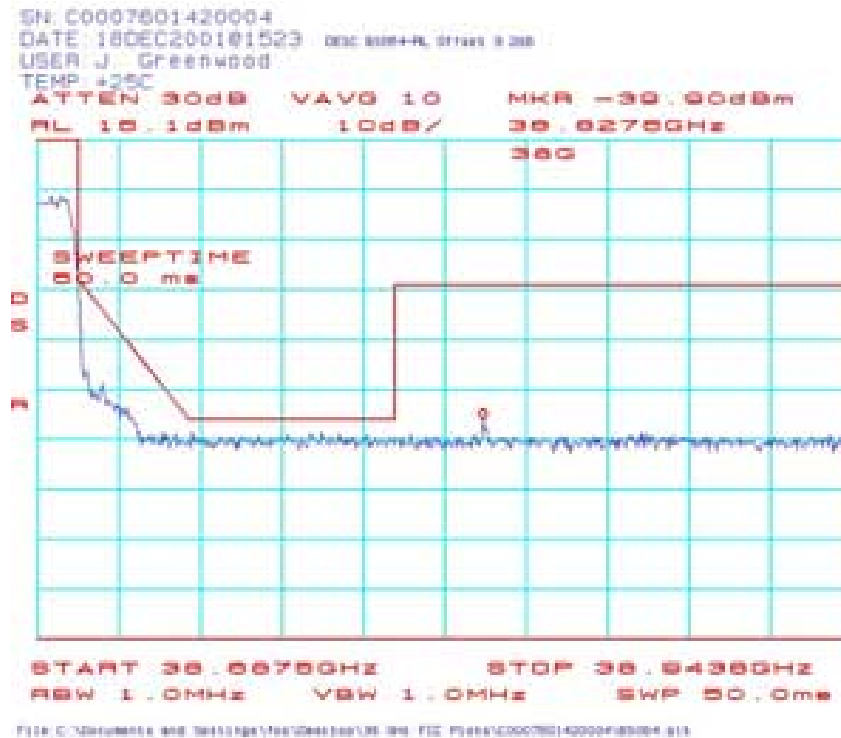


BS065: Spectrum Mask Plots (BS-ODU) 38.6875 GHz 16QAM:

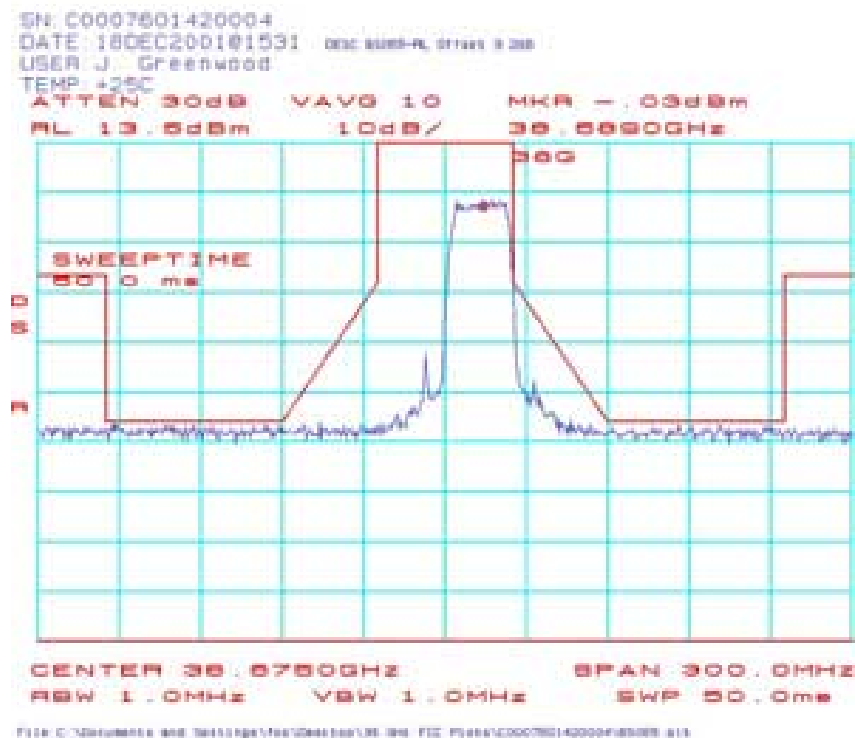


BS066: Spectrum Mask Plots (BS-ODU) 38.6875 GHz 16QAM:

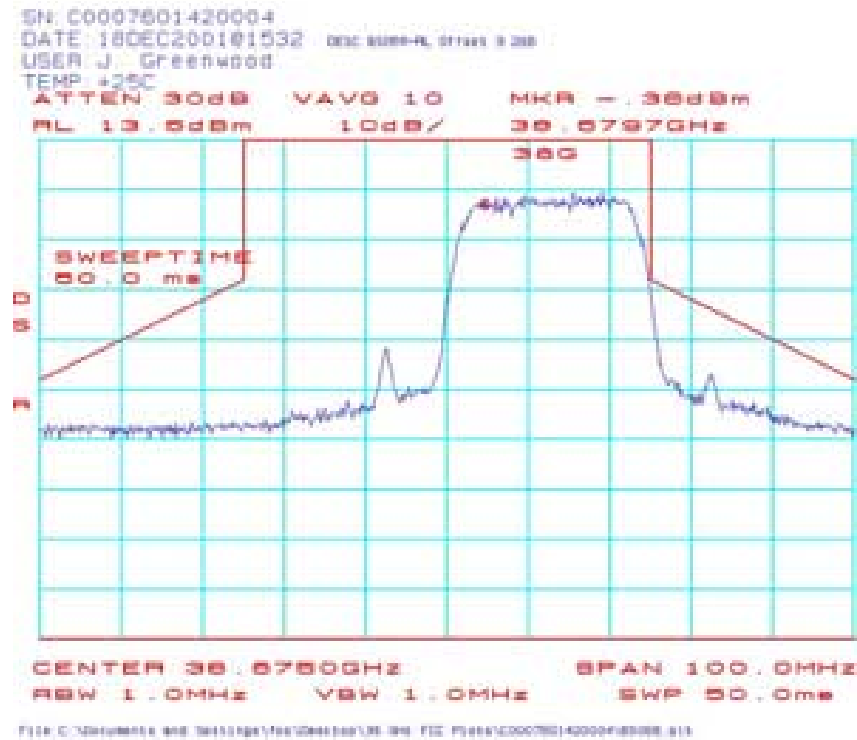

BS069: Spectrum Mask Plots (BS-ODU) 38.6875 GHz 16QAM:

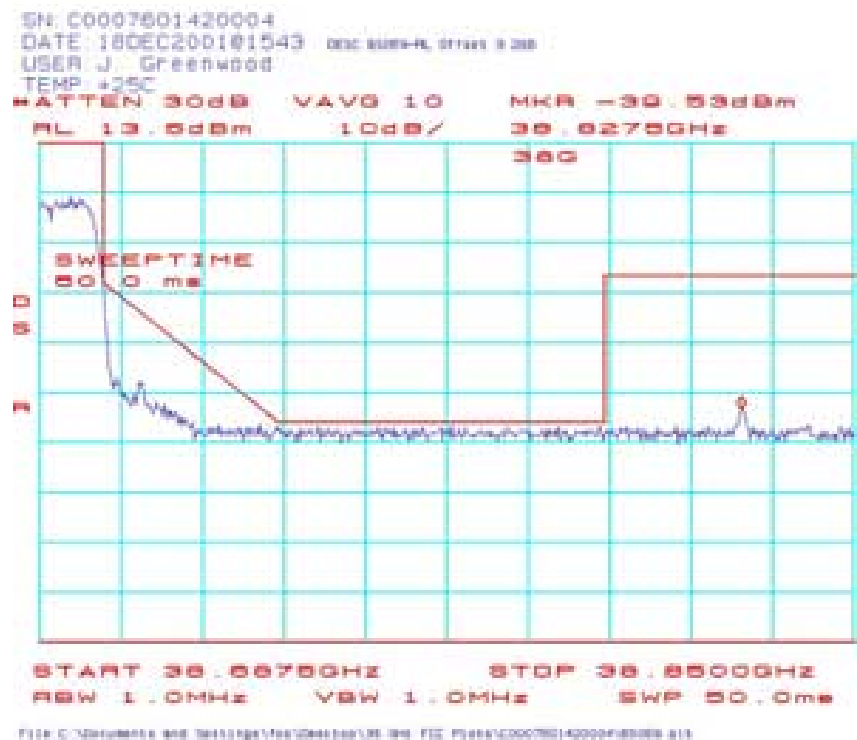


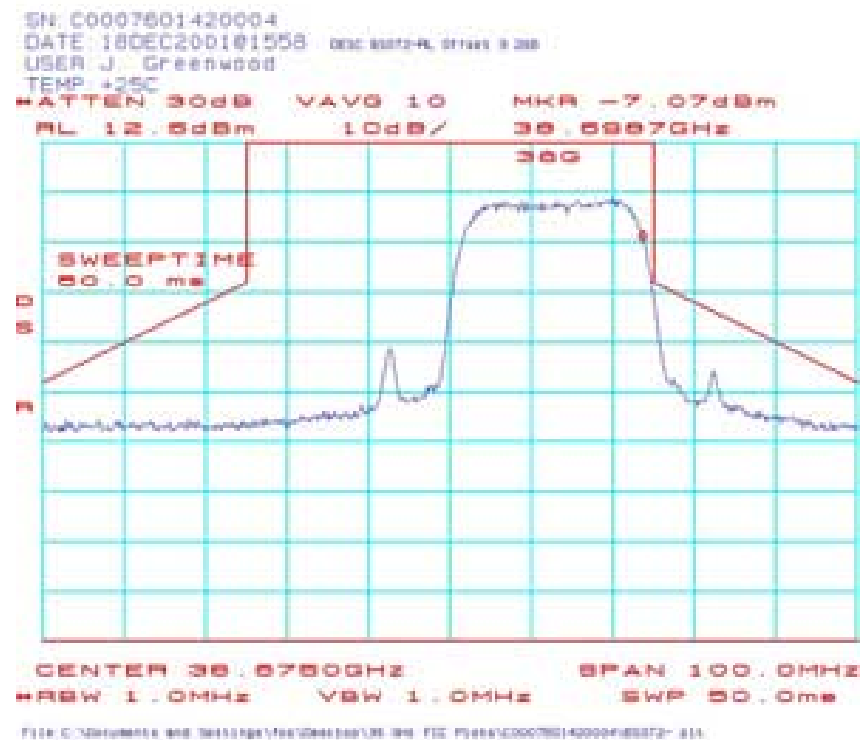


BS074: Spectrum Mask Plots (BS-ODU) 38.6875 GHz 64QAM:




BS075: Spectrum Mask Plots (BS-ODU) 38.6875 GHz 64QAM:

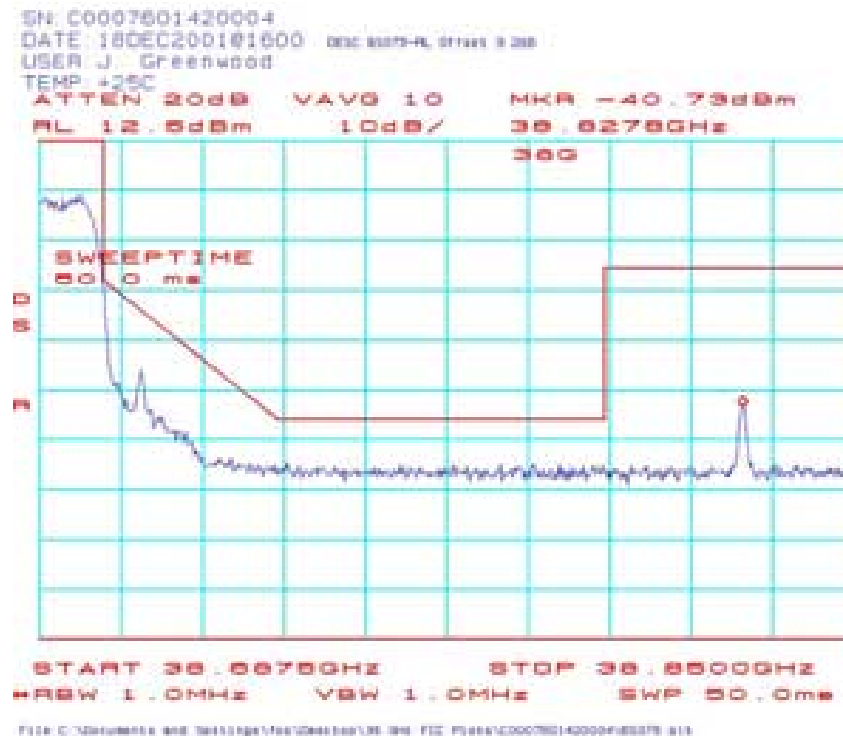


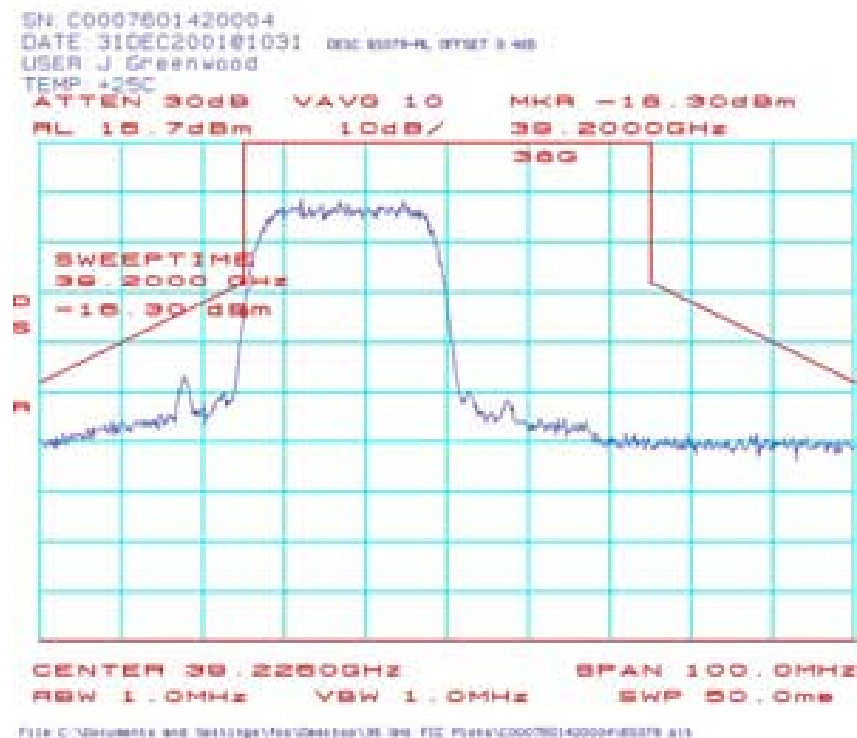


BS080: Spectrum Mask Plots (BS-ODU) 39.2125 GHZ QPSK:

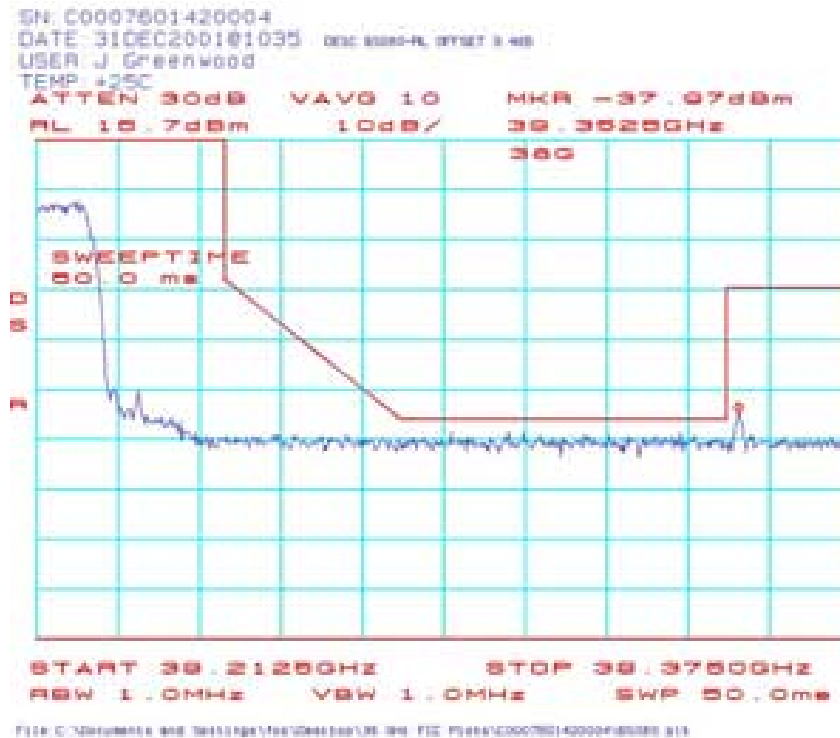


BS082: Spectrum Mask Plots (BS-ODU) 39.2125 GHz 16QAM:

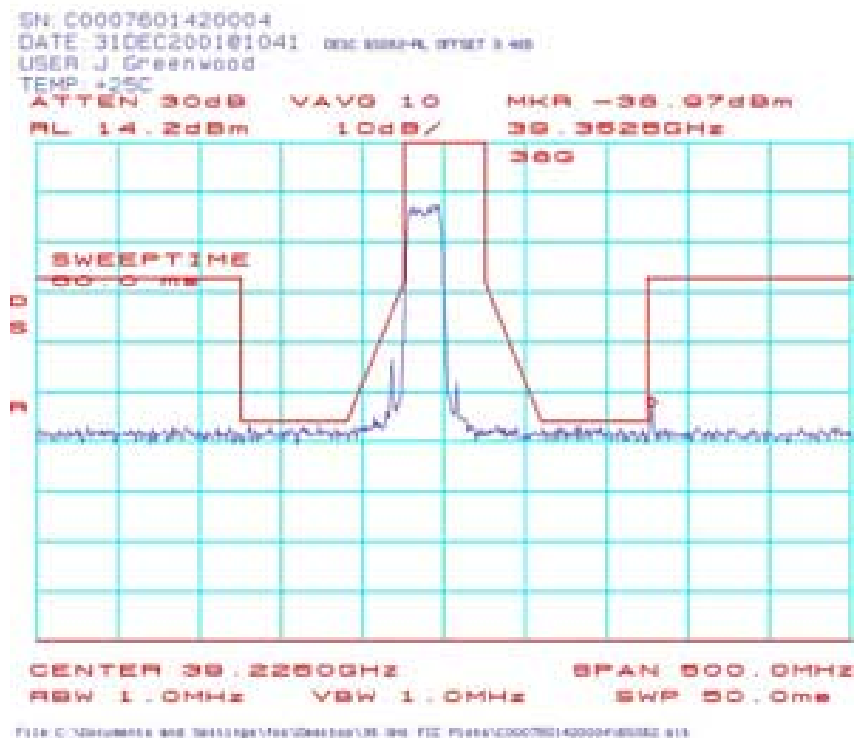


BS083: Spectrum Mask Plots (BS-ODU) 39.2125 GHz 16QAM:

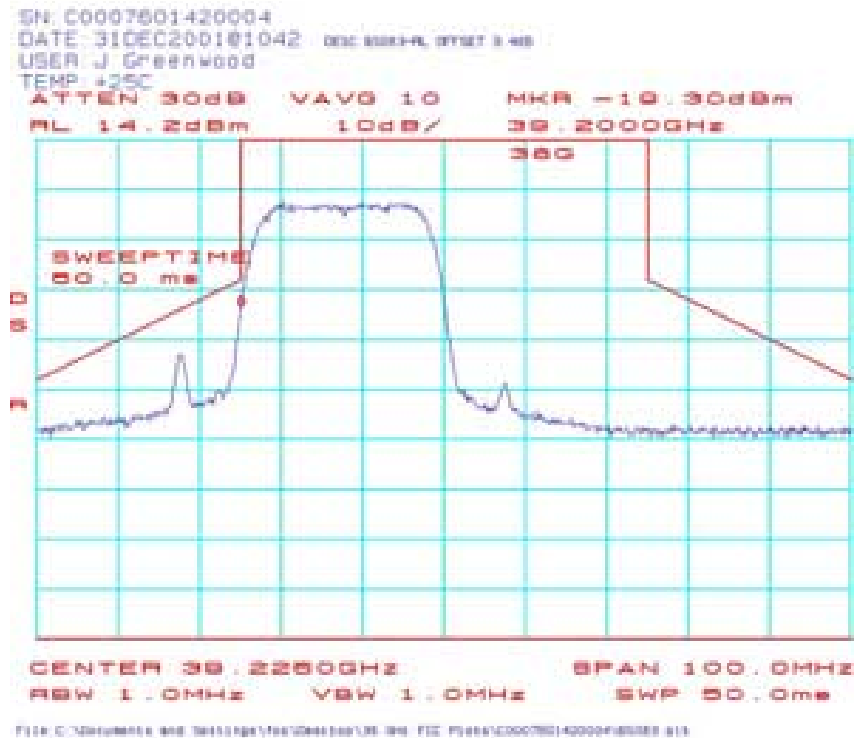


BS086: Spectrum Mask Plots (BS-ODU) 39.2125 GHz 16QAM:

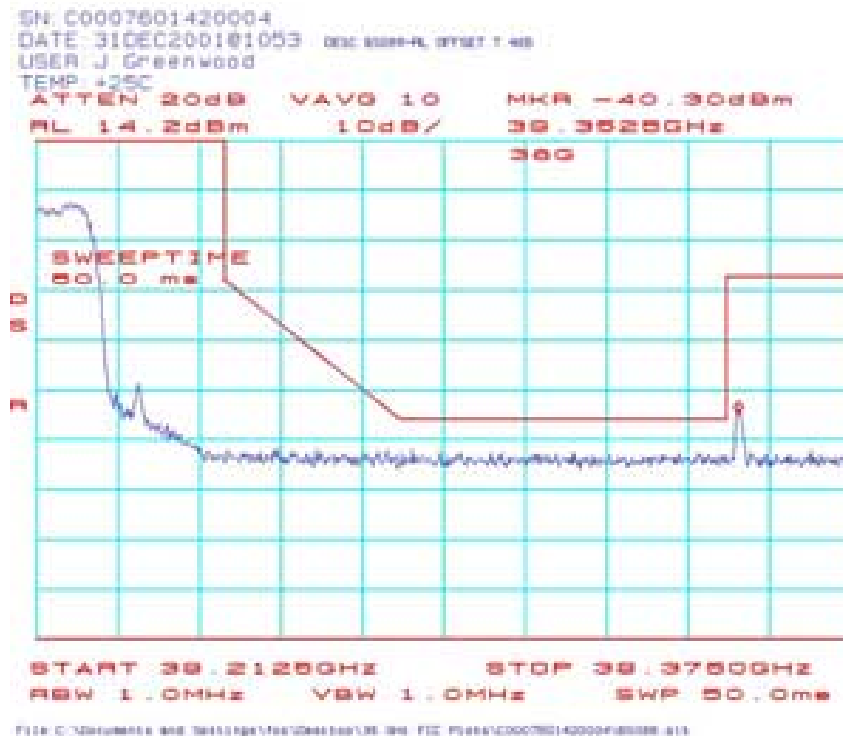

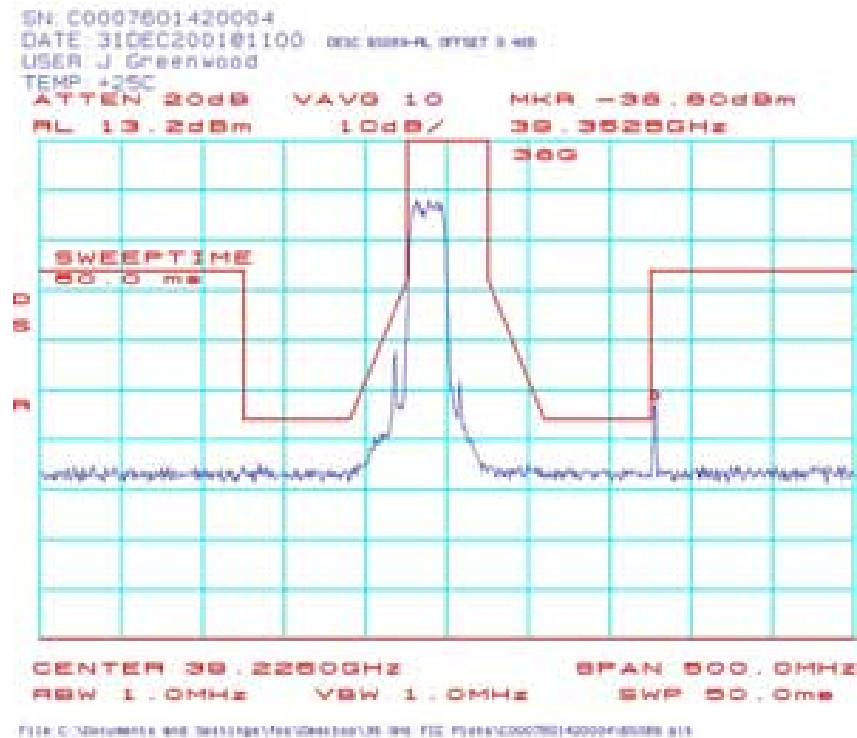




BS093: Spectrum Mask Plots (BS-ODU) 39.2125 GHZ 64QAM:

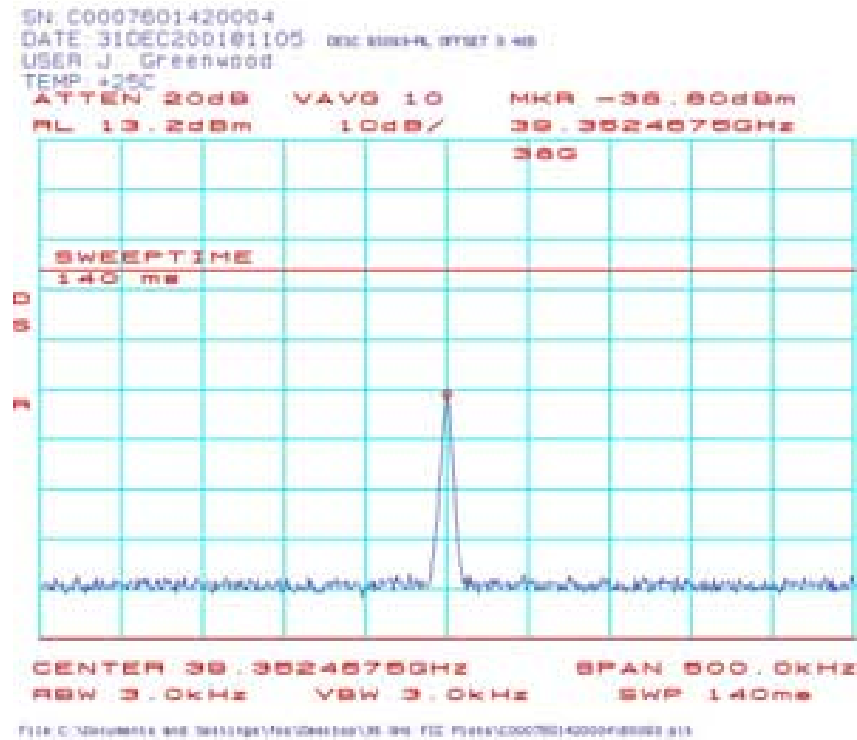

BS095: Spectrum Mask Plots (BS-ODU) 39.2375 GHz QPSK:

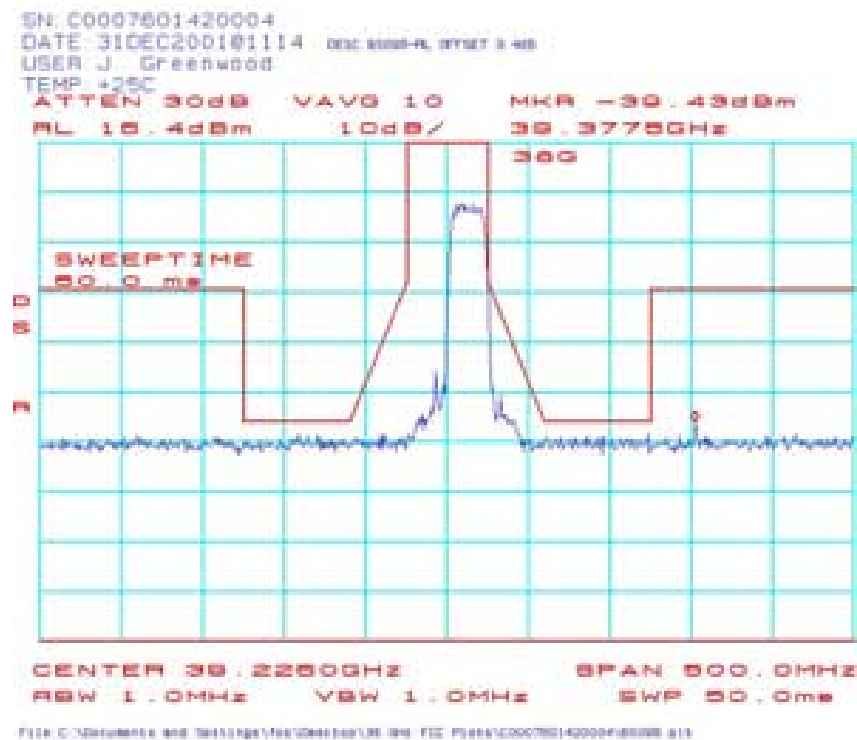

SN: C0007501420004
DATE: 31DEC2001@11:15 DSC: 8080-RL OFFSET: 3.4dB
USER: J. Greenwood
TEMP: 425C

ATTN: 30dB VAVG: 10 MKR: -15.10dBm
RL: 10.4dBm 10dB/ 39.2500GHz

380

SWEPTIME
50.0 ms

CENTER: 39.2500GHz SPAN: 100.0MHz
RBW: 1.0MHz VBW: 1.0MHz SWP: 50.0ms

File: C:\Documents and Settings\jagreenwood\My Documents\FEE Files\C0007501420004\8080-RL


SN: C0007601420004
DATE: 31DEC200101118 QMC: 8088-RL, OFFSET: 3.4dB
USER: J. GREENWOOD
TEMP: +25C
ATTEN: 30dB VAVG: 10 MKR: -36.43dBm
RL: 15.4dBm 10dB/ 39.3775GHz
360

SWEPTIME
50.0 ms


START 39.2975GHz STOP 39.4000GHz
RBW 1.0MHz VBW 1.0MHz SWP 50.0ms

File C:\Documents and Settings\jgreen\My Documents\8088 RL\FIC Files\C0007601420004\8088 RL


BS100: Spectrum Mask Plots (BS-ODU) 39.2375 GHz 16QAM:

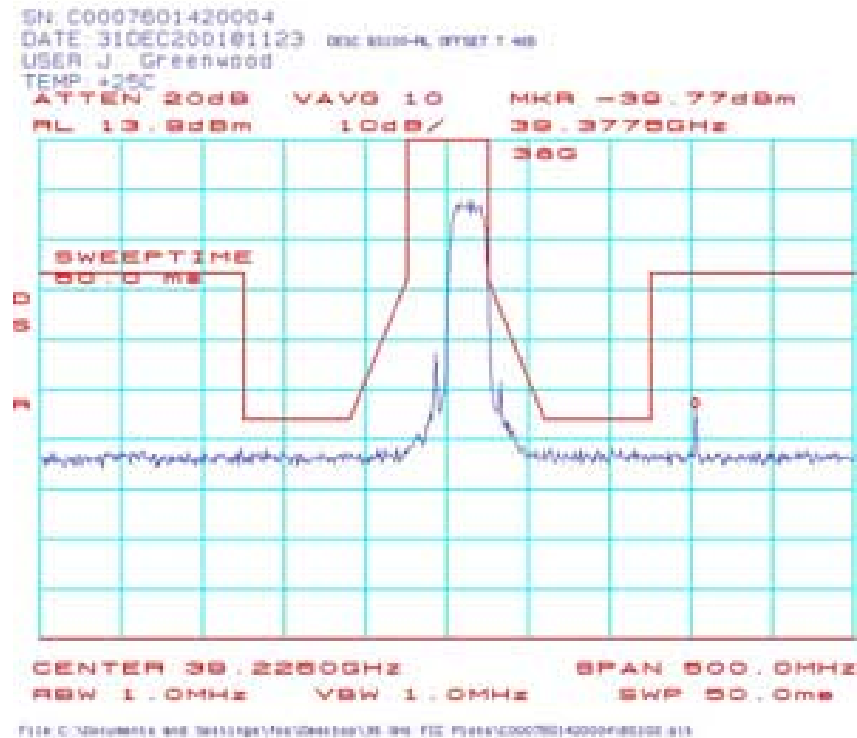


BS101: Spectrum Mask Plots (BS-ODU) 39.2375 GHz 16QAM:

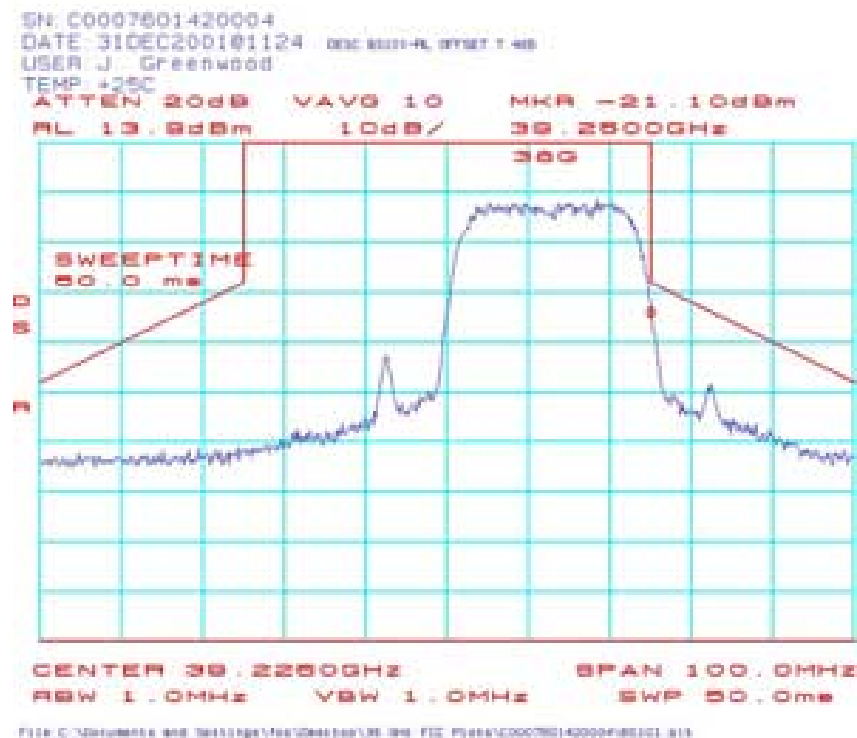


BS103: Spectrum Mask Plots (BS-ODU) 39.2375 GHz 16QAM:

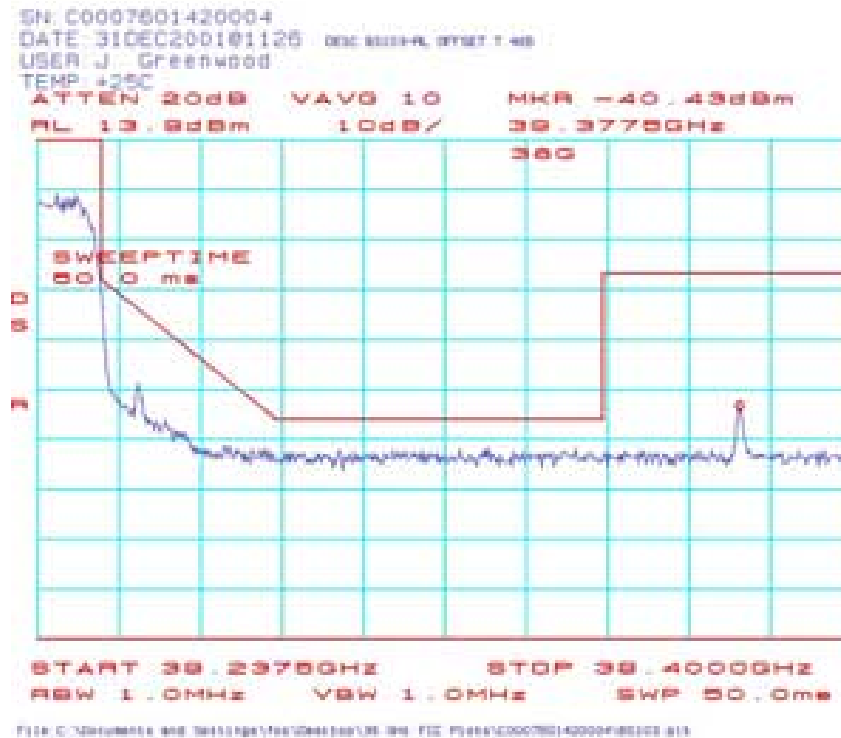


BS105: Spectrum Mask Plots (BS-ODU) 39.2375 GHz 64QAM:

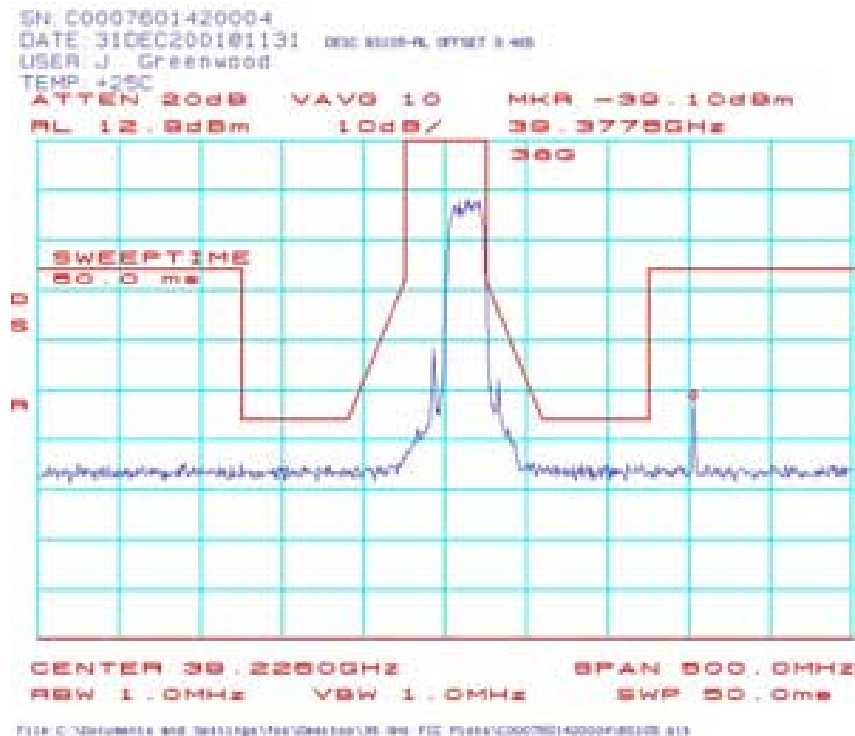


BS106: Spectrum Mask Plots (BS-ODU) 39.2375 GHz 64QAM:

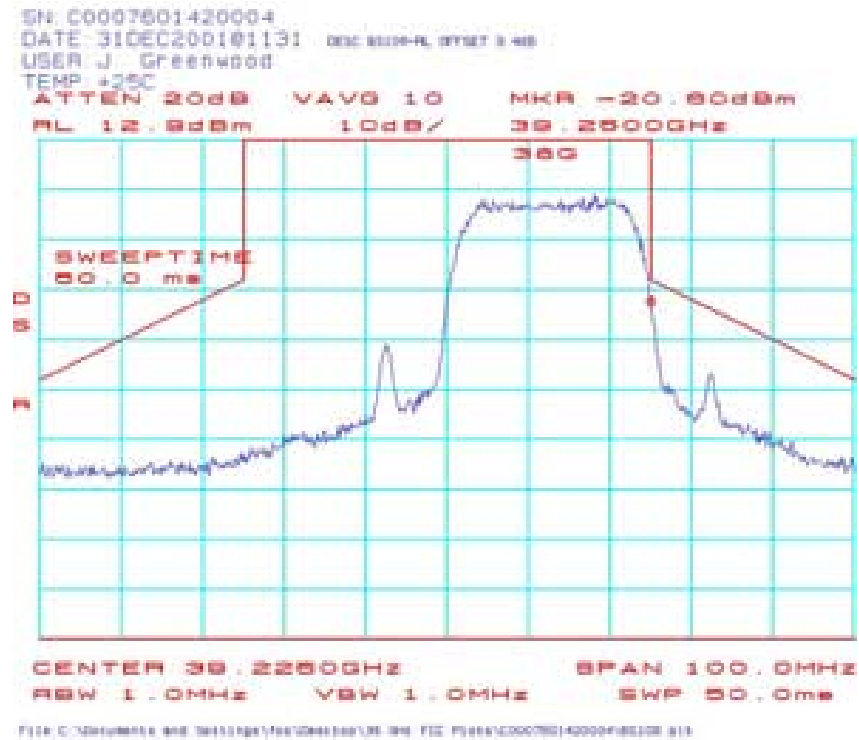

BS108 Spectrum Mask Plots (BS-ODU) 39.2375 GHz 64QAM:

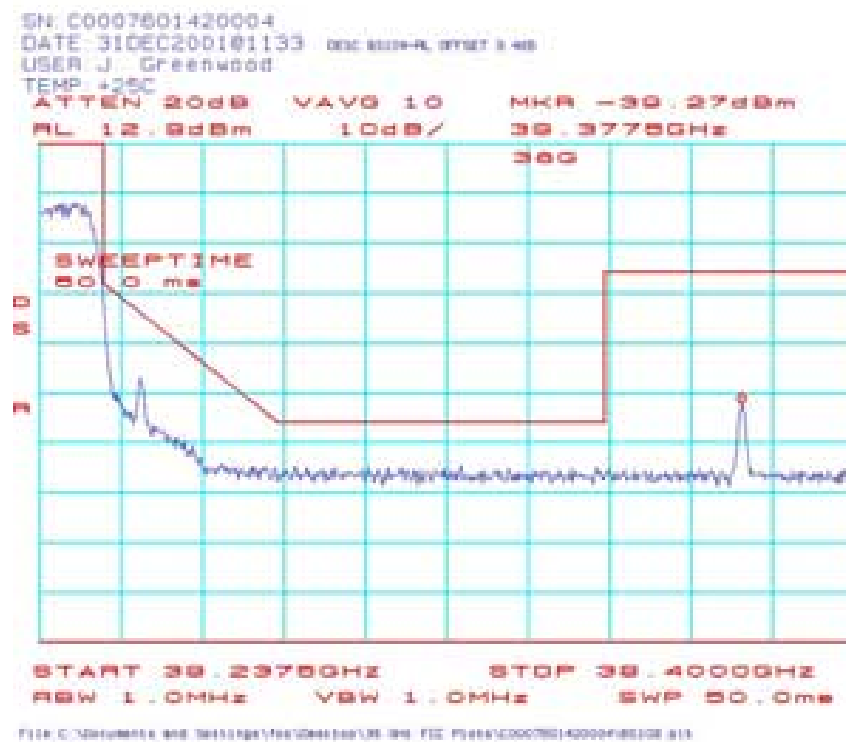


BS110: Spectrum Mask Plots (BS-ODU) 39.7625 GHz QPSK:

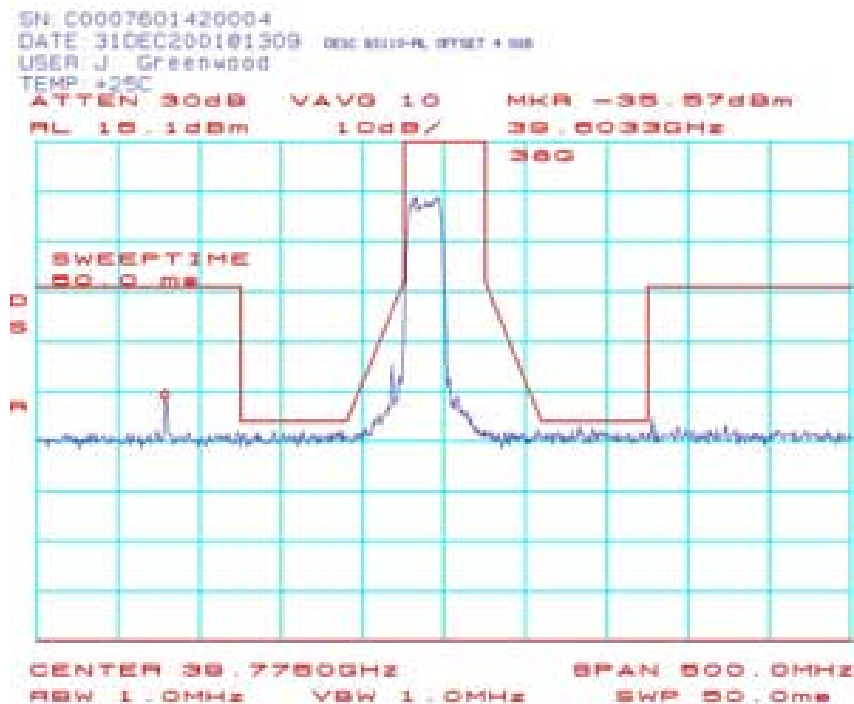


File: C:\Documents and Settings\jag\My Documents\BS 110 File: C:\Documents and Settings\jag\My Documents\BS 110


BS111: Spectrum Mask Plots (BS-ODU) 39.7625 GHz QPSK:

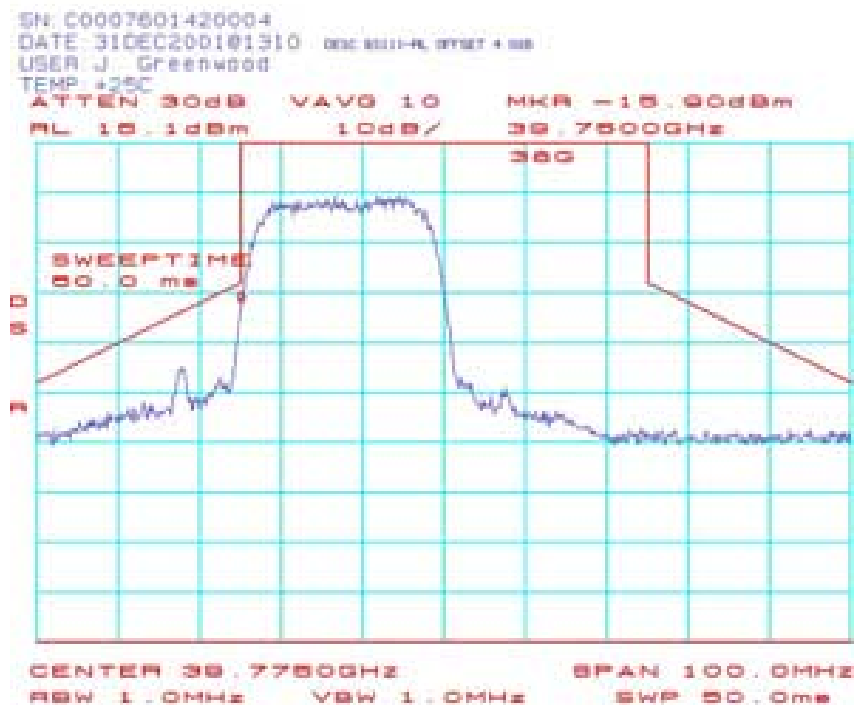


File: C:\Documents and Settings\jag\My Documents\BS 111 File: C:\Documents and Settings\jag\My Documents\BS 111

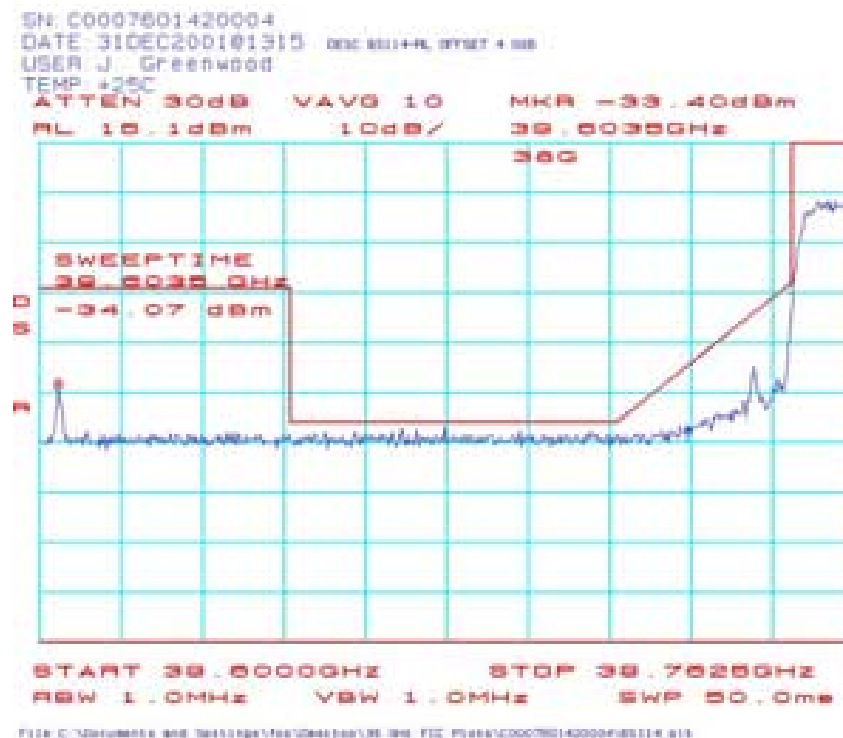


BS116: Spectrum Mask Plots (BS-ODU) 39.7625 GHz 16QAM:

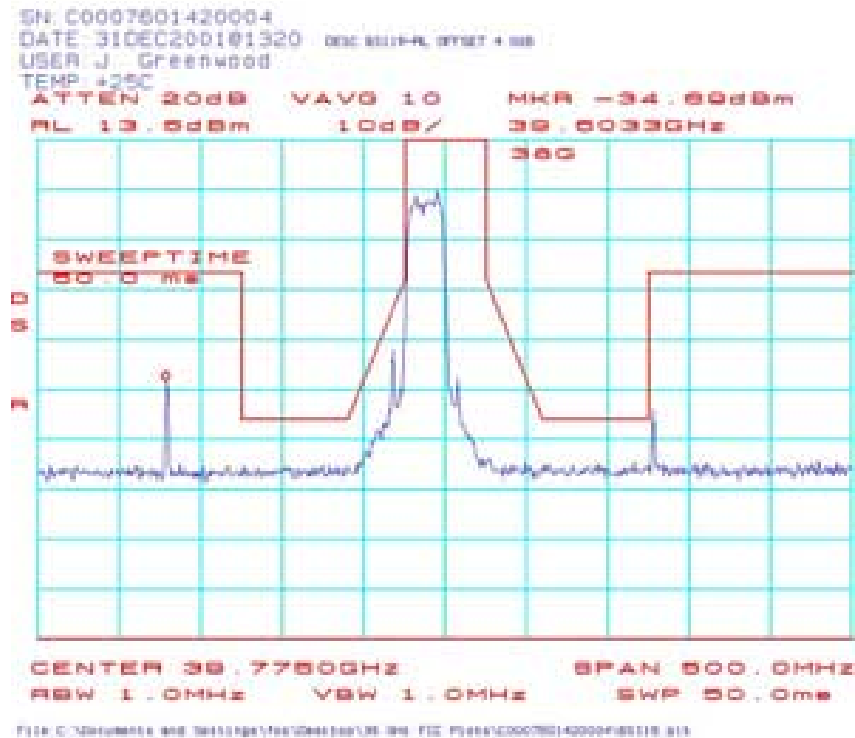


BS117: Spectrum Mask Plots (BS-ODU) 39.7625 GHz 16QAM:

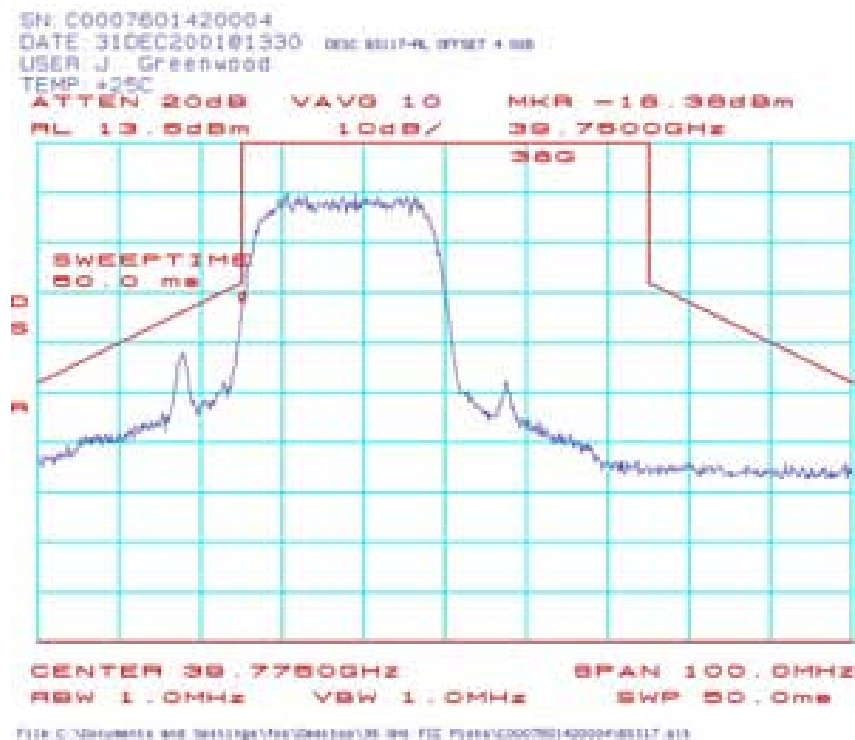


BS119: Spectrum Mask Plots (BS-ODU) 39.7625 GHz 16QAM:

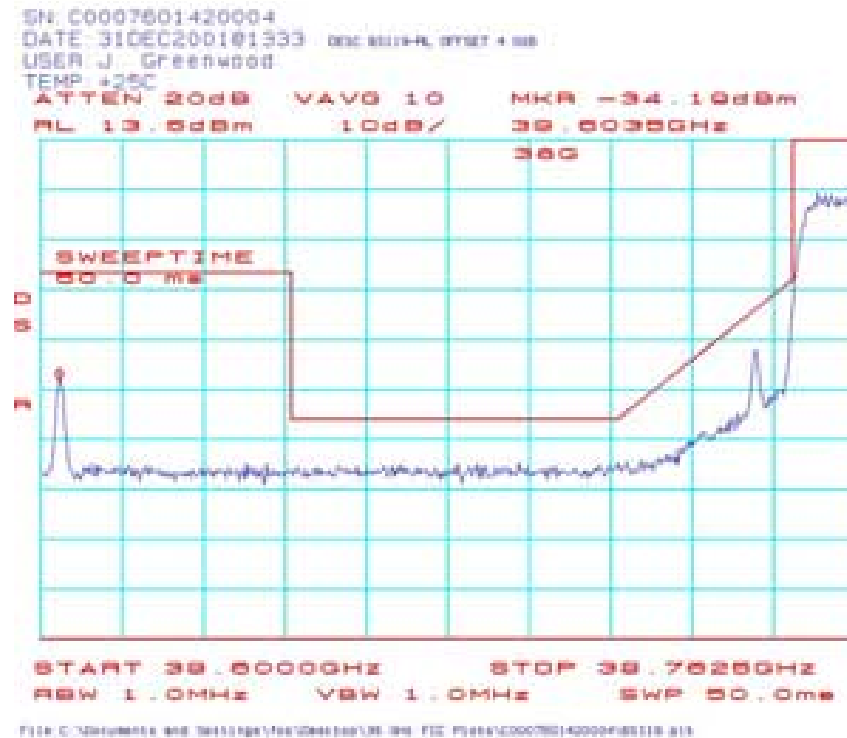


BS120: Spectrum Mask Plots (BS-ODU) 39.7625 GHz 16QAM:

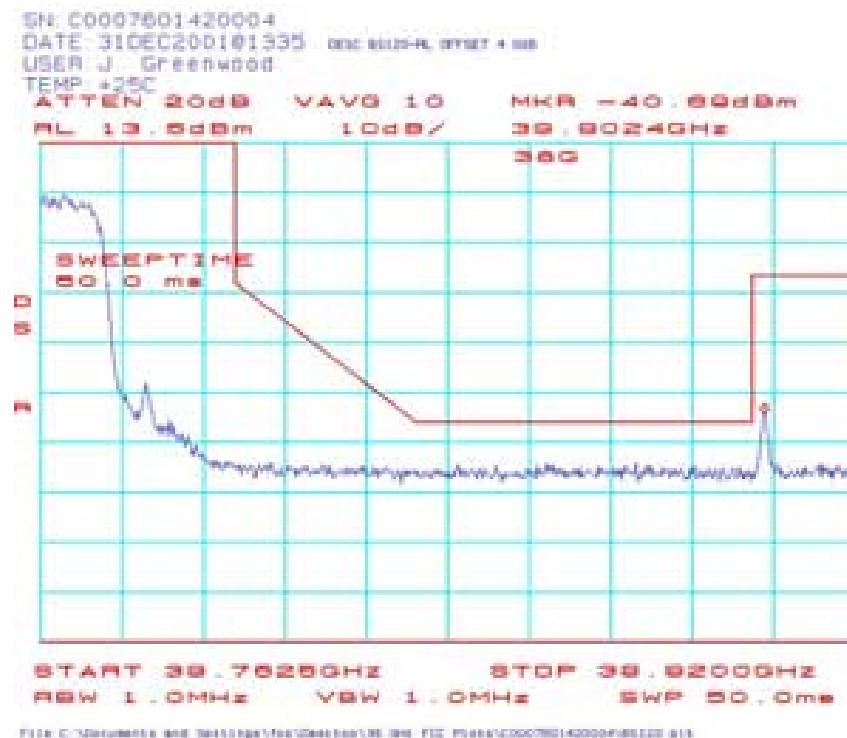


BS122: Spectrum Mask Plots (BS-ODU) 39.7625 GHz 64QAM:

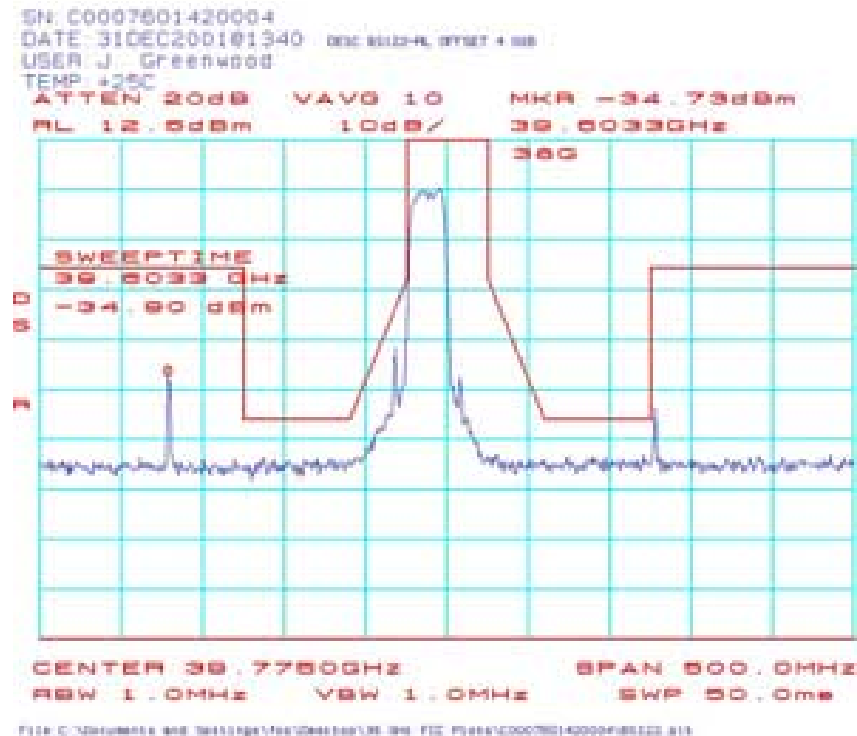


BS123: Spectrum Mask Plots (BS-ODU) 39.7625 GHz 64QAM:

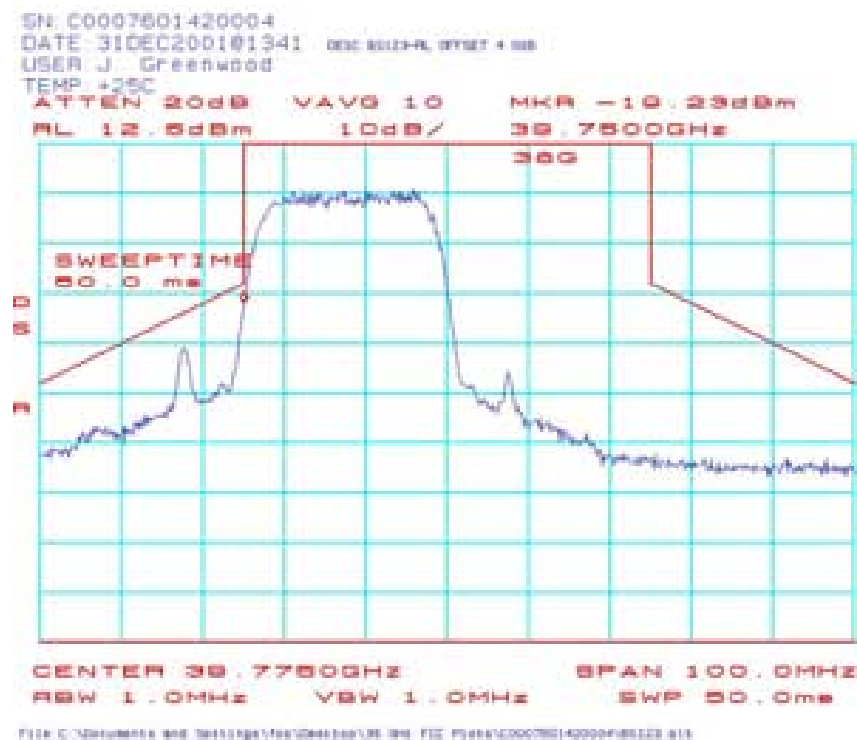


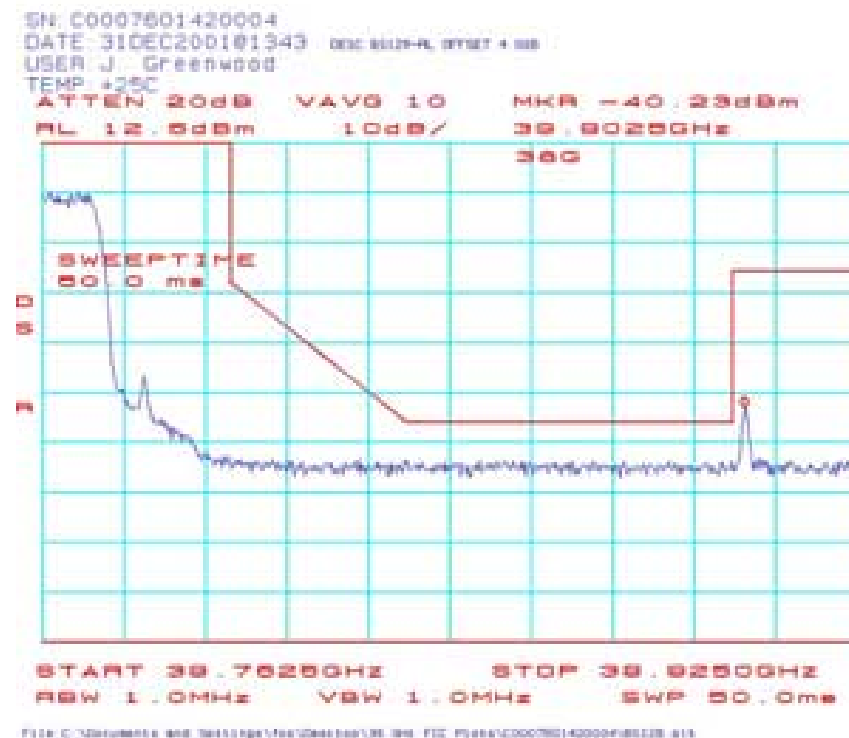


BS128: Spectrum Mask Plots (BS-ODU) 39.7875 GHz QPSK:

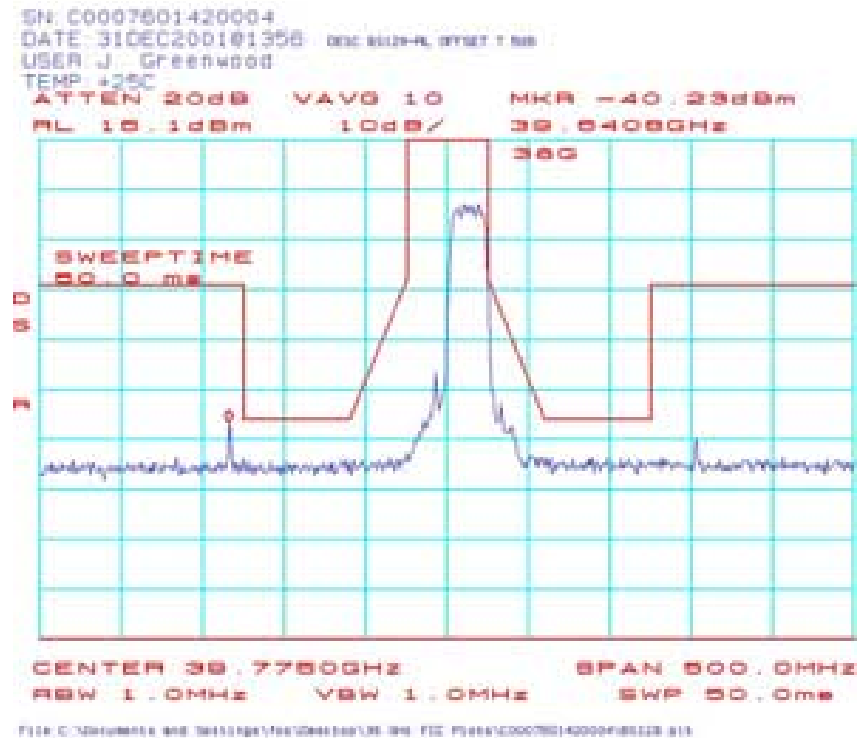


BS129 Spectrum Mask Plots (BS-ODU) 39.7875 GHz QPSK:

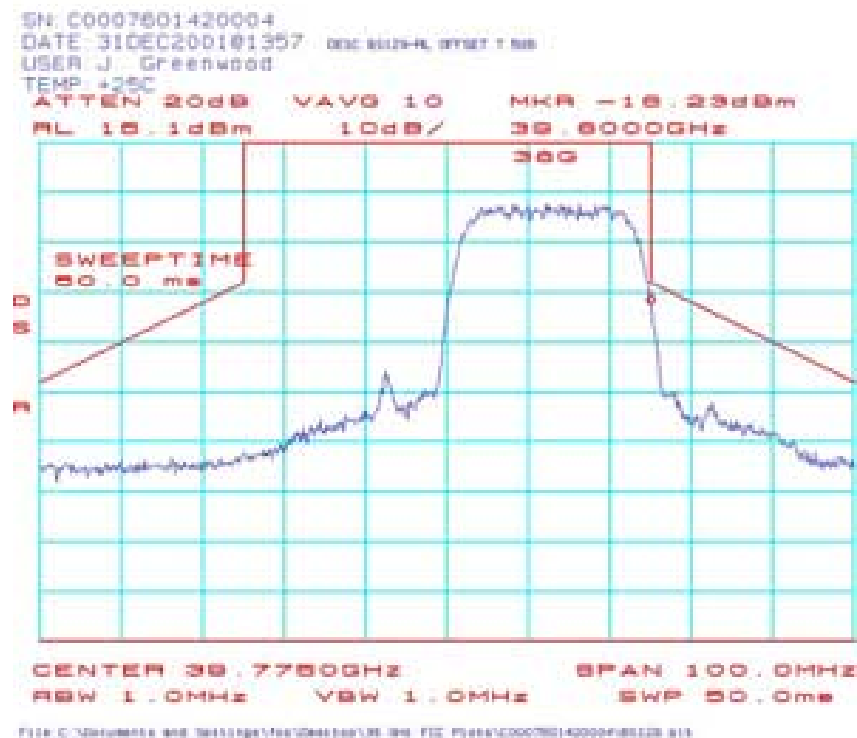


BS131: Spectrum Mask Plots (BS-ODU) 39.7875 GHz QPSK:

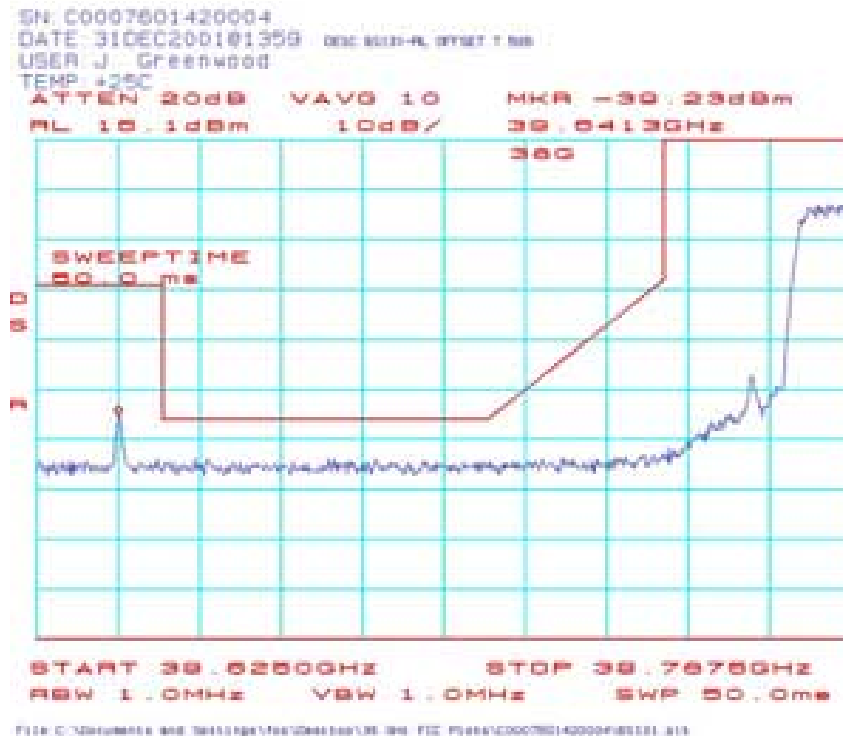

BS132: Spectrum Mask Plots (BS-ODU) 39.7875 GHz QPSK:

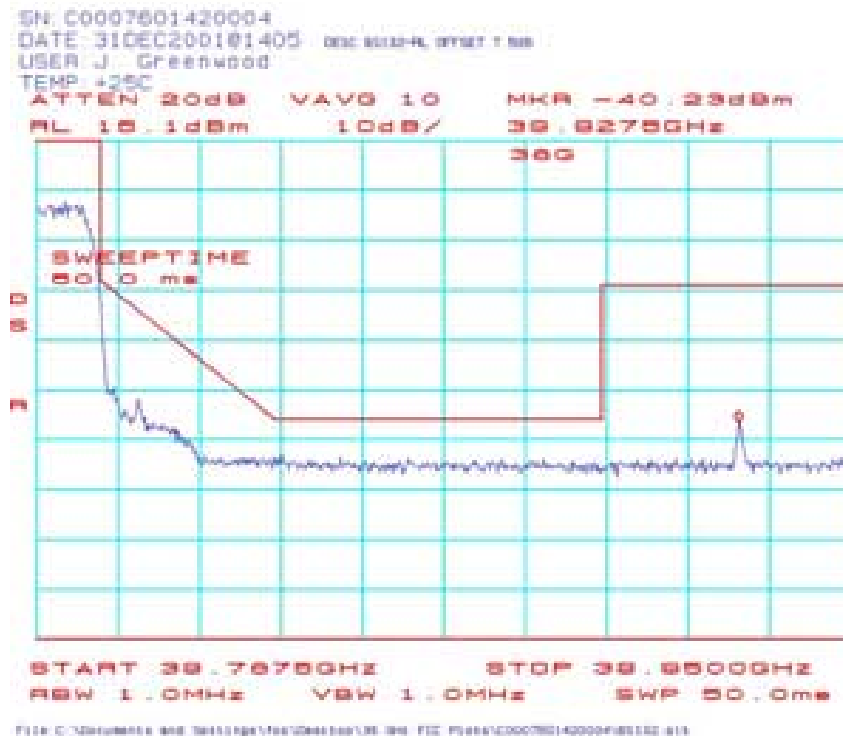


BS134: Spectrum Mask Plots (BS-ODU) 39.7875 GHz 16QAM:

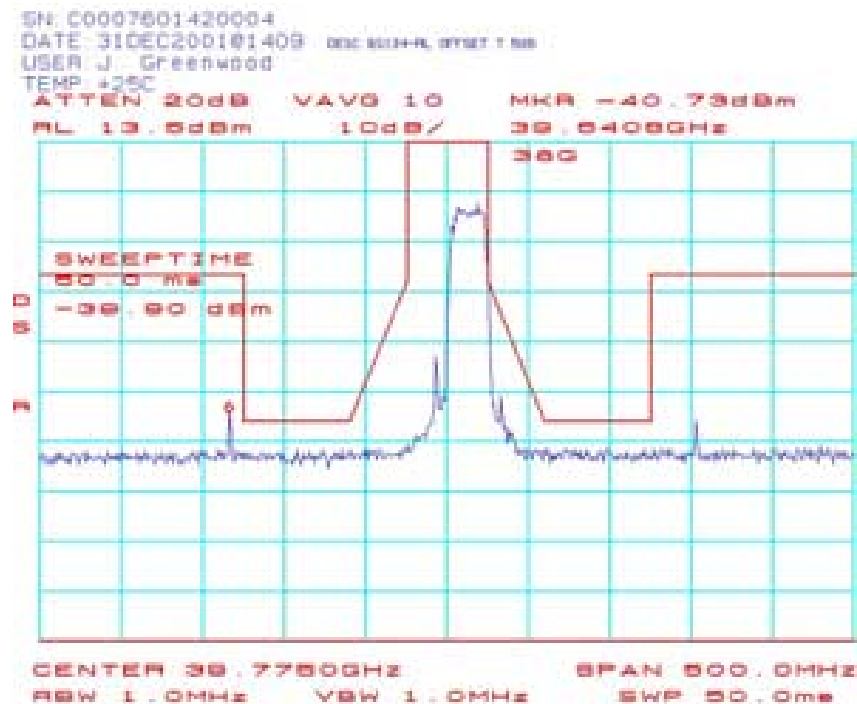


File: C:\Documents and Settings\jgreenwood\My Documents\Fiberless\3900\BS134-RL.FIG Plot: C:\Documents and Settings\jgreenwood\My Documents\Fiberless\3900\BS134-RL.FIG

BS135: Spectrum Mask Plots (BS-ODU) 39.7875 GHz 16QAM:

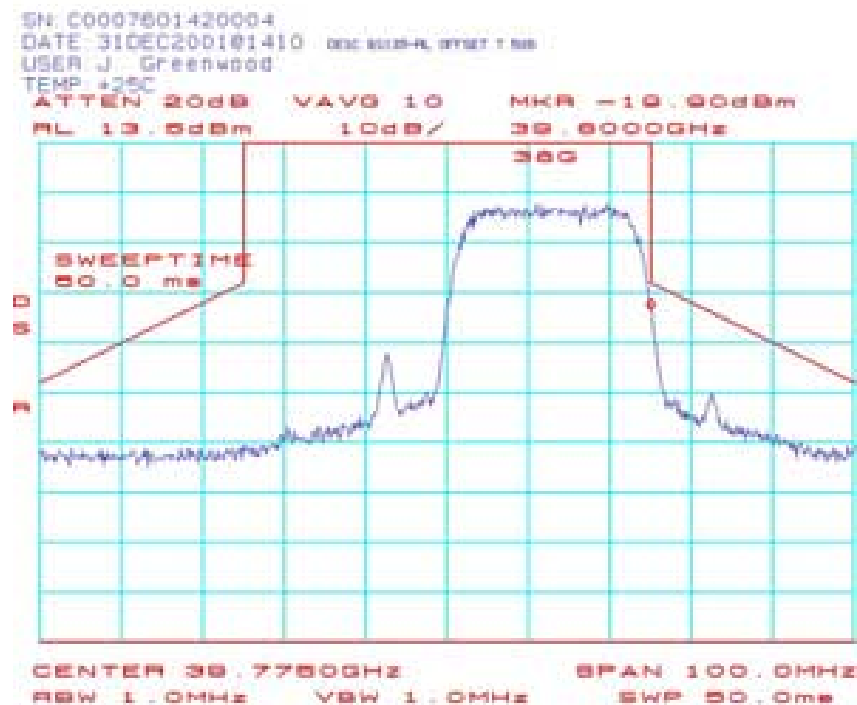


File: C:\Documents and Settings\jgreenwood\My Documents\Fiberless\3900\BS135-RL.FIG Plot: C:\Documents and Settings\jgreenwood\My Documents\Fiberless\3900\BS135-RL.FIG


BS137: Spectrum Mask Plots (BS-ODU) 39.7875 GHz 16QAM:

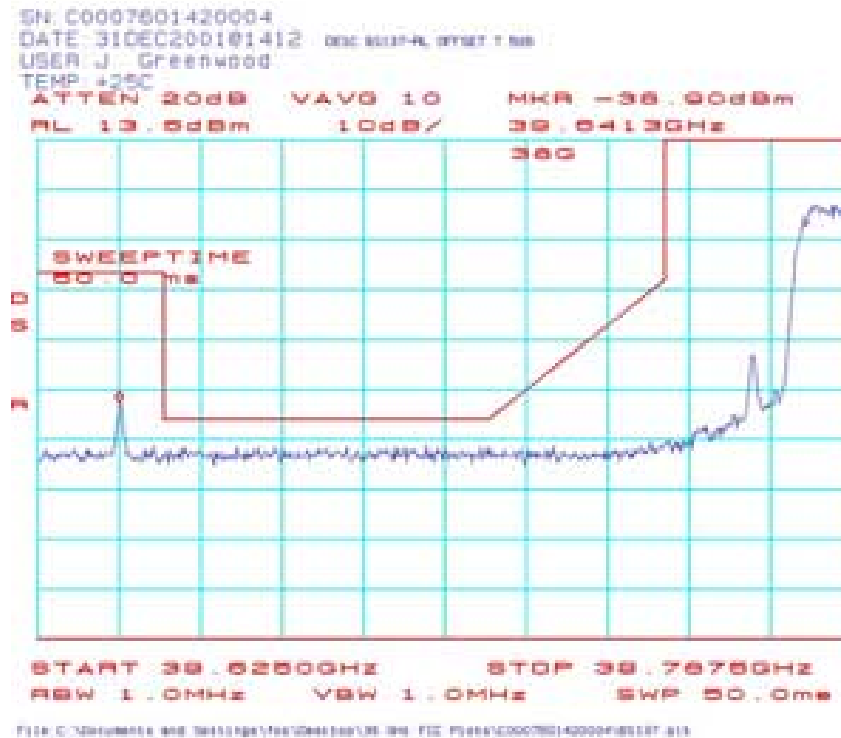


BS138: Spectrum Mask Plots (BS-ODU) 39.7875 GHz 16QAM:

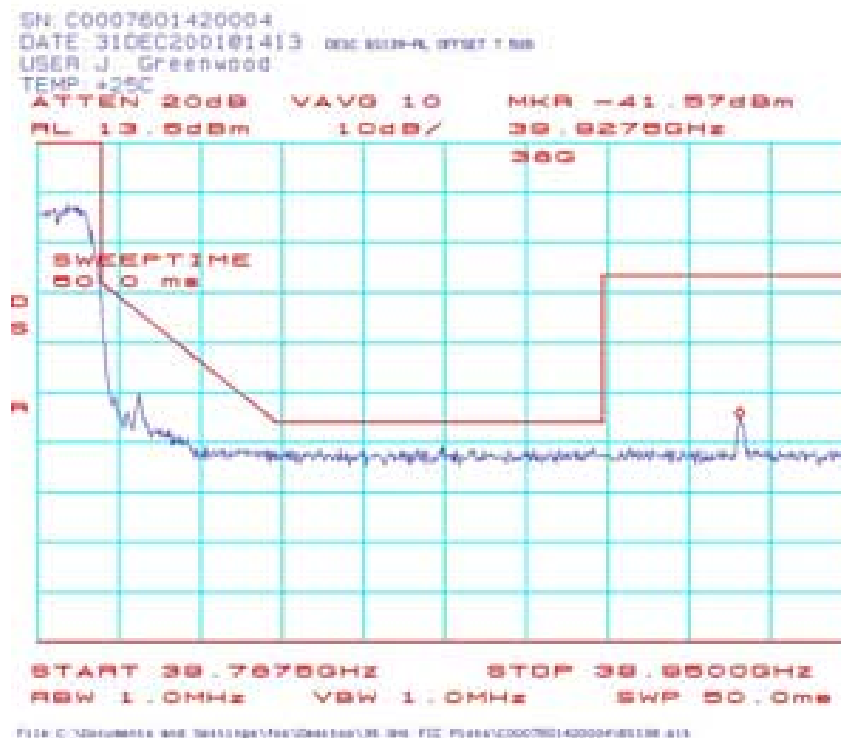


BS140: Spectrum Mask Plots (BS-ODU) 39.7875 GHz 64QAM:

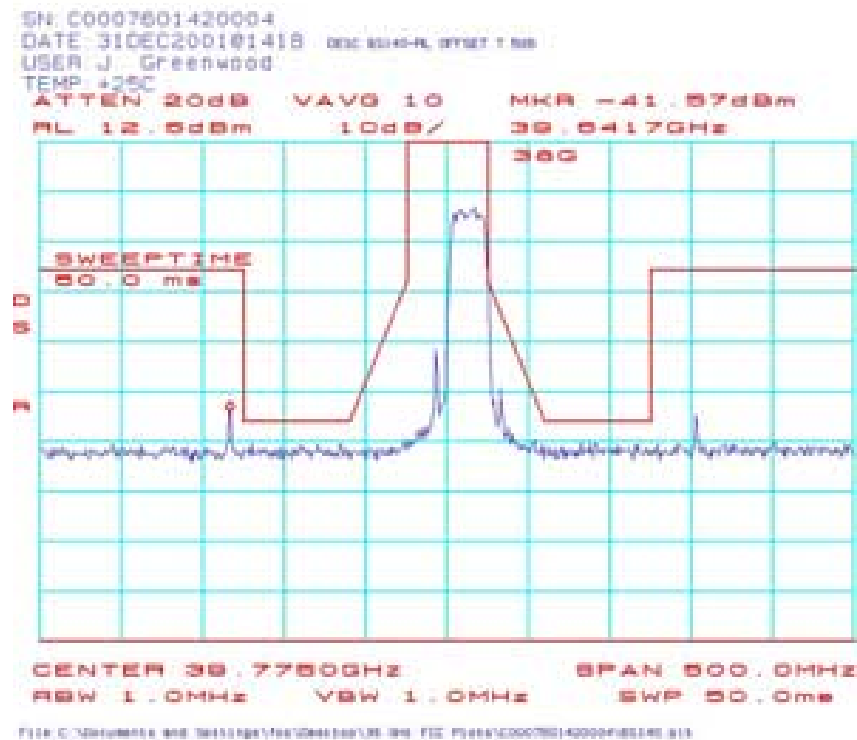

BS141: Spectrum Mask Plots (BS-ODU) 39.7875 GHz 64QAM:

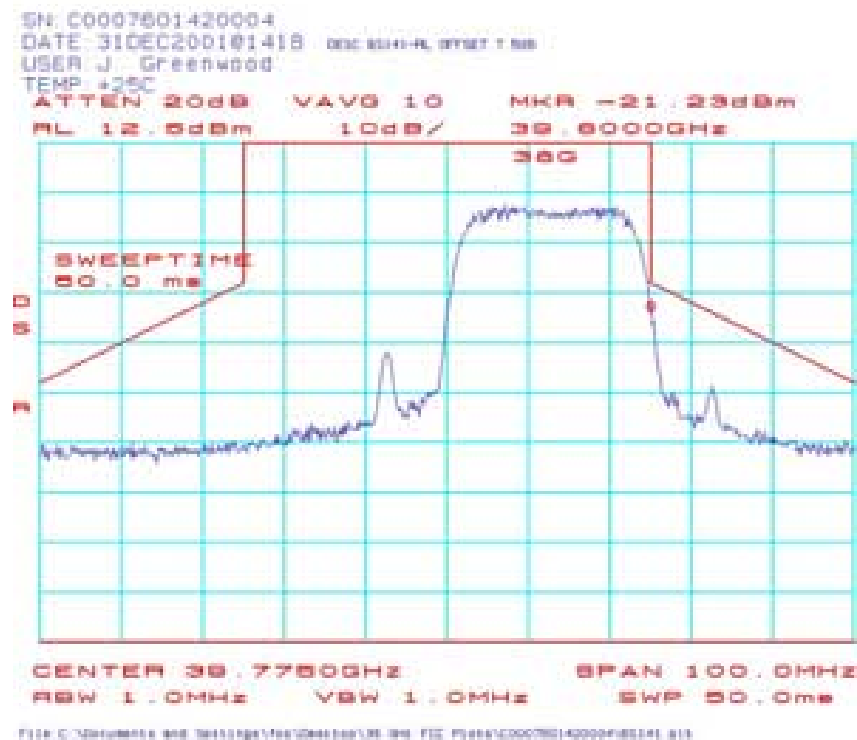

BS143: Spectrum Mask Plots (BS-ODU) 39.7875 GHz 64QAM:

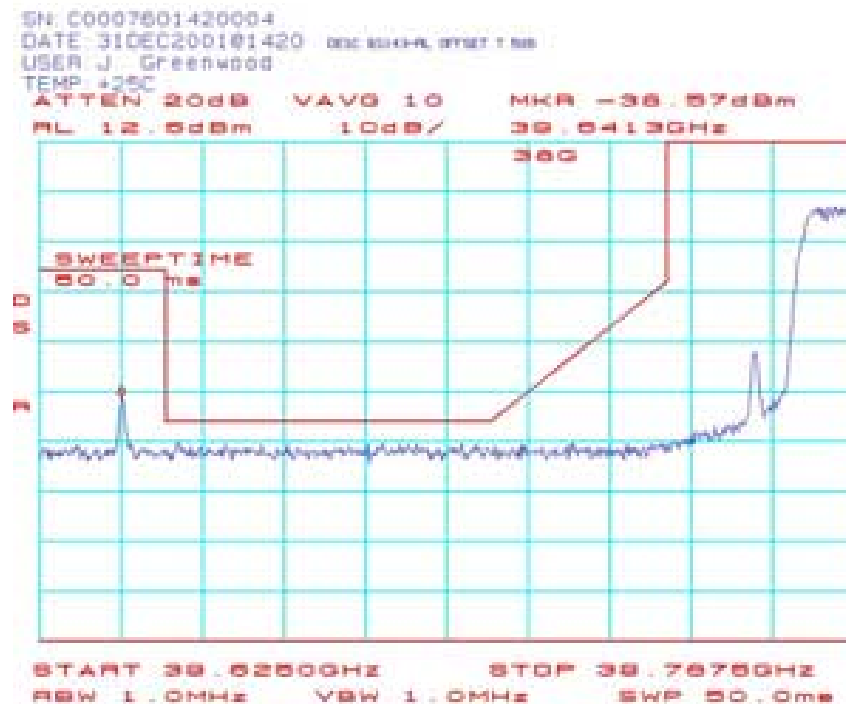


File: C:\Documents and Settings\jag\My Documents\JAG File Files\C0007601420004\BS143.s15

BS002: Occupied Bandwidth (BS-ODU) 38.6625GHz QPSK:




File: C:\Documents and Settings\jag\My Documents\JAG File Files\C0007601420004\BS002.s15

BS063: Occupied Bandwidth (BS-ODU) 38.6875 GHz QPSK:

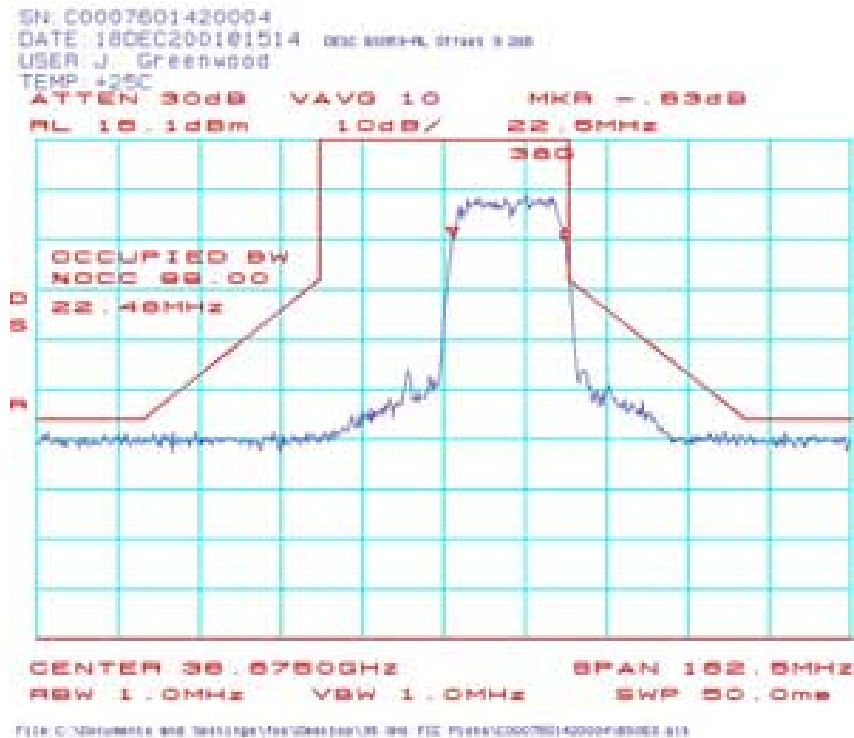


BS053: Occupied Bandwidth (BS-ODU) 38.6625 GHz 16QAM:

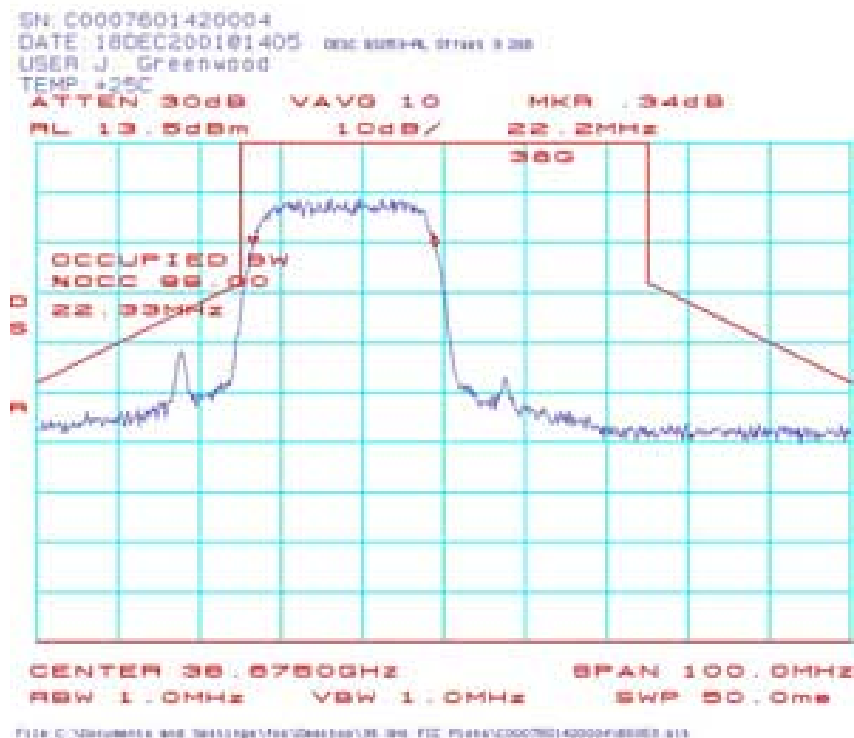

BS067: Occupied Bandwidth (BS-ODU) 38.6875 GHz 16QAM:



BS058: Occupied Bandwidth (BS-ODU) 38.6625 GHz 64QAM:

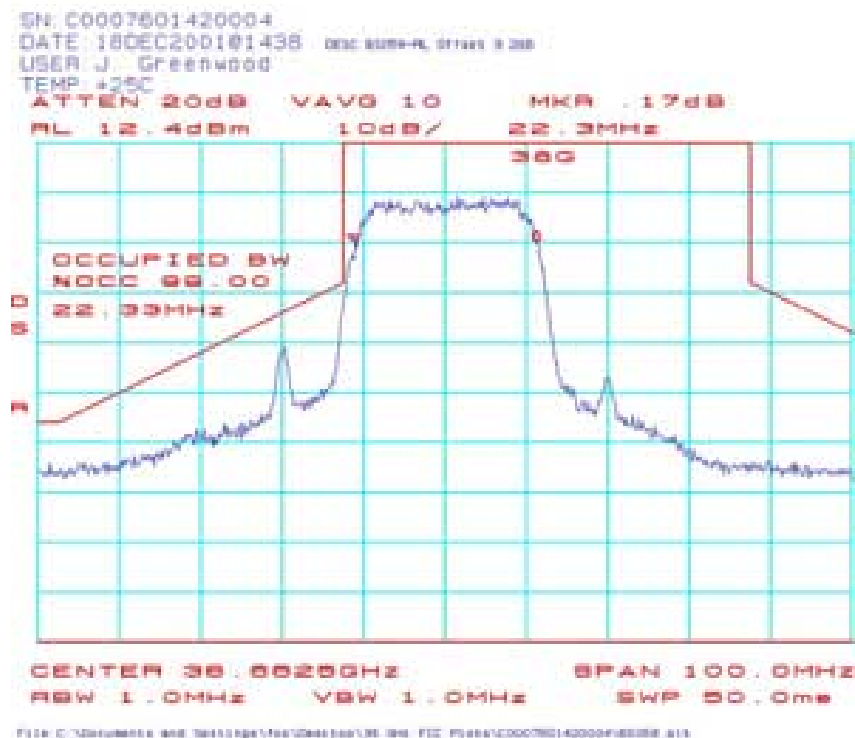

SN: C0007601420004
DATE 18DEC2001@1557 DMC 8073-RL, 071001 9 200
USER J. Greenwood
TEMP +25C
#ATTEN 30dB VAVG 10 MKR 1.00dB
RL 12.5dBm 10dB/ 22.3MHz
360
OCCUPIED BW
5000 99.00
22.33MHz
CENTER 36.6750GHz SPAN 100.0MHz
#RBW 1.0MHz VBW 1.0MHz SWP 50.0ms
FILE C:\Documents and Settings\jagreen\My Documents\US 01_FIG Files\C0007601420004\8073-RL


SN: C0007601420004
DATE: 31DEC200101032 DDC: 8075-RL OFFSET: 3.4dB
USER: J. GREENWOOD
TEMP: +25C
ATTN: 30dB VAWG: 10 MKR: -.50dB
RL: 15.7dBm 10dB/ 22.2MHz
360

OCCUPIED BW
NOISE 98.00
22.17MHz


CENTER 39.2250GHz SPAN 100.0MHz
RBW 1.0MHz VBW 1.0MHz SWP 50.0ms

File C:\Documents and Settings\jag\Documents\US 8M_FIG_Planes\C0007601420004\F80276_81M


BS097: Occupied Bandwidth (BS-ODU) 39.2375 GHz QPSK:

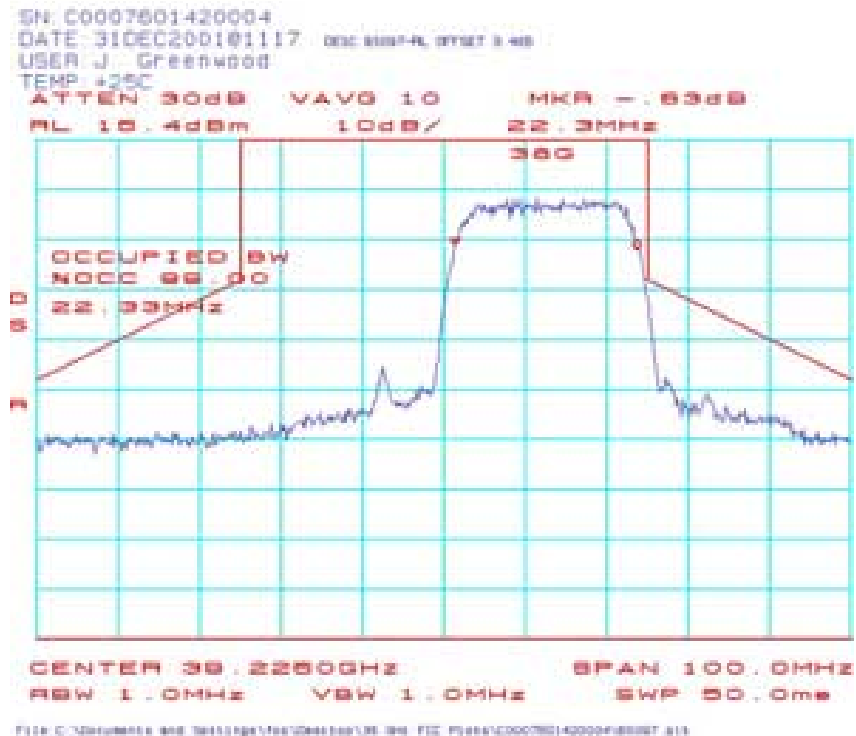

BS084: Occupied Bandwidth (BS-ODU) 39.2125 GHz 16QAM:

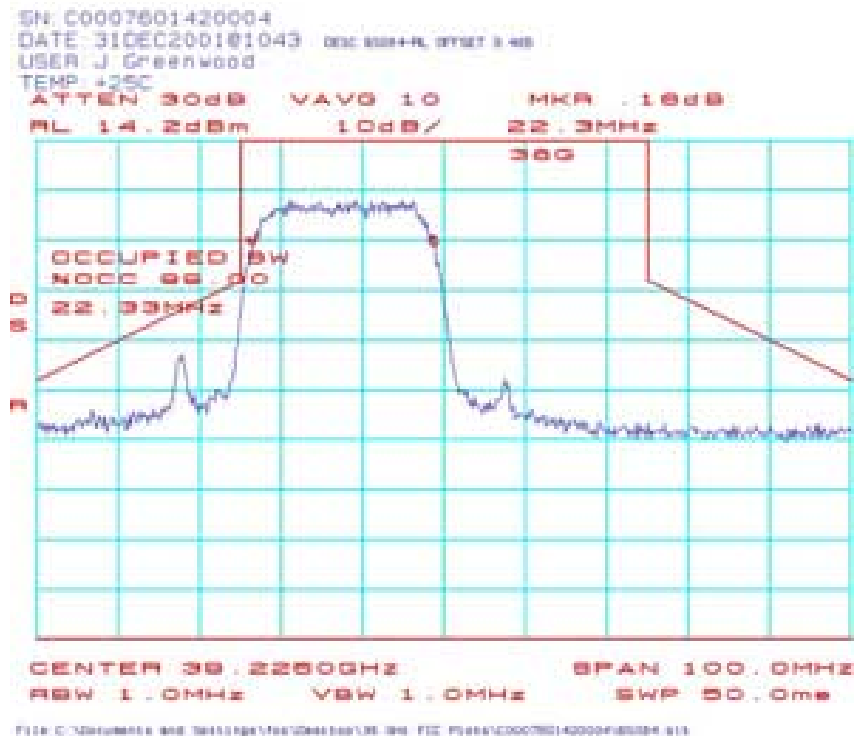


BS102: Occupied Bandwidth (BS-ODU) 38.2375 GHz 16QAM:

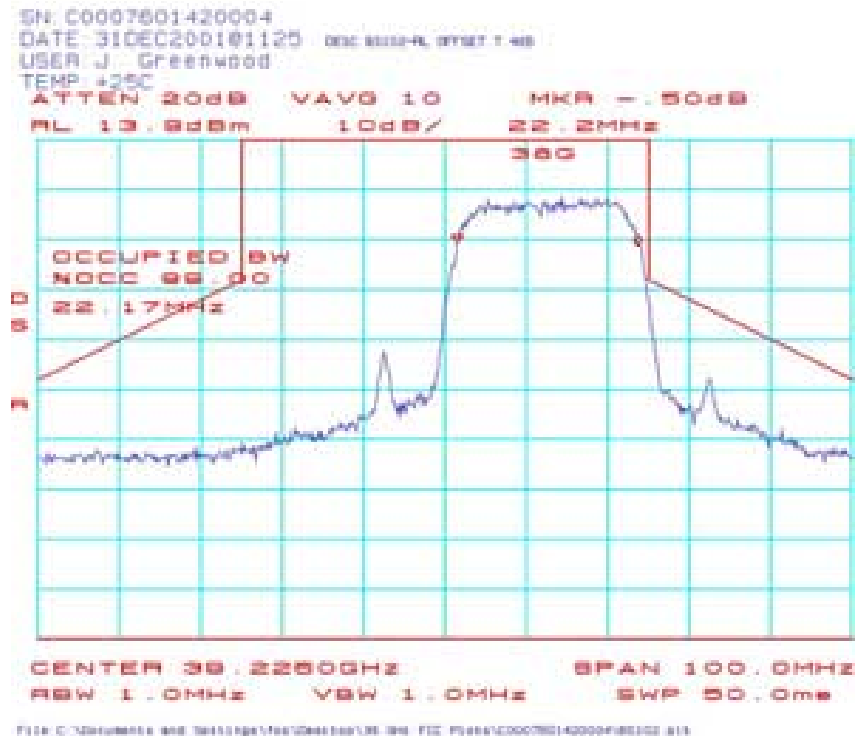

BS091: Occupied Bandwidth (BS-ODU) 39.2125 GHz 64QAM:



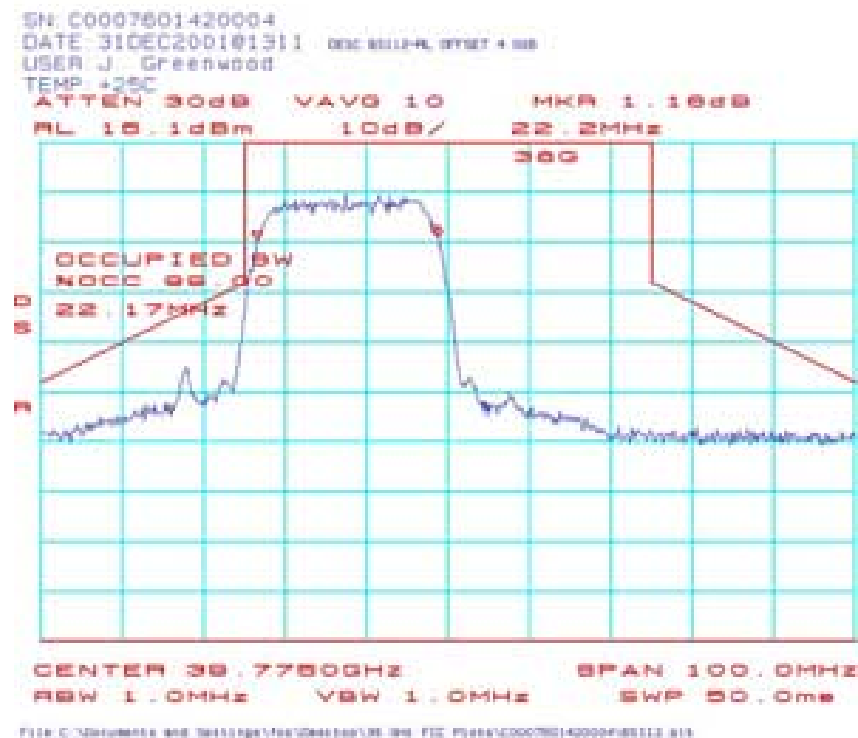


BS130: Occupied Bandwidth (BS-ODU) 39.7875 GHz QPSK:



BS118: Occupied Bandwidth (BS-ODU) 39.7625 GHz 16QAM:




BS136: Occupied Bandwidth (BS-ODU) 39.7875 GHz 16QAM:

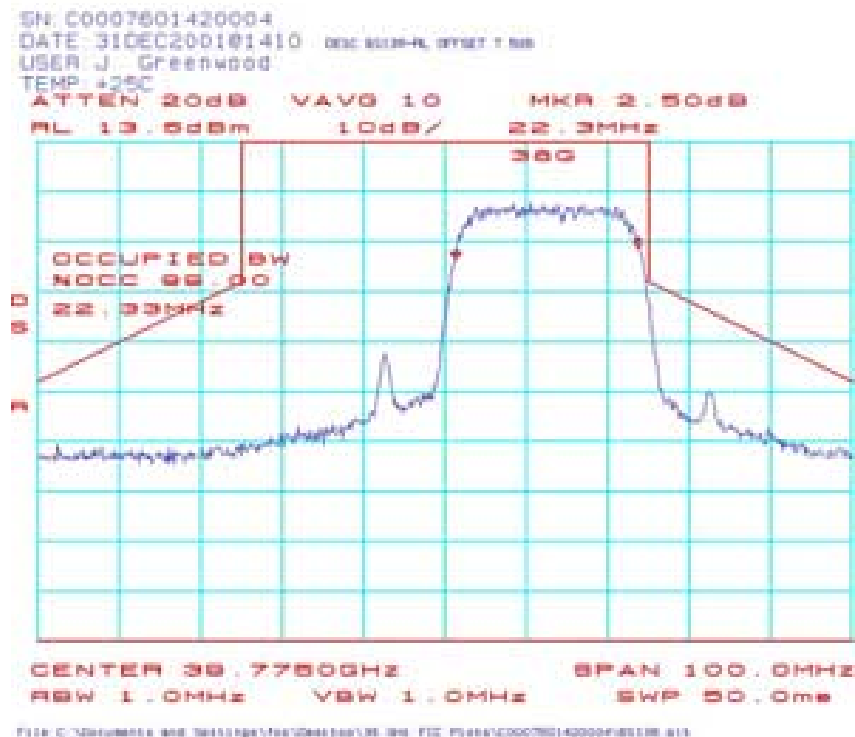


BS124: Occupied Bandwidth (BS-ODU) 39.7625 GHz 64QAM:




BS142: Occupied Bandwidth (BS-ODU) 39.7875 GHz 64QAM:

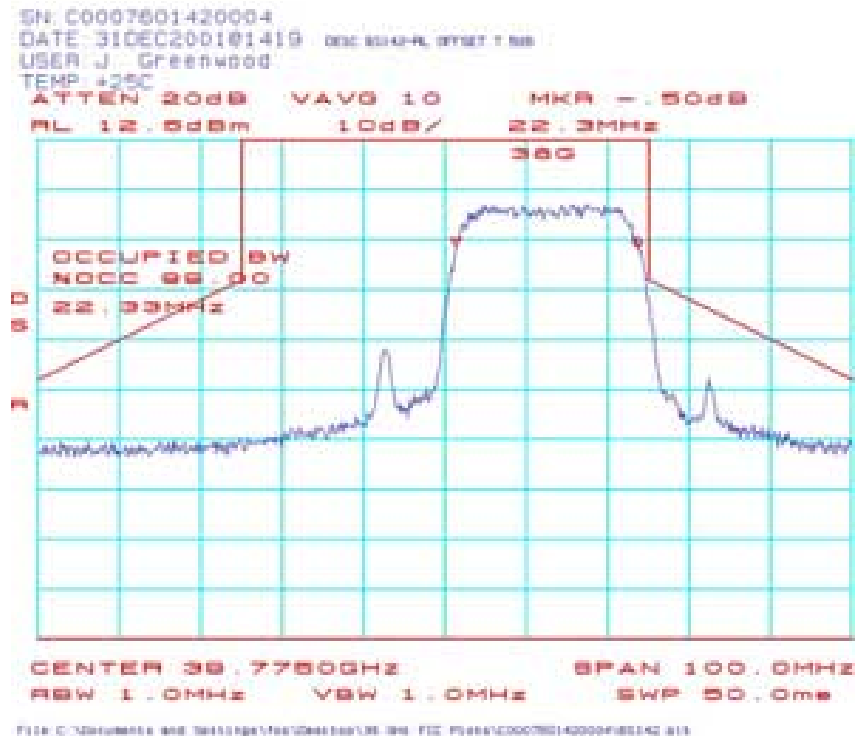


CPE006: Spurious Emission Plots (CPE-ODU) 9 kHz-50 kHz

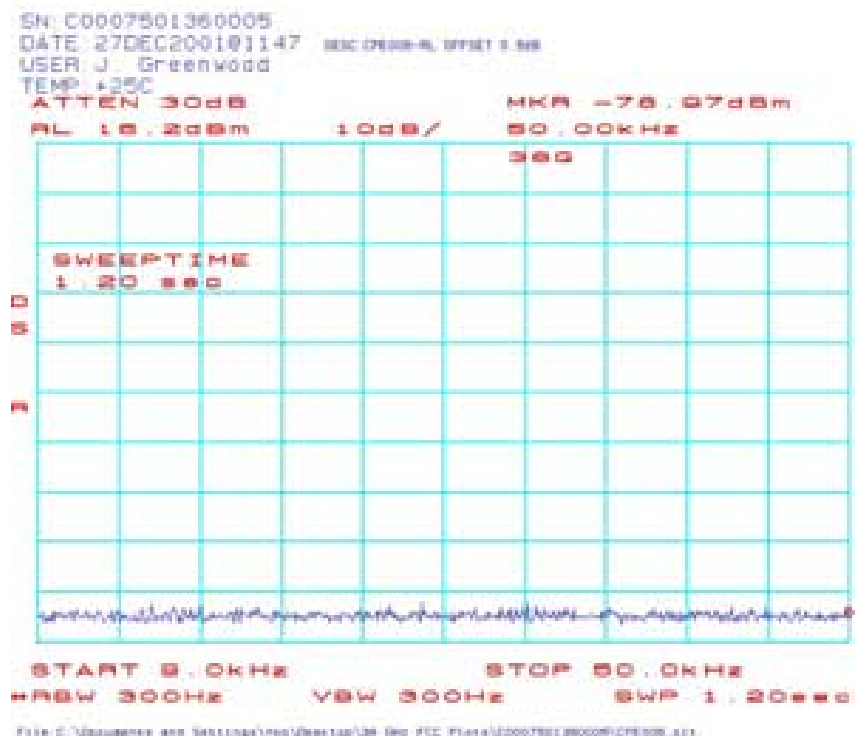


CPE007: Spurious Emission Plots (CPE-ODU) 50 kHz-100 kHz

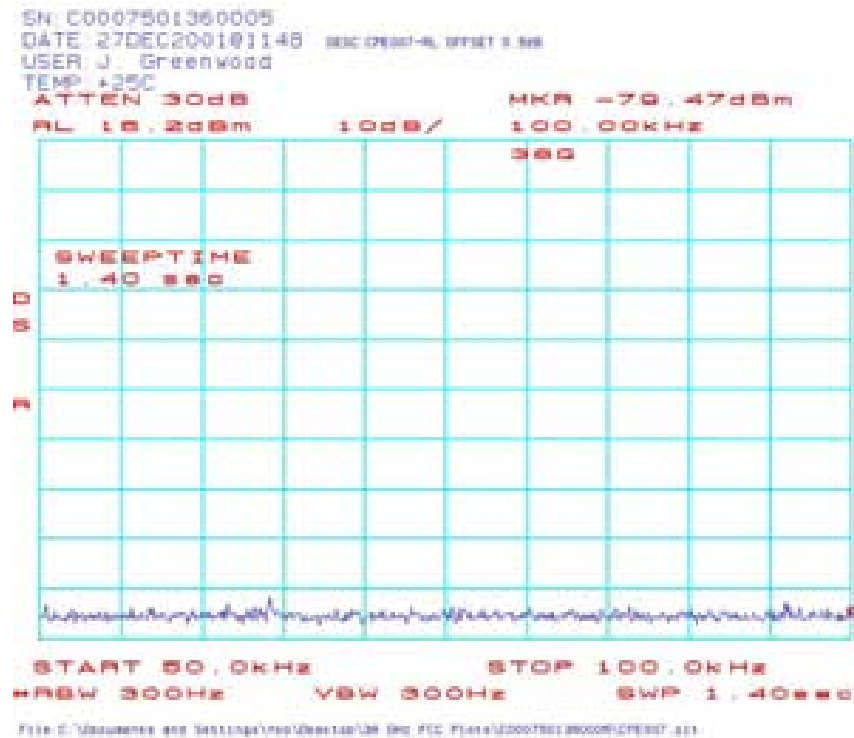


CPE008: Spurious Emission Plots (CPE-ODU) 100kHz-150 kHz

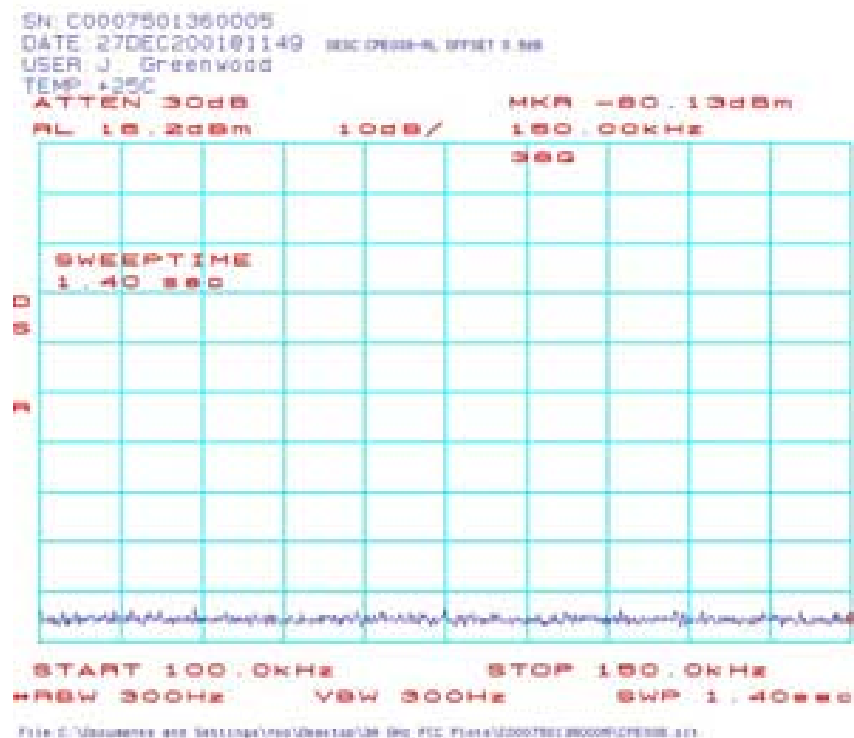


CPE010: Spurious Emission Plots (CPE-ODU) 150 kHz-1.0 MHz

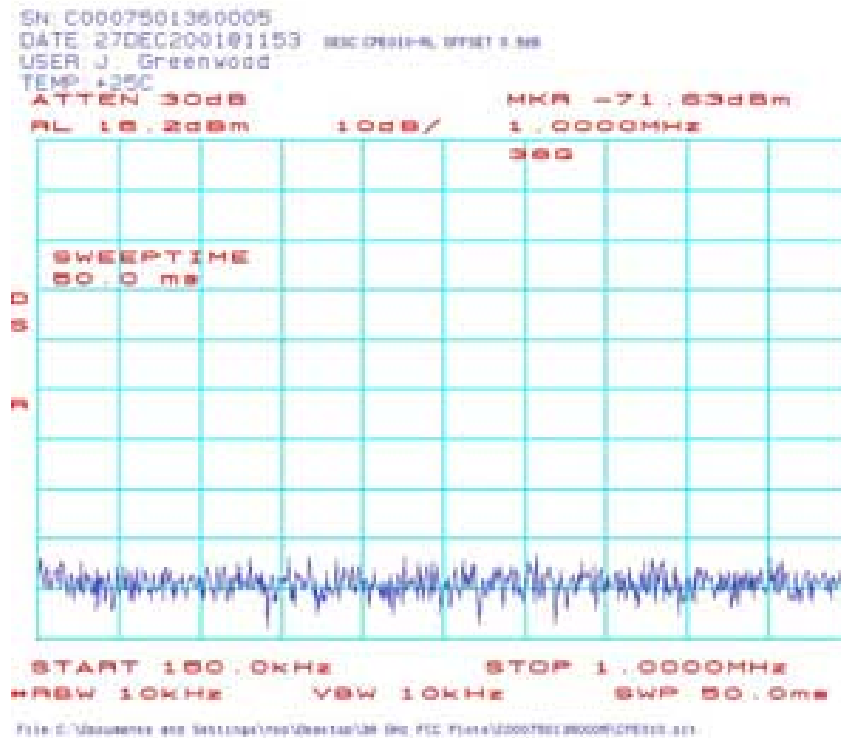


CPE011: Spurious Emission Plots (CPE-ODU) 1.0 MHz-10.0 MHz

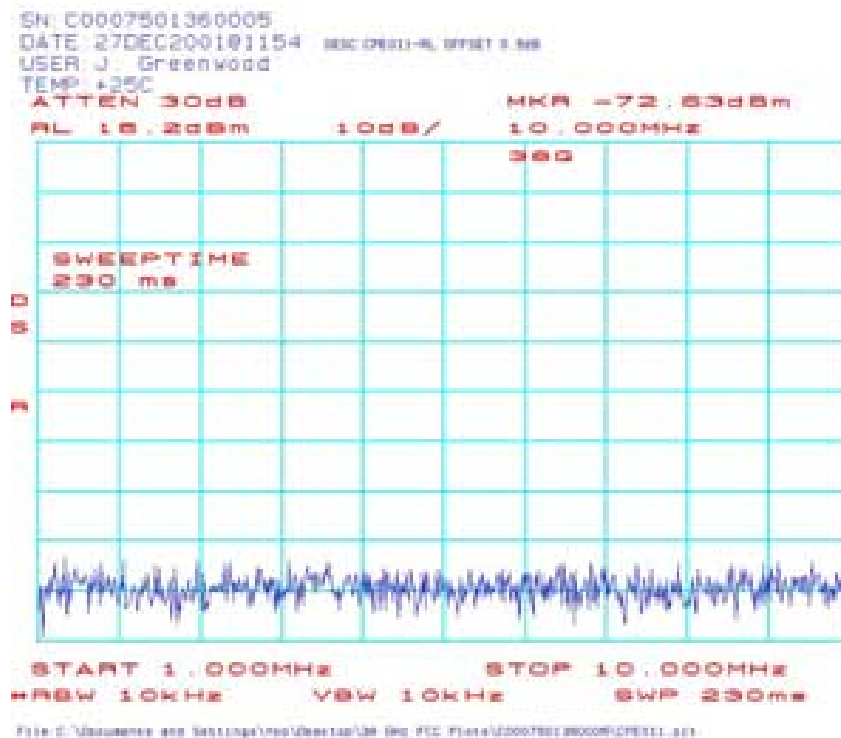


CPE012: Spurious Emission Plots (CPE-ODU) 10.0 MHz-30.0 MHz

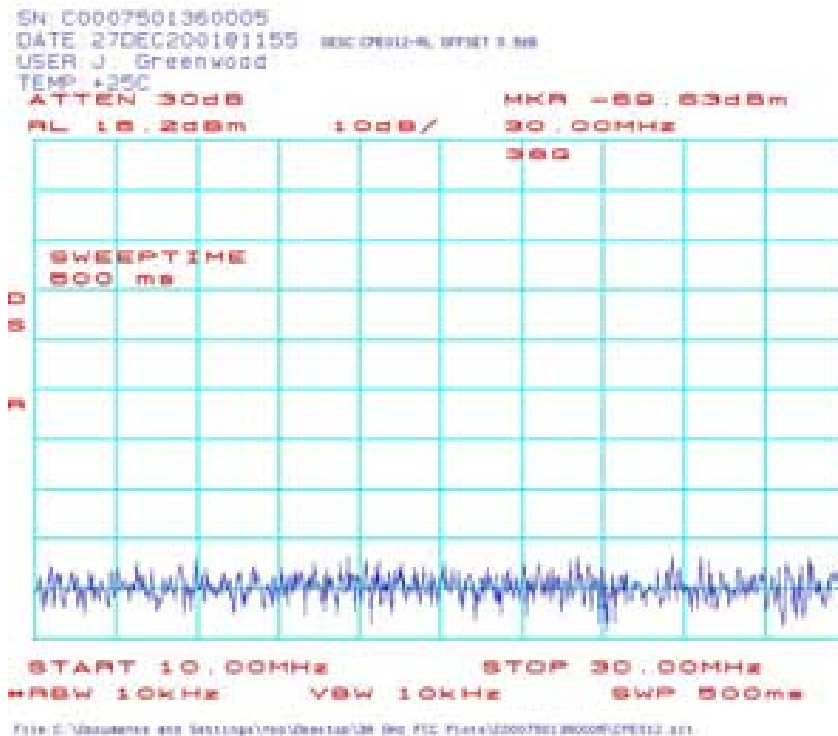


CPE015: Spurious Emission Plots (CPE-ODU) 30.0 MHz -200.0 MHz

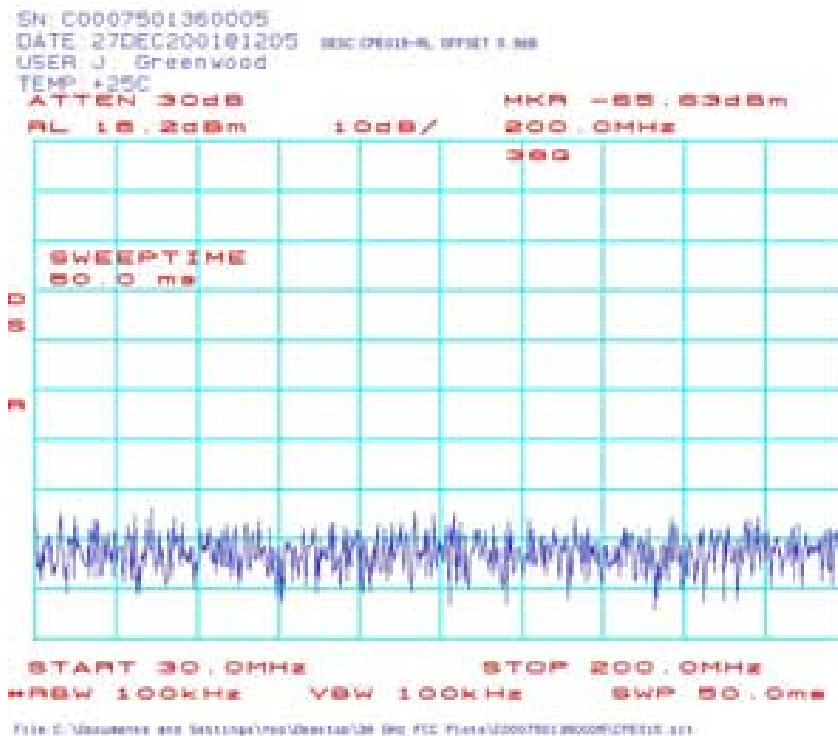


CPE016: Spurious Emission Plots (CPE-ODU) 200.0-500.0 MHz

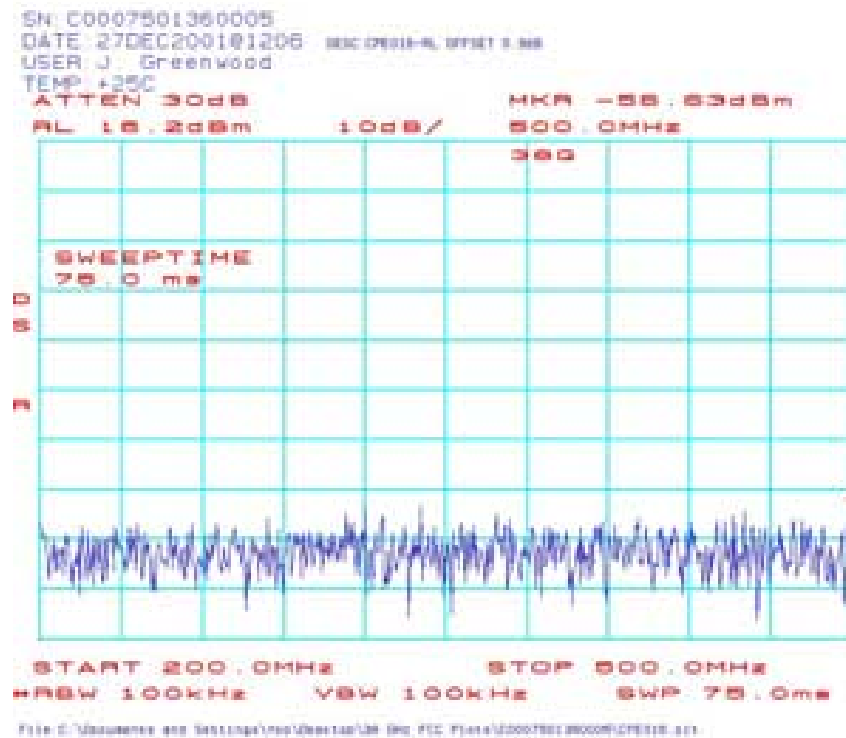


CPE017: Spurious Emission Plots (CPE-ODU) 500.0-800.0 MHz

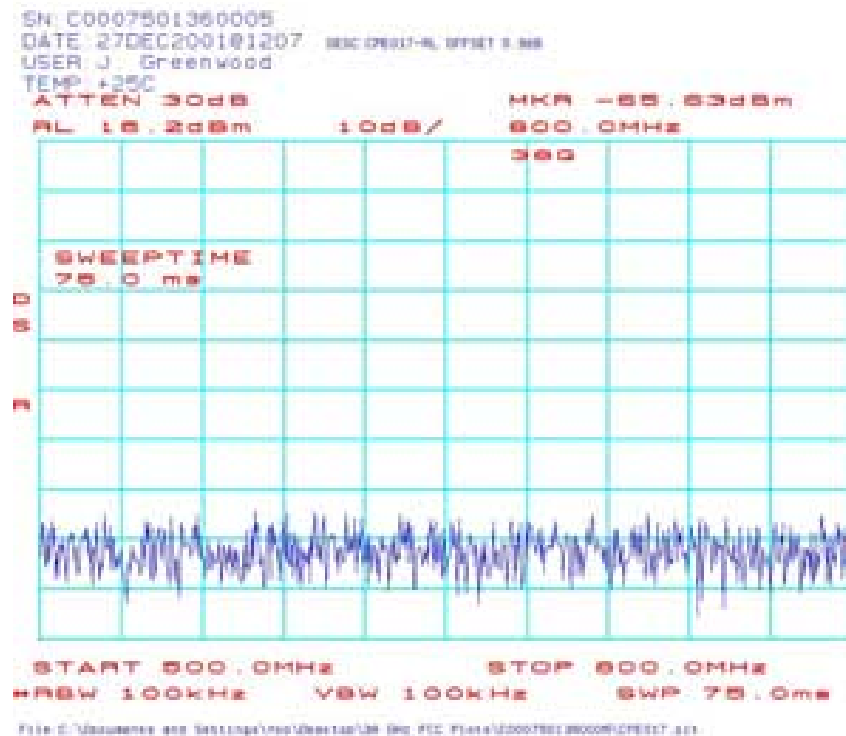


CPE014: Spurious Emission Plots (CPE-ODU) 800 MHz-1.0 GHz

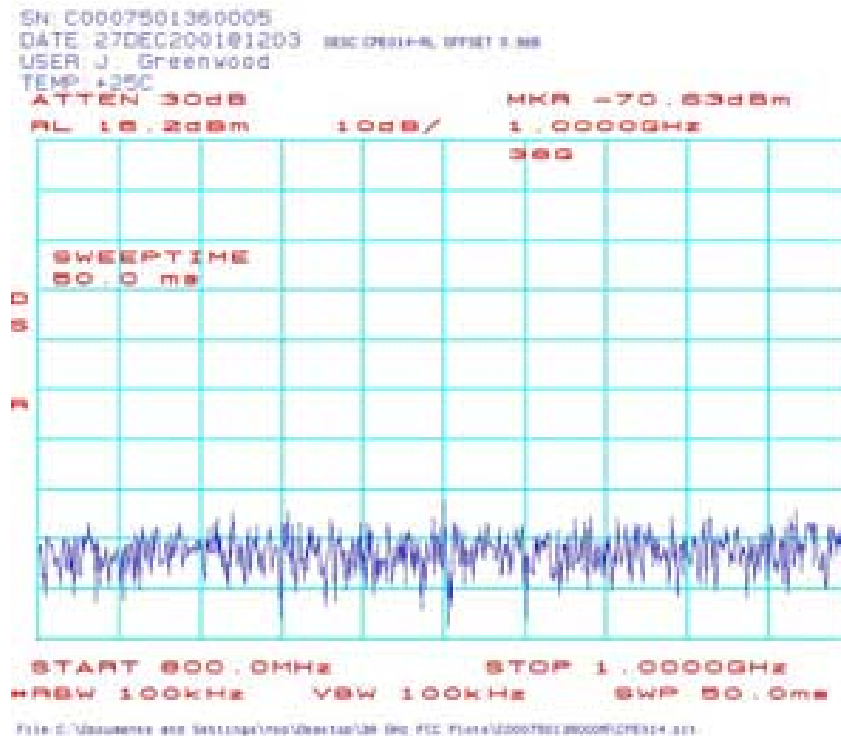


CPE020: Spurious Emission Plots (CPE-ODU) 1.0-2.5 GHz

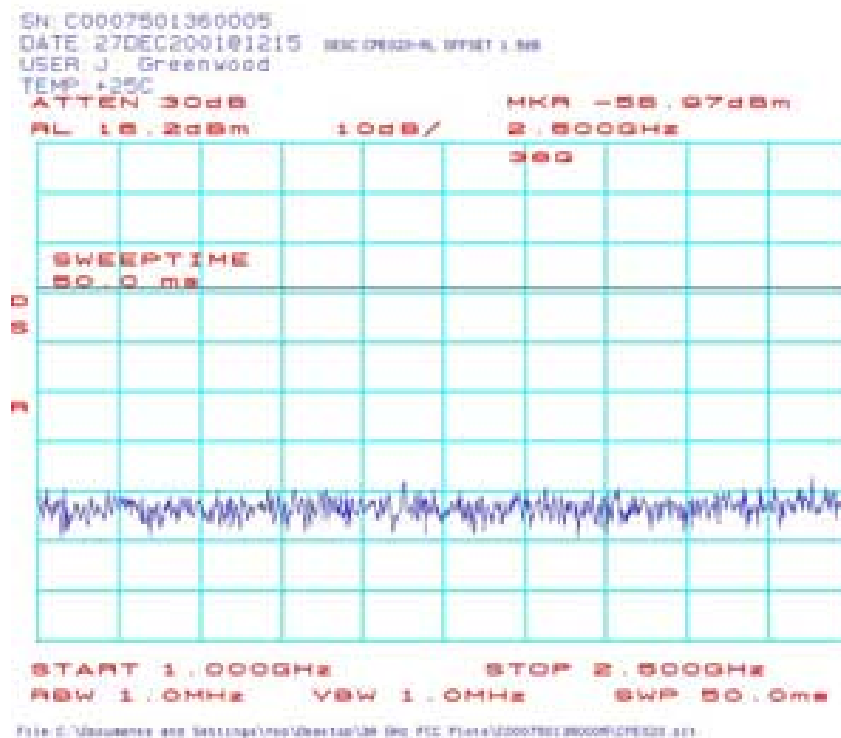


CPE021: Spurious Emission Plots (CPE-ODU) 2.5-5.0 GHz

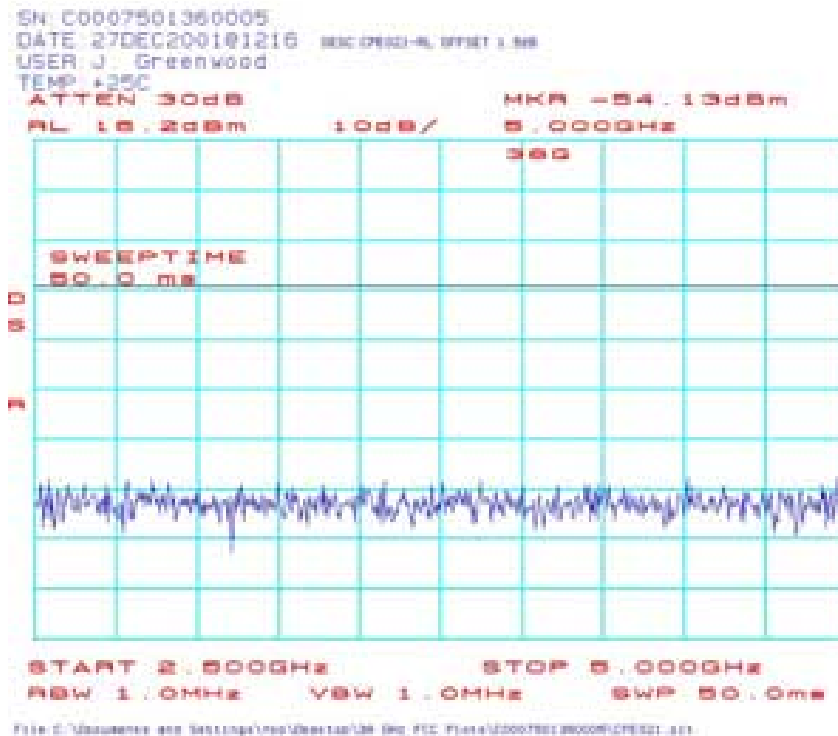

CPE022: Spurious Emission Plots (CPE-ODU) 5.0-7.5 GHz

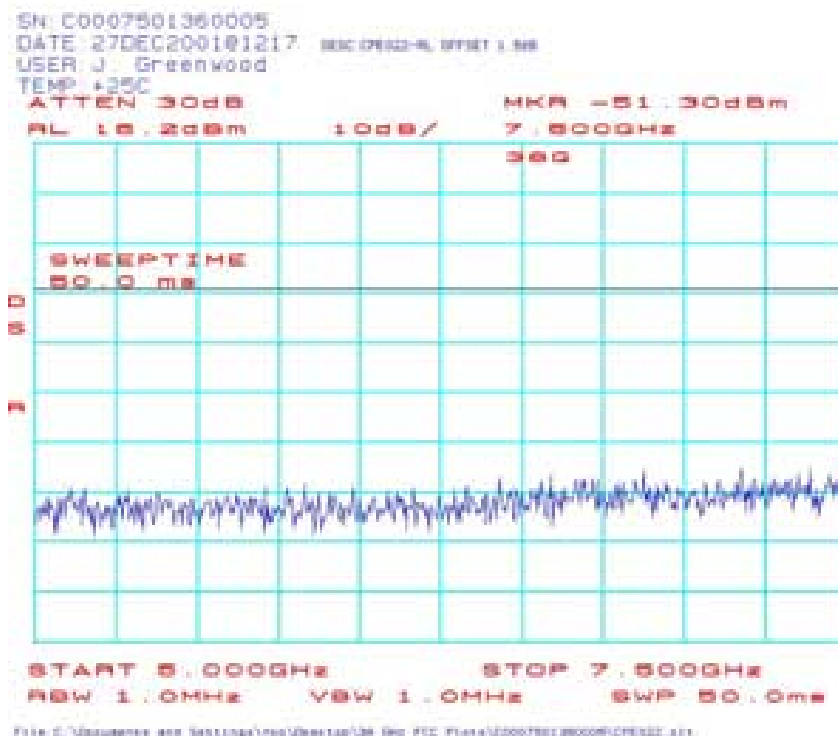


CPE024: Spurious Emission Plots (CPE-ODU) 7.5-10.0 GHz

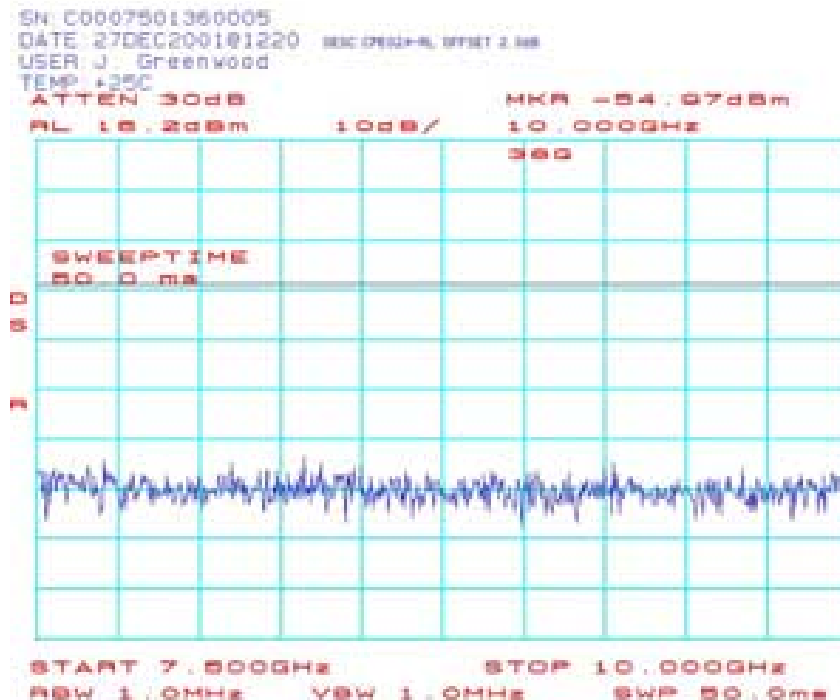


File C:\Documents and Settings\jmg\My Documents\Bldg FCC Files\12007501360005\CPE024.srf

CPE025: Spurious Emission Plots (CPE-ODU) 10.0-13.0 GHz

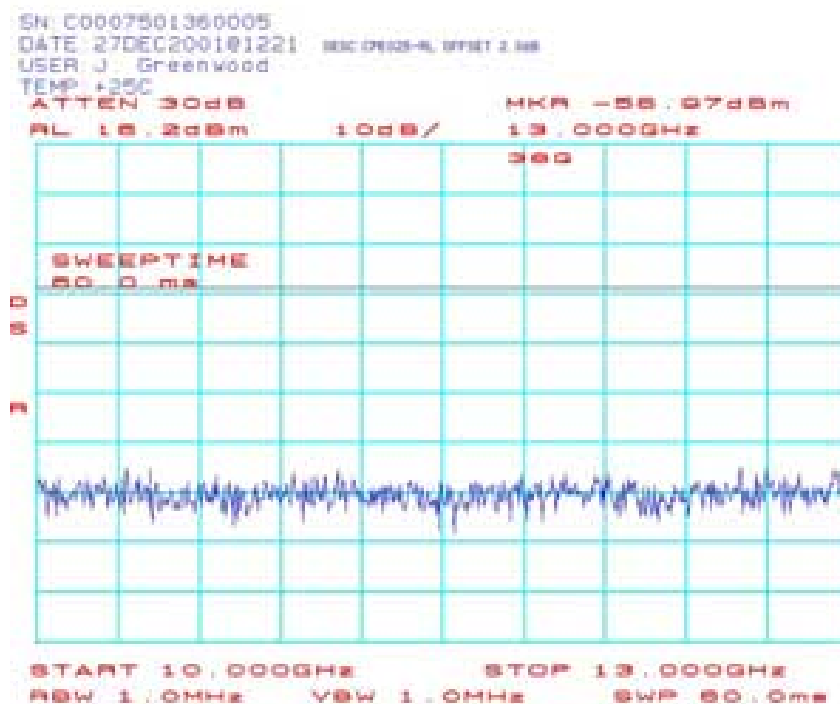


File C:\Documents and Settings\jmg\My Documents\Bldg FCC Files\12007501360005\CPE025.srf


CPE027: Spurious Emission Plots (CPE-ODU) 13.0-15.0 GHz

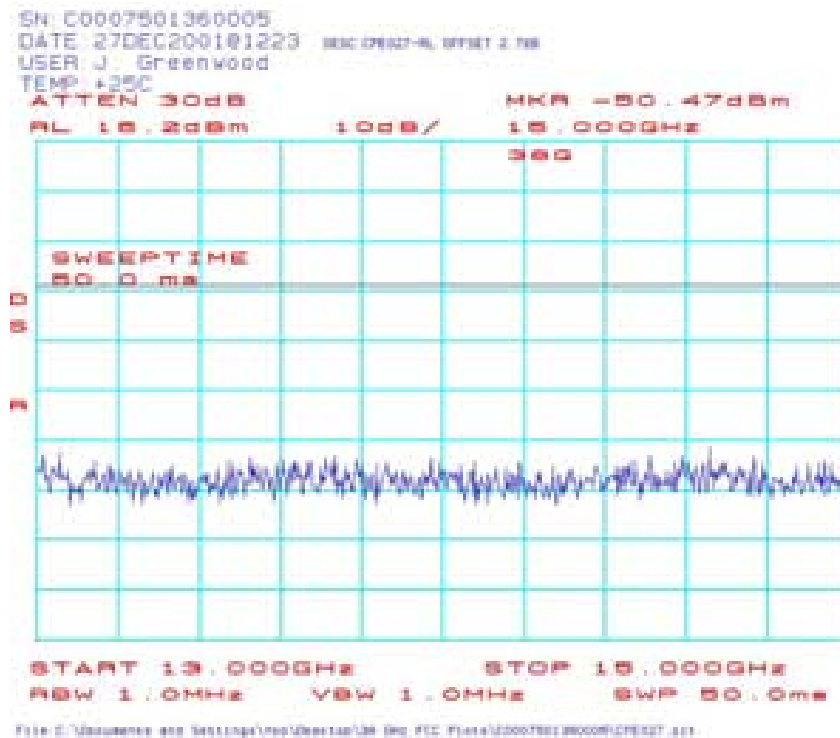


CPE028: Spurious Emission Plots (CPE-ODU) 15.0-17.0 GHz

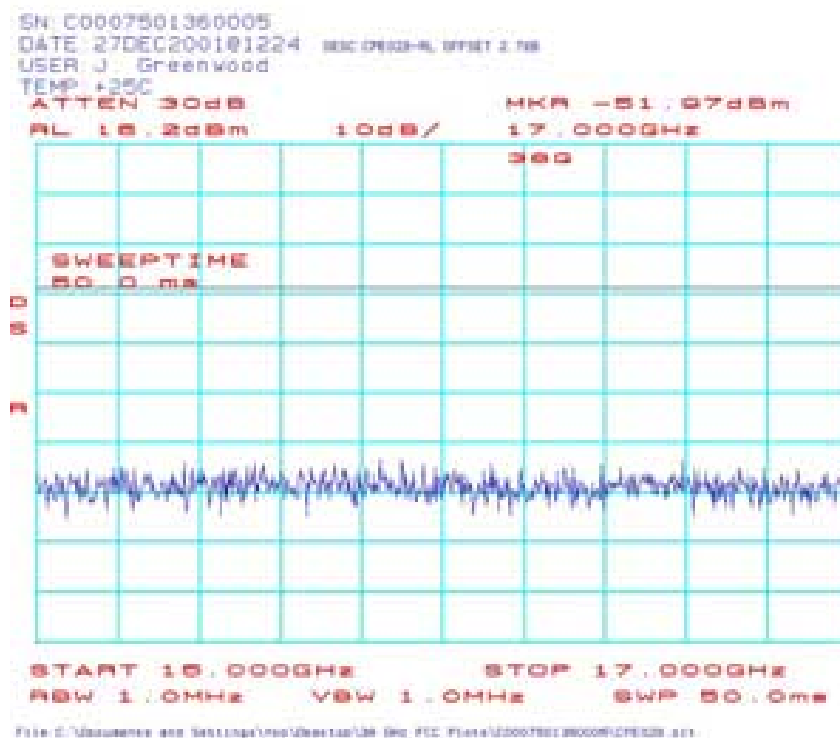


CPE029: Spurious Emission Plots (CPE-ODU) 17.0-20.0 GHz

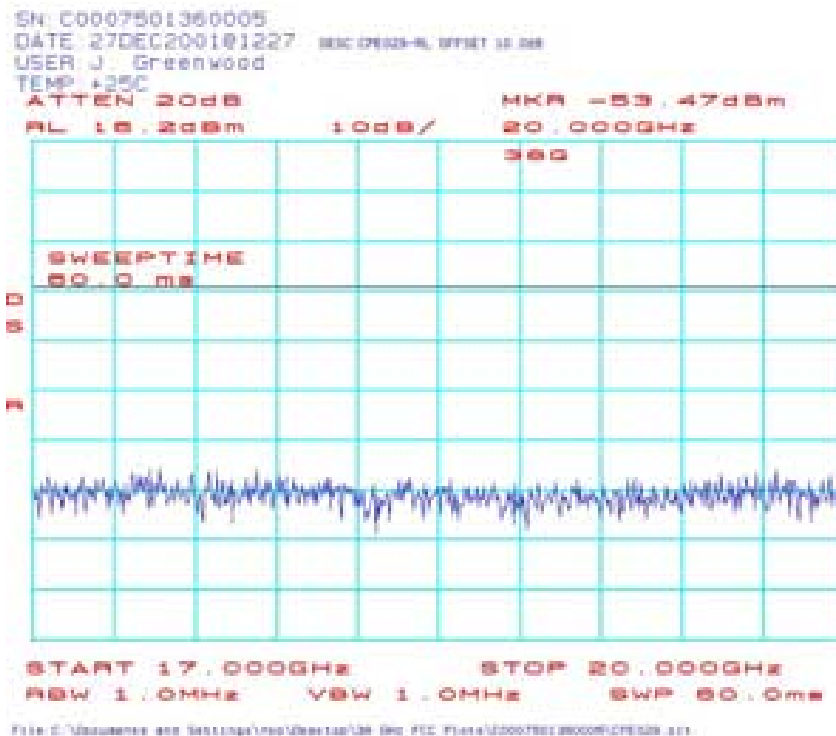


CPE031: Spurious Emission Plots (CPE-ODU) 20.0-22.5 GHz

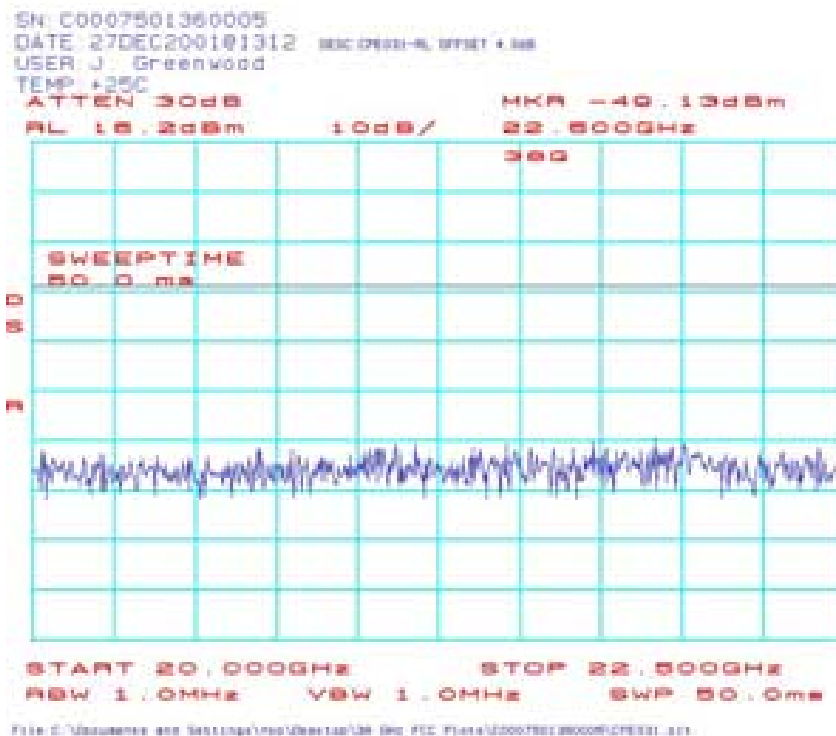


CPE032: Spurious Emission Plots (CPE-ODU) 22.5-25.0 GHz

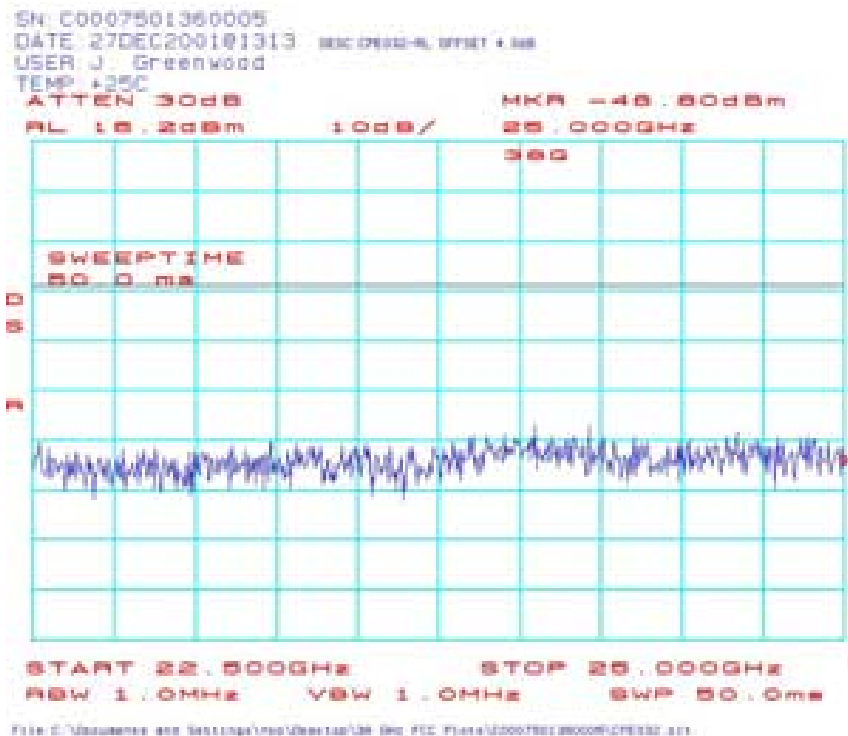


CPE033: Spurious Emission Plots (CPE-ODU) 25.0-27.5 GHz

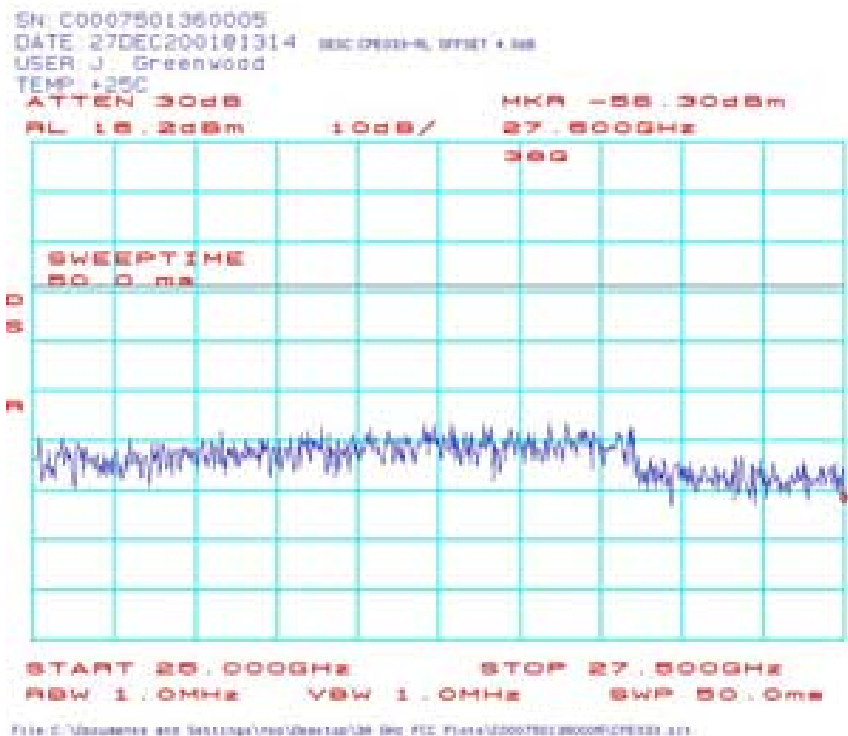


CPE034: Spurious Emission Plots (CPE-ODU) 27.5-30.0 GHz

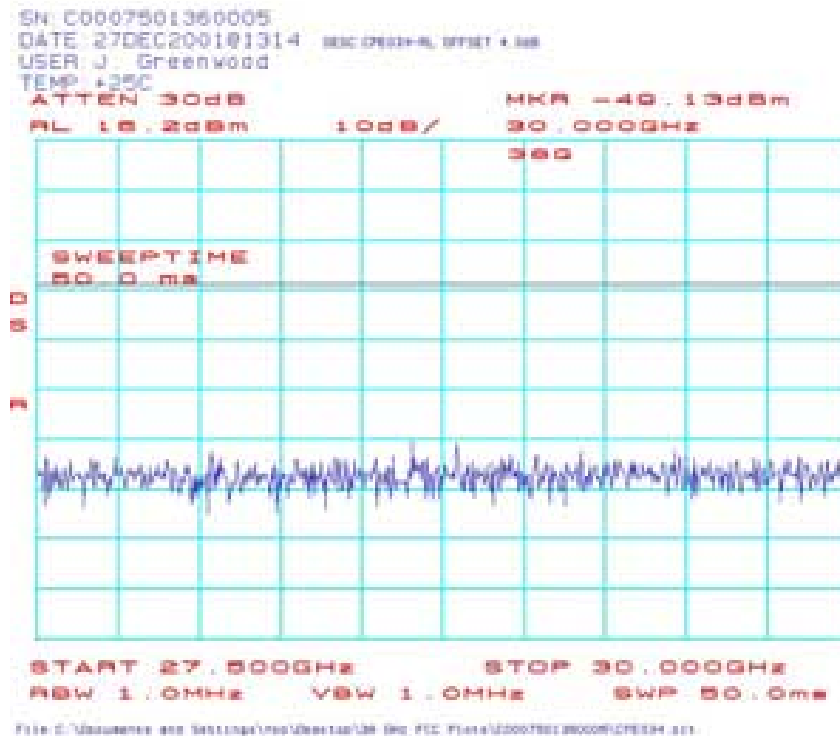


CPE035: Spurious Emission Plots (CPE-ODU) 30.0-32.5 GHz

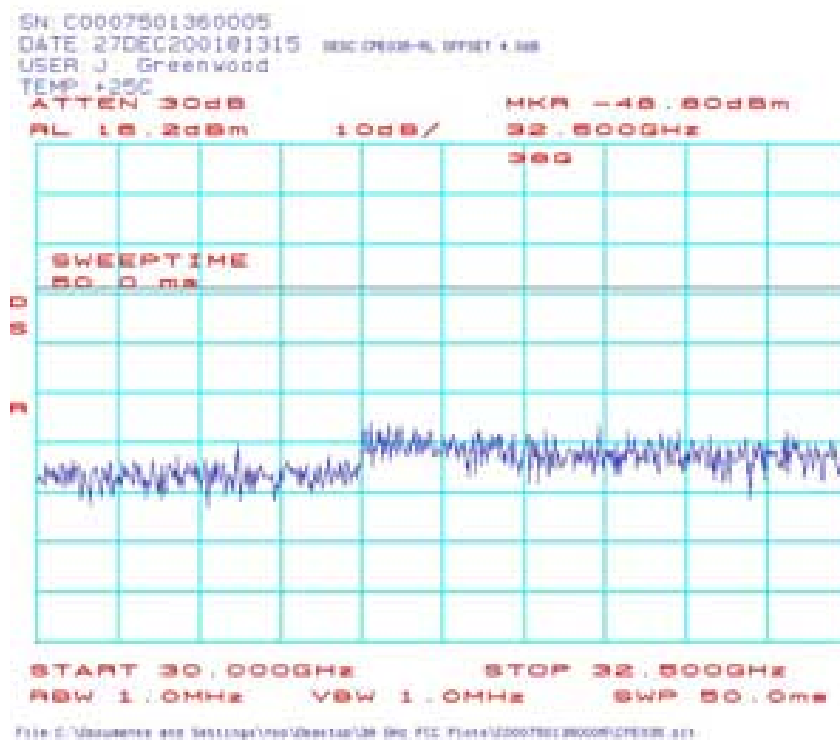


CPE036: Spurious Emission Plots (CPE-ODU) 32.5-35.0 GHz

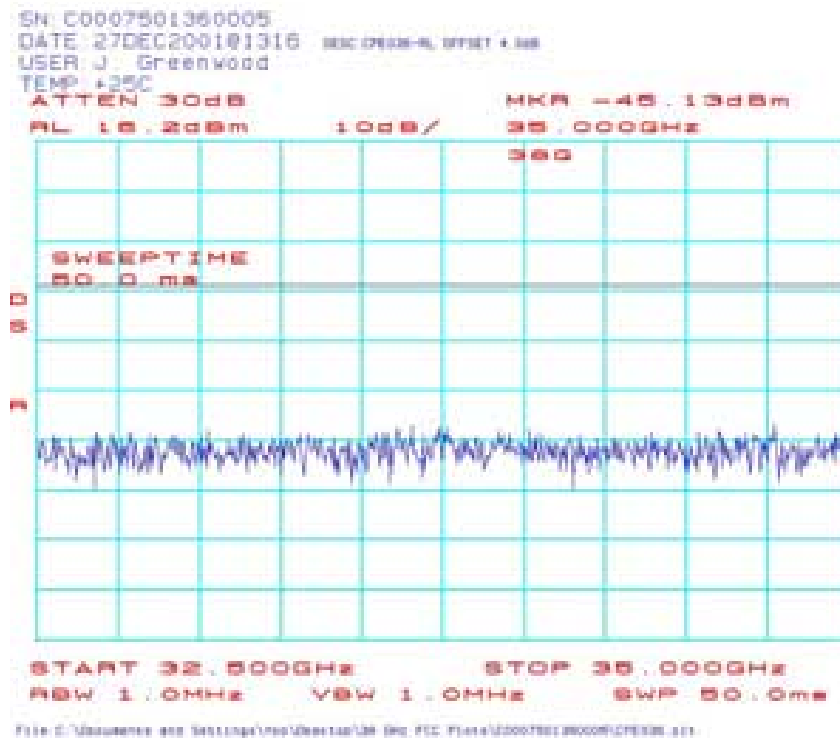


CPE037: Spurious Emission Plots (CPE-ODU) 35.0-38.5 GHz

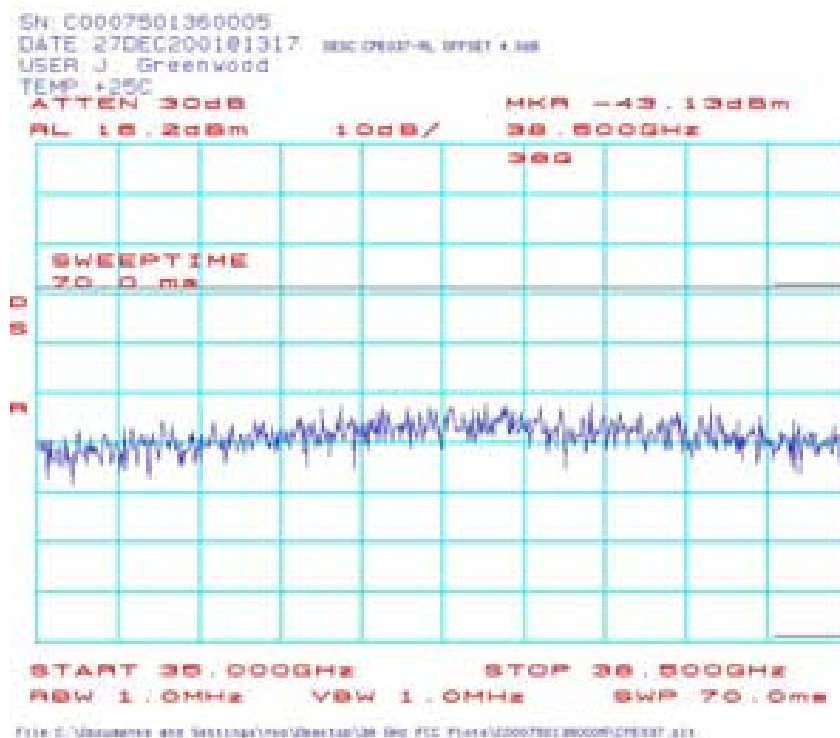

CPE038: Spurious Emission Plots (CPE-ODU) 38.75-40.0 GHz

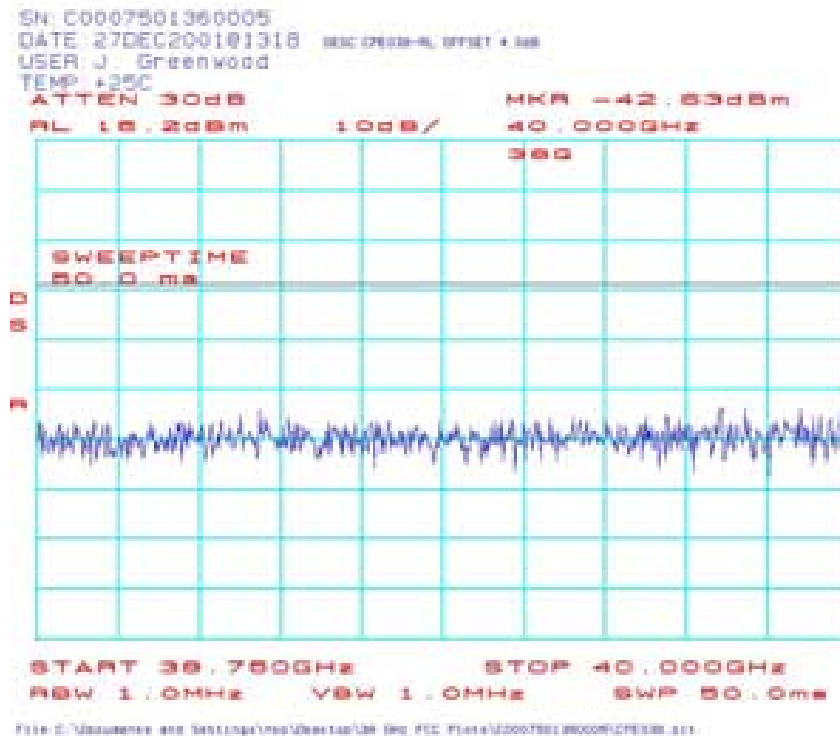


CPE200: Spurious Emission Plots (CPE-ODU) 40-60.0 GHz

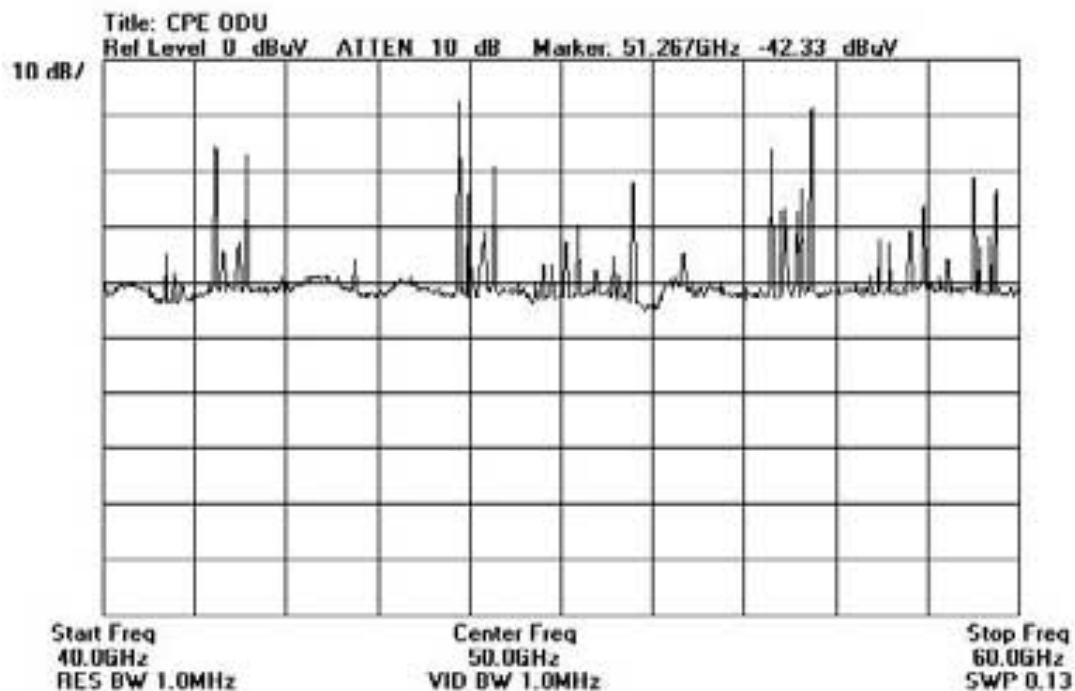


Note: the plots read dBuV but the actual measurement is in dBm. This is due to a limitation in the software used to capture the plots.

CPE204: Spurious Emission Plots with signal from a signal generator 40-60.0 GHz

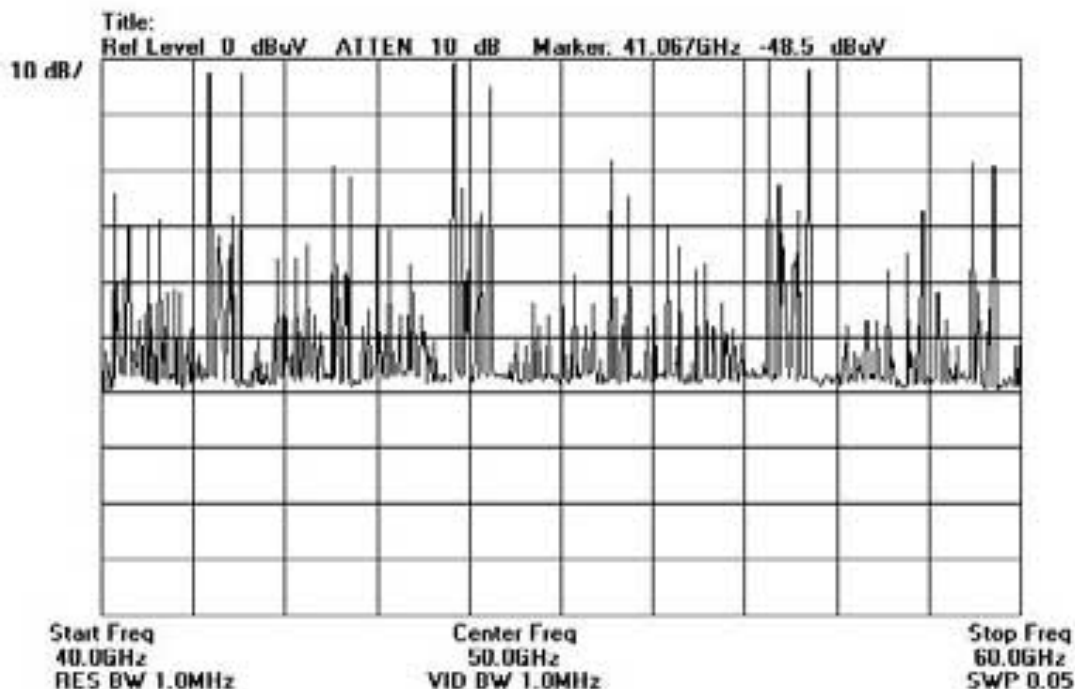


Note: the plots read dBuV but the actual measurement is in dBm. This is due to a limitation in the software used to capture the plots.

CPE205: Spurious Emission Plots with signal from a signal generator 47.5-48.5.0 GHz

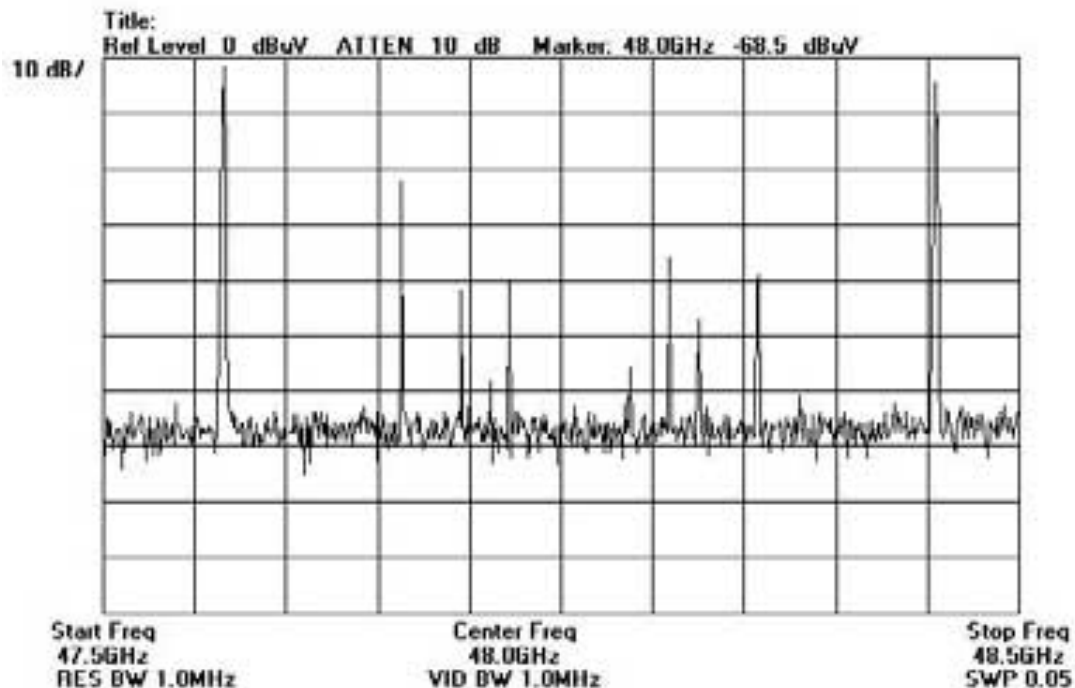


Note: the plots read dBuV but the actual measurement is in dBm. This is due to a limitation in the software used to capture the plots.

CPE206: Spurious Emission Plots with signal from a signal generator 50.948-51.948 GHz

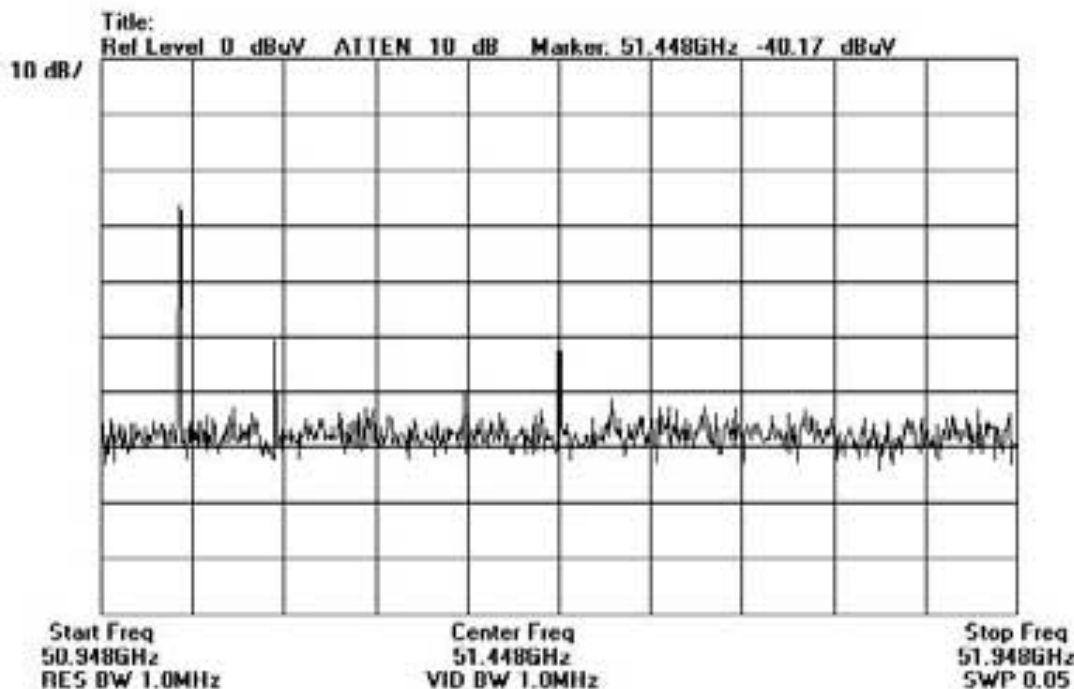


Note: the plots read dBuV but the actual measurement is in dBm. This is due to a limitation in the software used to capture the plots.

CPE207: Spurious Emission Plots with signal from a signal generator 53.98-54.98 GHz

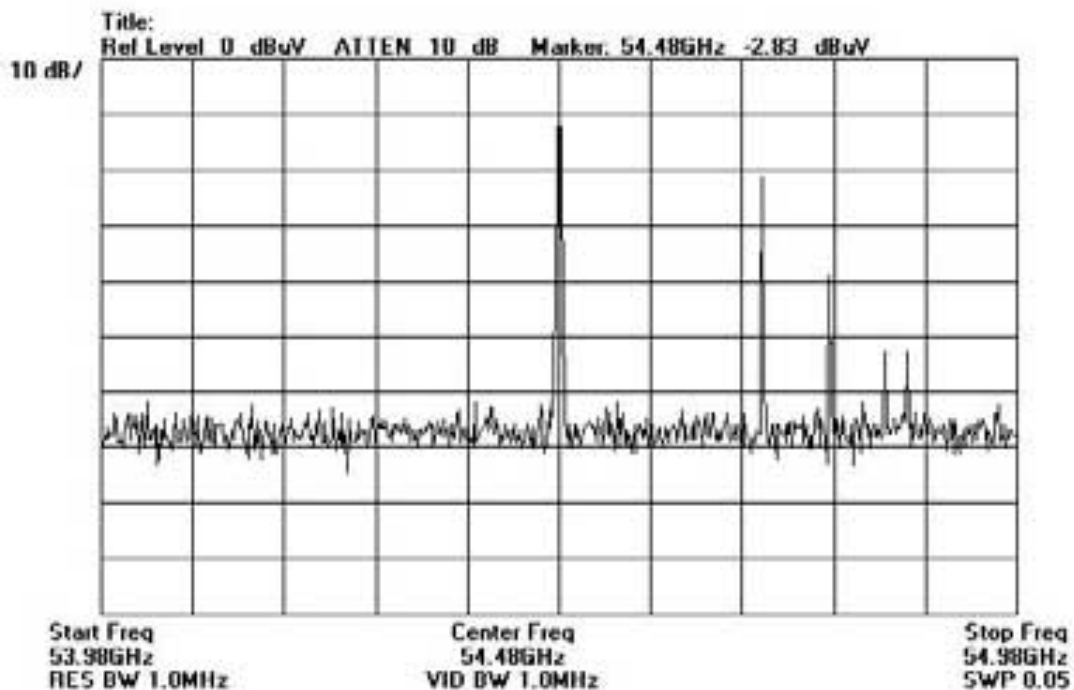


Note: the plots read dBuV but the actual measurement is in dBm. This is due to a limitation in the software used to capture the plots.

CPE201: Spurious Emission Plots (CPE-ODU) 60-90.0 GHz

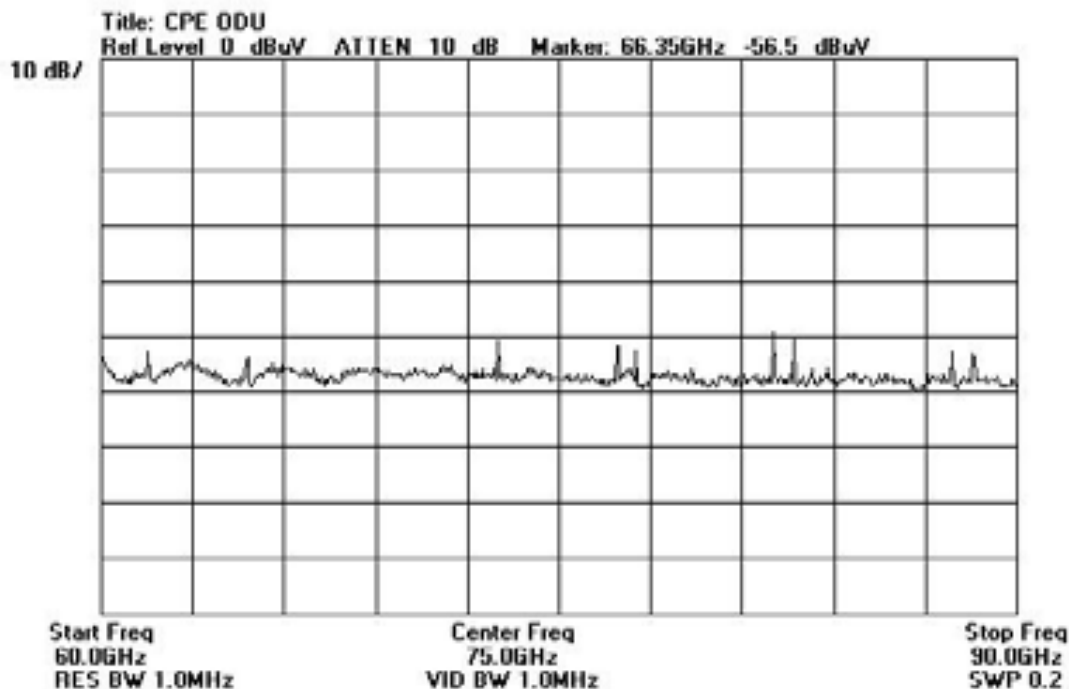


Note: the plots read dBuV but the actual measurement is in dBm. This is due to a limitation in the software used to capture the plots.

CPE202: Spurious Emission Plots (CPE-ODU) 90.0-110.0 GHz

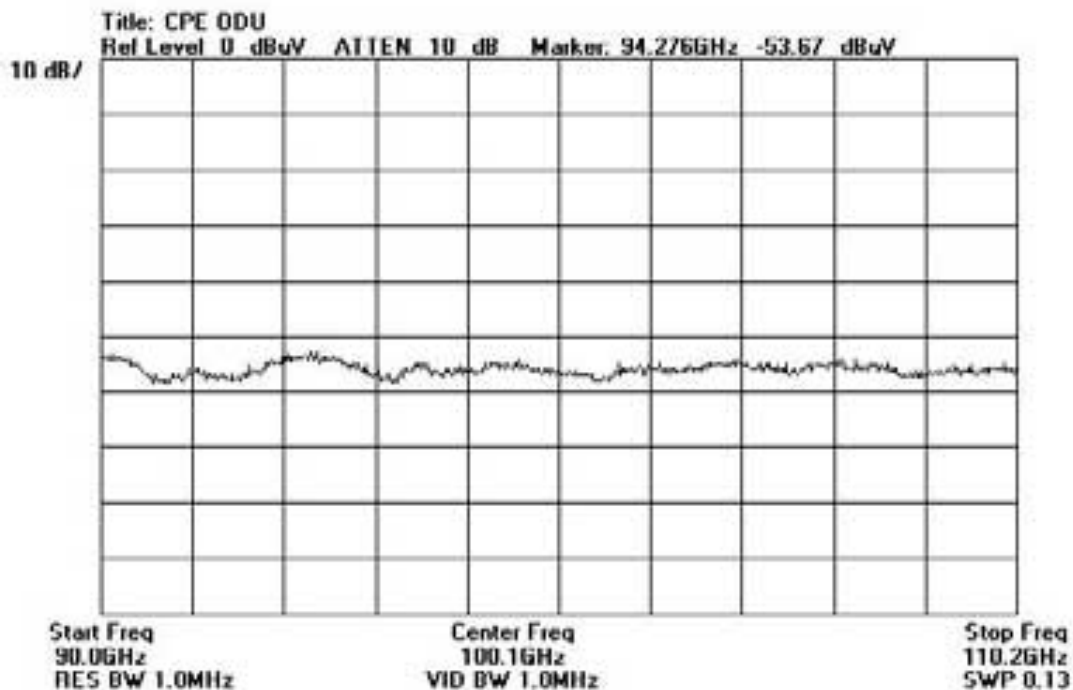


Note: the plots read dBuV but the actual measurement is in dBm. This is due to a limitation in the software used to capture the plots.

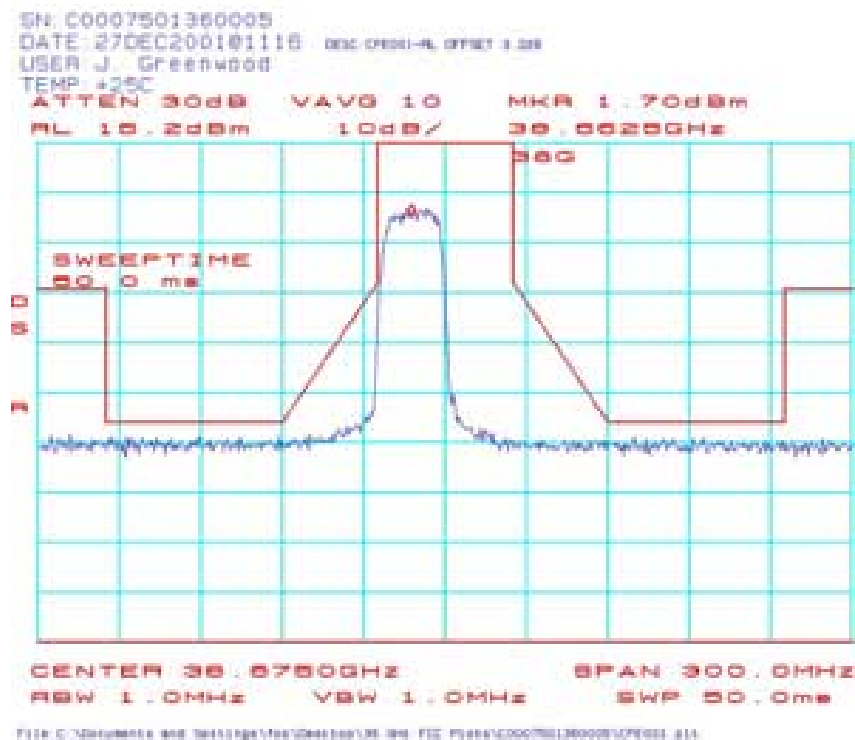


CPE002: Spectrum Mask Plots (CPE-ODU) 38.6625 GHz QPSK:




CPE040: Spectrum Mask Plots (CPE-ODU) 38.6625 GHz 16QAM:

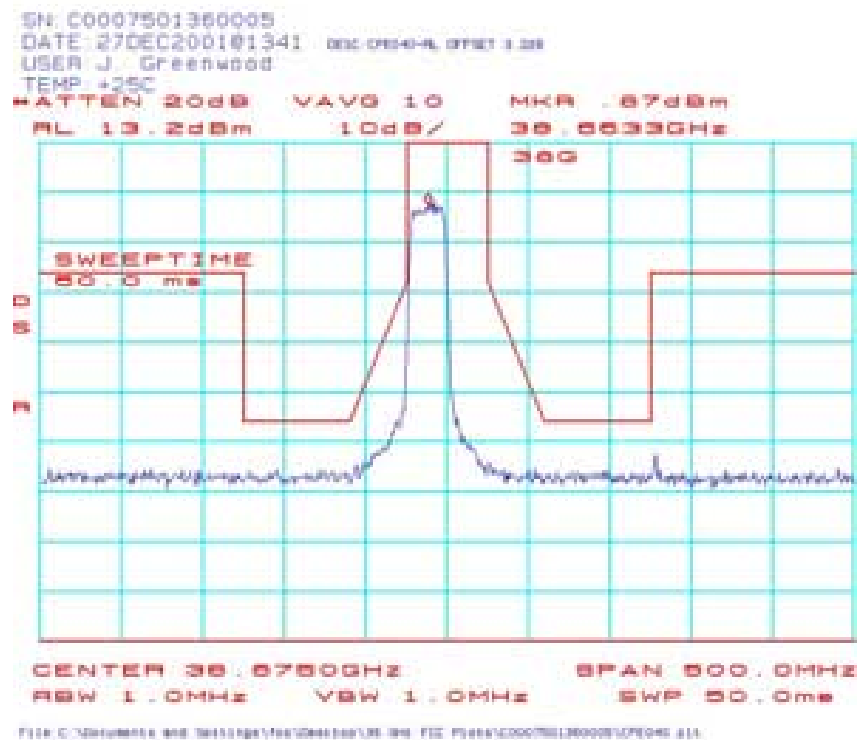


CPE041 Spectrum Mask Plots (CPE-ODU) 38.6625 GHz 16QAM:

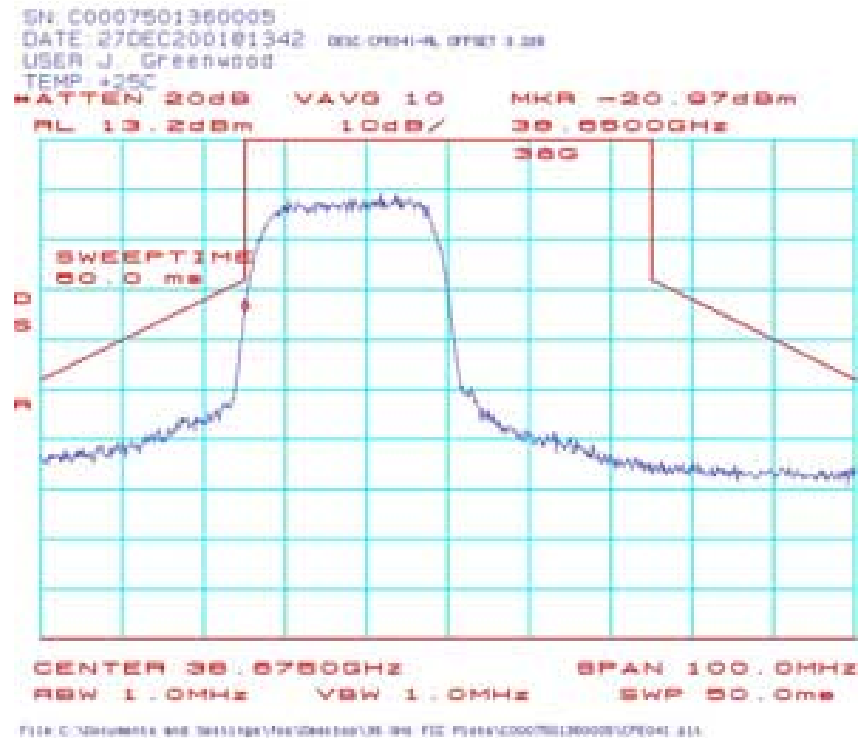


CPE043 Spectrum Mask Plots (CPE-ODU) 38.6625 GHz 16QAM:

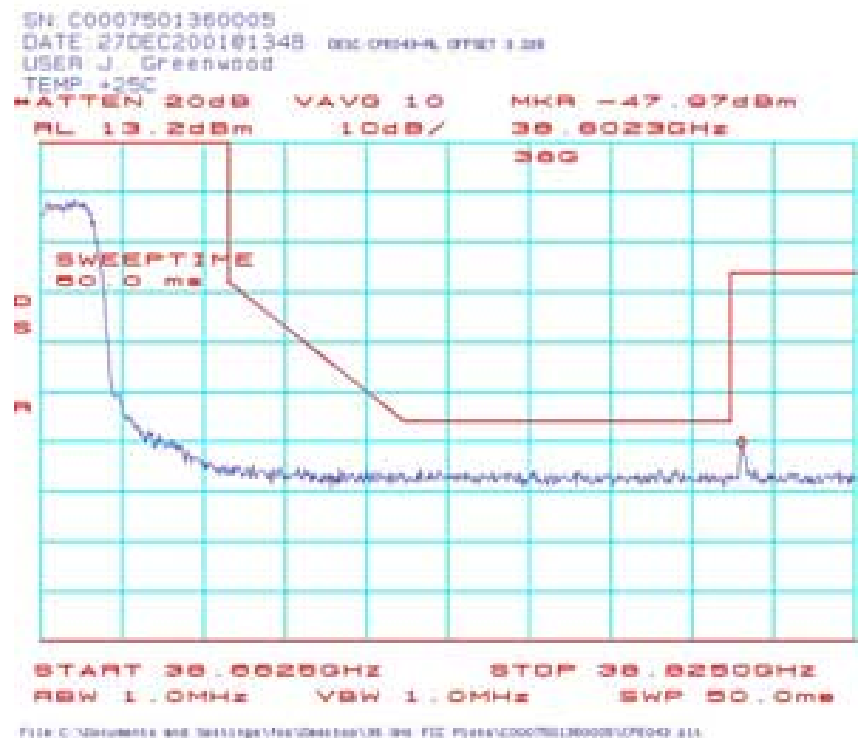


CPE046 Spectrum Mask Plots (CPE-ODU) 38.6625 GHz 64QAM:

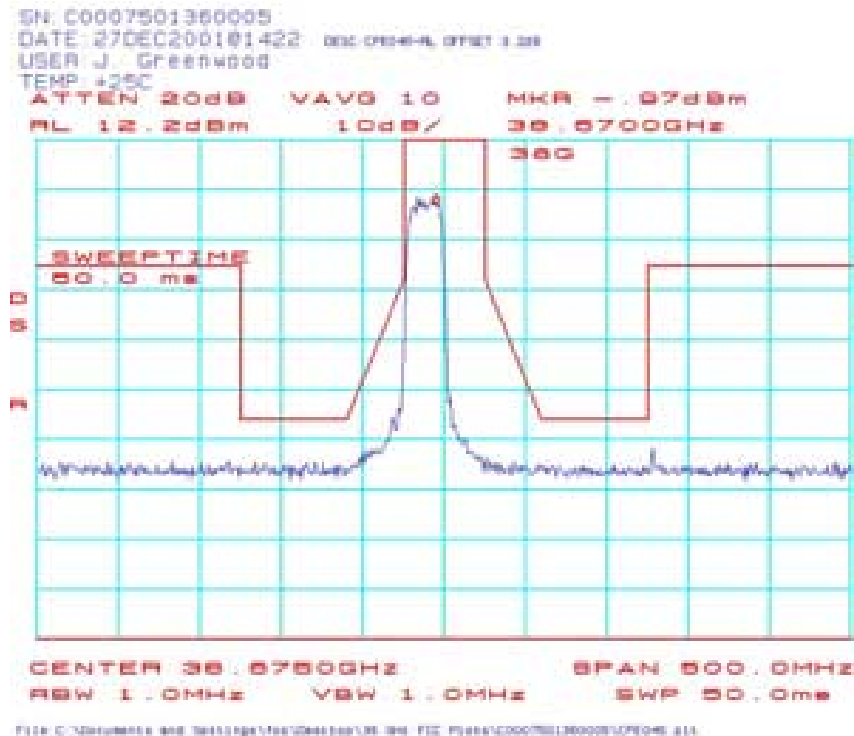


CPE047 Spectrum Mask Plots (CPE-ODU) 38.6625 GHz 64QAM:

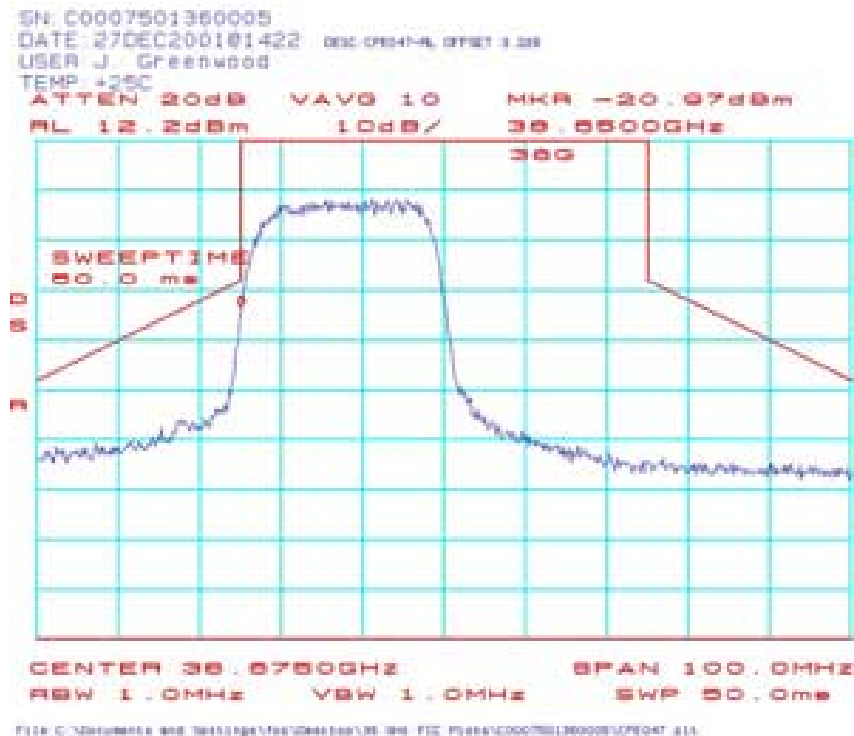


CPE049: Spectrum Mask Plots (CPE-ODU) 38.6625 GHz 64-QAM:

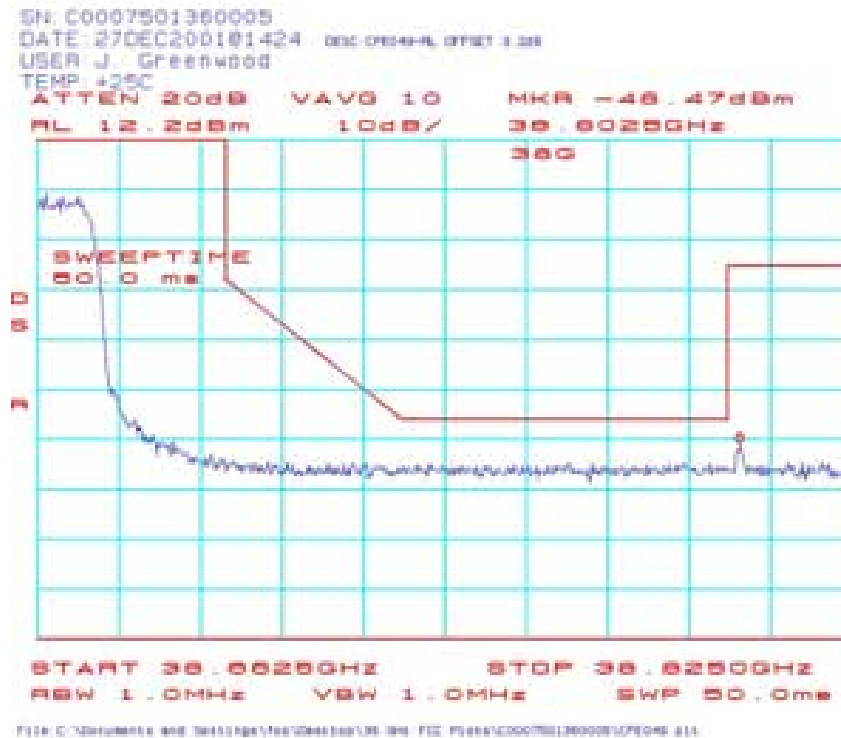


CPE051 Spectrum Mask Plots (CPE-ODU) 38.6875 GHz QPSK:

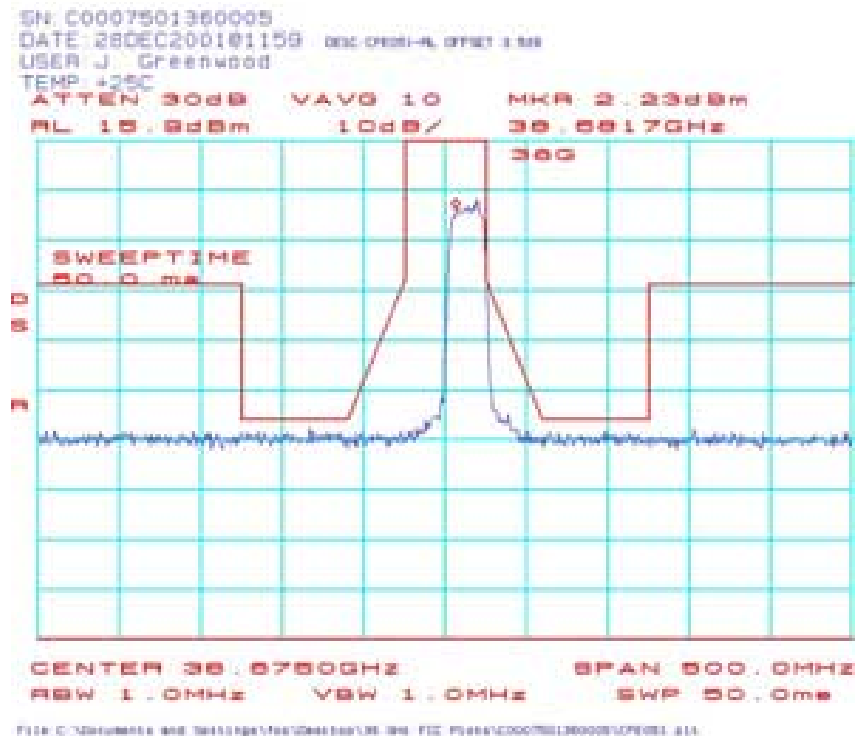

CPE052 Spectrum Mask Plots (CPE-ODU) 38.6875 GHz QPSK:

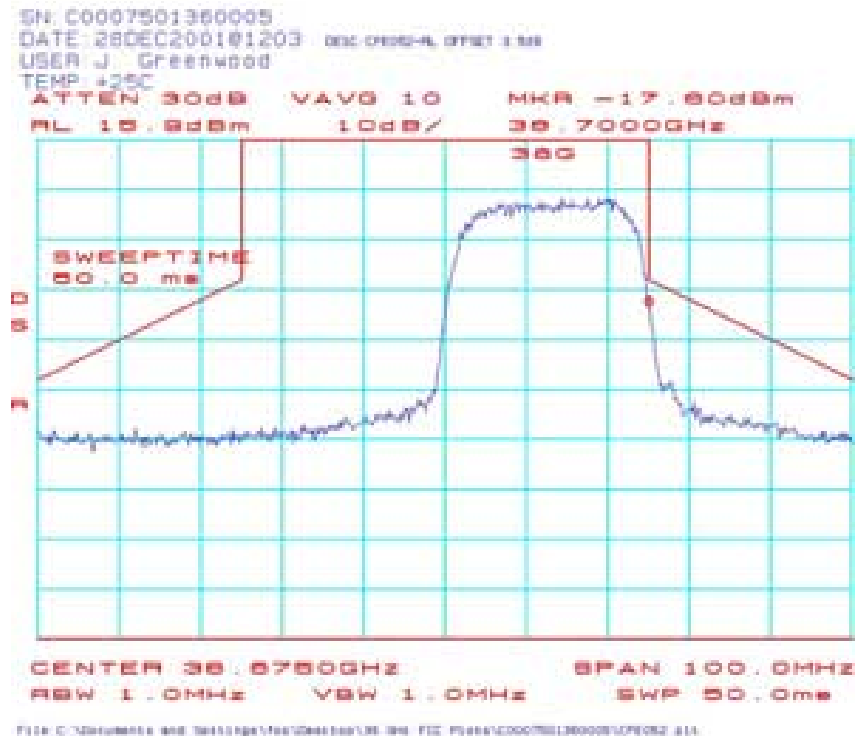

CPE056: Spectrum Mask Plots (CPE-ODU) 38.6875 GHz 16QAM:

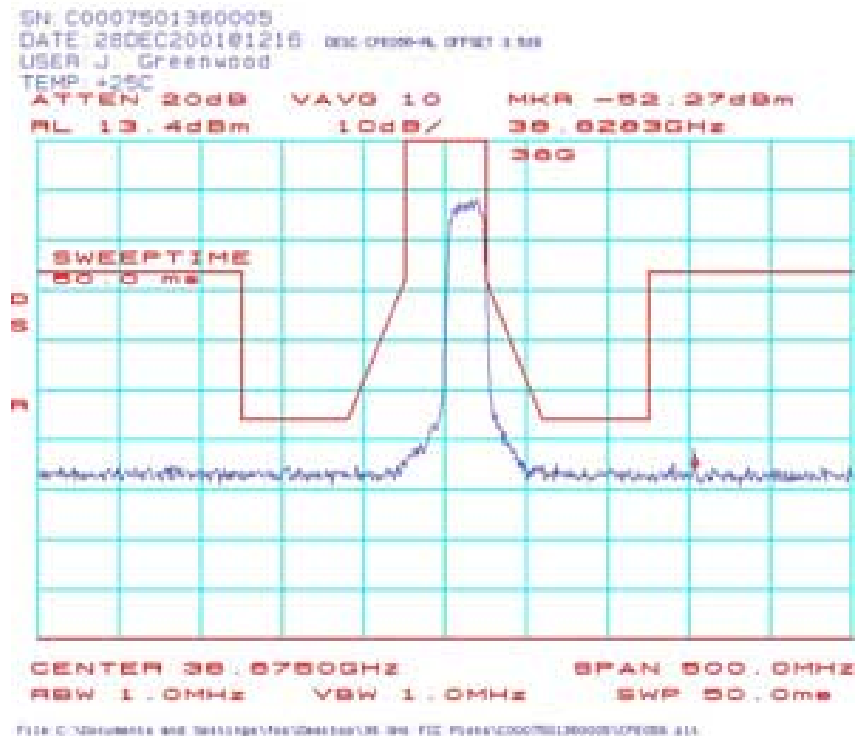

SN: C0007501360005
DATE: 28DEC200101217 DSC OFFFL OFFSET 1.5M
USER J. Greenwood
TEMP +25C

ATTEN 20dB VAVG 10 MKR -16.77dBm
RL 13.4dBm 10dB/ 39.7000GHz

SWEPTIME
60.0 ms

CENTER 36.6750GHz SPAN 100.0MHz
RBW 1.0MHz VBW 1.0MHz SWP 50.0ms

File C:\Documents and Settings\jgreenwood\My Documents\FID Files\C0007501360005\FIDSET_01A


SN: C0007501360005
DATE: 28DEC2001 01:223 OSC OFFSH-RL OFFSET 1.500
USER: J. Greenwood
TEMP: +25C
ATTEN 20dB VAVG 10 MKR -49.27dBm
RL 13.4dBm 10dB/ 36.6274GHz
36G

SWEPTIME
60.0 ms


START 36.6675GHz STOP 36.9000GHz
RBW 1.0MHz VBW 1.0MHz SWP 50.0ms


File C:\Documents and Settings\jgreenwood\My Documents\FIC Files\C0007501360005\FREQS.A11

CPE061: Spectrum Mask Plots (CPE-ODU) 38.6875 GHz 64-QAM:

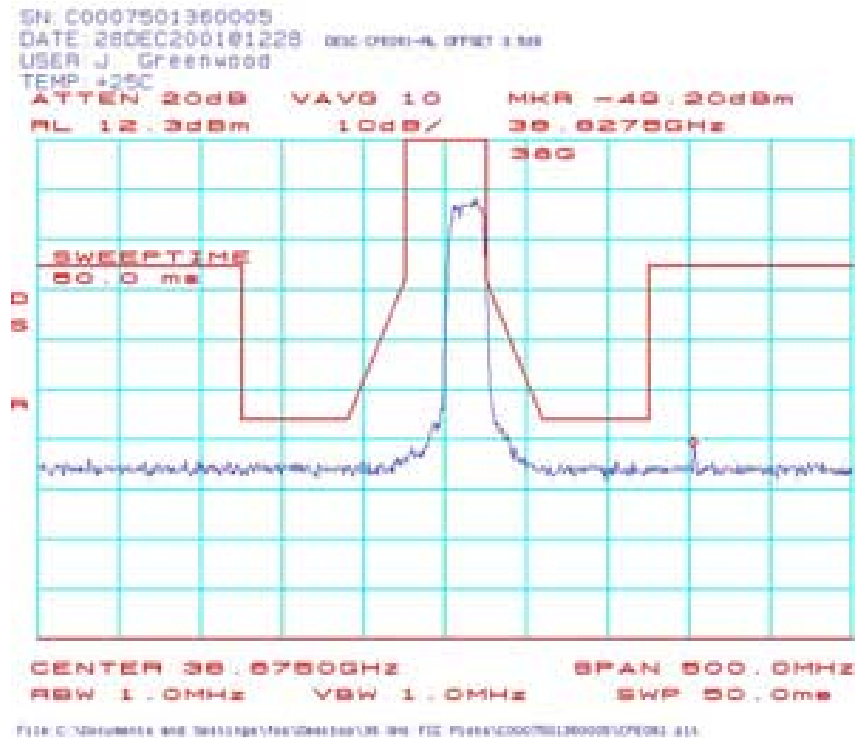


CPE062 Spectrum Mask Plots (CPE-ODU) 38.6875 GHz 64QAM:

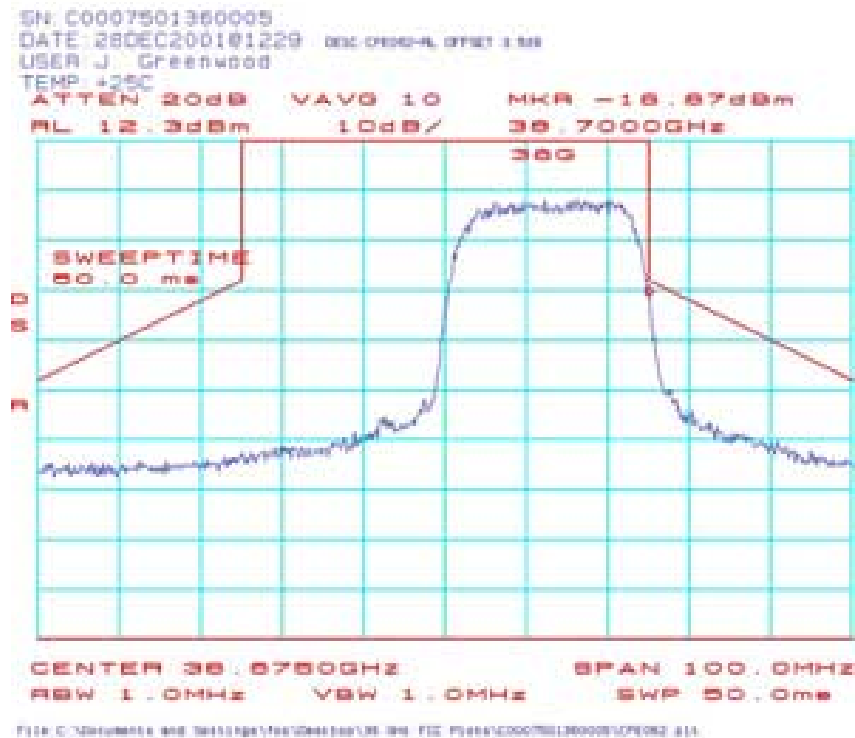


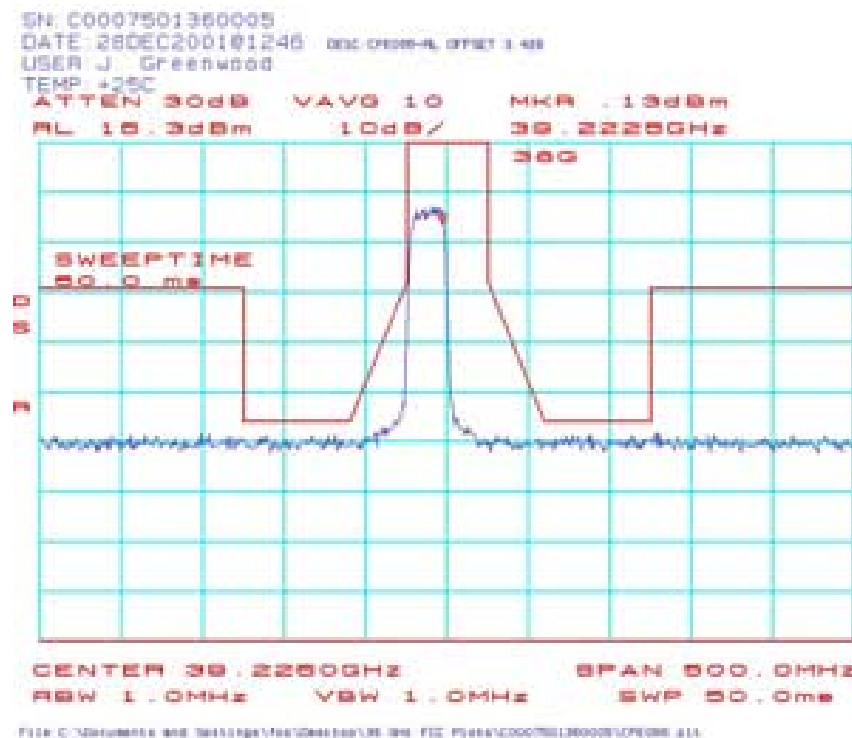


CPE067 Spectrum Mask Plots (CPE-ODU) 39.2125 GHz QPSK:

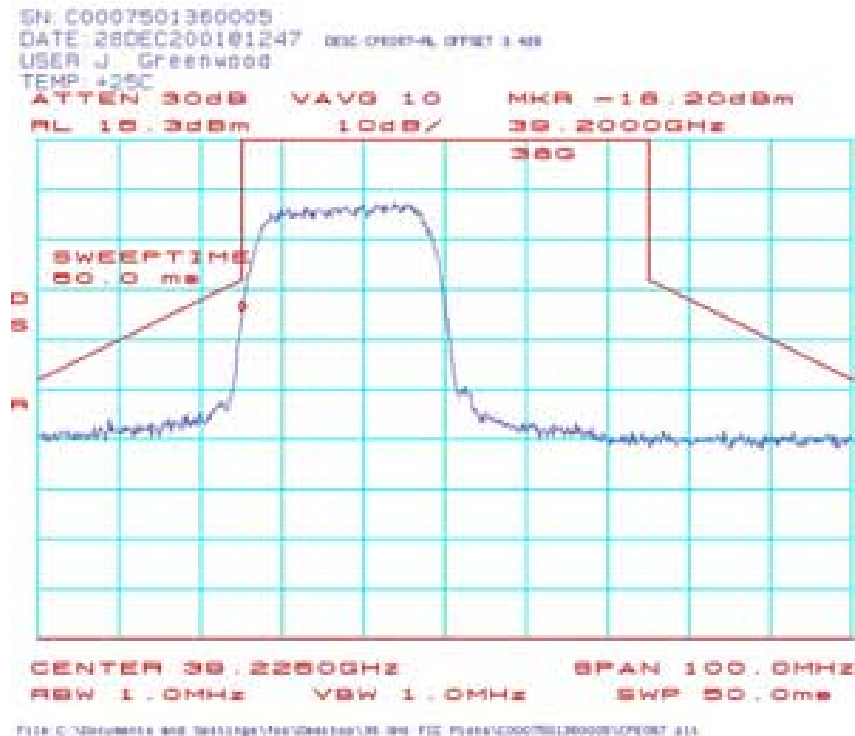


CPE072: Spectrum Mask Plots (CPE-ODU) 39.2125 GHz 16QAM:

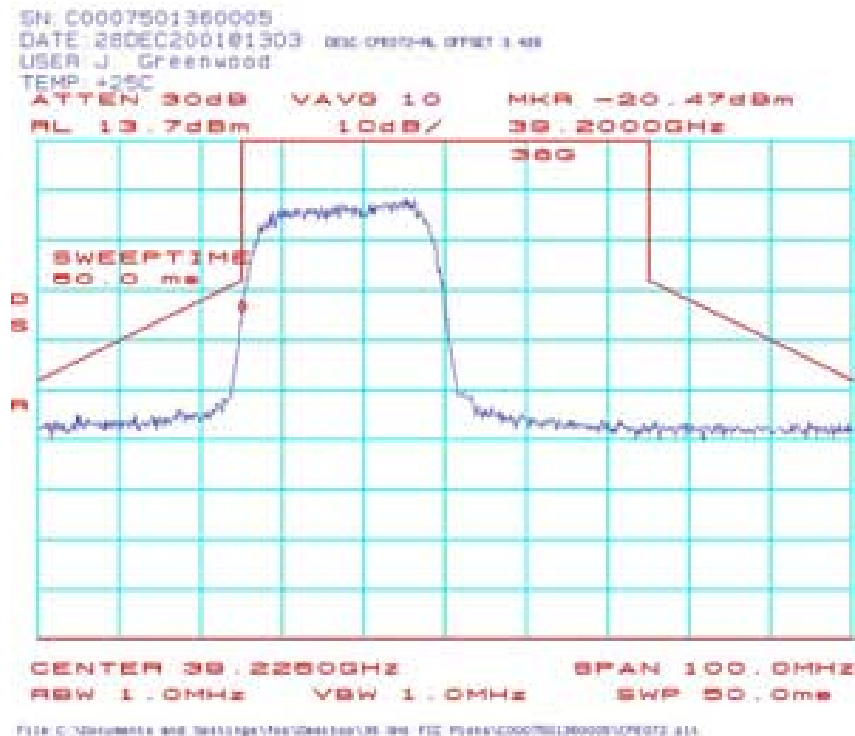

CPE074 Spectrum Mask Plots (CPE-ODU) 39.2125 GHz 16QAM:

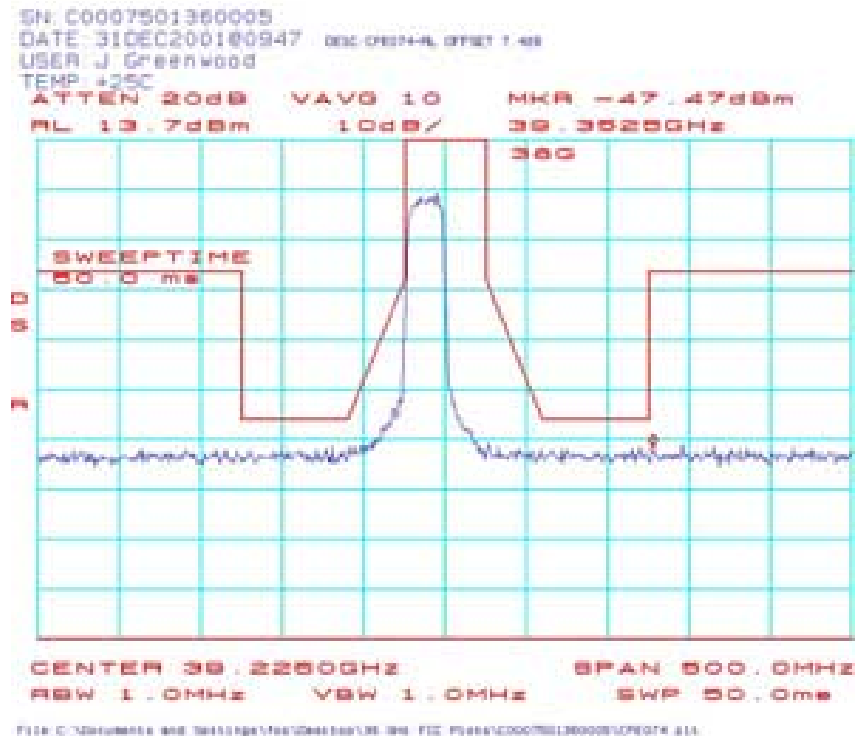

CPE075: Spectrum Mask Plots (CPE-ODU) 39.2125 GHz 16QAM:

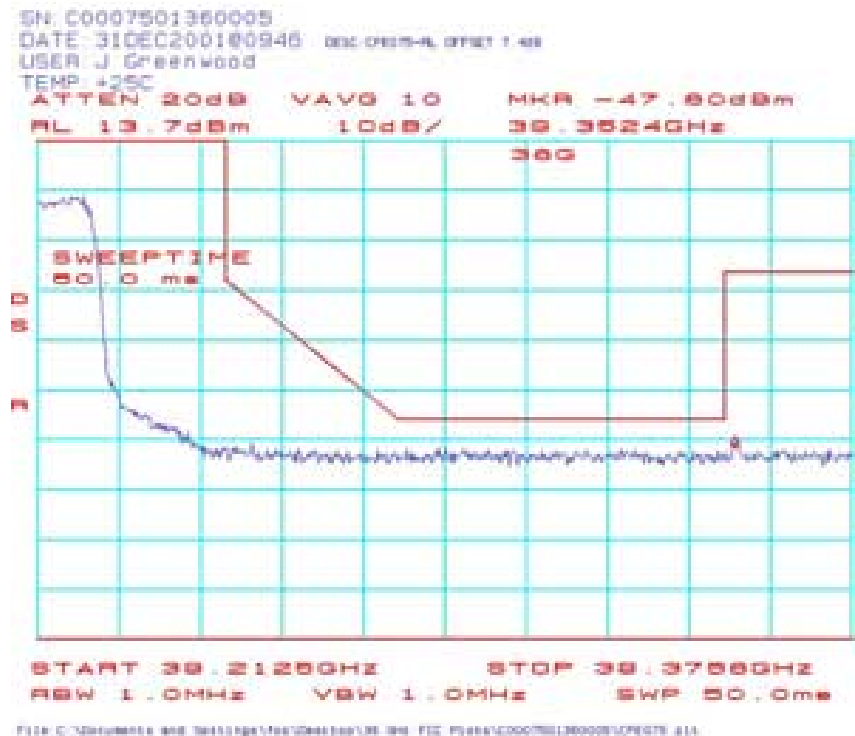

SN: C0007501360005
DATE: 28DEC200101317. DSC: 0107H-RL, OFFSET: 3.48
USER: J. Greenwood
TEMP: +25C
ATTN: 20dB VAWG: 10 MKR: -49.83dBm
RL: 12.7dBm 10dB/ 39.3525GHz
360

SWEPTIME
50.0 ms

CENTER 39.35250GHz SPAN 500.0MHz
RBW 1.0MHz VBW 1.0MHz SWP 50.0ms

File C:\Documents and Settings\jag\My Documents\MSR\FID Files\C0007501360005\0107H-RL

SN: C0007501360005
DATE: 28DEC200101317 DEC 08TH RL DTST 3 48
USER: J. Greenwood
TEMP: +25C
ATTN 20dB VAVG 10 MKR -21.97dBm
RL 12.7dBm 10dB/ 39.2000GHz
360


SWEPTIME
50.0 ms

dBm


CENTER 39.2250GHz SPAN 100.0MHz
RBW 1.0MHz VBW 1.0MHz SWP 50.0ms

File C:\Documents and Settings\jag\My Documents\Lab Data Files\Power\COO7501360005\PRG078_01A

CPE080: Spectrum Mask Plots (CPE-ODU) 39.2125 GHz 64QAM:

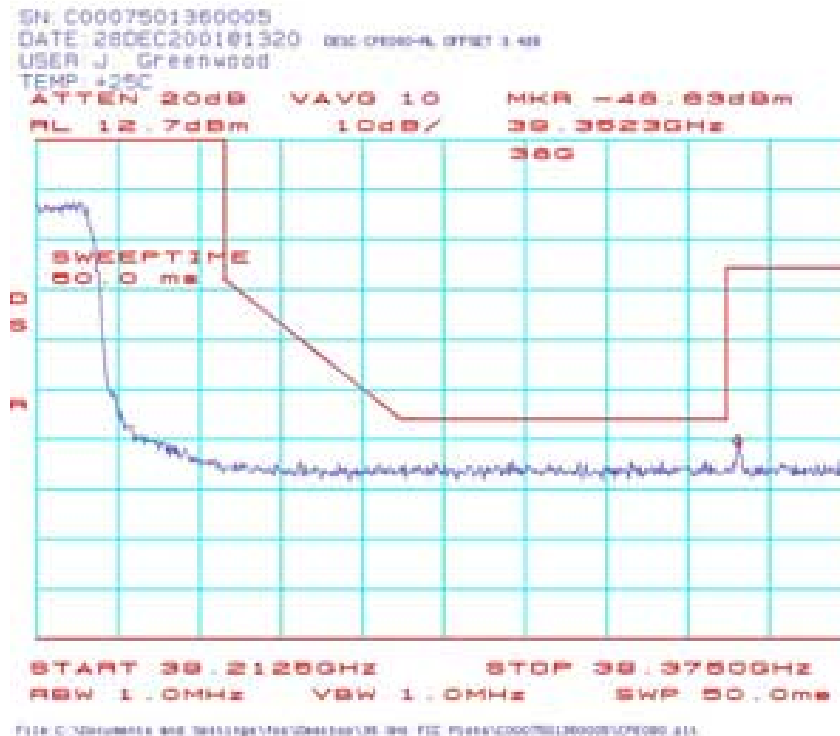

CPE082 Spectrum Mask Plots (CPE-ODU) 39.2375 GHz QPSK:

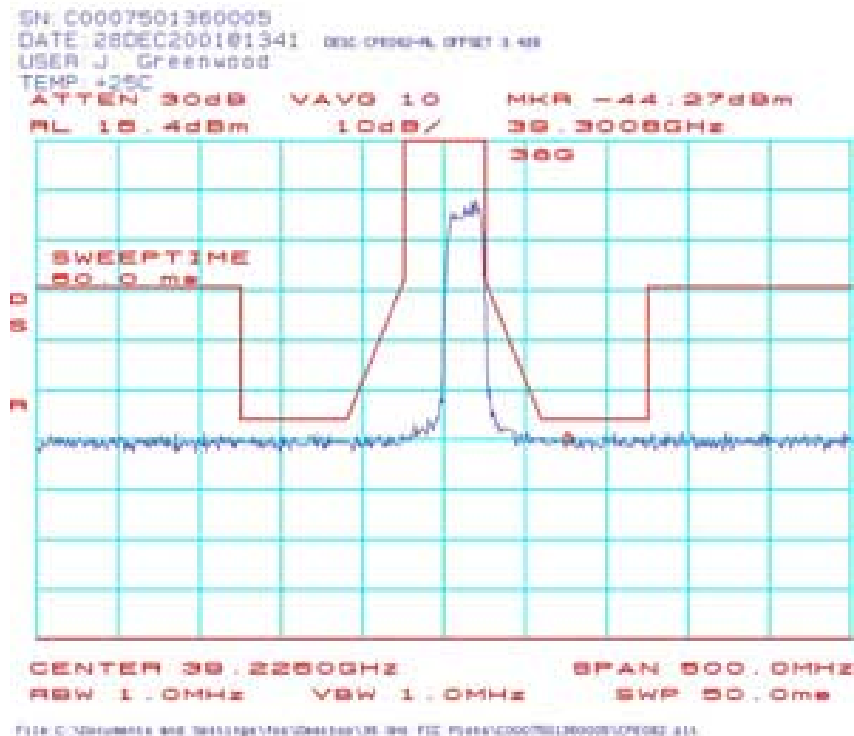

SN: C0007501360005
DATE: 28DEC200101342 DSC: OPEN-RL OFFSET: 3.4dB
USER: J. Greenwood
TEMP: +25C

ATTEN 30dB VAVG 10 MKR -17.98dBm
RL 10.4dBm 10dB/ 39.2500GHz
36G

SWEPTIME
60.0 ms

CENTER 39.2500GHz SPAN 100.0MHz
RBW 1.0MHz VBW 1.0MHz SWP 50.0ms

File C:\Documents and Settings\jag\My Documents\RF\3900007501360005\FREQ01.A11

SN: C0007501360005
DATE: 28DEC2001 01:34:7 DDC: 000000, DTST: 3.48
USER: J. Greenwood
TEMP: +25C
ATTN: 30dB VAW: 10 MKR: -44.80dBm
RL: 13.8dBm 10dB/ 39.3433GHz
360

SWEPTTONE
50.0 MHz


dB

MHz


CENTER 39.2250GHz SPAN 500.0MHz
RBW 1.0MHz VBW 1.0MHz SWP 50.0ms

File C:\Documents and Settings\jgreenwood\My Documents\FIC Files\C0007501360005\CP000_01A


CPE087 Spectrum Mask Plots (CPE-ODU) 39.2375 GHz 16QAM:

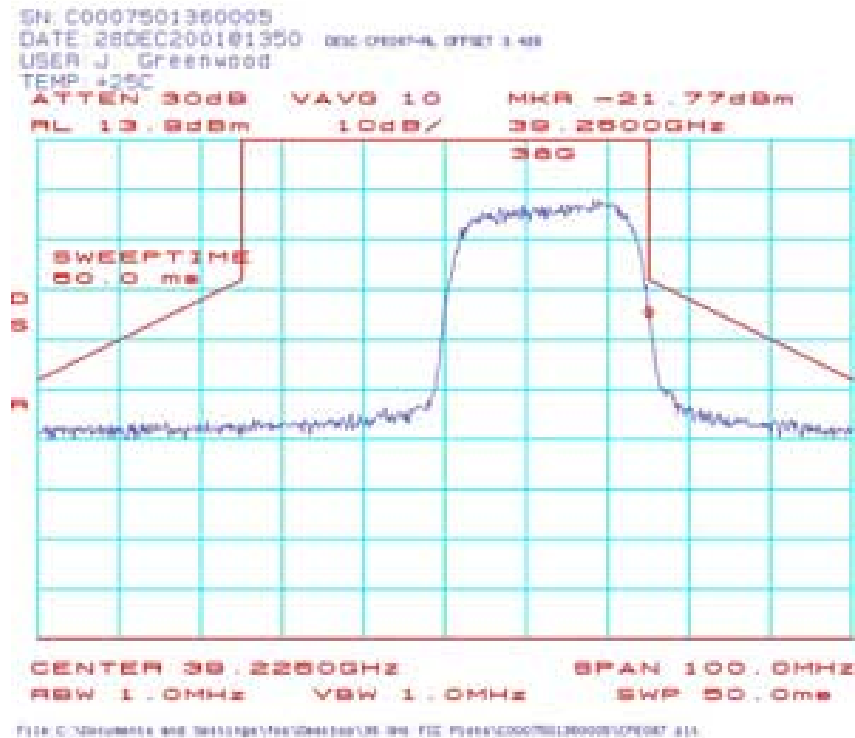


CPE089: Spectrum Mask Plots (CPE-ODU) 39.2375 GHz 16QAM:

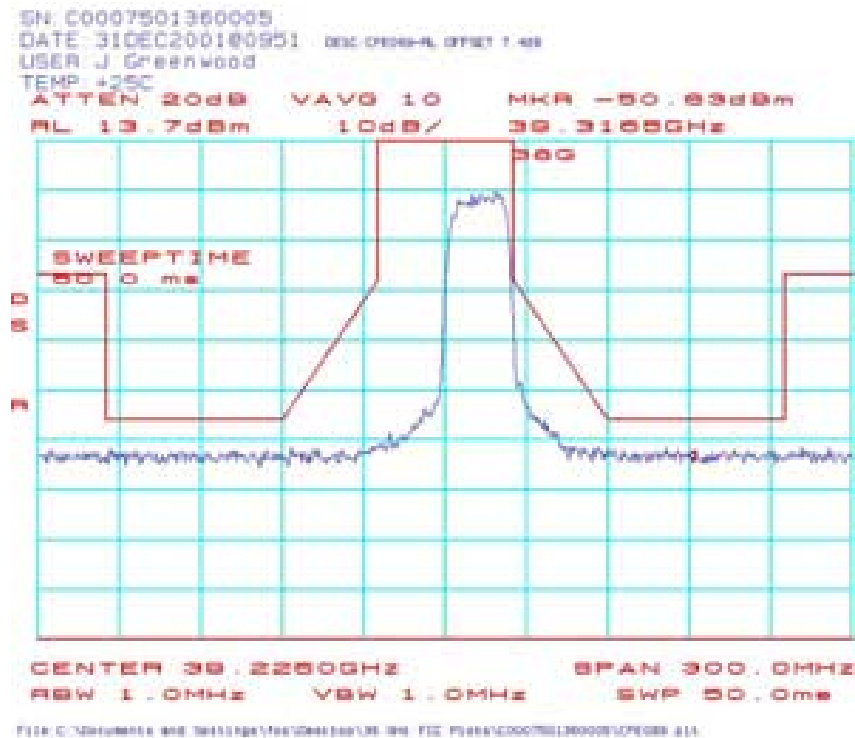

CPE091 Spectrum Mask Plots (CPE-ODU) 39.2375 GHz 64QAM:

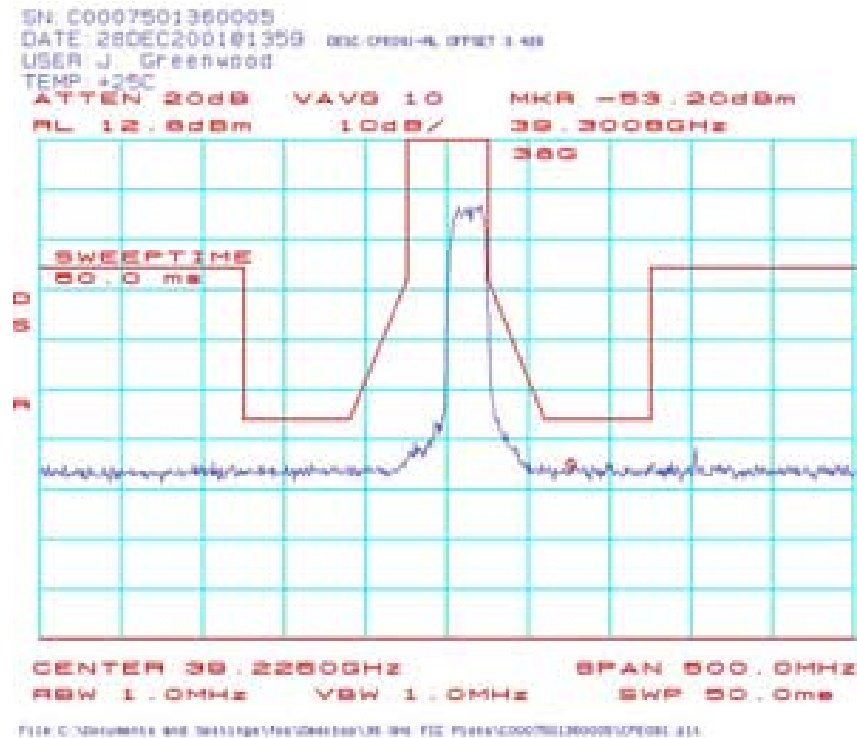

CPE092 Spectrum Mask Plots (CPE-ODU) 39.2375 GHz 64QAM:

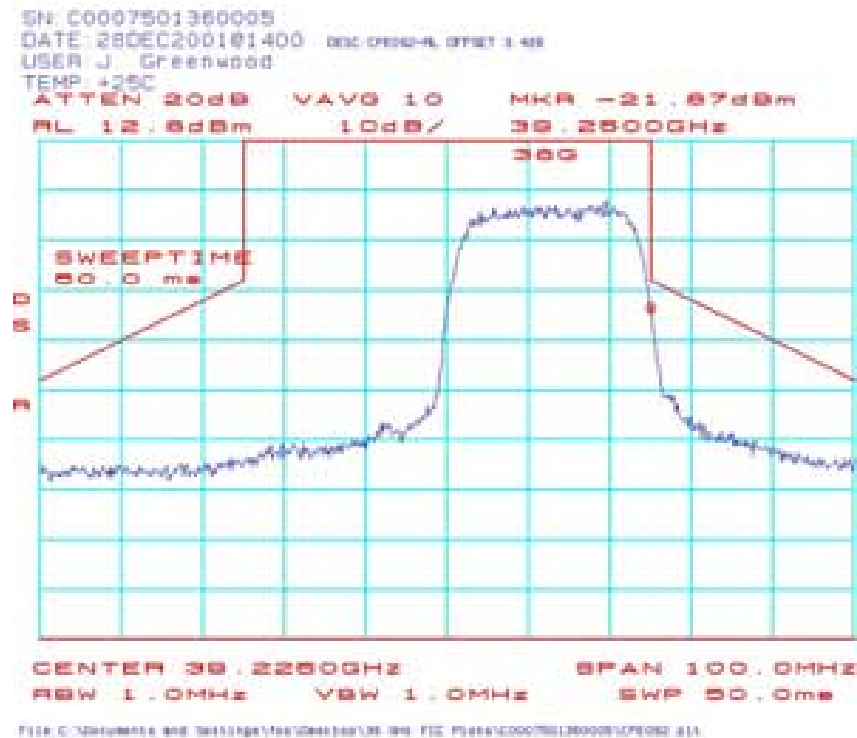

SN: C0007501360005
DATE: 28DEC200101404 DSC: OPEN-HL OFFSET: 3.488
USER: J. Greenwood
TEMP: +25C

ATTEN 20dB VAVG 10 MKR -40.53dBm
RL 12.8dBm 10dB/ 39.3773GHz
380

SWEPTIME
60.0 ms

START 39.2375GHz STOP 39.4000GHz
RBW 1.0MHz VBW 1.0MHz SWP 50.0ms


FILE C:\Documents and Settings\jgreen\My Documents\9867\F16\F16007501360005\OPEN-HL.A


SN: C0007501360005
DATE: 28DEC200101435 DISC: DPOB00-RL, OFFSET: 4.000
USER: J. GREENWOOD
TEMP: +25C
ATTN 30dB VAVG 10 MKR -39.80dBm
RL 15.2dBm 10dB/ 39.8033GHz
360

SWEPTIME
50.0 ms
-40.13 dBm

CENTER 39.7750GHz SPAN 500.0MHz
RBW 1.0MHz VBW 1.0MHz SWP 50.0ms

File C:\Documents and Settings\jgreenwood\My Documents\FIC Files\C0007501360005\CPROB 31A

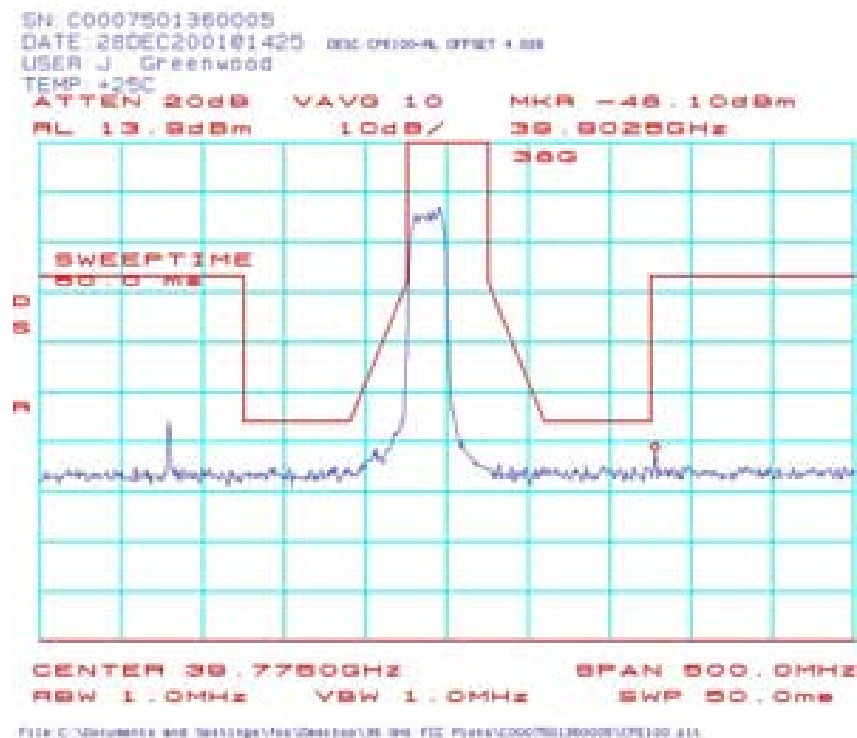

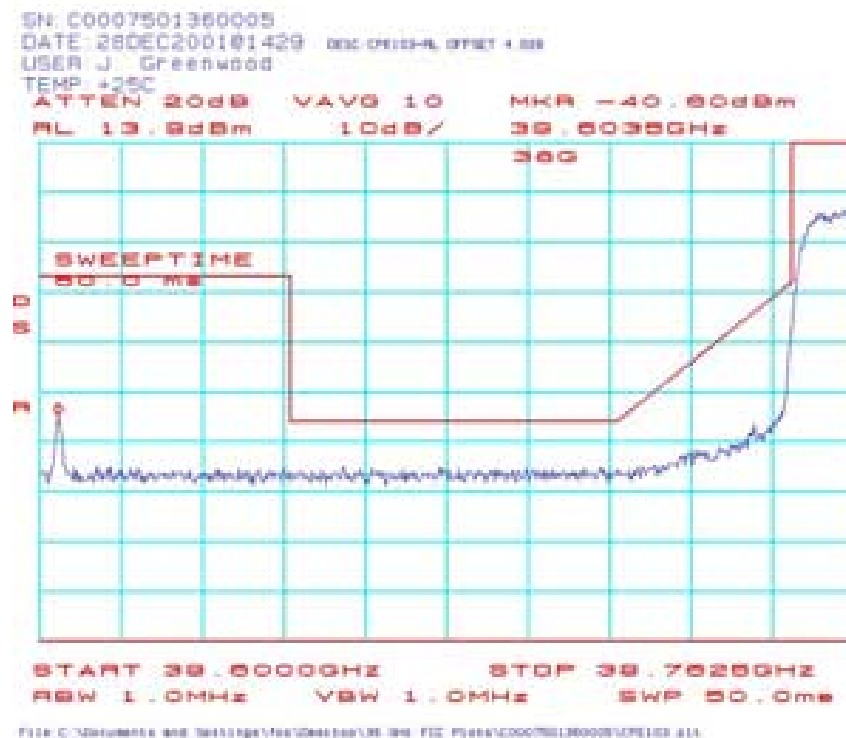

SN: C0007501360005
DATE: 28DEC2001 01:430 DMC OPERATOR: J. GREENWOOD
USER: J. Greenwood
TEMP: +25C

ATTEN 20dB VAVG 10 MKR -40.43dBm
RL 13.9dBm 10dB/ 39.9025GHz
380

SWEPTIME
50.0 ms

START 39.7525GHz STOP 39.9250GHz
RBW 1.0MHz VBW 1.0MHz SWP 50.0ms

FIG. C-20: Example of a Swept Frequency Measurement of a 100 MHz CW Signal

SN: C0007501360005
DATE: 28DEC200101431 DMC: 09125-RL, 07SET 4.000
USER: J. GREENWOOD
TEMP: +25C
ATTN 20dB VAVG 10 MKR -52.43dBm
RL 13.9dBm 10dB/ 39.7970GHz
260

SWEPTIME
50.0 ms

START 39.00000GHz STOP 39.92500GHz
RBW 1.0MHz VBW 1.0MHz SWP 50.0ms

File C:\Documents and Settings\jag\My Documents\BIB-004_FIG_Files\C0007501360005\CP110E_41A

SN: C0007501360005
DATE: 28DEC200101:44: DSC: 0910-RL, OFFSET: 4.00
USER: J. Greenwood
TEMP: +25C
ATTEN: 20dB VAWG: 10 MKR: -54.20dBm
RL: 12.8dBm 10dB/ 39.5692GHz
360

CENTER 39.5692GHz SPAN 500.0MHz
RBW 1.0MHz VBW 1.0MHz SWP 50.0ms

File C:\Documents and Settings\jag\My Documents\MSR\FID Plans\C0007501360005\FID107.s11

SN: C0007501350005
DATE: 28DEC2001 01:44: DES: ONESHOT, DTST: 1.00
USER: J. Greenwood
TEMP: +25C
ATTN: 20dB VAVG: 10 MKR: -2.70dBm
RL: 12.8dBm 10dB/ 39.7578GHz
360

SWEPTIME
50.0 ms

CENTER 39.7750GHz SPAN 100.0MHz
RBW 1.0MHz VBW 1.0MHz SWP 50.0ms

File: C:\Documents and Settings\jag\My Documents\30.398_FIG_Power\COO07501350005\30.398_311

S# C0007501360005
DATE 28DEC200101445 DSC ONLIS-RL SPST 4.00
USER J. Greenwood
TEMP +25C

ATTN 20dB VAVG 10 MKR -41.37dBm
PL 12.8dBm 10dB/ 39.6035GHz
360

SWEETLINE
50.0 ms

START 39.60000GHZ STOP 39.76250GHZ
RBW 1.0MHz VBW 1.0MHz SWP 50.0ms

FULL SCREEN MODE AND TRIGGER/FREQUENCY USE THE F2 KEY TO GO TO THE OTHER SCREENS.

SN: C0007501360005
DATE: 28DEC200101446 DDC OFF: RL OFFSET: 4.00
USER: J. GREENWOOD
TEMP: +25C
ATTN 20dB VAVG 10 MKR -49.20dBm
RL 12.8dBm 10dB/ 39.90250GHz
360

SWEPTIME
50.0 ms

START 39.70250GHz STOP 39.90250GHz
RBW 1.0MHz VBW 1.0MHz SWP 50.0ms

File C:\Documents and Settings\jgreen\My Documents\BIB\SWP_Files\C0007501360005\CP111_31A

SN: C0007501360005
DATE: 28DEC2001 01:45:33 DBC: OFF CHL: SPST: 1 SW
USER: J. Greenwood
TEMP: +25C

ATTN 30dB VAVG 10 MKR -41.90dBm
RL 10.1dBm 10dB/ 39.6408GHz
380

SWEPTIME
50.0ms

dB

0

10

20

30

40

50

60

70

80

90

100

CENTER 39.7750GHz SPAN 500.0MHz
RBW 1.0MHz VBW 1.0MHz SWP 50.0ms

File C:\Documents and Settings\jagreenwood\My Documents\FID Files\C0007501360005\CP111A.DA

SN: C0007501360005
DATE: 28DEC2001 01:45:40 DEC 09:14:41, DTST: 1:58
USER: J. Greenwood
TEMP: +25C
ATTN 30dB VAVG 10 MKR -16.57dBm
RL 10.1dBm 10dB/ 39.6000GHz
360

SWEPTIME
50.0 ms

CENTER 39.7750GHz SPAN 100.0MHz
RBW 1.0MHz VBW 1.0MHz SWP 50.0ms

File C:\Documents and Settings\jgreenwood\My Documents\FID Plans\C0007501360005\U93116.d1a

SN: C0007501360005
DATE: 31DEC200100934 OSC: OFF CH: RL OFFSET: 7.5dB
USER: J. GREENWOOD
TEMP: +25C

ATTEN 20dB VAVG 10 MKR -43.77dBm
RL 13.9dBm 10dB/ 39.6400GHz
36G

SWEPTIME
50.0ms

CENTER 39.7750GHz SPAN 500.0MHz
RBW 1.0MHz VBW 1.0MHz SWP 50.0ms

FILE C:\Documents and Settings\JRG\My Documents\FID FILES\C0007501360005\31127_31A


SN: C0007501360005
DATE: 31DEC2001@0934 DESC: ON: RL, DTST: 1.58
USER: J. Greenwood
TEMP: +25C
ATTN 20dB VAVG 10 MKR -20.93dBm
RL 13.9dBm 10dB/ 39.6000GHz
360

SWEPTIME
50.0 ms


CENTER 39.7750GHz SPAN 100.0MHz
RBW 1.0MHz VSW 1.0MHz SWP 50.0ms

File C:\Documents and Settings\jag\My Documents\BSP File\360007501360005\RL118.d1a

CPE120: Spectrum Mask Plots (CPE-ODU) 39.7875 GHz 16QAM:

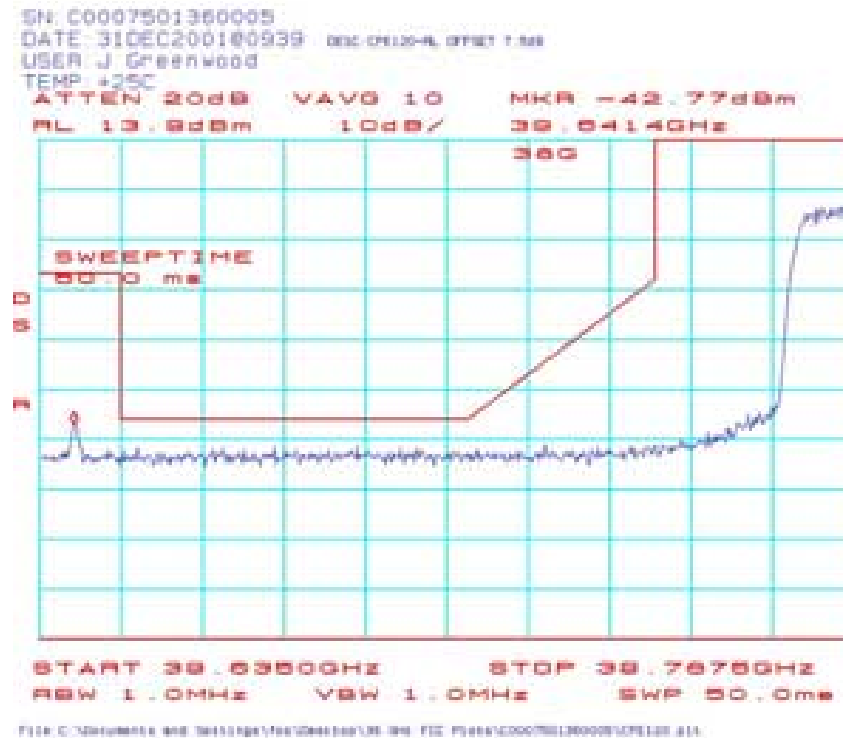

CPE121: Spectrum Mask Plots (CPE-ODU) 39.7875 GHz 16QAM:

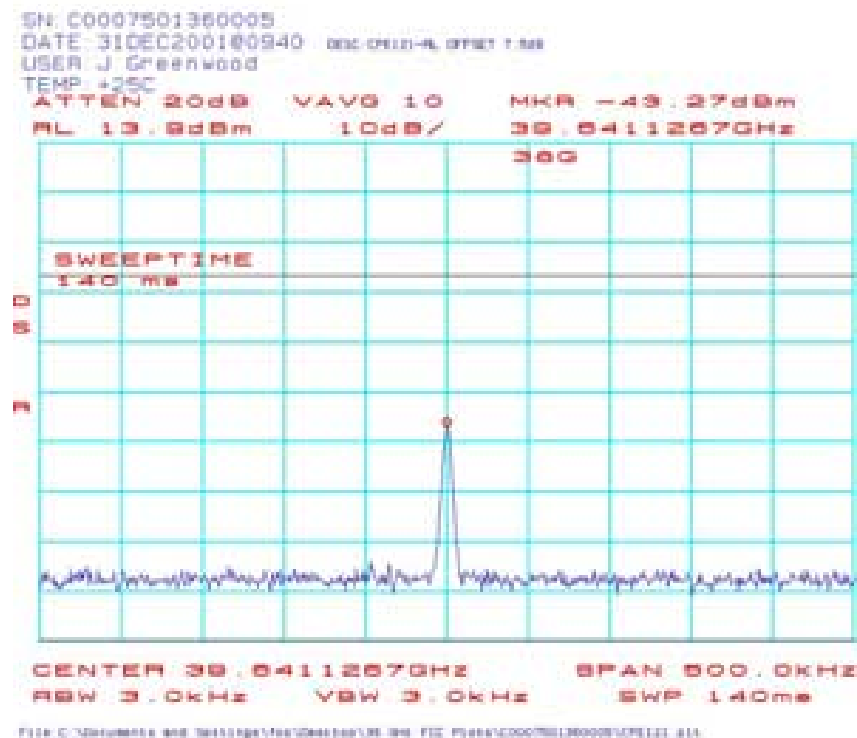

SN: C0007501360005
DATE: 31DEC200100924 DMC: 091204L OFSET: 3.500
USER: J. GREENWOOD
TEMP: +25C
ATTEN: 20dB VAVG: 10 MKR: -42.53dBm
RL: 12.8dBm 10dB/ 39.6400GHz
360

SWEETTIME
50.0 ms

CENTER 39.7750GHz SPAN 500.0MHz
RBW 1.0MHz VBW 1.0MHz SWP 50.0ms

File C:\Documents and Settings\jgreenwood\My Documents\FID Files\C0007501360005\31DEC2001_31A


SN: C0007501360005
DATE: 31DEC200100925 OSC: ONL+RL, DTST: 1.50
USER: J. Greenwood
TEMP: +25C
ATTN: 20dB VAVG: 10 MKR: -20.70dBm
RL: 12.8dBm 10dB/ 39.6000GHz
360

SWEPTIME
50.0 ms


CENTER 39.7750GHz SPAN 100.0MHz
RBW 1.0MHz VBW 1.0MHz SWP 50.0ms

File: C:\Documents and Settings\jgreenw\My Documents\FID Files\C0007501360005\US128.d1a


CPE126: Spectrum Mask Plots (CPE-ODU) 39.7875 GHz 64QAM:

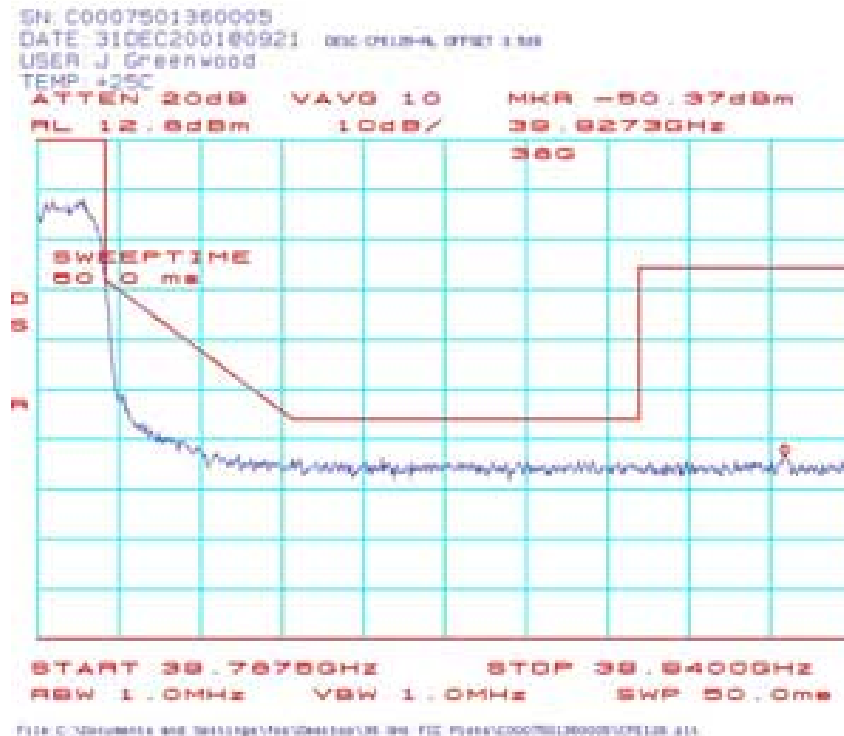


CPE127 Spectrum Mask Plots (CPE-ODU) 39.7875 GHz 64QAM:

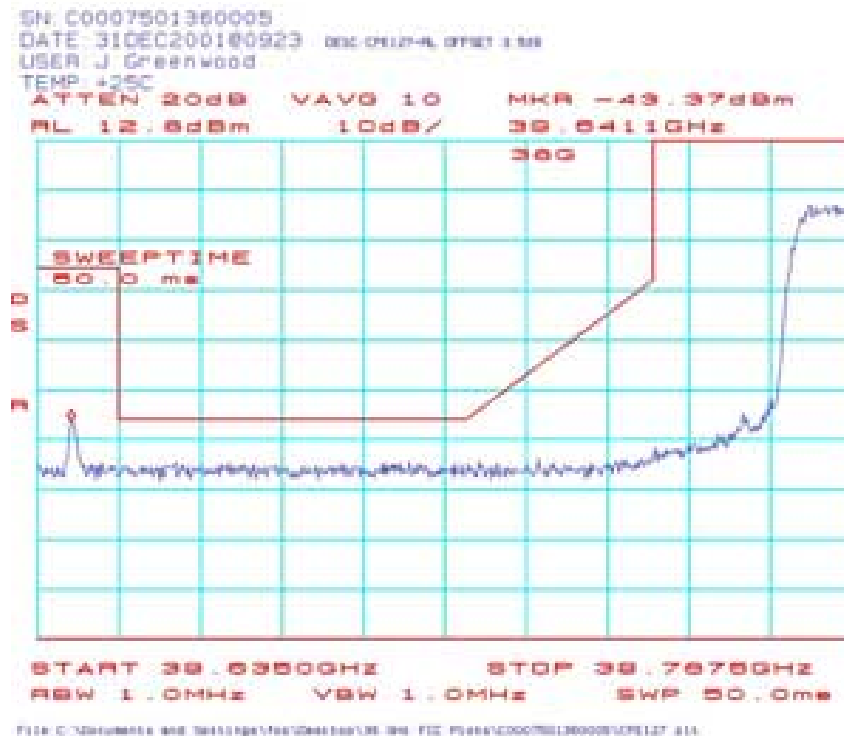

CPE003: Occupied Bandwidth (CPE-ODU) 38.6625 GHz QPSK:

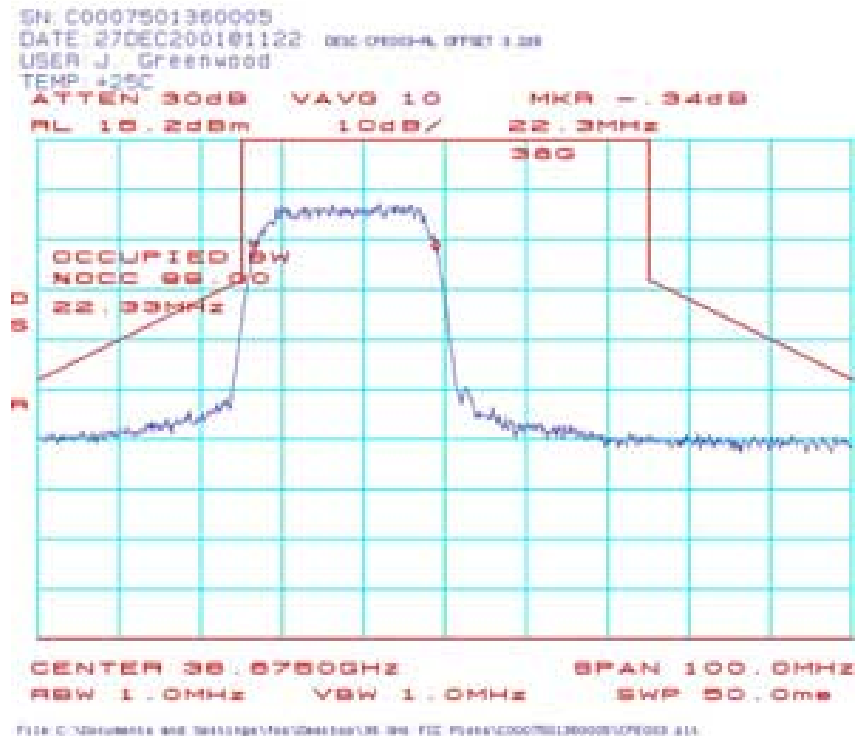

CPE053: Occupied Bandwidth (CPE-ODU) 38.6875 GHz QPSK:

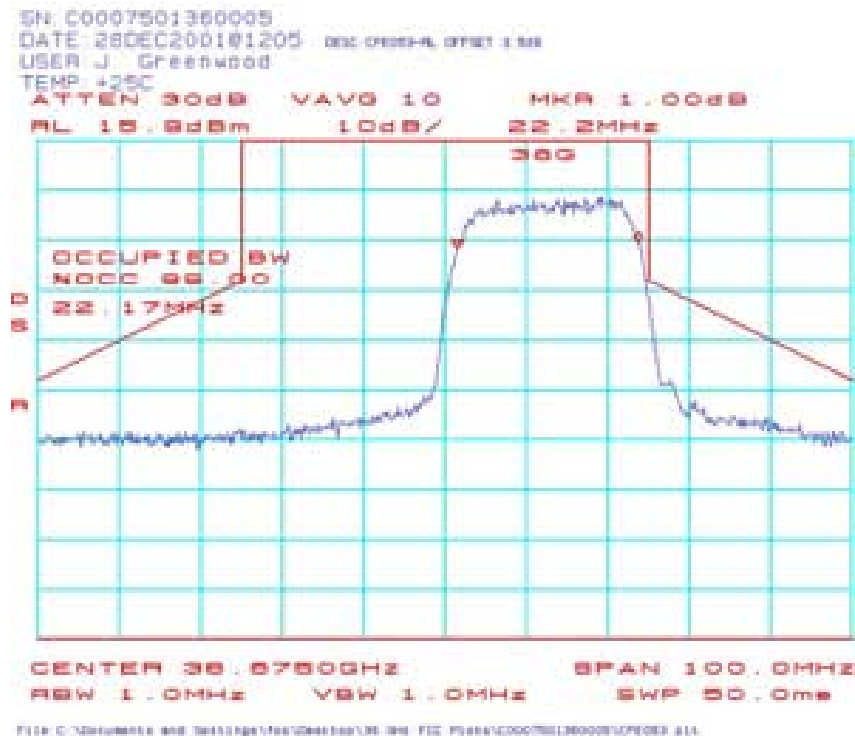

SN: C0007501360005
 DATE: 27DEC200101345 BSC OPS-4-RL OFFSET 0.20
 USER J. Greenwald
 TEMP +25C
 HATTEN 20dB VAVG 10 MKR .66dB
 RL 13.2dBm 10dB/ 22.2MHz 360

OCCUPIED BW
 5000 99.00
 22.17MHz

CENTER 36.6750GHz SPAN 100.0MHz
 RBW 1.0MHz VBW 1.0MHz SWP 50.0ms

File C:\Programs and Tools\Agilent\92404\bin\92404.exe File C:\0007501360005\92404.d11

SN: C0007501360005
DATE: 28DEC2001@1218 DSC: DPM-RL, OFFSET: 1.5dB
USER: J. Greenwood
TEMP: +25C
ATTN 20dB VAVG 10 MKR 0dB
RL 13.4dBm 10dB/ 22.2MHz
OCCUPIED BW
NOISE 99.00
22.17MHz
CENTER 36.67500GHz SPAN 100.0MHz
RBW 1.0MHz VBW 1.0MHz SWP 50.0ms

SN: C0007501360005
DATE: 27DEC200101423 DMC OPER-HL OFFSET: 3.28
USER: J. Greenwood
TEMP: +25C
ATTEN 20dB VAVG 10 MKR 2.17dB
RL 12.2dBm 10dB/ 22.2MHz
380

OCCUPIED BW
4000.00
22.17MHz

CENTER 36.07500GHz SPAN 100.0MHz
RBW 1.0MHz VBW 1.0MHz SWP 50.0ms

File C:\Documents and Settings\jagreen\My Documents\US-99_FIG_Files\C0007501360005\CP046_31A

SN: C0007501360005
DATE: 28DEC200101230 DISC: DSK-HL, OFFSET: 1.5dB
USER: J. Greenwood
TEMP: +25C
ATTEN: 20dB VAWG: 10 MKR: .67dB
RL: 12.3dBm 10dB/ 22.2MHz
OCCUPIED BW
NOISE: 99.00
22.17MHz
CENTER: 36.67500GHz SPAN: 100.0MHz
RBW: 1.0MHz VBW: 1.0MHz SWP: 50.0ms

SN: C0007501360005
DATE: 28DEC200101250 DBC: OPEN:RL OFFSET: 3.48
USER: J. Greenwood
TEMP: +25C
ATTN: 30dB VAVG: 10 MKR: .83dB
RL: 10.3dBm 10dB/ 22.2MHz
380

OCCUPIED BW
4000.00
22.17MHz

CENTER 39.2260GHz SPAN 100.0MHz
RBW 1.0MHz VBW 1.0MHz SWP 50.0MHz

File C:\Instruments\86100\86100\86100\86100\FID_P0007501360005\OPEN1_11A

SN: C0007501360005
DATE: 28DEC200101344 DSC: 092544L, DTST: 3.48
USER: J. GREENWOOD
TEMP: +25C
ATTN 30dB VAVG 10 MKR -.50dB
RL 15.4dBm 10dB/ 22.3MHz
360
OCCUPIED BW
NOCC 99.00
22.33MHz
CENTER 39.22500GHz SPAN 100.0MHz
RBW 1.0MHz VBW 1.0MHz SWP 50.0ms
FILE C:\Documents and Settings\jag\Documents\JES ETC Files\C0007501360005\CPROB 31A

SN: C0007501360005
DATE: 28DEC200101304 DBC: DBST-HL OFFSET: 3.4dB
USER: J. Greenwood
TEMP: +25C

ATTEN 30dB VAVG 10 MKR 1.17dB
RL 13.7dBm 10dB/ 22.2MHz
380


OCCUPIED BW
NOISE 99.00
22.17MHz

CENTER 39.2280GHz SPAN 100.0MHz
RBW 1.0MHz VBW 1.0MHz SWP 50.0ms


FILE C:\Documents and Settings\jagreenwood\My Documents\BNC FILES\C0007501360005\CPCT3.11A

SN: C0007501360005
DATE: 28DEC200101350 DSC: 0906H-R, DTST: 1.48
USER: J. GREENWOOD
TEMP: +25C
ATTN 30dB VAVG 10 MKR -2.87dB
RL 13.9dBm 10dB/ 22.2MHz
360
OCCUPIED BW
NOISE 98.00
22.17MHz
CENTER 39.2250GHz SPAN 100.0MHz
RBW 1.0MHz VBW 1.0MHz SWP 50.0ms


CPE079: Occupied Bandwidth (CPE-ODU) 39.2125 GHz 64QAM:

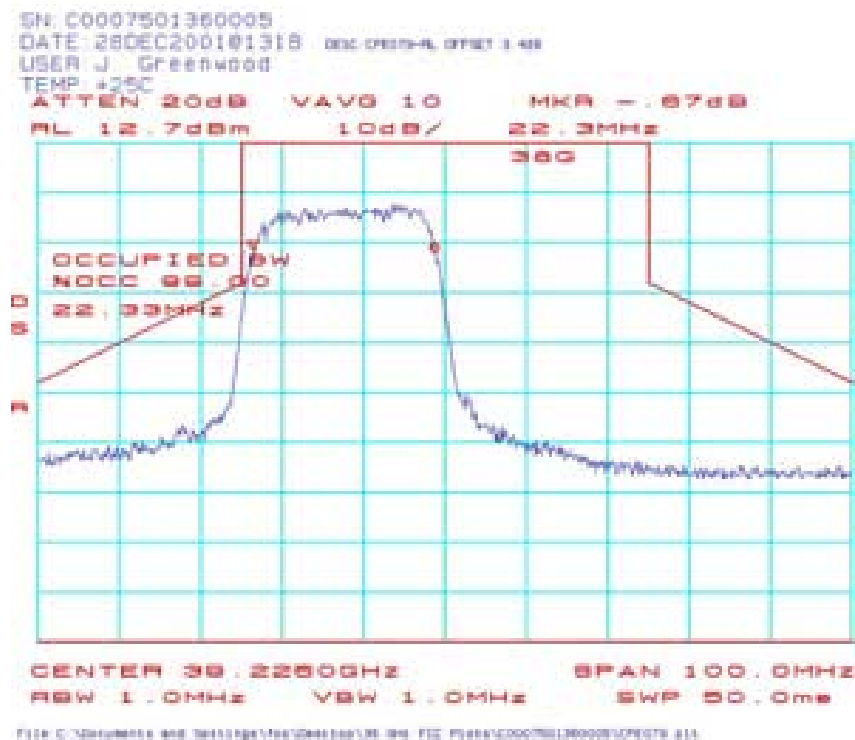

CPE093: Occupied Bandwidth (CPE-ODU) 39.2375 GHz 64QAM:

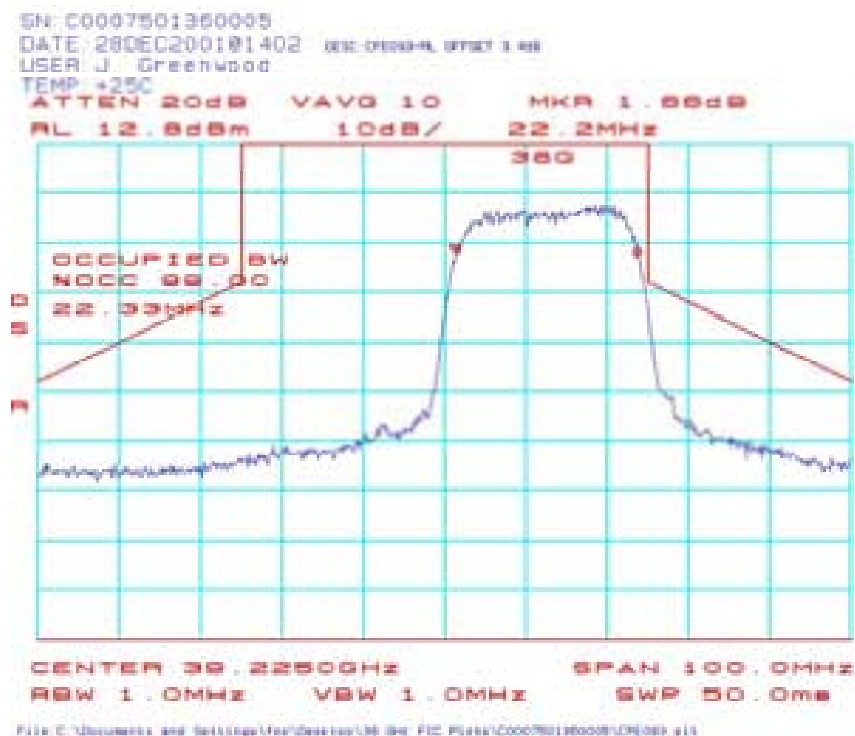


CPE098: Occupied Bandwidth (CPE-ODU) 39.7625 GHz QPSK:

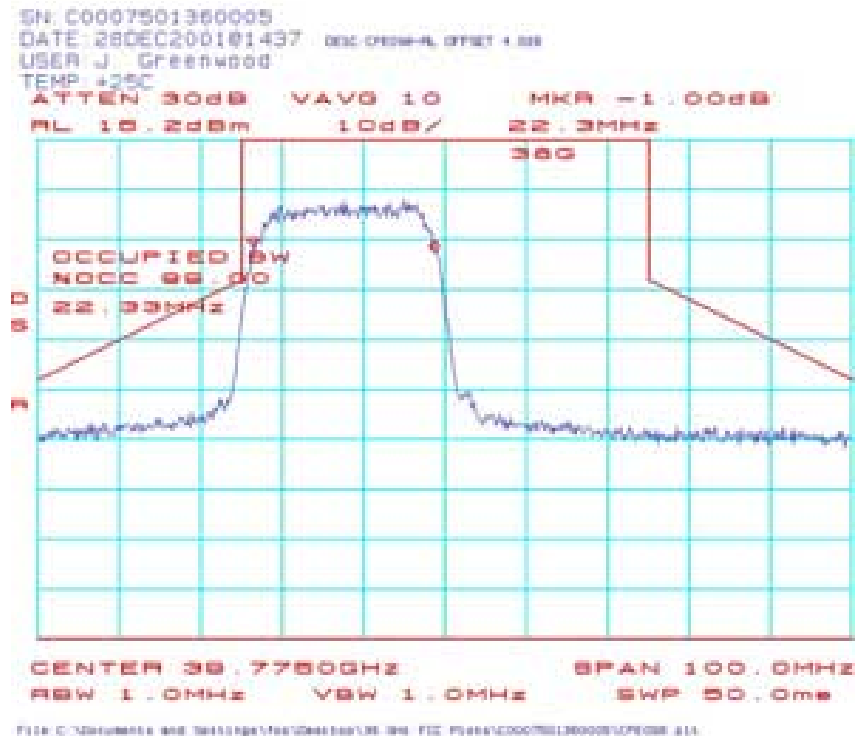


CPE115: Occupied Bandwidth (CPE-ODU) 39.7875 GHz QPSK:



CPE102 Occupied Bandwidth (CPE-ODU) 39.7625 GHz 16QAM:

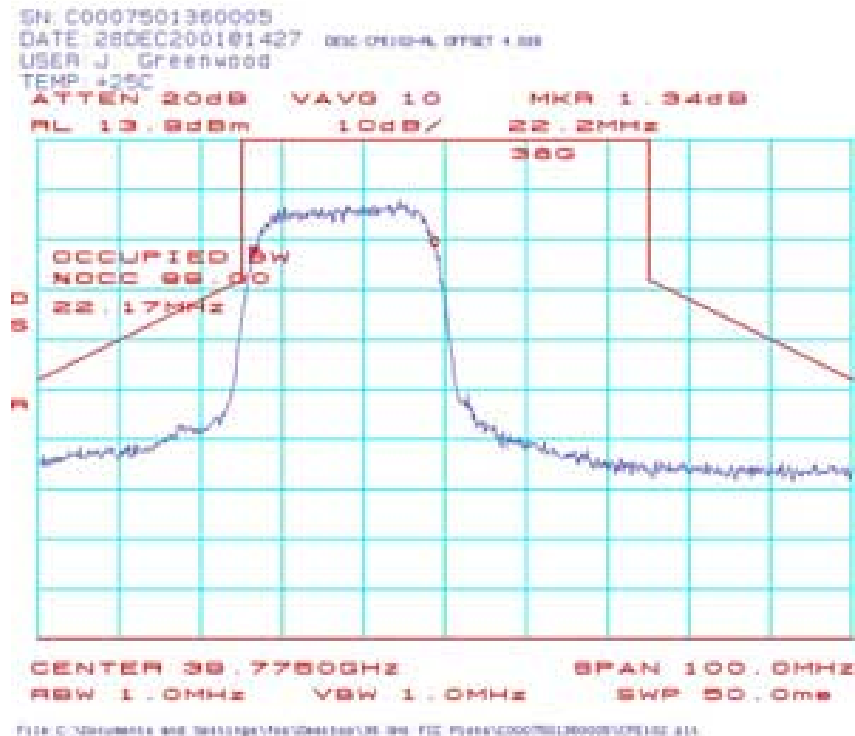

CPE119: Occupied Bandwidth (CPE-ODU) 39.7875 GHz 16QAM:

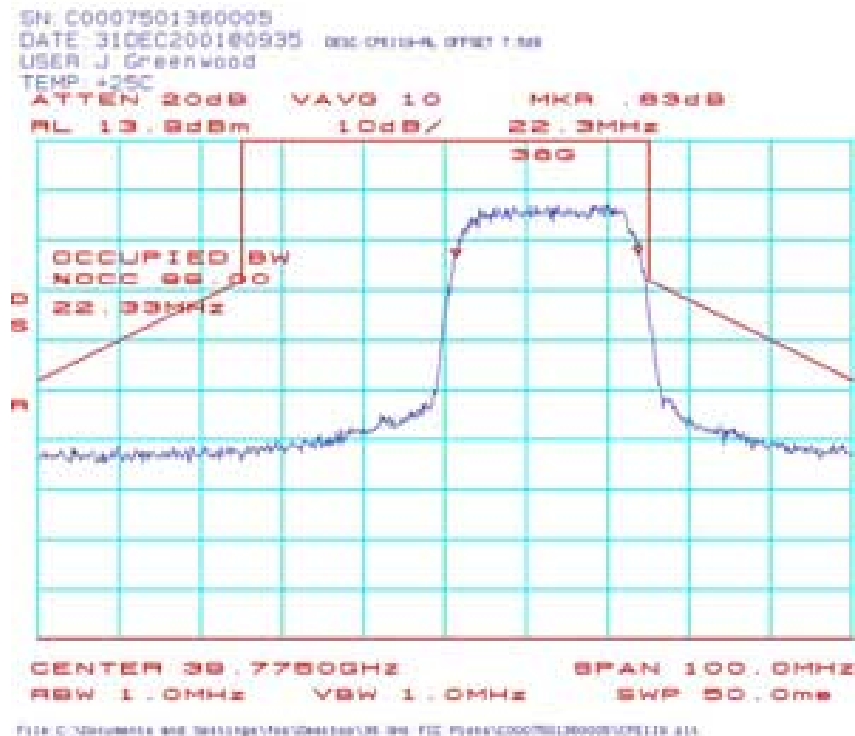

SN: C0007501360005
DATE: 28DEC2001 01:443 DMC OPERATOR: J. GREEN
USER: J. Greenwood
TEMP: +25C

ATTEN 20dB VAVG 10 MKR 0dB
RL 12.8dBm 10dB/ 22.2MHz
380

OCCUPIED BW
4000 99.00
22.17MHz

CENTER 39.77500GHz SPAN 100.0MHz
RBW 1.0MHz VBW 1.0MHz SWP 50.0ms

File C:\Instruments\MSO\Software\US-9000_FIQ_Plotter\C0007501360005\FIQ1000.a11

SN: C0007501360005
DATE: 31DEC200100925 OSC CH125-RL OFFSET 1.5dB
USER: J. GREENWOOD
TEMP: +25C
ATTEN 20dB VAVG 10 MKR 1.00dB
RL 12.8dBm 10dB/ 22.3MHz
360

OCCUPIED BW
NOISE 99.00
22.33MHz

CENTER 39.7750GHz SPAN 100.0MHz
RBW 1.0MHz VBW 1.0MHz SWP 50.0ms

File: C:\Documents and Settings\jgreenwood\My Documents\FID Files\C0007501360005\UP125.d11

**Title: Test of the Fiberless™ 3900 Series Outdoor Unit - Base
Station (BS) and Customer Premises Equipment (CPE)
To CFR 47 part 101, subpart C (Oct 1998)**

Report#: Radio-TR-001-v0.1
Issue Date: 12 February 2002
Page: 144 of 144

This page has been intentionally left blank.
