

FCC Test Firm Designation Number: FR0014
SED Wireless Device Testing Laboratory CAB Number: FR0004

Matériel testé :
Equipment under test:

IDENTEC SOLUTIONS / IDS1000
(Trademark / Marketing name or product reference)

Client / Demandeur:
Customer / Applicant : **IDENTEC SOLUTIONS AG**
Millennium Park 2
A-6890 Lustenau – Austria

Rapport délivré à :
Issued to: **IDENTEC SOLUTIONS AG**
Karl-Heinz Feierle
Millennium Park 2
A-6890 Lustenau – Austria

Référence de la proposition : 012020-23939
Proposal number:

Numéro d'affaire : 13324
Work number :

Date de l'essai : Le 6 avril 2020
Date of test: April 6th, 2020

Objectif des essais : EMC qualification according to following standards:
Test purpose: - CFR 47, FCC Part 15, Subpart C
(Chapter 15.249 - Operation within the bands 902–928 MHz, 2400–2483.5 MHz, 5725–5875 MHz, and 24.0–24.25 GHz)
- Industry Canada, RSS-Gen Issue 5 & RSS-210 Issue 10, section B.10
(Bands 902–928, 2400–2483.5 and 5725–5875 MHz)
Measurement standards:
ANSI C63.10 (2013)

Lieu du test: SMEE, Rue de Taille
Test location: 38500 VOIRON - France

Test réalisé par : Laurent CHAPUS
Test realized by:

Conclusion : L'équipement satisfait aux prescriptions et essais des normes citées en référence.
Conclusion: *The appliance complies with requirements and tests of above mentioned standards.*

Ed.	Date	Modifications Pages	Written by : Visa	Approved by: Visa
1	April 22, 2020	Initial Edition	Laurent CHAPUS Technical Manager	Regis ANCEL General Manager

La copie de ce document n'est permise que sous sa forme intégrale. Ce document est le résultat d'essais effectués sur un échantillon. Il ne préjuge pas de la conformité de l'ensemble des produits fabriqués à l'objet essayé.

This document shall not be reproduced, except in full. This document contains results related only to the item tested. It does not imply the conformity of the whole production to the item tested.



Accréditation
N° 1-6356
Portée disponible sur :
Scope available on :
www.cofrac.fr

COORDONNEES

SMEE
Rue de Taille – ZI Des Blanchisseries
38500 VOIRON - France

TEL : 04 76 65 76 50
FAX : 04 76 66 18 30

SAS au capital de 50 000 € / RC Grenoble B534 796 453 / SIRET 534 796 453 00015 / code APE 7490B / n° TVA : FR 59 534 796 453

Contents

1. NORMATIVES REFERENCES	3
2. TEST SYNTHESIS.....	4
3. EQUIPMENT UNDER TEST (EUT).....	5
4. TEST CONDITIONS.....	5
5. MODIFICATIONS OF THE EUT	5
6. SPECIAL ACCESSORIES	5
7. MEASUREMENT UNCERTAINTY	6
8. FIELD STRENGTH CALCULATION.....	6
9. FIELD STRENGTH OF FUNDAMENTAL	7
10. FIELD STRENGTH OF HARMONICS	9
11. UNWANTED EMISSIONS	12
12. OCCUPIED BANDWIDTH (99%).....	22

1. Normatives References

FCC qualification according to:		
Standards	Applied	Title
ANSI C63.10 (2013)	X	American National Standard for Testing Unlicensed Wireless Devices
CFR47, Part 15	X	Telecommunication – Federal Communication Commission – Radio frequency devices, Sections 15.207 / 15.209 / 15.249

Industry Canada qualification according to:		
Standards	Applied	Title
RSS-Gen (Issue 5/2019)	X	General Requirements and Information for the Certification of Radio Apparatus
RSS-210 (Issue10/2019)	X	Licence-exempt Radio Apparatus: Category I Equipment, Section B.10: Devices Operating in Frequency Bands for Any Application, Band 2400-2483.5MHz.

Deviation from standards: None.

2. Test synthesis

TEST	Paragraph number FCC Part 15 IC RSS-210	Spec. FCC Part 15 IC RSS-210	RESULTS (comments)
Conducted emissions test	15.207 (a) RSS-Gen: Issue 5, §8.8	15.207 (a) Table 4, §8.8	N/A (1)
Field Strength of fundamental	15.249 (a) (c) RSS-210: Issue 9, §B.10 (a)	94dBµV/m @3m (50mV/m @ 3m)	PASS
Field Strength of harmonics	15.249 (a) (c) (e) RSS-210: Issue 9, §B.10 (a)	54dBµV/m @3m (0.5mV/m @ 3m)	PASS
Unwanted emissions outside the specified frequency band and harmonics	15.209 / 15.249 (d) (e) RSS-210: Issue 9, §B.10 (b) / RSS-Gen: Issue 5, §8.9	Whichever is less stringent, either: - 50dB below level of fundamental, or; - General field strength limits, as follow: <u>Measure at 300m</u> 9-490kHz: 2400µV/m/F(kHz) <u>Measure at 30m</u> 0.490-1.705: 24000µV/m/F(kHz) 1.705-30MHz: 30µV/m <u>Measure at 3m</u> 30MHz-88MHz : 40 dBµV/m 88MHz-216MHz : 43.5 dBµV/m 216MHz-960MHz : 46.0 dBµV/m Above 960MHz : 54.0 dBµV/m	PASS
Occupied Bandwidth	RSS-Gen: Issue 5, §6.7	BW at 99%	PASS

NA: Not Applicable

(1): Battery operated equipment

• General conclusion:

Measures and tests performed on the sample of the product **DENTEC SOLUTIONS / IDS1000**, in configuration and description presented in this test report, show compliance with standards FCC CFR 47, PART 15, Subpart C and Industry Canada RSS-Gen & RSS-210.

3. Equipment Under Test (EUT)

**Nom /
Identification**

IDENTEC SOLUTIONS / IDS1000
(Trademark / Marketing name or product reference)

P/N: 456010
Sn: 0.000.355.101

**FCC ID:
IC:
Model:**

OO4-IDS1000
IC : 3538A-IDS1000
IDS1000

Note : IDS1000 active tag model covers both iQ355 XP and iQ355P part names
(X for ATEX certified version)
All tests are performed with the iQ355 XP version.

**Alimentation /
Power supply**

3VDC from internal battery

**Auxiliaires /
Auxiliaries**

- PC Laptop ASUS, model F200M
- i-Point Si (Identec product)

Sn:1915IP0015

**Entrées-Sorties /
Input / Output**

	Câbles pour essai / Cables for test	Blindé / Shielded	Prévu pour >3m / Intended for >3m
None	-	-	-

**Mode de fonctionnement /
Running mode**

Equipment running modes are:
The tested sample is able to be set in following modes:
- Transmit a modulated carrier frequency on low, middle and high channels
(902.5/915/927.5MHz)

**Programme de test /
Test program /**

PC test program "Gen3 Tag Certification tool"

**Informations supplémentaires /
Additional informations**

Declaration of the applicant:
- Type of technology: Proprietary RF protocol
- Emission bands: 902-928MHz
- Frequency transmission band: 902.5 to 927.5MHz.
- Equipment intended for use as a portable station
- Equipment designed for continuous operation
- Antenna type: PCB trace antenna
- Rated conducted output power: -1dBm

**Dimensions de l'EST /
Dimensions of EUT**

90mm x 42 x 13

4. Test conditions

Power supply voltage:

Equipment under test:

Auxiliaries:

3V DC (Battery fully charged)
None

5. Modifications of the EUT

None.

6. Special accessories

None required for compliance with emission limits.

7. Measurement Uncertainty

Test Description	Expanded uncertainty
Conducted emissions test (150k-30MHz, AC mains)	± 3.5dB
Radiated emission test (9kHz-30MHz, electric field)	± 4.0dB
Radiated emission test (30-300MHz, OATS)	± 5.6dB
Radiated emission test (300-1000MHz, OATS)	± 5.3dB
Radiated emission test (1-40GHz, OATS / FAC)	± 5.6dB
Conducted RF output power at antenna port	± 1.6dB
Radiated RF output power (Peak, Power density)	± 5.6dB
DTS Bandwidth, 99% OBW	±4%
Temperature	± 1°C
Time and duty cycle calculation	±1%
AC and DC voltage	±1%

Note: Expanded uncertainty at 95% confidence (k=2)

8. Field Strength Calculation

The field strength (level) is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation is as follow:

$$FS = RA + AF + CF - AG$$

Where FS = Field Strength (Level)

RA = Receiver Amplitude (Meter Reading)

AF = Antenna Factor

CF = Cable Factor

AG = Amplifier Gain

Total factor = AF+CF-AG

Margin value = Emission level – Limit value

Example:

RA: 14.0dBμV / AF: 16.5 dBm⁻¹ / CF: 3.5dB / AG: 15dB

→ Total factor: 5dBm⁻¹


→ Field level: 19.0dBμV/m (-21.0dB for margin if limit is 40dBμV/m)

9. Field Strength of fundamental

TEST: Field strength of fundamental / FCC part 15.249 – RSS 210 §B.10			Verdict
Method: Measurements were made in a 3-meter Open Area Test Site (OATS) that complies to ANSI C63.4 / C63.10. Measurements were performed with a peak detector using a 100kHz RBW. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in horizontal and vertical polarities. Final measurements (Peak) were then performed by rotating the EUT 360° and adjusting the receive antenna height from 1 to 4 m. The tested equipment is set to transmit operation with modulation on lowest, middle and highest channels. Three orthogonal axis measurements on EUT are performed to obtain the maximum peak field strength.			Pass
Laboratory Parameters:	Required prior to the test	During the test	
Ambient Temperature	20 to 30 °C	24°C ± 2	
Relative Humidity	30 to 70 %	36% ± 5	
Limits – FCC Part 15.249 (a) (c) / RSS-210 §B.10 (a)			
Frequency (MHz)	Limits (dBµV/m)		
	Level / Detector / Distance	Results	
902 to 928 MHz	94dBµV/m / Pk / 3m	Pass	
Supplementary information:			
Test location: SMEE			
Test date: April 6 th , 2020. Tested by L. Chapus			

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Log-periodic antenna	EMCO	3146	ANT-191-019	2019/6	2021/6
RF cable	Div	OATS/25m	CAB-101-017	2019/4	2020/4
OATS	Div	10/3m	SIT-101-001	2017/7	2020/7
Antenna mast	Innco- Systems	MA4000EP	MAT-101-001	-	-
Turntable	Innco- Systems	DS1200S	PLA-101-001	-	-
Measuring Receiver	Rohde&Schwarz	ESRP	REC-151-002	2019/9	2021/9
EMC Software	NEXIO	BAT EMC V3.18	SOF-101-001	-	-

Test Setup for radiated emission

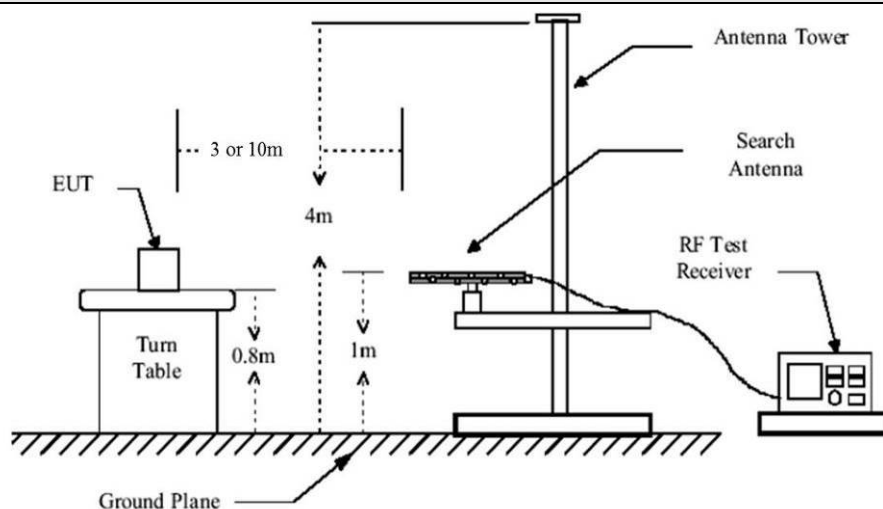

Test setup for 30-1000MHz (3m)


Tabulated Results for Field Strength of fundamental

FREQ	Field Strength @ 3m	Detector	Limit	Margin	Result
(MHz)	(dBμV/m)		(dBμV/m)	dB	
902.5	93.9	Pk	Pass	-0.1	Pass
915.0	93.1	Pk	Pass	-0.9	Pass
927.5	93.4	Pk	Pass	-0.6	Pass
RBW:		100kHz			
Measurement distance:		3m			
Limit:		FCC Part 15.249 (a) (c) / RSS-210 §B.10			
Final measurement detector:		Peak			
RESULT:		PASS			

10. Field Strength of harmonics

TEST: Field Strength of harmonics / FCC part 15.249 – RSS-210 §B.10		Verdict
<u>Method:</u> For frequency above 1GHz, final measurements are made in a Full Anechoic Chamber (FAC) that complies with ANSI C63.10. Measurements were performed at an antenna to EUT separation distance of 3 meter. The EUT was rotated 360° about its azimuth with the receive antenna in horizontal and vertical polarities. Three orthogonal axis measurements on EUT are performed to obtain the maximum peak field strength, with 60° rotation on each axis.(Clause 6.6.5 of ANSI C63.10). A pre-scan frequency identification of the EUT has been performed in full anechoic chamber. The measured radiated field of the EUT is performed (or corrected) at 3-meters of distance. Antenna is 1.5-meters high. The pre-characterization graphs are obtained in PEAK and Average detection with 360° continuous rotation of the device under test.		Pass
Laboratory Parameters:	Required prior to the test	During the test
Ambient Temperature	20 to 30 °C	24°C ± 2
Relative Humidity	30 to 70 %	36% ± 5
Fully configured sample scanned over the following frequency range	Frequency range on each side of line	Measurement Point
	30MHz – 25GHz	3 m measurement distance
Limits – FCC Part 15.249 (a) (c) (e) / RSS-210 §B.10 (a)		
Frequency bands for harmonics (MHz)	Limits (dBµV/m)	
	Level / Detector / Distance	Results
4800 to 4967	54.0 / AV / 3m 74.0 / PK / 3m	Pass
7200 to 7450.5	54.0 / AV / 3m 74.0 / PK / 3m	Pass
9600 to 9934	54.0 / AV / 3m 74.0 / PK / 3m	Pass
12000 to 12417.5	54.0 / AV / 3m 74.0 / PK / 3m	Pass
14400 to 14901	54.0 / AV / 3m 74.0 / PK / 3m	Pass
16800 to 17384.5	54.0 / AV / 3m 74.0 / PK / 3m	Pass
19200 to 19868	54.0 / AV / 3m 74.0 / PK / 3m	Pass
21600 to 22351.5	54.0 / AV / 3m 74.0 / PK / 3m	Pass
24000 to 24835	54.0 / AV / 3m 74.0 / PK / 3m	Pass
Supplementary information: Test location: SMEE Test date: April 6th, 2020. Tested by L. Chapus		

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Horn antenna	ETS-LINDGREN	3115	ANT-141-013	2018/10	2021/10
Spectrum analyzer	Rohde&Schwarz	FSV40	ASP-171-004	2019/8	2021/8
RF cable	Pasternack RF	PE302-120	CAB-131-024	2019/4	2020/4
RF cable	HUBER+SUHNER	SF104	CAB-141-030	2019/4	2020/4
Anechoic chamber	COMTEST	214263	CAG-141-001	2017/6	2020/6
Antenna mast	Innco- Systems	MA4000EP	MAT-101-001	-	-
Turntable	Innco- Systems	DS1200S	PLA-101-001	-	-
Turntable	Innco- Systems	CT0800	PLA-141-001		
Pre-amplifier	PE	1524	PRE-101-002	2019/6	2020/6
Measuring receiver	Rohde&Schwarz	ESRP	REC-151-003	2019/9	2021/9
EMC Software	NEXIO	BAT EMC V3.18	SOF-101-001	-	-

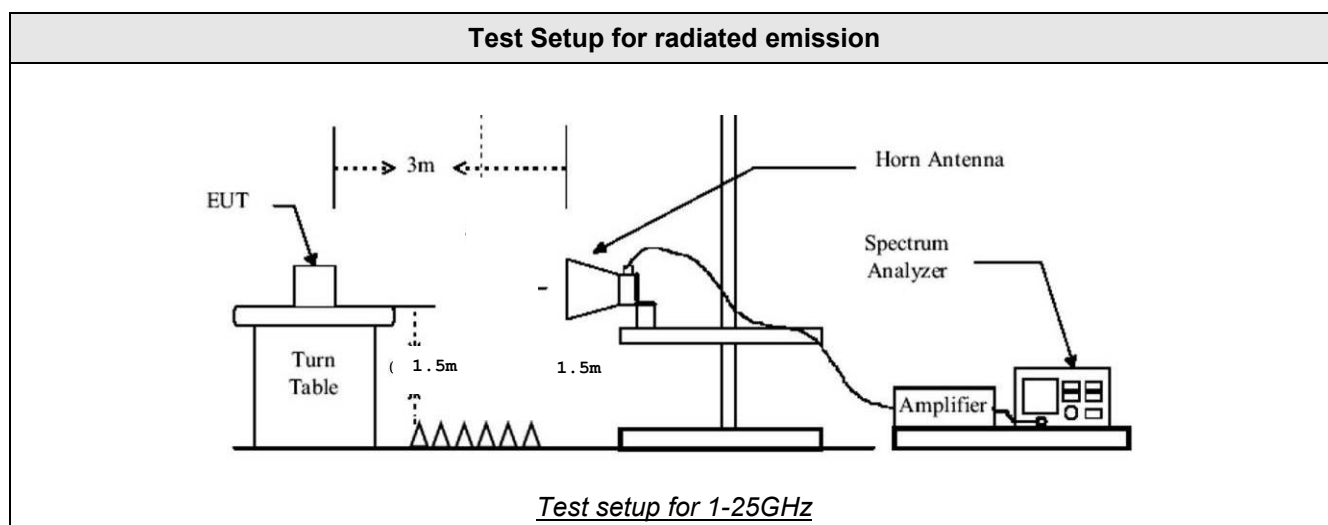

Tabulated Results for Field strength of harmonics (1GHz-9.3GHz)				
FREQ (MHz)	Field level dBμV/m	Detector	Limit (dBμV/m)	Result
Levels at least 10dB below limits		Pk	74.0	Pass
Levels at least 10dB below limits		Av	54.0	Pass
RBW		1MHz		
Measurement distance:		3m		
Limit:		FCC Part 15.249 (a) (c) (e)		
Final measurement detector:		Peak / Average		
RESULT:		PASS		
Notes:		(1): See pre-scan graphs in chapter 11 (Unwanted emission)		


11. Unwanted emissions

TEST: Unwanted emissions outside fundamental and harmonics bands / FCC part 15.209, 15.249 - RSS-210 §B.10 / RSS-Gen §8.9		Verdict
Method: Measurements were made in a 3-meter Open Area Test Site that complies to ANSI C63.4/ C63.10 for frequency below 1GHz. Measurements were made in a 3-meter Full Anechoic Chamber (FAC) that complies to ANSI C63.10 for frequency above 1GHz. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in horizontal and vertical polarities. Final measurements (Peak/Quasi-Peak/Average) were then performed by rotating the EUT 360° and adjusting the receive antenna height. The tested equipment is set to transmit operation with modulations on lowest, middle and highest channel. Three orthogonal axis measurements on EUT are performed to obtain the maximum peak field strength. A pre-scan frequency identification of the EUT has been performed in full anechoic chamber. The measured radiated field of the EUT is performed at 3-meters of distance for frequency 9k-1GHz. The measured radiated field of the EUT is performed at 1.6-meters of distance for frequency 1-25GHz. Antenna is 1.25m (Freq < 1GHz) or 1.5m (Freq < 1GHz) high in front of EUT.		Pass
Laboratory Parameters:	Required prior to the test	During the test
Ambient Temperature	20 to 30 °C	24°C ± 2
Relative Humidity	30 to 70 %	36% ± 5
Fully configured sample scanned over the following frequency range	Frequency range on each side of line	Measurement Point
	9kHz – 30MHz	10 m measurement distance
	30MHz – 10GHz	3 m measurement distance
Limits – FCC Part 15.209, 15.249 (d) (e) / RSS-Gen §8.9, RSS-210 §B.10 (b)		
Whichever is less stringent, either:		
Frequency (MHz)	Limits (dBµV/m)	
	Level / Detector / Distance	Results
30 to 1000	50dB below the fundamental / QP / 3m	Not used
Above 1GHz	50dB below the fundamental / Av / 3m 30dB below the fundamental / Pk / 3m	Not used
Or		
Frequency (MHz)	Limits (dBµV/m)	
	Level / Detector / Distance	Results
0.009 to 0.090	107.6 – 87.6 / AV / 10m 127.6 – 107.6 / PK / 10m	Pass
0.090 to 0.110	87.6 – 85.9 / QP / 10m	Pass
0.110 to 0.490	85.7 – 72.9 / AV / 10m 105.7 – 92.9 / PK / 10m	Pass
0.490 to 1.705	52.9 – 42.1 / QP / 10m	Pass
1.705 to 30	48.6 / QP / 10m	Pass
30 to 88	40.0 / QP / 3m	Pass
88 to 216	43.5 / QP / 3m	Pass
216 to 960	46.0 / QP / 3m	Pass
960-1000	54.0 / QP / 3m	Pass


Above 1GHz	54.0 / AV / 3m 74.0 / PK / 3m	Pass
Supplementary information: Test location: SMEE Test date: November 4 th , 2019. Tested by L. Chapus		

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Log-periodic antenna	EMCO	3146	ANT-191-019	2019/6	2021/6
Biconnic antenna	COM-POWER	AB- 900	ANT-101-003	2019/6	2021/6
Loop antenna	EMCO	6502	ANT-101-009	2019/8	2021/8
BiConiLog antenna	EMCO	3142B	ANT-101-010	2019/8	2021/8
Horn antenna	ETS-LINDGREN	3115	ANT-141-013	2018/10	2021/10
Horn antenna	ETS-LINDGREN	3116	ANT-161-014	2017/12	2022/12
Spectrum analyzer	Rohde&Schwarz	FSV40	ASP-171-004	2019/8	2021/8
RF cable	Div	OATS/25m	CAB-101-017	2019/4	2020/4
RF cable	Pasternack RF	PE302-120	CAB-131-024	2019/4	2020/4
RF cable	HUBER+SUHNER	RG214U	CAB-141-026	2019/4	2020/4
RF cable	HUBER+SUHNER	RG214U	CAB-141-029	2019/4	2020/4
RF cable	HUBER+SUHNER	SF104	CAB-141-030	2019/4	2020/4
RF cable	HUBER+SUHNER	SF102 (K/2m)	CAB-171-034	2019/4	2020/4
RF cable	HUBER+SUHNER	SF102 (K/3m)	CAB-171-034	2019/4	2020/4
Pre-amplifier	Pasternack RF	PE1524	PRE-101-002	2019/6	2020/6
Pre-amplifier	SMEE	18-40GHz	PRE-171-004	2017/12	2019/12
Anechoic chamber	COMTEST	214263	CAG-141-001	2017/6	2020/6
OATS	Div	10m	SIT-101-001	2017/7	2020/7
Antenna mast	Innco- Systems	MA4000EP	MAT-101-001	-	-
Turntable	Innco- Systems	DS1200S	PLA-101-001	-	-
Turntable	Innco- Systems	CT0800	PLA-141-001	-	-
Measuring Rec	Rohde&Schwarz	ESRP	REC-151-002	2019/9	2021/9
EMC Software	NEXIO	BAT EMC V3.18	SOF-101-001	-	-


Test Setup for radiated emission

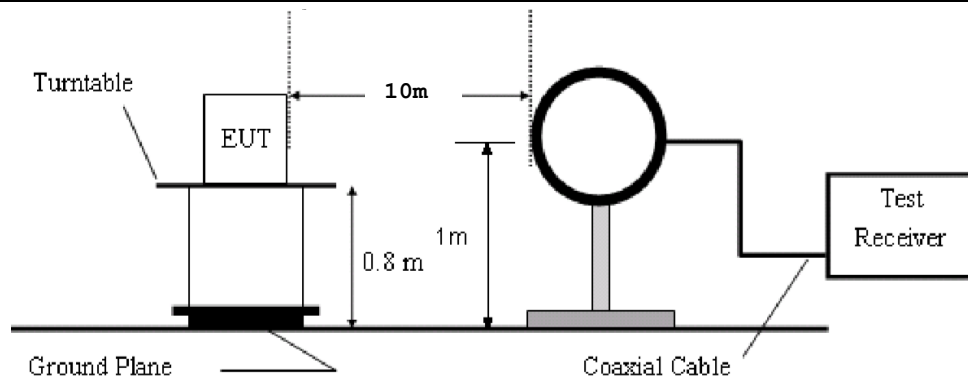

Test setup for 9k-30MHz

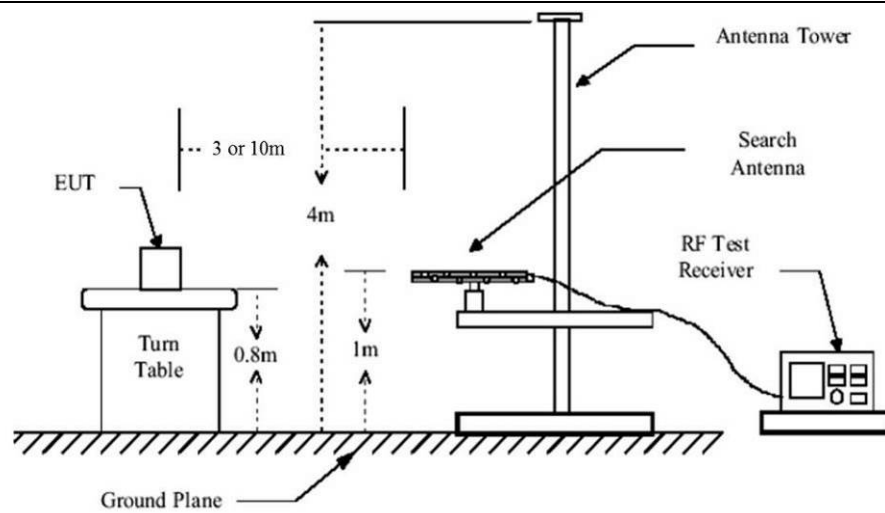

Test setup for 30-1000MHz (3m)

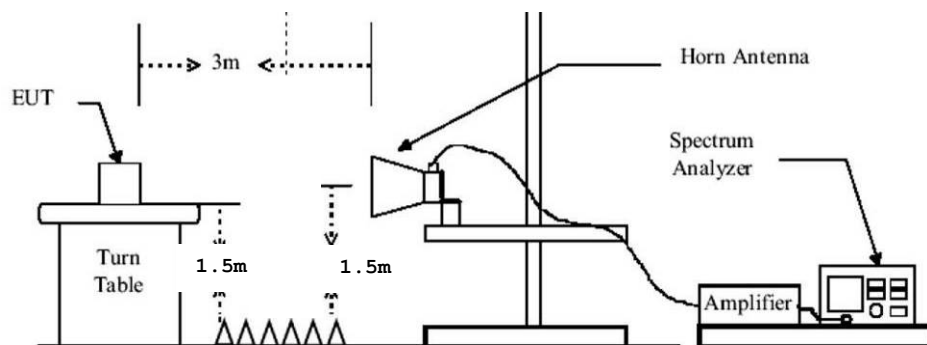


Test setup for 1-10GHz

Tabulated Results for Unwanted emissions (9kHz-30MHz)							
FREQ	RF field @ 30m	Limit @ 30m	Margin	Antenna		Table angle	Correc. Fact. (CF)
MHz	(QP) dBμV/m	(QP) dBμV/m	dB	Angle (Degree)	Position	Degree	dB
Levels are at least 10dB below limits							
Supplementary information: Frequency list measured on the Open Area Test Site has been created with pre-scan results.							
Frequency band investigated:		9kHz-30MHz					
RBW:		200Hz (9kHz-150kHz)					
		9kHz (150kHz-30MHz)					
Measurement distance:		10m					
Limit:		FCC Part 15.209 – 15.249 / RSS-Gen §8.9 – RSS-210 §B.10 (b)					
Final measurement detector:		Peak / Quasi-Peak / Average					
Note:		CF: Correction factor = Antenna factor + Cable loss *1: Measure have been done at 10m distance and corrected according to requirements of 15.209.e) (M@30m = M@10m-19.1dB)					

Tabulated Results for Radiated Disturbance (3m measurement on Open Area Test Site, 30MHz-1GHz)										
FREQ	Meter reading	Meter reading	Total Factor	Field level	Field level	Pol	Antenna height	Table angle	Limit	Margin
MHz	(QP) dBμV	(Pk) dBμV	dB	(QP) dBμV/m	(Pk) dBμV/m		cm	Degré	(QP) dBμV/m	dB
Levels are at least 10dB below limits										
Supplementary information: Frequency list measured on the Open Area Test Site is created with pre-scan results.										
Frequency band investigated:		30MHz-1GHz								
RBW:		120kHz								
Measurement distance:		3m								
Limit:		FCC Part 15.209 – 15.249 / RSS-Gen §8.9 – RSS-210 §B.10 (b)								
Final measurement detector:		Quasi-Peak								
RESULT:		PASS								
Note:		Limits used are FCC part 15.209 / RSS-Gen.								


Tabulated Results for Unwanted emissions (1GHz-10GHz)				
FREQ	Field level	Detector	Limit	Result
(MHz)	dBμV/m		(dBμV/m)	
Levels at least 10dB below limits		Pk	74 Pk	Pass
Levels at least 10dB below limits		Av	54 Av	Pass
RBW		1MHz (CISPR)		
Measurement distance:		3m		
Limit:		FCC Part 15.209 – 15.249 / RSS-Gen §8.9 – RSS-210 §B.10 (b)		
Final measurement detector:		Peak / CISPR Average		
RESULT:		PASS		
Notes:		Limits used are FCC part 15.209 / RSS-Gen.		

Graphical representation of Band-edge compliance (Radiated)

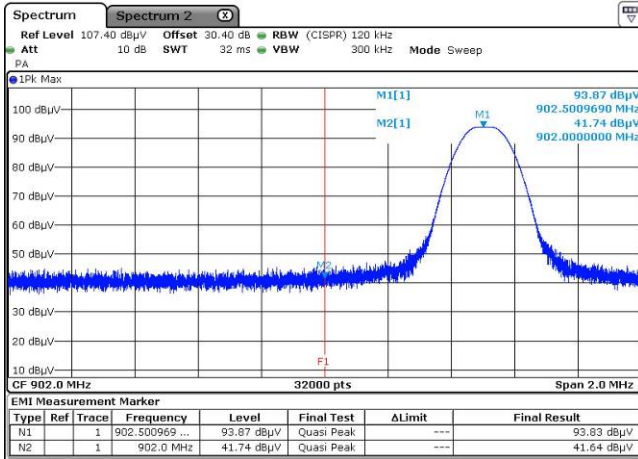

Low band-edge compliance


M2 = 902MHz
Quasi-Peak level below 902MHz is 41.6dBμV/m max at 3m
(limit is 46dBμV/m)
RESULT: PASS
Note: Radiated measurement

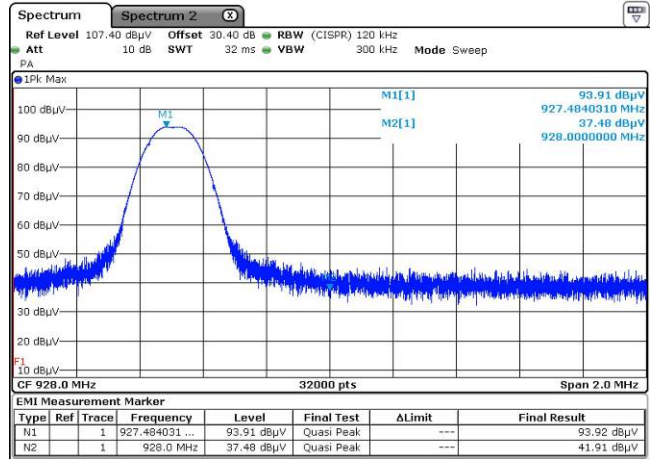

High band-edge compliance

M2 = 928MHz
Quasi-Peak level below 902MHz is 41.9dBμV/m max at 3m
(limit is 46dBμV/m)
RESULT: PASS
Note: Radiated measurement

Graphical representation of Radiated Disturbance Measurement (Peak detection, Anechoic chamber pre-scan, 9kHz-30MHz / 3m / Parallel & Perpendicular antenna position / Transmit mode)

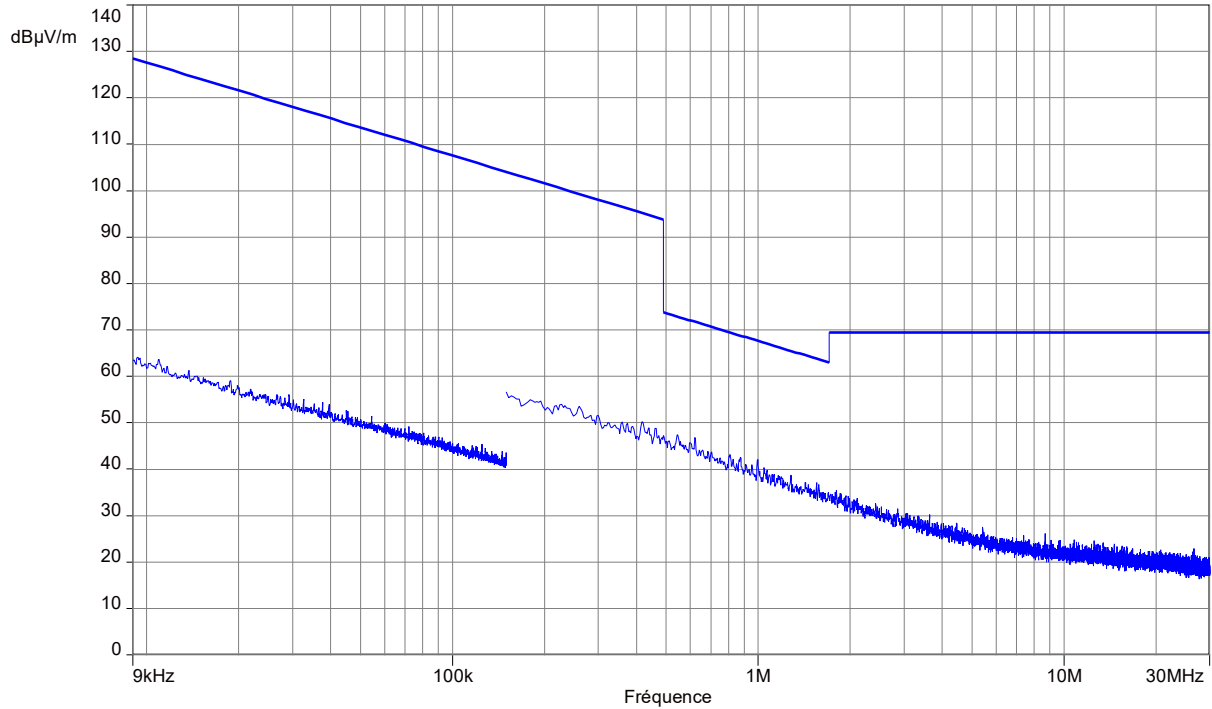


Notes: Pre-scan graph only for identification purpose.
Same result for transmit mode on all channels.

Frequency band investigated:	9kHz-30MHz
Unit :	dBμV/m
RBW :	200Hz (9kHz-150kHz) 9kHz (150kHz-30MHz)
Antenna polarization :	Parallel & Perpendicular to measurement axis
Measurement detector:	Peak

Graphical representation of Radiated Disturbance Measurement (Peak detection, Anechoic chamber pre-scan, 30MHz-1GHz / 3m)

Horizontal polarization (Low, Mid and high channels)

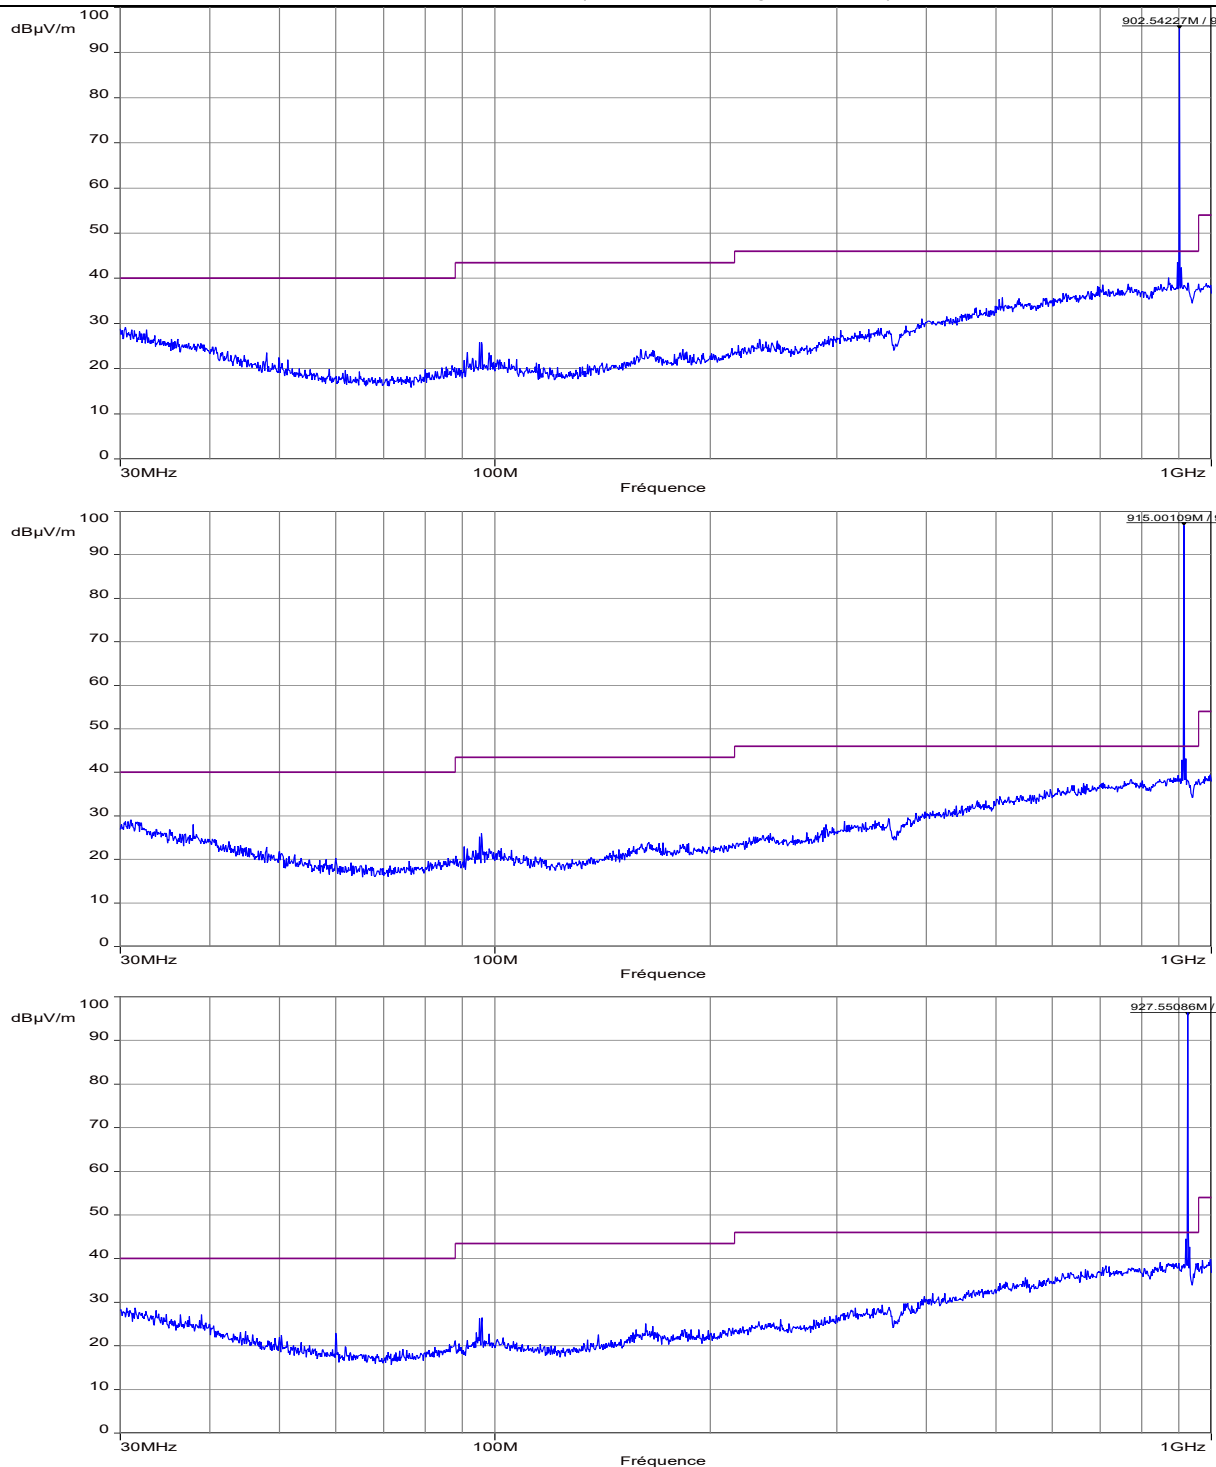

----- : Peak measure

----- : QP limit (3m)




Note: Pre-scan graph only for identification purpose.

Marker List :

Frequency (MHz)	Peak Level (dBμV/m)	Limit (dBμV/m)	Polarization
None	-	-	-

Graphical representation of Radiated Disturbance Measurement (Peak detection, Anechoic chamber pre-scan, 30MHz-1GHz / 3m)

Vertical polarization (Low, Mid and high channels)

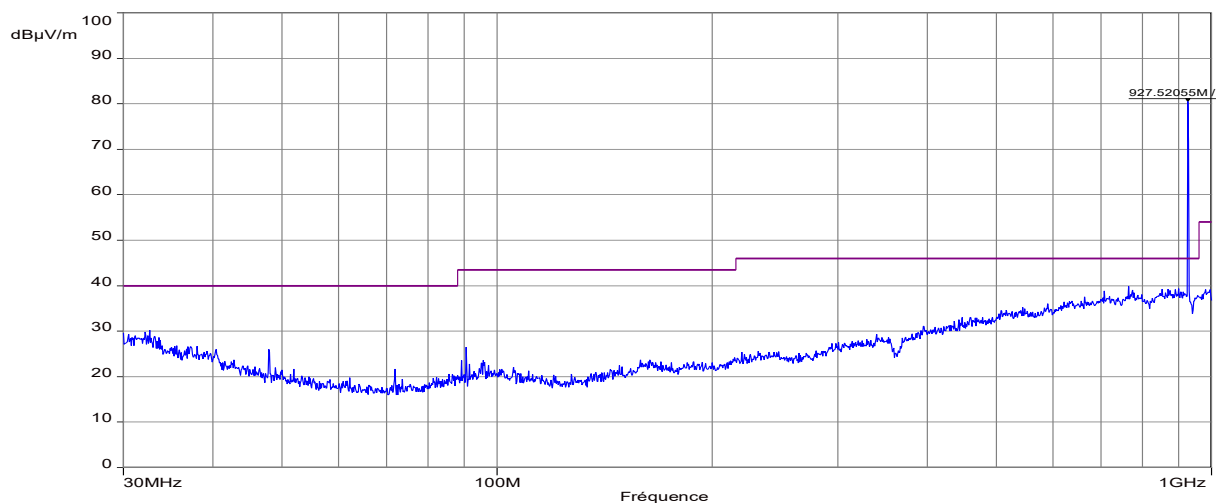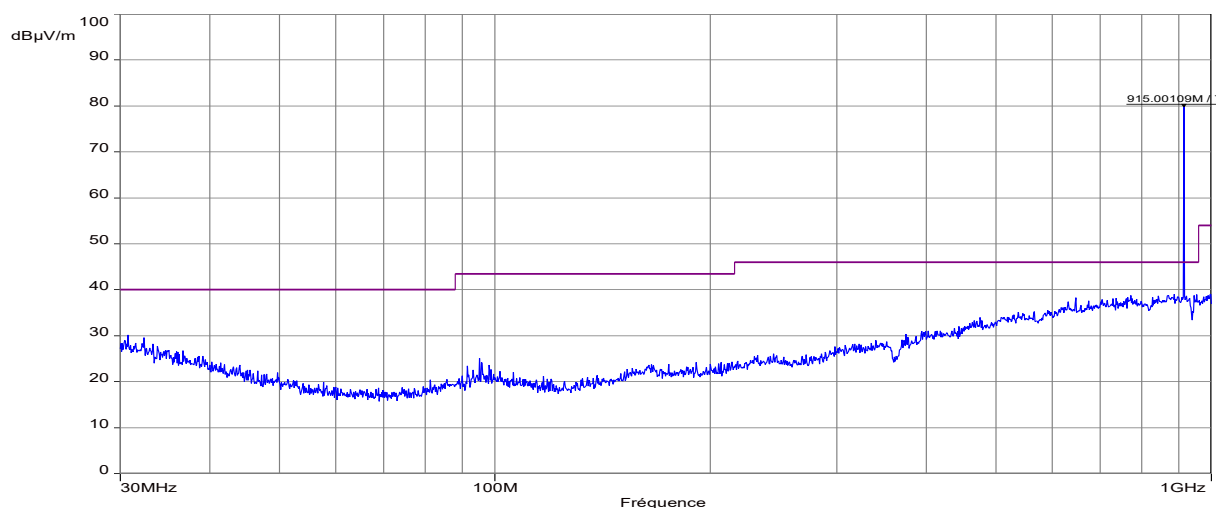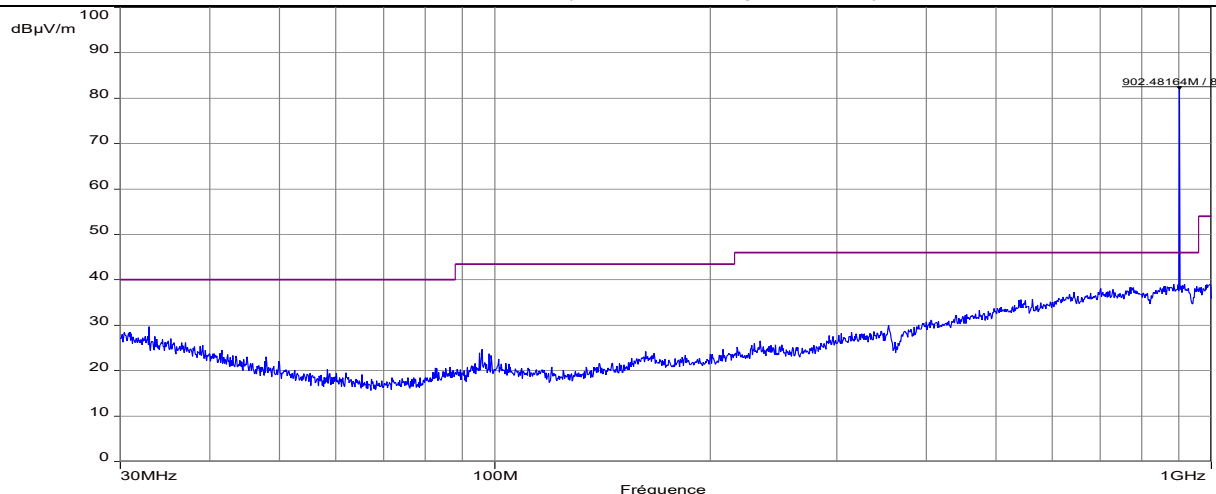

----- : Peak measure

----- : QP limit (3m)




Note: Pre-scan graph only for identification purpose.

Marker List :

Frequency (MHz)	Peak Level (dBµV/m)	Limit (dBµV/m)	Polarization
None	-	-	-

Graphical representation of Radiated Disturbance Measurement (Peak detection, Anechoic chamber pre-scan, 1GHz-10GHz / 3m)

Horizontal polarization (Low, Mid and high channels)

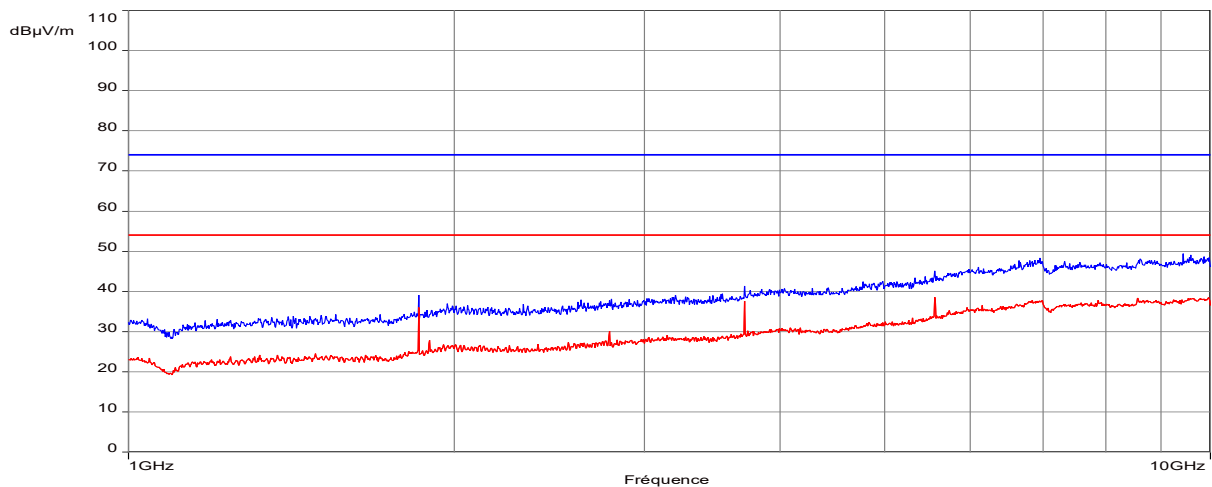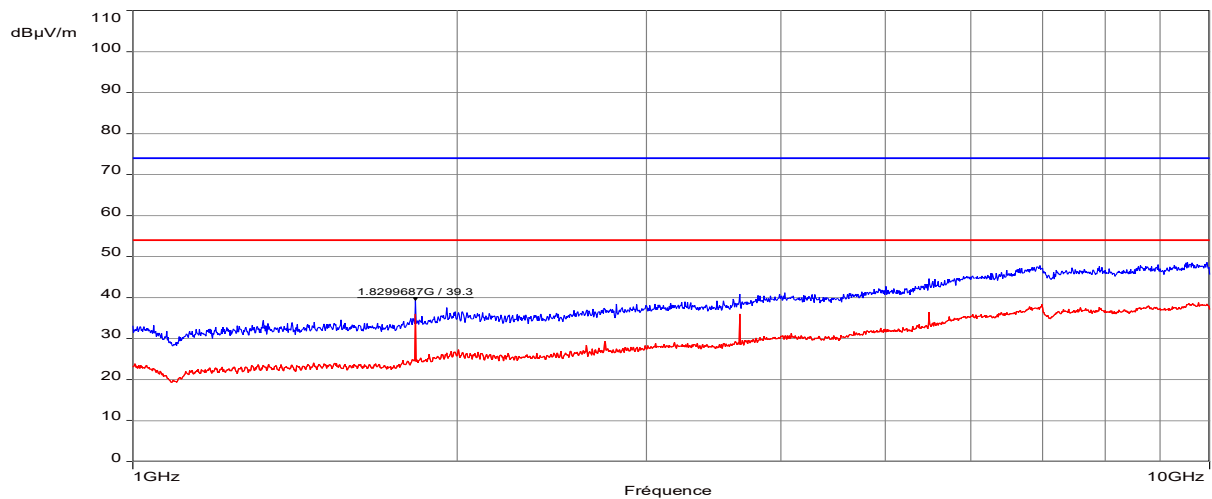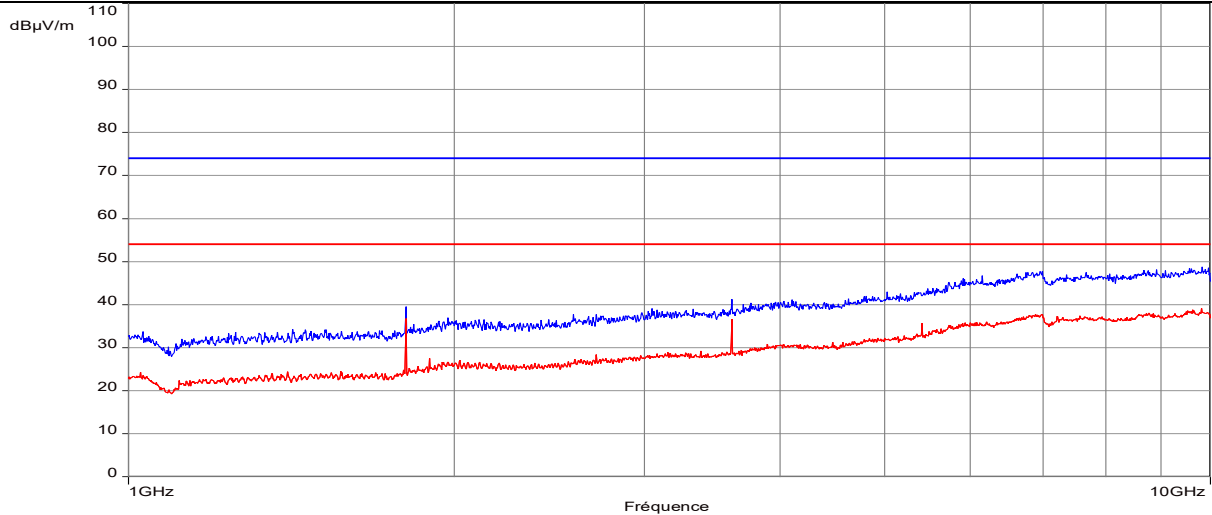

----- : Peak measure / limit

----- : AVG measure / limit


Note: Pre-scan graph only for identification purpose.

Marker List :

Frequency (MHz)	Peak Level (dBμV/m)	Limit (dBμV/m)	Polarization
None	-	-	-

Graphical representation of Radiated Disturbance Measurement (Peak detection, Anechoic chamber pre-scan, 1GHz-10GHz / 3m)

Vertical polarization (Low, Mid and high channels)

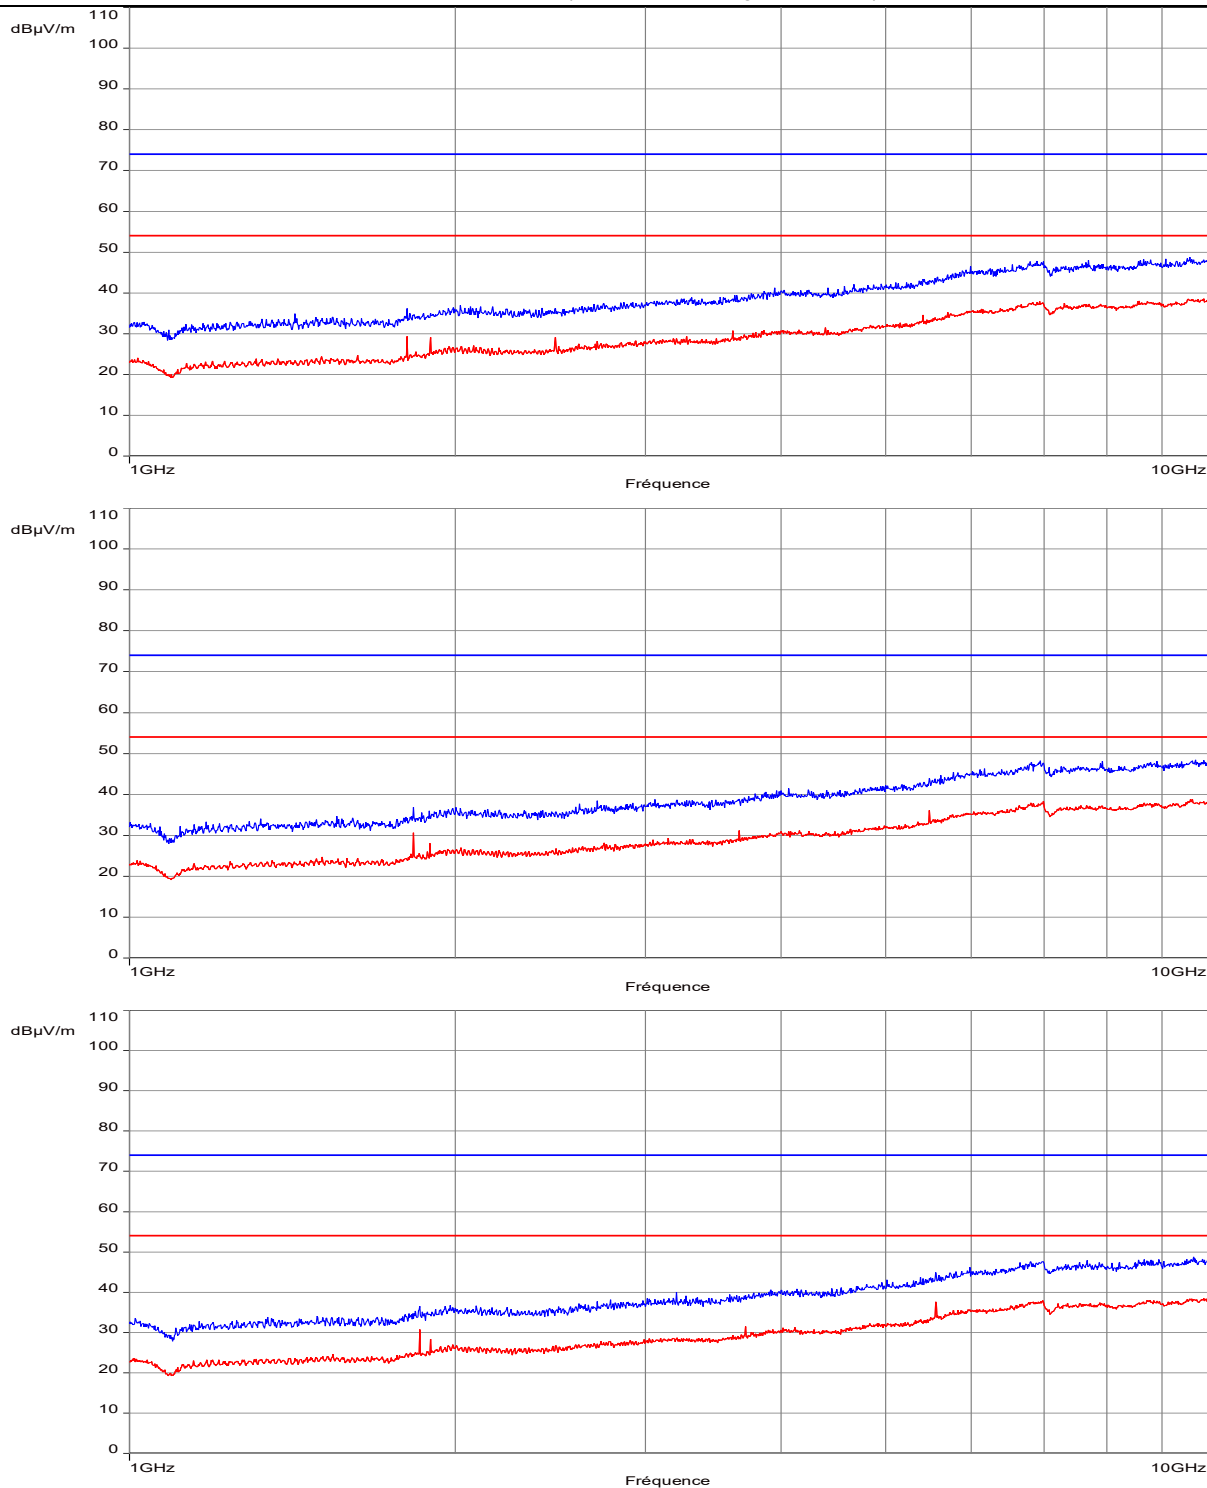

----- : Peak measure / limit

----- : AVG measure / limit

Note: Pre-scan graph only for identification purpose.


Marker List :

Frequency (MHz)	Peak Level (dBμV/m)	Limit (dBμV/m)	Polarization
None	-	-	-

12. Occupied bandwidth (99%)

TEST: Occupied bandwidth (99%) / RSS-GEN			Verdict
Method: The setup is in an anechoic chamber. The spectrum analyzer is connected to the measuring antenna. A radiated measurement is performed. The RBW is set in the range of 1% to 5% of the occupied bandwidth, with $VBW \geq 3 \times RBW$. The SPAN is wide enough to capture all products of the modulation process. A Peak detector is used. Measure is performed with OBW 99% function of the spectrum analyser. The tested equipment is set to transmit operation with modulation on low, mid and high channels.			Pass
Laboratory Parameters:	Required prior to the test	During the test	
Ambient Temperature	20 to 30 °C	24°C ± 2	
Relative Humidity	30 to 70 %	36% ± 5	
Supplementary information: Test location: SMEE Test date: November 5 th , 2019			


Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Horn antenna	ETS-LINDGREN	3115	ANT-141-013	2018/10	2021/10
RF cable	Pasternack RF	PE302-120	CAB-131-024	2019/4	2020/4
RF cable	HUBER+SUHNER	SF104	CAB-141-030	2019/4	2020/4
Anechoic chamber	COMTEST	214263	CAG-141-001	2017/6	2020/6

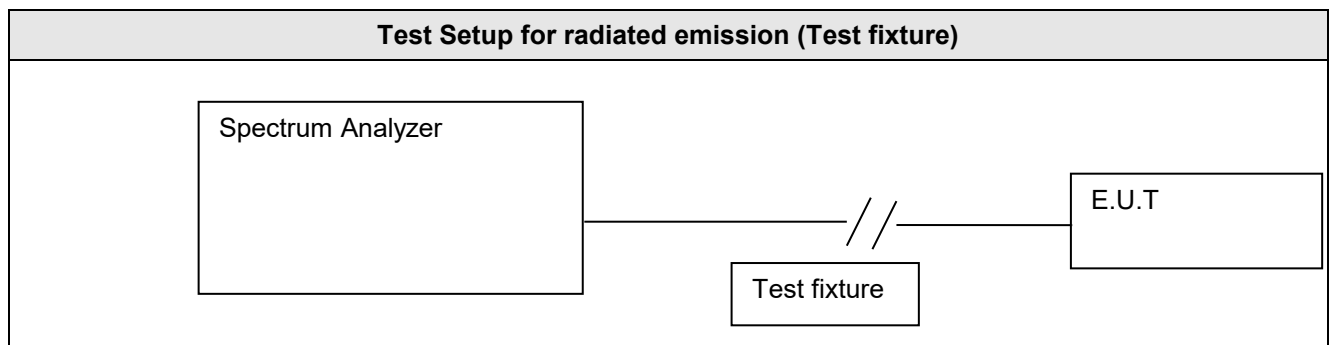


Tabulated Results for Occupied Bandwidth

Frequency (MHz)	99% Occupied Bandwidth (kHz)
902.5	53.72
915.0	53.68
927.5	53.72


Graphical representation of Occupied Bandwidth

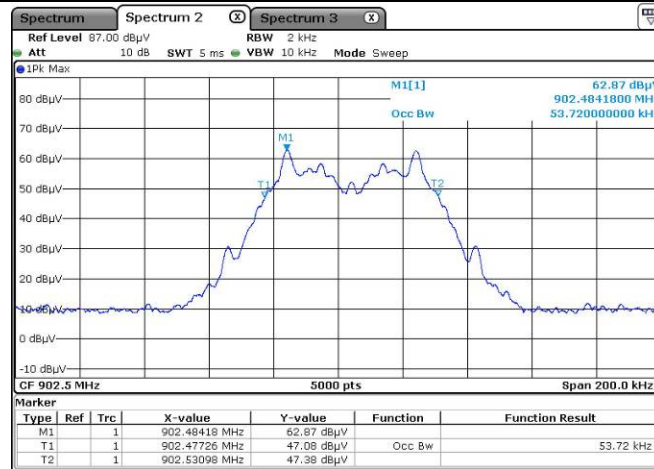

Low Channel

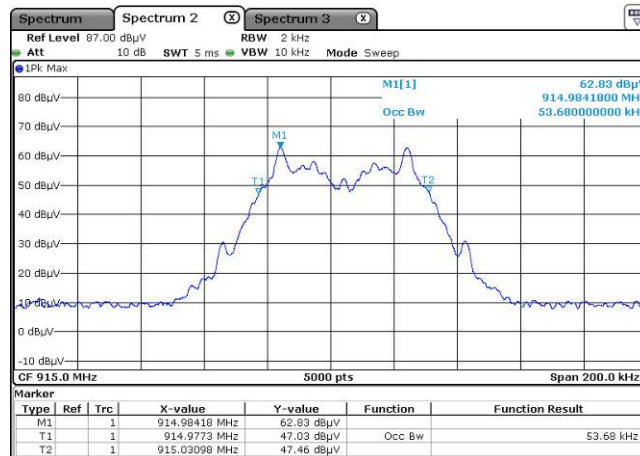

Mid Channel

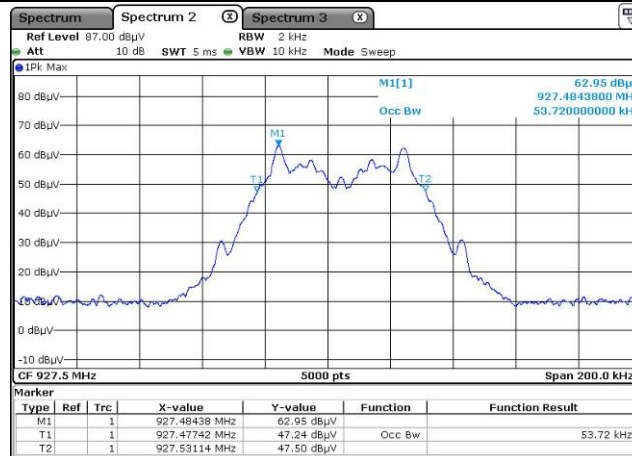

High Channel

Frequency band investigated:	902 to 928MHz
RBW / VBW :	2kHz / 10kHz
Measurement detector:	Peak / Max hold