

FCC Test Firm Designation Number: FR0014
Industry Canada Test Firm Number: Site# 9545A-1

Matériel testé :
Equipment under test:

IDENTEC SOLUTIONS / i-PORTM352 UHF (Module RF)
(Trademark / Marketing name or product reference)

Client / Demandeur:
Customer / Applicant : **IDENTEC SOLUTIONS AG**
Millennium Park 2
A-6890 Lustenau - Austria

Fabricant :
Manufacturer: **IDENTEC SOLUTIONS AG**
Millennium Park 2
A-6890 Lustenau - Austria

Numéro d'affaire :
Work number : 12100

Référence de la proposition : 082017-22617
Proposal number:

Date de l'essai :
Date of test: March 28th, 2018

Objectif des essais :
Test purpose: EMC qualification accordingly to following standards:
- CFR 47, FCC Part 15, Subpart C
(Chapter 15.249 - Operation within the bands 902–928 MHz, 2400–2483.5 MHz, 5725–5875 MHz, and 24.0–24.25 GHz)

Lieu du test:
Test location: SMEE, Rue de Taille
38500 VOIRON - France

Test réalisé par :
Test realized by: Laurent Chapus

Conclusion :
Conclusion: L'équipement satisfait aux prescriptions des normes citées en référence.
The appliance complies with requirements of above mentioned standards.

Ed.	Date	Modifications Pages	Written by : Visa	Approved by: Visa
1	July 23 rd , 2018	Initial Edition	Laurent Chapus	Régis ANCEL

La copie de ce document n'est permise que sous sa forme intégrale. Ce document est le résultat d'essais effectués sur un échantillon. Il ne préjuge pas de la conformité de l'ensemble des produits fabriqués à l'objet essayé.
This document shall not be reproduced, except in full. This document contains results related only to the item tested. It does not imply the conformity of the whole production to the item tested.



Accréditation
N° 1-6356
Portée disponible sur :
Scope available on :
www.cofrac.fr

COORDONNEES

SMEE
Rue de Taille – ZI Des Blanchisseries
38500 VOIRON - France

TEL : 04 76 65 76 50
FAX : 04 76 66 18 30

SAS au capital de 50 000 € / RC Grenoble B534 796 453 / SIRET 534 796 453 00015 / code APE 7490B / n° TVA : FR 59 534 796 453

Contents

1. NORMATIVES REFERENCES	3
2. TEST SYNTHESIS	4
3. EQUIPMENT UNDER TEST (EUT).....	5
4. TEST CONDITIONS.....	5
5. MODIFICATIONS OF THE EUT	5
6. CONDUCTED EMISSION MEASUREMENT (150KHZ-30MHZ).....	6
7. FIELD STRENGTH OF FUNDAMENTAL.....	9
8. FIELD STRENGTH OF HARMONICS.....	12
9. UNWANTED EMISSIONS.....	15

1. Normatives References

FCC qualification according to:		
Standards	Applied	Title
ANSI C63.4 (2014)	X	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
ANSI C63.10 (2013)	X	American National Standard for Testing Unlicensed Wireless Devices
CFR47, Part 15	X	Telecommunication – Federal Communication Commission – Radio frequency devices, Sections 15.207 / 15.209 / 15.249

Deviation from standards: None.

2. Test synthesis

TEST	Paragraph number FCC Part 15	Spec. FCC Part 15	RESULTS (comments)
Conducted emissions test	15.207 (a)	15.207 (a)	PASS
Field Strength of fundamental	15.249 (a) (c)	94dBμV/m @3m (50mV/m @ 3m)	PASS
Field Strength of harmonics	15.249 (a) (c) (e)	54dBμV/m @3m (0.5mV/m @ 3m)	PASS
Unwanted emissions outside the specified frequency band and harmonics	15.209 / 15.249 (d) (e)	Whichever is less stringent, either: - 50dB below level of fundamental, or; - General field strength limits, as follow: <u>Measure at 300m</u> 9-490kHz: 2400μV/m/F(kHz) <u>Measure at 30m</u> 0.490-1.705: 24000μV/m/F(kHz) 1.705-30MHz: 30μV/m <u>Measure at 3m</u> 30MHz-88MHz : 40 dBμV/m 88MHz-216MHz : 43.5 dBμV/m 216MHz-960MHz : 46.0 dBμV/m Above 960MHz : 54.0 dBμV/m	PASS

- General conclusion:**

Measures and tests performed on the sample of the products i-PORTM352 UHF (Module), in configuration and description presented in this test report, show compliance with standards FCC CFR 47, PART 15, Subpart C.

3. Equipment Under Test (EUT)

Nom /
Identification

**IDENTEC SOLUTIONS / i-PORTM352
UHF (Module)**

Sn : 000005

FCC ID:

OO4-ILR-IPM352UH

Alimentation /
Power supply

24V DC for RS422 interface board
3.3V for RF module

Auxiliaires /
Auxiliaries

- Interface board RS422 IDENTEC SOLUTIONS / i-Port-M-IF-422 Sn: 000003
- Power supply adapter XP-POWER (Class I with PE)
Model: VEC65US24
- Laptop PC ASUS – F200M (KX529H) with its power supply adapter
- USB to RS422 converter

Entrées-Sorties /
Input / Output

	Câbles pour essai / Cables for test	Blindé / Shielded	Prévu pour >3m / Intended for >3m
Antenna Port 1 (SMA)	None	Coaxial	No
Antenna Port 2 (SMA)	None	Coaxial	No
Auxiliary ports:			
- RS422	5m, RJ45	Yes	Yes
- DC port	1.8m, 2 wires	No	No

Version programme /
Firmware version

V102.05

Mode de fonctionnement /
Running mode

The tested sample is able to:
- Transmit a carrier frequency on low, middle and high channels (902.5MHz / 915MHz / 927.5MHz)

Programme de test /
Test program /

Gen3 Tag Certification tool v1.0.0.19789

• Equipment information:

UHF Carrier frequency:

- Frequency band: 902 to 928 MHz
- Frequency used in Tx/Rx mode:
 - 902.5MHz
 - 915MHz
 - 927.5MHz
- Modulation: FSK (± 20 kHz)
- Antenna type 1: 289070 ILR – half-wave dipole antenna SMA i-CTA868 MH (2dBi) (Tx reg value set at 36)
- Antenna type 2: RFI Model: YBS806-82 (11dBi) (Tx reg value set at 8)
- Antenna port 1 and port 2 are identical and cannot be used simultaneously.

4. Test conditions

Power supply voltage:

Equipment under test : 24V DC from external power supply

5. Modifications of the EUT


None

6. Conducted Emission Measurement (150kHz-30MHz)

TEST: Limits for conducted disturbance 150kHz – 30MHz				Verdict
Method: The LISN is placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane. This distance was between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment were at least 0,8 m from the AMN. All power was connected to the system through Artificial Mains Network (AMN). Conducted voltage measurements on lines were made at the output of the LISN. The EUT is 80cm above the ground reference plane and 40cm from the vertical ground plane. The AC power cable is 1m length.				Pass
Laboratory Parameters:		Required prior to the test		During the test
Ambient Temperature		20 to 30 °C		23°C ± 2
Relative Humidity		25 to 70 %		40% ± 5
Fully configured sample scanned over the following frequency range		Frequency range on each side of line		Measurement Point
		150kHz to 30MHz		AC input port (110V) Power adapter
Limits				
Frequency (MHz)	Limit dB (µV)			
	Quasi-Peak	Result	Average	Result
0.15 – 0.50	66 \ 56	PASS	56 \ 46	PASS
0.50 - 5	56	PASS	46	PASS
5 – 30	60	PASS	50	PASS
Supplementary information: Test location: SMEE Test date: March 28 th , 2018. Tested by L. CHAPUS Power supply voltage: 110V/60Hz to power adapter				

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Attenuator / limiter	SMEE	ATT#2	ATT-171-010	2017/6	2018/6
Cable RF	Div	1m	CAB-101-021	2017/4	2018/4
LISN (50Ω / 50µH) (Meas.)	AFJ	LS16C	RSI-101-001	2017/6	2019/6
Measuring receiver	Rohde&Schwarz	ESRP	REC-151-002	2017/3	2019/3
EMC Software	NEXIO	BAT EMC V3.8	SOF-101-001	-	-
AC power supply	PACIFIC POWER	AMX-125	101-002	-	-


Test Setup for conducted emission

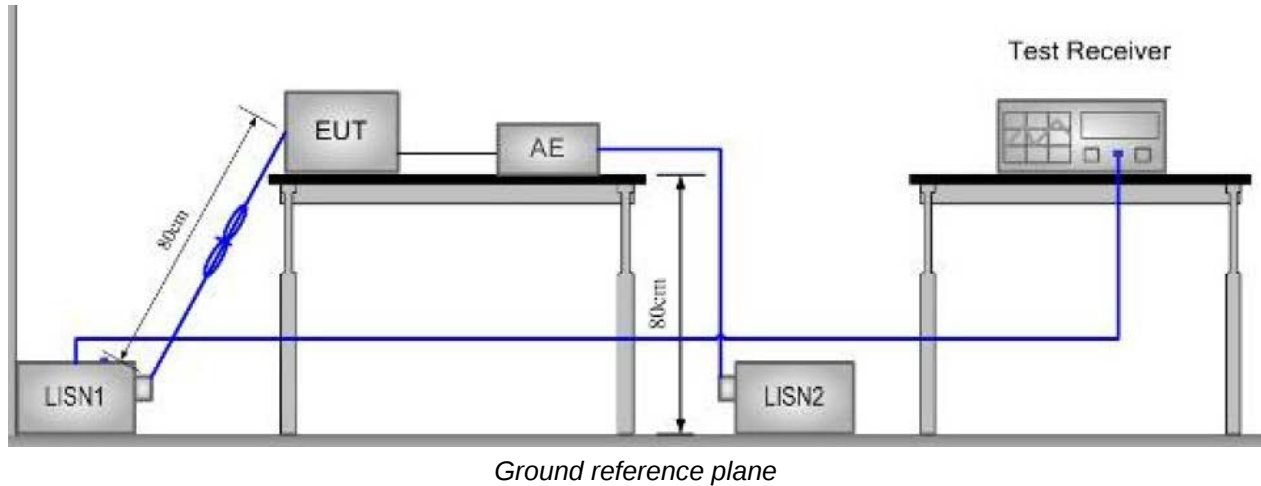


Tabulated Results for Mains Terminal Disturbance Voltage on AC port

FREQ (MHz)	Meas. PK (dBμV)	Mes. QP (dBμV)	LIMIT QP (dBμV)	Margin QP (dB)	Mes. AV (dBμV)	LIMIT AV (dBμV)	Margin AV (dB)	Line
0.457	45.2	41.0	56.7	-15.7	31.9	46.7	-14.9	L1
24.001	40.0	39.1	60.0	-20.9	37.5	50.0	-12.6	L1
0.450	45.4	40.6	56.8	-16.2	31.5	46.8	-15.3	Neutral
24.000	39.3	38.3	60.0	-21.7	36.7	50.0	-13.3	Neutral
Frequency band investigated:		150kHz-30MHz						
RBW:		9kHz						
Voltage:		110V/60Hz						
Limit:		FCC Part 15.209 a)						
Final measurement detector:		Quasi-Peak and CISPR Average (AV)						
Wide Measurement Uncertainty:		± 3.5dB (k=2)						
RESULT:		PASS						
Measured value calculation:		The measured value (level) is calculated by adding the Cable Factor, the Transient suppressor attenuation and LISN attenuation from the receiver amplitude reading. The basic equation is as follow: $\text{Meas.} = \text{RA} + \text{CF} + \text{ATT}_{\text{TRAN}} + \text{ATT}_{\text{LISN}}$ Where Meas. = Level (dBμV) RA = Receiver Amplitude CF = Cable Factor ATT_{TRAN} = Transient suppressor attenuation ATT_{LISN} = LISN attenuation Margin value = Emission level – Limit value (A negative margin shows compliance to limit) Same results for all running mode (Antenna type 1 and 2, antenna port 1 and port 2)						

Graphical representation of Conducted Disturbance Measurement (Peak and Average detection) AC port, Line L1 – Power adapter

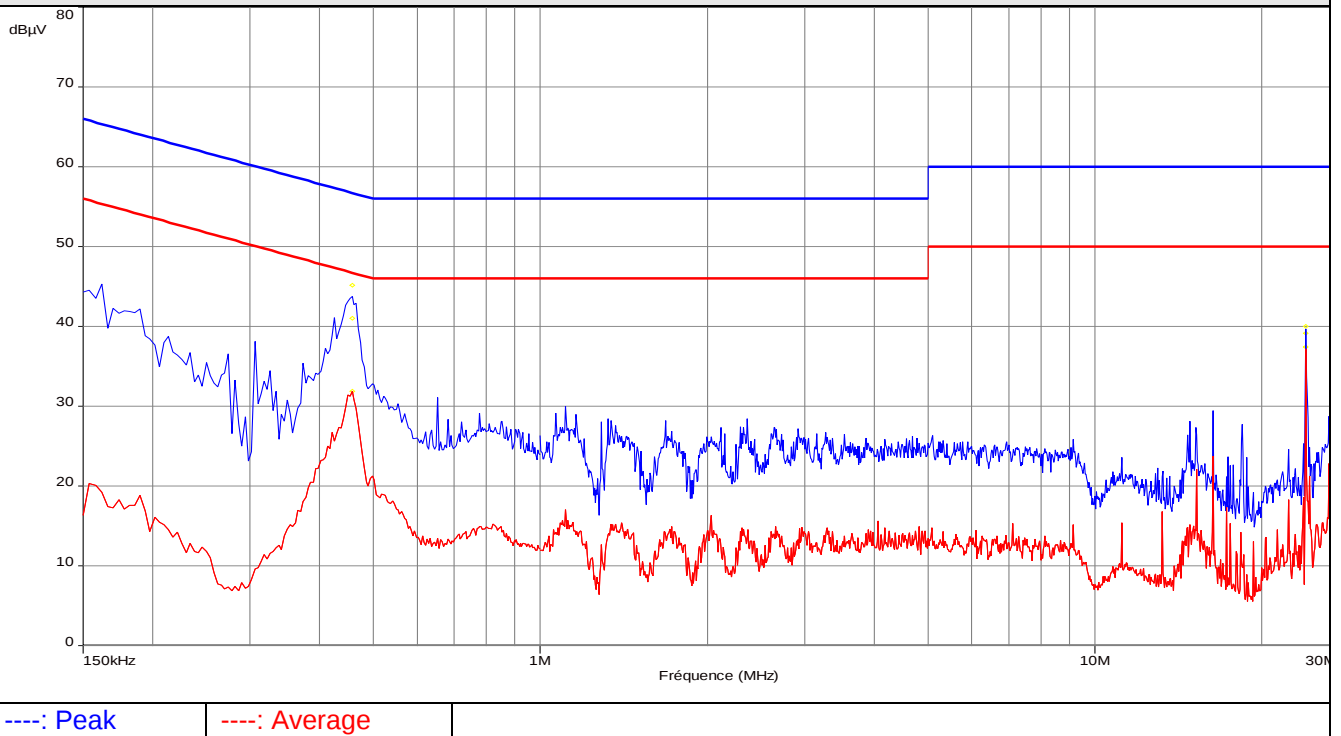

Graphical representation of Conducted Disturbance Measurement (Peak and Average detection) AC port, Line Neutral – Power adapter

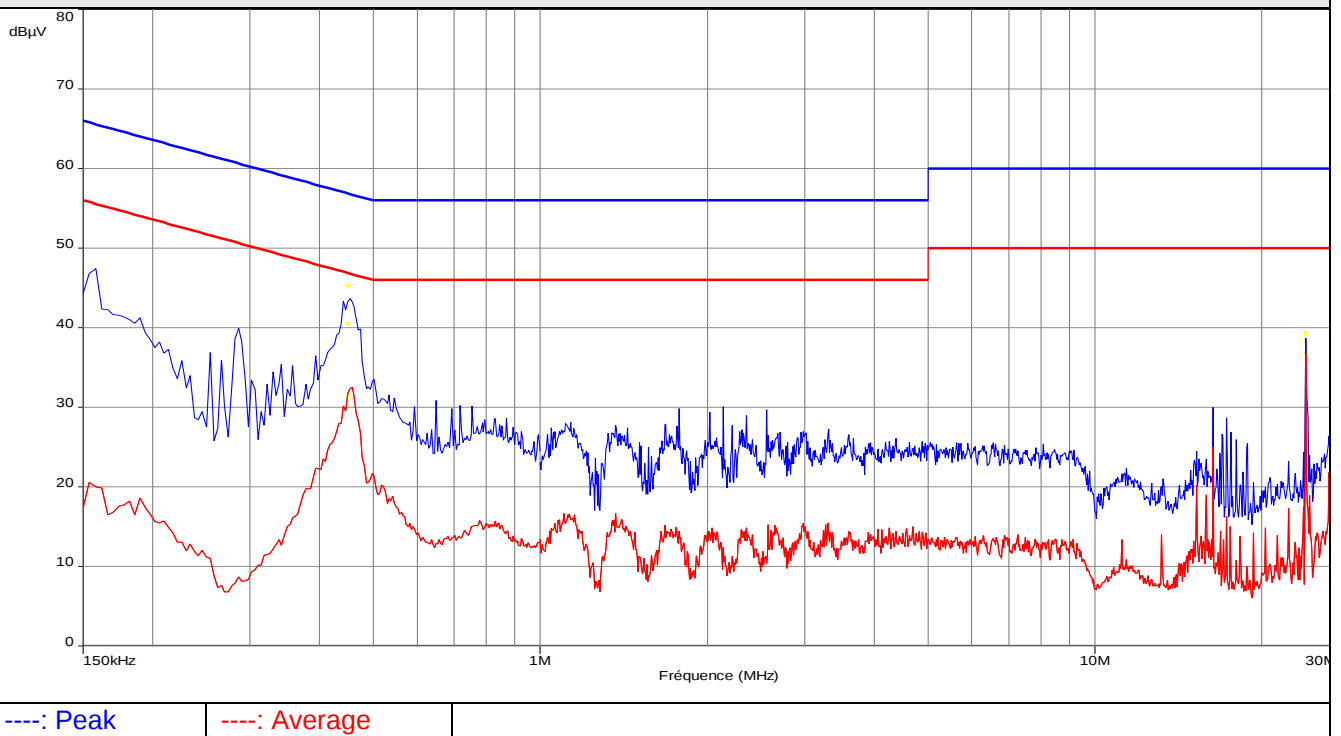


7. Field Strength of fundamental

TEST: Field strength of fundamental / FCC part 15.249			Verdict
<u>Method:</u> Measurements were made in a 3-meter Open Area Test Site (OATS) that complies to ANSI C63.4 and RSS-Gen. Measurements were performed with peak detector using a 100kHz RBW. The VBW is set to 300kHz. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in horizontal and vertical polarities. Final measurements (Peak) were then performed by rotating the EUT 360° and adjusting the receive antenna height from 1 to 4 m. The tested equipment is set to transmit operation with modulations on lowest, middle and highest channel. Three orthogonal axis measurements on EUT are performed to obtain the maximum peak field strength.			Pass
Laboratory Parameters:	Required prior to the test	During the test	
Ambient Temperature	10 to 40 °C	21°C ± 2	
Relative Humidity	10 to 90 %	40% ± 5	
Limits – FCC Part 15.249 (a) (c)			
Frequency (MHz)	Limits (dBµV/m)		
	Level / Detector / Distance	Results	
902 to 928 MHz	94dBµV/m / Pk / 3m	Pass	
Supplementary information:			
Test date: March 28 th , 2018. Tested by L. Chapus			

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Log-periodic antenna	TDK	PLP3003	ANT-101-001	2017/5	2019/5
RF cable	Div	OATS/25m	CAB-101-017	2017/4	2018/4
OATS	Div	10m	SIT-101-001	2017/7	2020/7
Antenna mast	Innco- Systems	MA4000EP	MAT-101-001	-	-
Turntable	Innco- Systems	DS1200S	PLA-101-001	-	-
Measuring Rec	Rohde&Schwarz	ESRP	REC-151-002	2017/3	2019/3

Test Setup for radiated emission

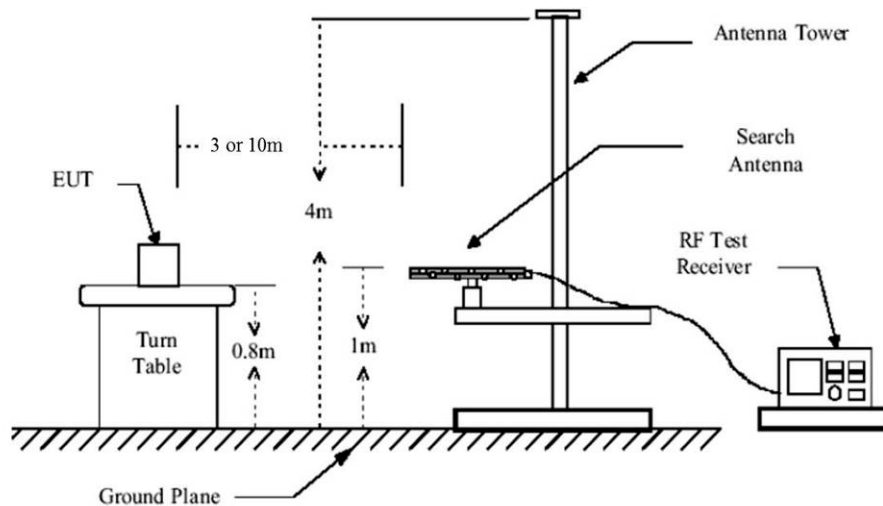

Test setup for 30-1000MHz

Tabulated Results for Field Strength of fundamental Antenna type 1 (Dipole antenna)

FREQ (MHz)	Field Strength 3m (dBμV/m)	Limit (dBμV/m)	Result
902.5	93.4	94.0	Pass
915.0	92.1	94.0	Pass
927.5	91.2	94.0	Pass

RBW: 100kHz

Measurement distance: 3m

Limit: FCC Part 15.249 (a) (c)

Final measurement detector: Peak

Wide Measurement Uncertainty: ± 5.6dB (k=2)

RESULT: PASS

Note:

(1): The field strength (level) is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation is as follow:

$$FS = RA + AF + CF - AG$$
Where FS = Field Strength
RA = Receiver Amplitude
AF = Antenna Factor
CF = Cable Factor
AG = Amplifier Gain
Total factor (dB) is AF + CF – AG
Margin value = Emission level – Limit value

(2): Three orthogonal axis measurements on EUT are performed to obtain the maximum peak field strength.

(3): Tx REG value set at 36

(4): Worst case results for both antenna port 1 or 2.


Tabulated Results for Field Strength of fundamental Antenna type 2 (Yagi Antenna)			
FREQ	Field Strength 3m	Limit	Result
(MHz)	(dBμV/m)	(dBμV/m)	
902.5	91.3	94.0	Pass
915.0	92.5	94.0	Pass
927.5	93.7	94.0	Pass
RBW:		100kHz	
Measurement distance:		3m	
Limit:		FCC Part 15.249 (a) (c)	
Final measurement detector:		Peak	
Wide Measurement Uncertainty:		± 5.6dB (k=2)	
RESULT:		PASS	
Note:		(1): The field strength (level) is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation is as follow: $FS = RA + AF + CF - AG$ Where FS = Field Strength RA = Receiver Amplitude AF = Antenna Factor CF = Cable Factor AG = Amplifier Gain Total factor (dB) is AF + CF – AG Margin value = Emission level – Limit value (2): Three orthogonal axis measurements on EUT are performed to obtain the maximum peak field strength. (3): Tx REG value set at 8 (4): Worst case results for both antenna port 1 or 2.	

8. Field Strength of harmonics

TEST: Field Strength of harmonics / FCC part 15.249		Verdict
<u>Method:</u> Measurements were made in a 3-meter Full Anechoic Chamber that complies to ANSI C63.10. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in horizontal and vertical polarities. Final measurements were then performed by rotating the EUT 360° and adjusting the receive antenna height. The tested equipment is set to transmit operation with modulations on lowest and highest channel. Three orthogonal axis measurements on EUT are performed to obtain the maximum peak field strength. A pre-scan frequency identification of the EUT has been performed in full anechoic chamber. The measured pre-scan radiated field of the EUT is performed at 3 or 1.6meters of distance for frequency 960MHz-10GHz.		Pass
Laboratory Parameters:	Required prior to the test	During the test
Ambient Temperature	10 to 40 °C	23°C ± 2
Relative Humidity	10 to 90 %	40% ± 5
Fully configured sample scanned over the following frequency range	Frequency range on each side of line	Measurement Point
	30MHz – 9.3GHz	3 m measurement distance
Limits – FCC Part 15.249 (a) (c) (e)		
Frequency bands for harmonics (MHz)	Limits (dBµV/m)	
	Level / Detector / Distance	Results
1804 to 1856	54.0 / AV / 3m 74.0 / PK / 3m	Pass
2706 to 2784	54.0 / AV / 3m 74.0 / PK / 3m	Pass
3608 to 3712	54.0 / AV / 3m 74.0 / PK / 3m	Pass
4510 to 4640	54.0 / AV / 3m 74.0 / PK / 3m	Pass
5412 to 5568	54.0 / AV / 3m 74.0 / PK / 3m	Pass
6314 to 6496	54.0 / AV / 3m 74.0 / PK / 3m	Pass
7216 to 7424	54.0 / AV / 3m 74.0 / PK / 3m	Pass
8118 to 8352	54.0 / AV / 3m 74.0 / PK / 3m	Pass
9020 to 9280	54.0 / AV / 3m 74.0 / PK / 3m	Pass
Supplementary information: Test date: March 28th, 2018. Tested by L. Chapus		

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Horn antenna	ETS-LINDGREN	3115	ANT-141-013	2014/3	2019/3
RF cable	Pasternack RF	PE302-120	CAB-131-024	2017/6	2018/6
RF cable	HUBER+SUHNER	SF104	CAB-141-030	2017/6	2018/6
High-Pass filter	Wainwright Inst.	HK6-948-1200	FIL-141-004	2017/6	2018/6
Pre-amplifier	Pasternack RF	PE1524	PRE-101-002	2017/6	2018/6
Anechoic chamber	COMTEST	214263	CAG-141-001	2017/6	2020/6
OATS	Div	10m	SIT-101-001	2017/7	2020/7
Turntable	Innco- Systems	CT0800	PLA-141-001	-	-
Measuring Rec	Rohde&Schwarz	ESRP	REC-151-002	2017/3	2019/3
Spectrum analyzer	Rohde&Schwarz	FSV40	ASP-171-004	2017/5	2019/5

Test Setup for radiated emission

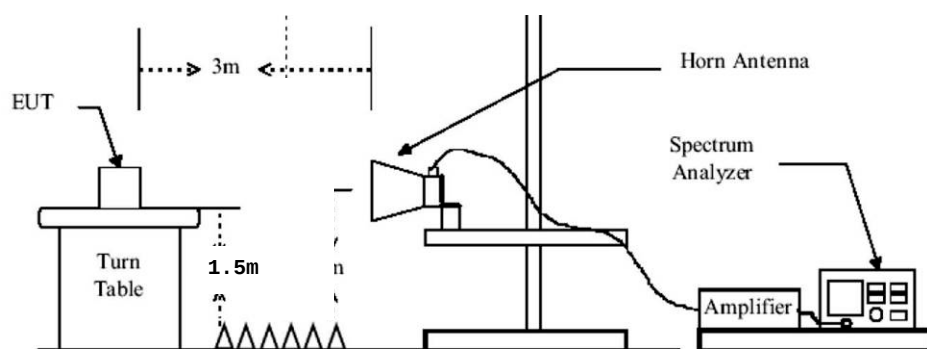

Test setup for 1-10GHz


Tabulated Results for Field strength of harmonics (1GHz-9.3GHz, Antenna type 1, Dipole antenna)				
FREQ (MHz)	Field level dBμV/m	Detector	Limit (dBμV/m)	Result
Levels at least 10dB below limits		Pk	74.0	Pass
Levels at least 10dB below limits		Av	54.0	Pass
Tabulated Results for Field strength of harmonics (1GHz-9.3GHz, Antenna type 2, Yagi antenna)				
FREQ (MHz)	Field level dBμV/m	Detector	Limit (dBμV/m)	Result
Levels at least 10dB below limits		Pk	74.0	Pass
Levels at least 10dB below limits		Av	54.0	Pass
RBW		1MHz		
Measurement distance:		3m		
Limit:		FCC Part 15.249 (a) (c) (e)		
Final measurement detector:		Peak / Average		
Wide Measurement Uncertainty:		± 5.6dB (k=2)		
RESULT:		PASS		
Notes:		(1): The field strength (level) is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation is as follow: $FS = RA + AF + CF - AG$ Where FS = Field Strength RA = Receiver Amplitude AF = Antenna Factor CF = Cable Factor AG = Amplifier Gain Total factor (dB) is $AF + CF - AG$ Margin value = Emission level – Limit value (2): Peak pre-scans not performed at 3-meters distance are corrected as follow: $M@3m = M@D_m + 20 \times \log (D_m / 3m)$ Where D is the measurement distance in meter (3): Three axis measurement performed for equipment under test (4): Worst case results for both antenna port 1 or 2. (5): See pre-scan graphs in chapter 9 (Unwanted emissions)		

9. Unwanted emissions


TEST: Unwanted emissions outside fundamental and harmonics bands / FCC part 15.209, 15.249		Verdict
<u>Method:</u> Measurements were made in a 3-meter Full Anechoic Chamber that complies to ANSI C63.10. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in horizontal and vertical polarities. Final measurements were then performed by rotating the EUT 360° and adjusting the receive antenna height. The tested equipment is set to transmit operation with modulations on lowest and highest channel. Three orthogonal axis measurements on EUT are performed to obtain the maximum peak field strength. A pre-scan frequency identification of the EUT has been performed in full anechoic chamber. The measured pre-scan radiated field of the EUT is performed at 3 or 1.6meters of distance for frequency 960MHz-10GHz.		Pass
Laboratory Parameters:	Required prior to the test	During the test
Ambient Temperature	10 to 40 °C	23°C ± 2
Relative Humidity	10 to 90 %	40% ± 5
Fully configured sample scanned over the following frequency range	Frequency range on each side of line	Meas. point
	9kHz – 30MHz	10 m
	30MHz – 9.3GHz	3 m
Limits – FCC Part 15.209, 15.249 (d) (e)		
Whichever is less stringent, either:		
Frequency (MHz)	Limits (dBµV/m)	
	Level / Detector / Distance	Results
30 to 1000	50dB below the fundamental / QP / 3m	Not used
Above 1GHz	50dB below the fundamental / Av / 3m 30dB below the fundamental / Pk / 3m	Not used
Or		
Frequency (MHz)	Limits (dBµV/m)	
	Level / Detector / Distance	Results
0.009 to 0.090	107.6 – 87.6 / AV / 10m 127.6 – 107.6 / PK / 10m	Pass
0.090 to 0.110	87.6 – 85.9 / QP / 10m	Pass
0.110 to 0.490	85.7 – 72.9 / AV / 10m 105.7 – 92.9 / PK / 10m	Pass
0.490 to 1.705	52.9 – 42.1 / QP / 10m	Pass
1.705 to 30	48.6 / QP / 10m	Pass
30 to 88	40.0 / QP / 3m	Pass
88 to 216	43.5 / QP / 3m	Pass
216 to 960	46.0 / QP / 3m	Pass
960 to 1000	54.0 / QP / 3m	
Above 1GHz	54.0 / AV / 3m 74.0 / PK / 3m	Pass
Supplementary information: Test date: March 28 th , 2018. Tested by L. Chapus		

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Log-periodic antenna	TDK	PLP3003	ANT-101-001	2017/5	2019/5
Biconnic antenna	COM-POWER	AB- 900	ANT-101-003	2017/5	2019/5
Loop antenna	EMCO	6502	ANT-101-009	2017/8	2019/8
BiConiLog antenna	EMCO	3142B	ANT-101-010	2017/7	2019/7
Horn antenna	ETS-LINDGREN	3115	ANT-141-013	2014/3	2019/3
RF cable	Div	OATS/25m	CAB-101-017	2017/4	2018/4
RF cable	Pasternack RF	PE302-120	CAB-131-024	2017/6	2018/6
RF cable	HUBER+SUHNER	RG214U	CAB-141-026	2017/4	2018/4
RF cable	HUBER+SUHNER	RG214U	CAB-141-029	2017/4	2018/4
RF cable	HUBER+SUHNER	SF104	CAB-141-030	2017/6	2018/6
High-Pass filter	Wainwright Inst.	HK6-948-1200	FIL-141-004	2017/6	2018/6
Pre-amplifier	Pasternack RF	PE1524	PRE-101-002	2017/6	2018/6
Anechoic chamber	COMTEST	214263	CAG-141-001	2017/6	2020/6
OATS	Div	10m	SIT-101-001	2017/7	2020/7
Antenna mast	Innco- Systems	MA4000EP	MAT-101-001	-	-
Turntable	Innco- Systems	DS1200S	PLA-101-001	-	-
Turntable	Innco- Systems	CT0800	PLA-141-001	-	-
Measuring Rec	Rohde&Schwarz	ESRP	REC-151-002	2017/3	2019/3
Spectrum analyzer	Rohde&Schwarz	FSV40	ASP-171-004	2017/5	2019/5


Test Setup for radiated emission

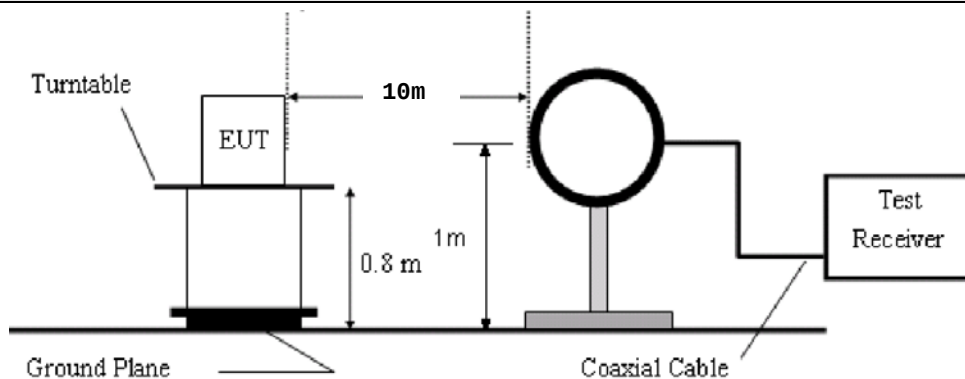

Test setup for 9k-30MHz

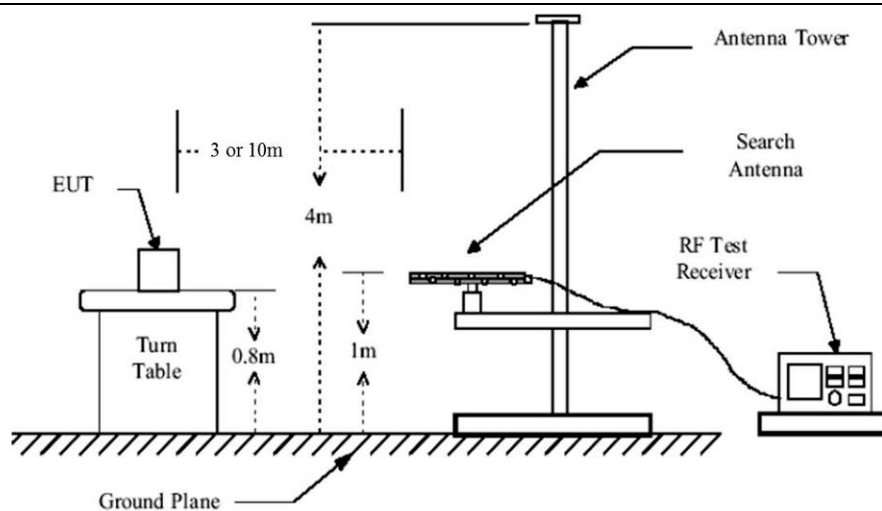

Test setup for 30-1000MHz

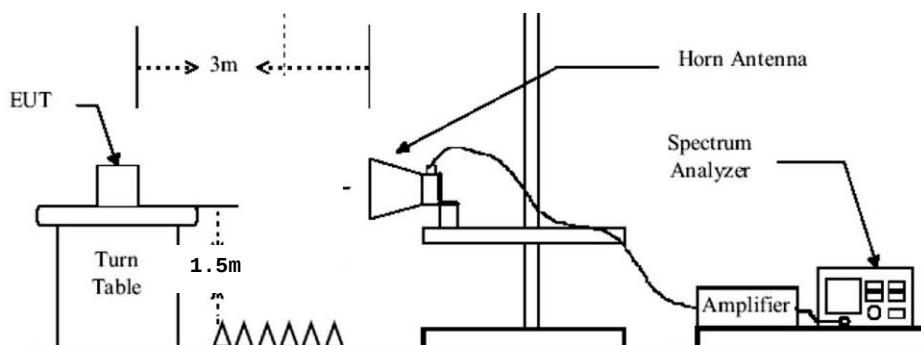


Test setup for 1-10GHz

Tabulated Results for Unwanted emissions (9kHz-30MHz) Antenna type 1 (Dipole) / Antenna type 2 (YAGI)						
FREQ	RF field @ 30m	Limit @ 30m	Margin	Antenna angle	Table angle	Correc. Fact. (CF)
MHz	(QP) dBμV/m	(QP) dBμV/m	dB	Degree	Degree	dB
Levels are at least 10dB below applicable limits						
Supplementary information: Frequency list measured on the Open Area Test Site has been created with pre-scan results.						
Frequency band investigated:		9kHz-30MHz				
RBW:		200Hz (9kHz-150kHz)				
		9kHz (150kHz-30MHz)				
Measurement distance:		10m				
Limit:		FCC Part 15.209 – 15.249				
Final measurement detector:		Quasi-Peak				
Wide Measurement Uncertainty:		± 3.5 dB (k=2)				
Note:		CF: Correction factor = Antenna factor + Cable loss *1: Measure have been done at 10m distance and corrected according to requirements of 15.209.e) (M@30m = M@10m-19.1dB)				

Tabulated Results for Unwanted emissions (30MHz-1GHz)					
Antenna type 1 (Dipole)					
FREQ	Meter reading	Total factor	Field level	Limit	Margin
MHz	(QP) dBμV	dB	(QP) dBμV/m	(QP) dBμV/m	dB
902.0	16.1	29.4	45.5	46.0	-0.5
928.0	13.7	29.3	43.0	46.0	-3.0
Tabulated Results for Unwanted emissions (30MHz-1GHz)					
Antenna type 2 (Yagi)					
FREQ	Meter reading	Total factor	Field level	Limit	Margin
MHz	(QP) dBμV	dB	(QP) dBμV/m	(QP) dBμV/m	dB
902.0	13.9	29.4	43.3	46.0	-2.7
928.0	15.9	29.3	45.2	46.0	-0.8
Supplementary information:					
Frequency list measured on the Open Area Test Site has been created with pre-scan results.					
Frequency band investigated:		30MHz-1GHz			
RBW:		120kHz			
Measurement distance:		3m			
Limit:		FCC Part 15.209 or 15.249			
Final measurement detector:		Quasi-Peak			
Wide Measurement Uncertainty:		± 5.6dB (k=2)			
RESULT:		PASS			
Notes:		(1): The field strength (level) is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation is as follow: $FS = RA + AF + CF - AG$ Where FS = Field Strength RA = Receiver Amplitude AF = Antenna Factor CF = Cable Factor AG = Amplifier Gain Total factor (dB) is $AF + CF - AG$ Margin value = Emission level – Limit value (2): Limits 15.209 used (3): Three axis measurement performed for equipment under test (4): Worst case results for both antenna port 1 or 2.			


Tabulated Results for Unwanted emissions (1GHz-9.3GHz, Antenna type 1, Dipole antenna)				
FREQ (MHz)	Field level dBμV/m	Detector	Limit (dBμV/m)	Result
Levels at least 10dB below limits		Pk	74.0	Pass
Levels at least 10dB below limits		Av	54.0	Pass
Tabulated Results for Field Unwanted emissions (1GHz-9.3GHz, Antenna type 2, Yagi antenna)				
FREQ (MHz)	Field level dBμV/m	Detector	Limit (dBμV/m)	Result
Levels at least 10dB below limits		Pk	74.0	Pass
Levels at least 10dB below limits		Av	54.0	Pass
RBW		1MHz		
Measurement distance:		3m		
Limit:		FCC Part 15.249 (a) (c) (e)		
Final measurement detector:		Peak / Average		
Wide Measurement Uncertainty:		± 5.6dB (k=2)		
RESULT:		PASS		
Notes:		(1): The field strength (level) is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation is as follow: $FS = RA + AF + CF - AG$ Where FS = Field Strength RA = Receiver Amplitude AF = Antenna Factor CF = Cable Factor AG = Amplifier Gain Total factor (dB) is $AF + CF - AG$ Margin value = Emission level – Limit value (2): Peak pre-scans not performed at 3-meters distance are corrected as follow: $M@3m = M@D_m + 20 \times \log (D_m / 3_m)$ Where D is the measurement distance in meter (3): Three axis measurement performed for equipment under test (4): Worst case results for both antenna port 1 or 2.		

Graphical representation of Band-edge compliance (Radiated) Antenna type 1 (Dipole antenna)

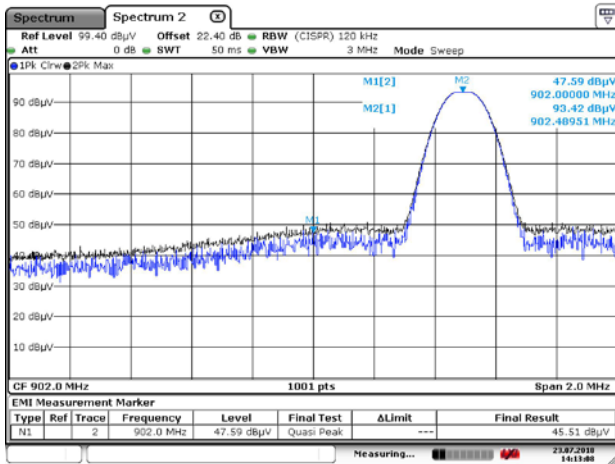

Low band-edge compliance


F1 = 902MHz
Quasi-Peak level below 902MHz is 45.5dBμV/m max at 3m
(limit is 46dBμV/m @ 3m)
RESULT: PASS
Note: Radiated measurement

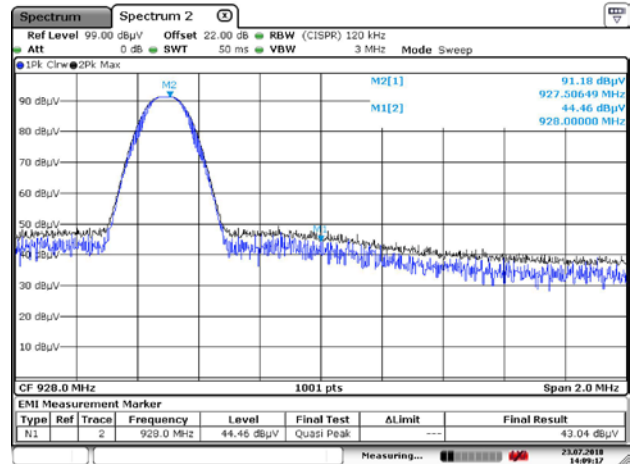

High band-edge compliance


F1 = 928MHz
Quasi-Peak level above 928MHz is 43.0dBμV/m max at 3m
(limit is 46dBμV/m @ 3m)
RESULT: PASS
Note: Radiated measurement

Graphical representation of Band-edge compliance (Radiated) Antenna type 2 (Yagi antenna)

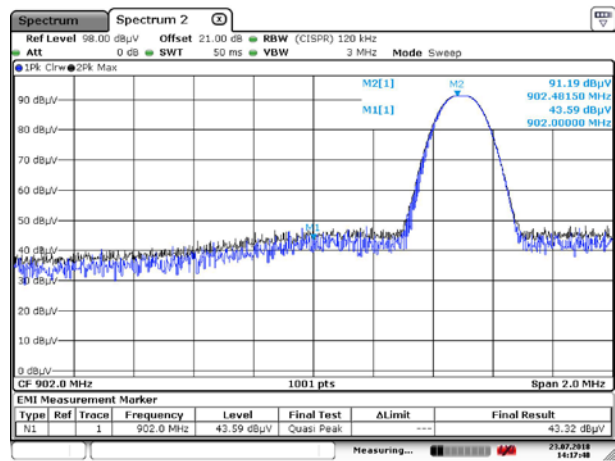

Low band-edge compliance



F1 = 902MHz
Quasi-Peak level below 902MHz is 43.3dBμV/m max at 3m
(limit is 46dBμV/m @ 3m)
RESULT: PASS
Note: Radiated measurement

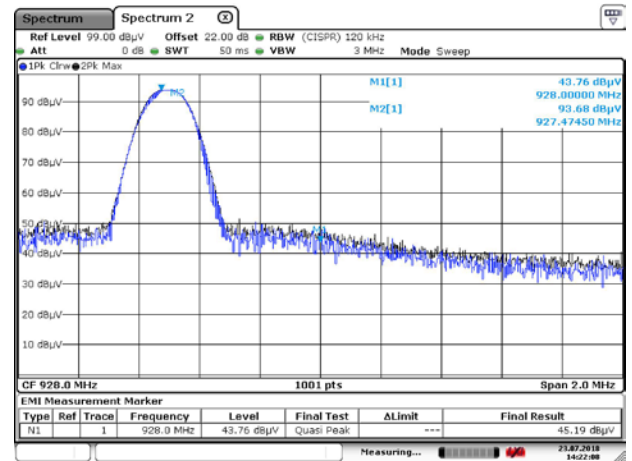

High band-edge compliance

F1 = 928MHz
Quasi-Peak level above 928MHz is 45.2dBμV/m max at 3m
(limit is 46dBμV/m @ 3m)
RESULT: PASS
Note: Radiated measurement

**Graphical representation of Radiated Disturbance Measurement (Peak detection, Anechoic chamber pre-scan, 30MHz-1GHz / 3m / Horizontal & Vertical, Transmit mode at 915MHz)
Antenna type 1 (Dipole antenna)**

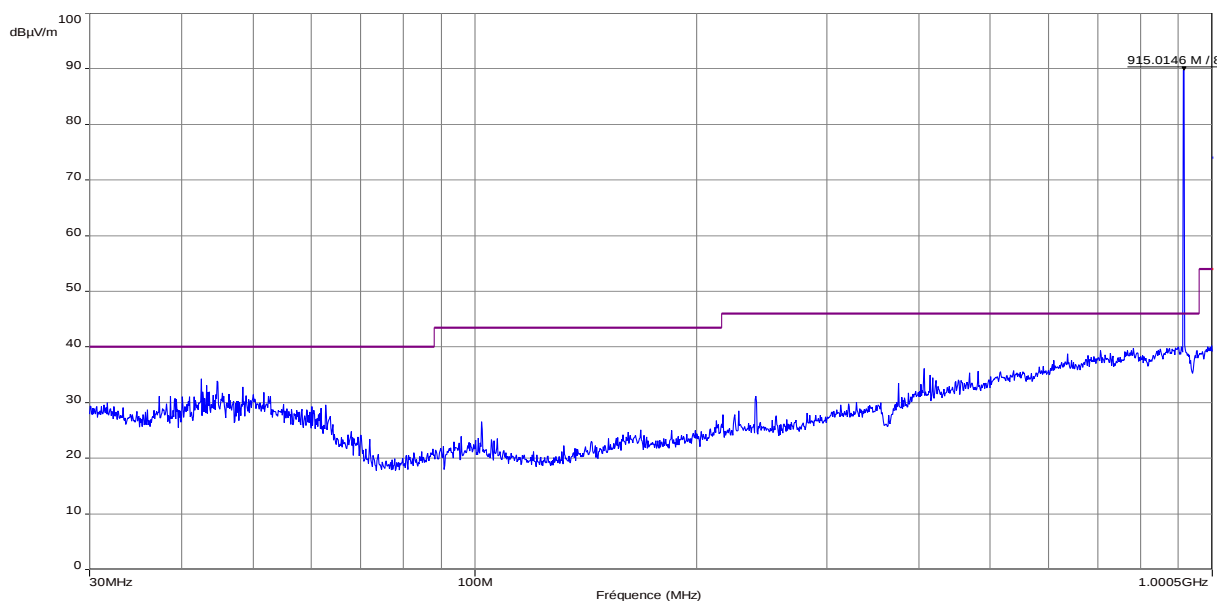
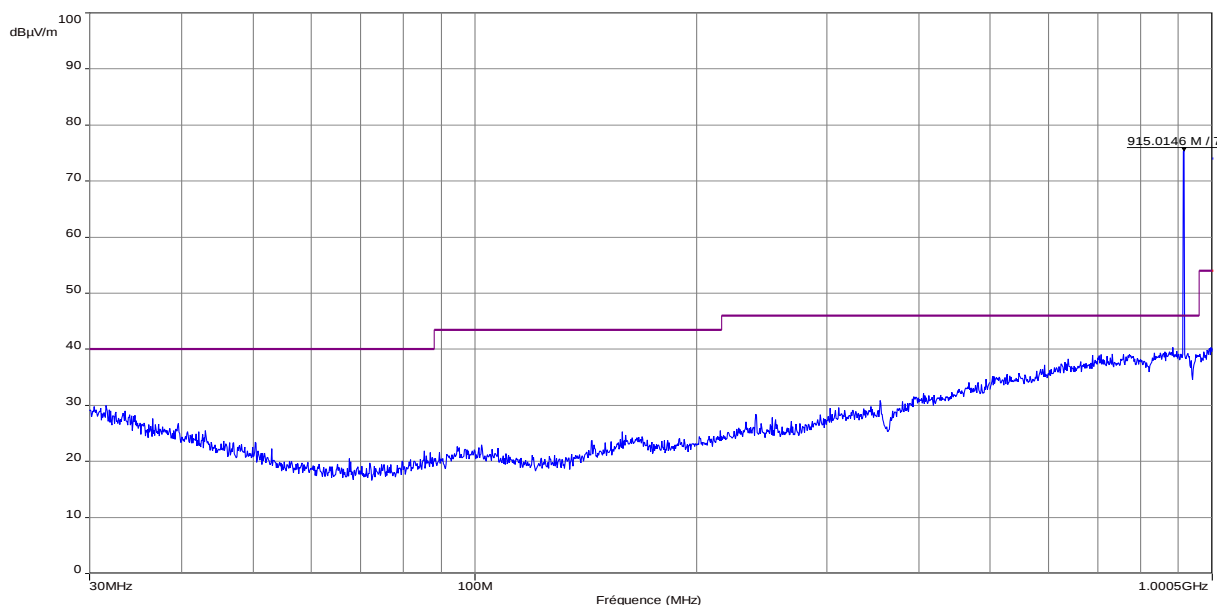


Note: Pre-scan graph only for identification purpose.

Same results for low and high channels. EUT with the transmit antenna is set vertically.

Frequency band investigated:	30MHz-1GHz
Unit :	dBμV/m
RBW :	100kHz
Antenna polarization :	Horizontal and vertical
Limit:	15.209
Measurement detector:	Peak
Wide Measurement Uncertainty:	± 5.6dB (k=2)

**Graphical representation of Radiated Disturbance Measurement (Peak detection, Anechoic chamber pre-scan, 1GHz-9GHz / 3m / Horizontal & Vertical / Transmit mode at 915MHz)
Antenna type 1 (Dipole antenna)**

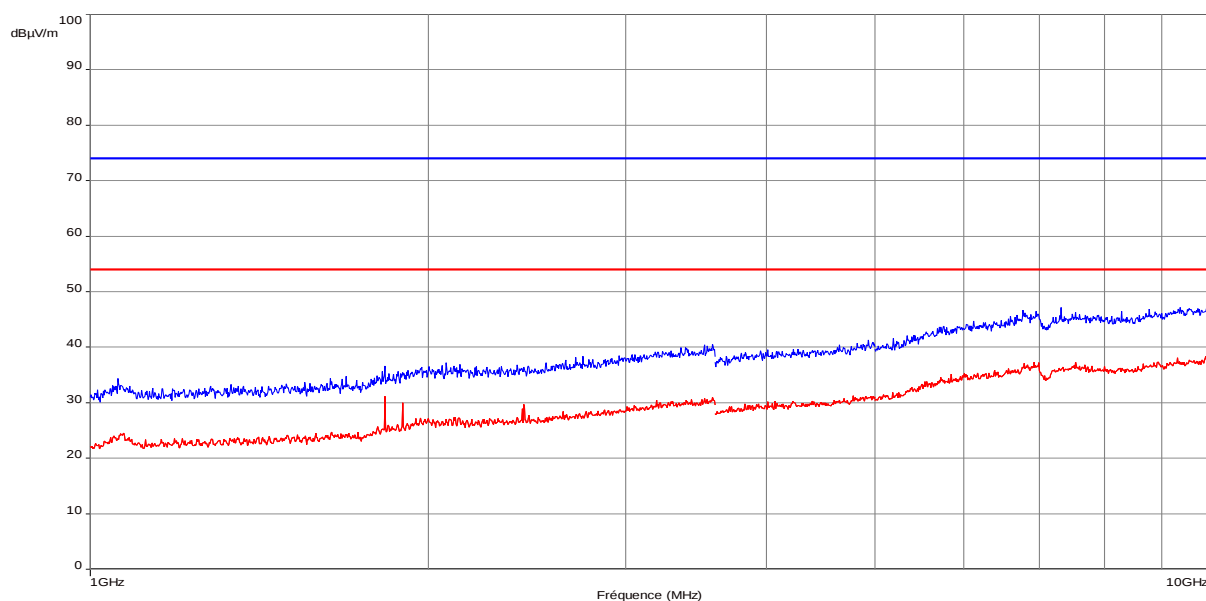
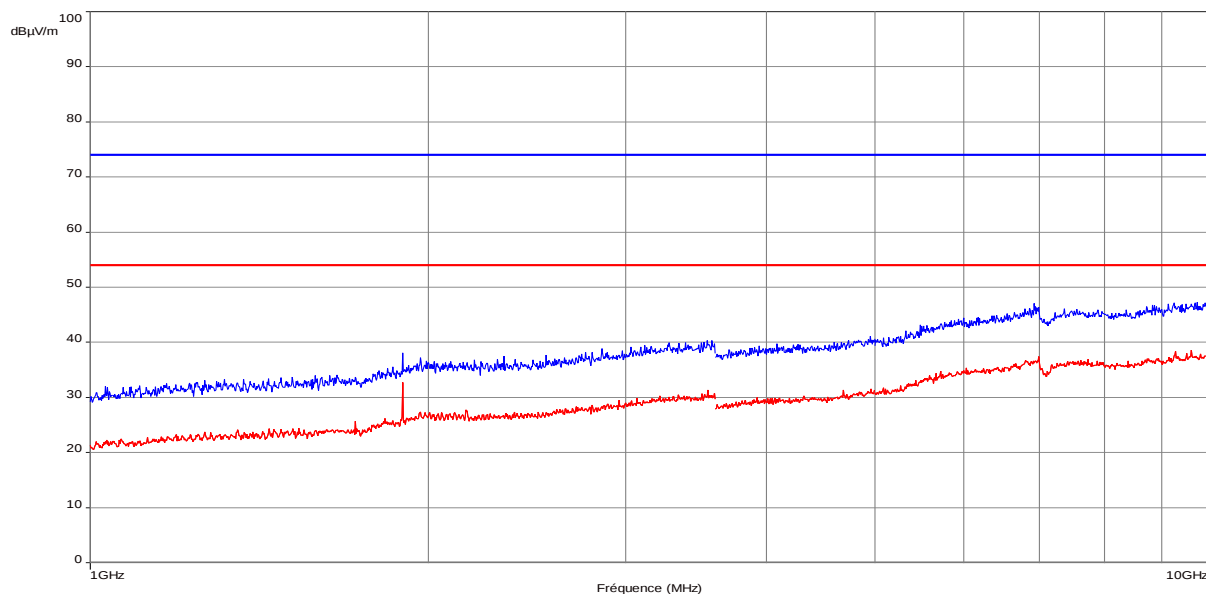


Note: Pre-scan graph only for identification purpose.

Same results for low and high channels. EUT with the transmit antenna is set vertically.

Frequency band investigated:	1GHz-9GHz
Unit :	dBμV/m
RBW :	1MHz
Antenna polarization :	Horizontal and Vertical
Limit:	15.209
Measurement detector:	Peak
Wide Measurement Uncertainty:	± 5.6dB (k=2)

**Graphical representation of Radiated Disturbance Measurement (Peak detection, Anechoic chamber pre-scan, 30MHz-1GHz / 3m / Horizontal & Vertical, Transmit mode at 915MHz)
Antenna type 2 (Yagi antenna)**

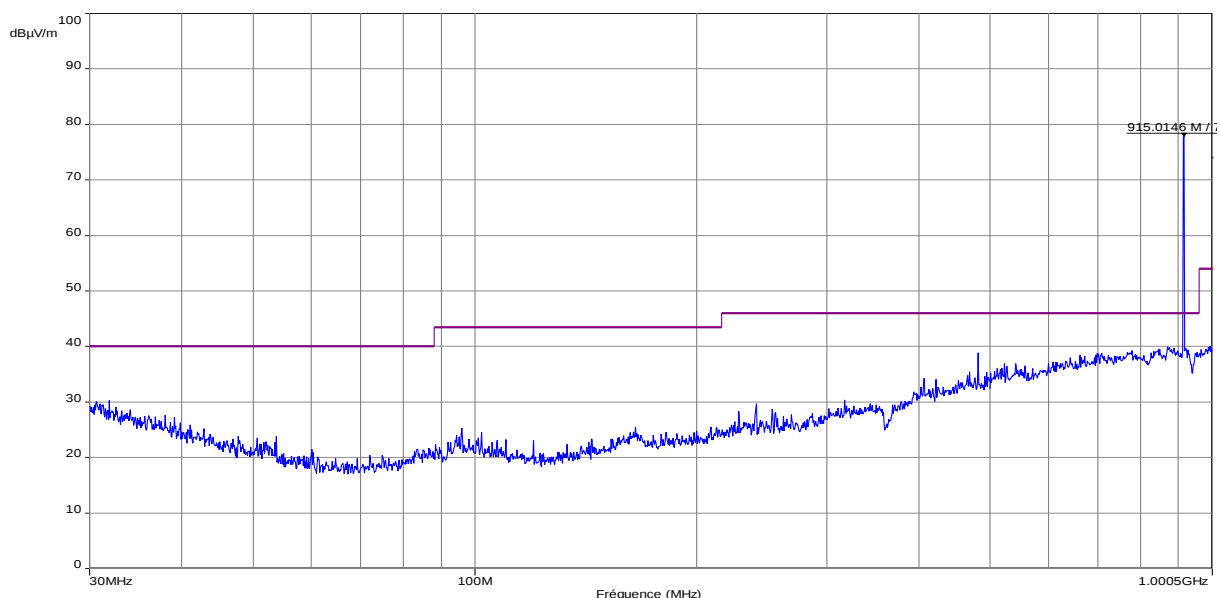
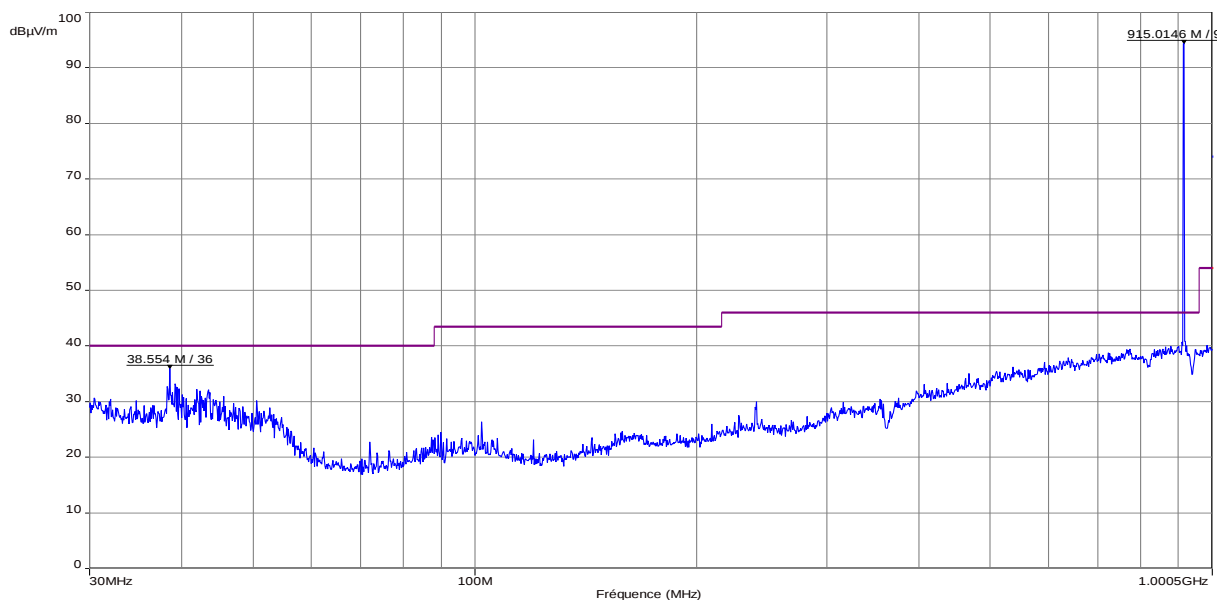


Note: Pre-scan graph only for identification purpose.

Same results for low and high channels. EUT with the transmit antenna is set vertically.

Frequency band investigated:	30MHz-1GHz
Unit :	dBμV/m
RBW :	100kHz
Antenna polarization :	Horizontal and vertical
Limit:	15.209
Measurement detector:	Peak
Wide Measurement Uncertainty:	± 5.6dB (k=2)

**Graphical representation of Radiated Disturbance Measurement (Peak detection, Anechoic chamber pre-scan, 1GHz-9GHz / 3m / Horizontal & Vertical / Transmit mode at 915MHz)
Antenna type 2 (Yagi antenna)**

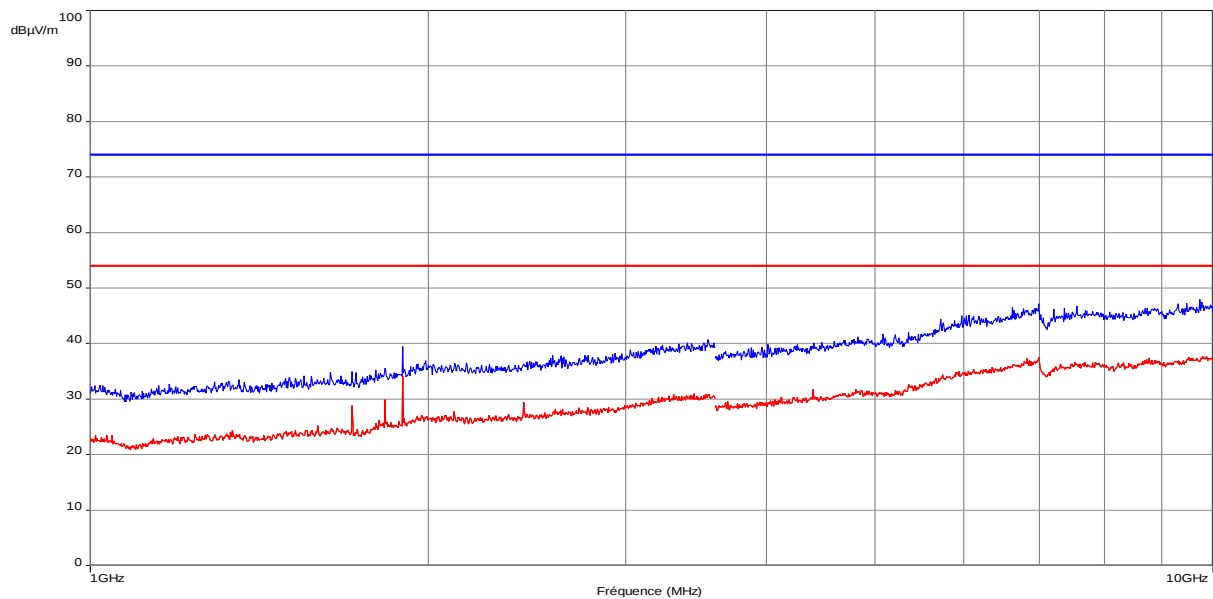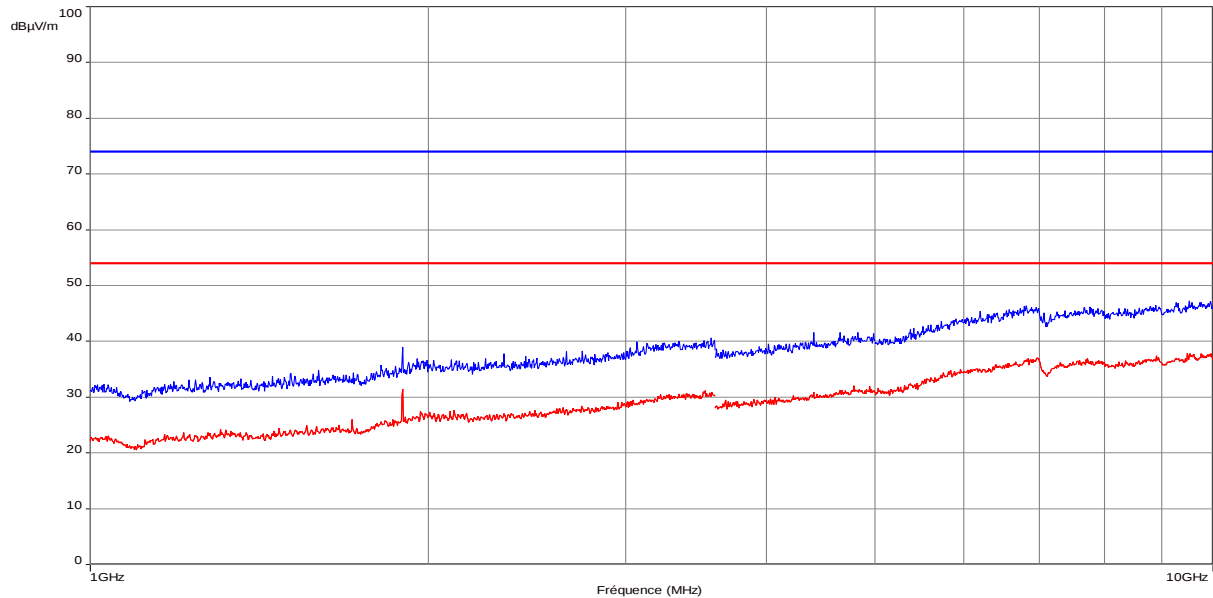

Note: Pre-scan graph only for identification purpose.

Same results for low and high channels. EUT with the transmit antenna is set vertically.

Frequency band investigated:	1GHz-9GHz
Unit :	dBμV/m
RBW :	1MHz
Antenna polarization :	Horizontal and Vertical
Limit:	15.209
Measurement detector:	Peak
Wide Measurement Uncertainty:	± 5.6dB (k=2)