


PRODUCT LABELING

Label representation:

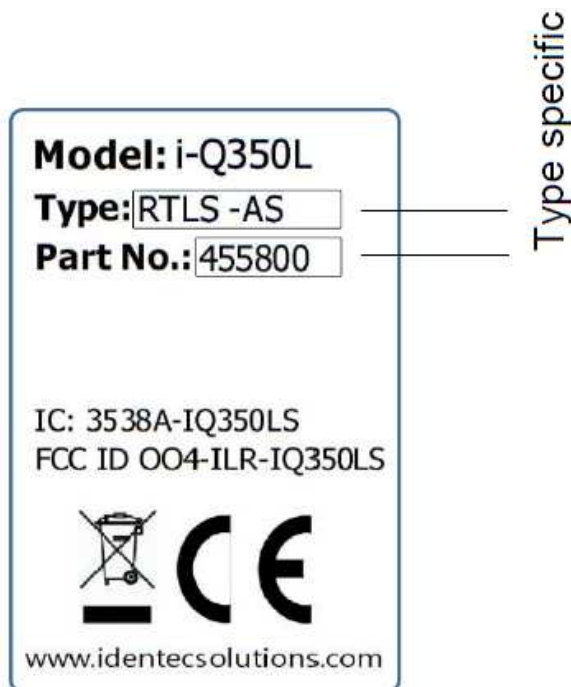


Label description:

MATERIAL	Self-adhesive label Polyester white
DIMENSION	Length 30mm, height 20mm
CORNER RADIUS	1mm
UNIT	On roll 76,2mm
RESISTIVITY	UV resistant, operating temperature range -40 to +85°C
PRINT	Black, min 300dpi
LAMINATION	Clear matt or glossy polyester
CORNER RADIUS	1mm
CONTENT	Fixed content: • “Model:”, “Type:” “Part No.:” Tahoma 5pt bold • “www.identecolutions.com” Tahoma text height 1,3mm • “IC: 3538A-IQ350LS”, “FCC ID 004-ILR-IQ350LS” Tahoma text height 1,5mm • CE graphic height 6mm • Wheeled bin graphic height 6mm Type specific content: • 455800 ILR-Tag i-Q350L RTLS -AS - o type “RTLS -AS” 5pt Tahoma - o part no “455800” 4pt Tahoma • 455812 ILR-Tag i-Q350L RTLS -AH - o type “RTLS -AH” 5pt Tahoma - o part no “455812” 4pt Tahoma
AVAILABLE PATTERN	Created in EasyLabel 6 • Type_455800_iQ350L_RTLS_AS_10.fmt • Type_455812_iQ350L_RTLS_AH_10.fmt

FCC ID: 004-ILR-IQ350LS
IC ID: 3538A-IQ350LS

Label location:

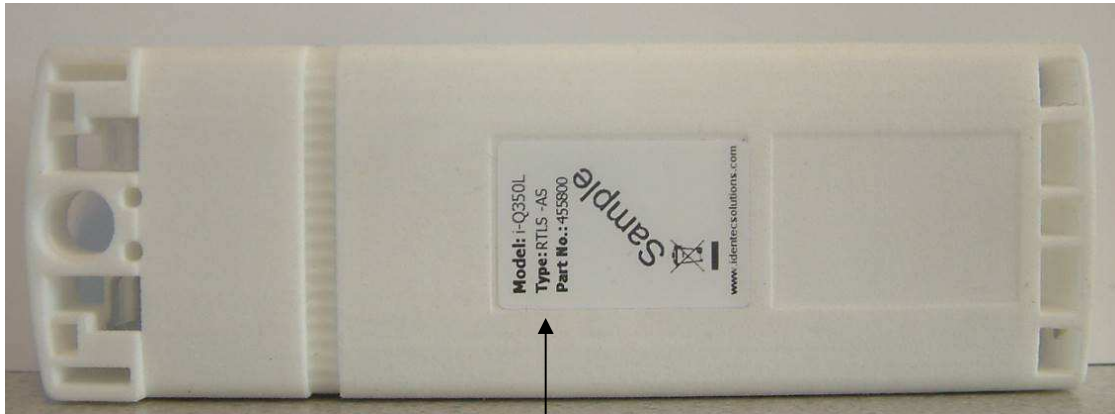

Rear face of equipment