
Appendix B. Highest Measurement Data

Test Laboratory: DEKRA

Date: 2026/04/10

8_RF 2.4GHz_2.4G Wireless-2M_CH38_Back_0mm_ANT Main**DUT: Mouse; Type: P725**

Communication System: UID 0, RF 2.4GHz; Frequency: 2440 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 2440$ MHz; $\sigma = 1.8$ S/m; $\epsilon_r = 39.22$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3698; ConvF(6.64, 6.51, 6.41) @ 2440 MHz; Calibrated: 2025/11/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2025/11/13
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/Flat/Area Scan (9x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.118 W/kg

Configuration/Flat/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.224 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.166 W/kg

SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.044 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 54%

Maximum value of SAR (measured) = 0.139 W/kg

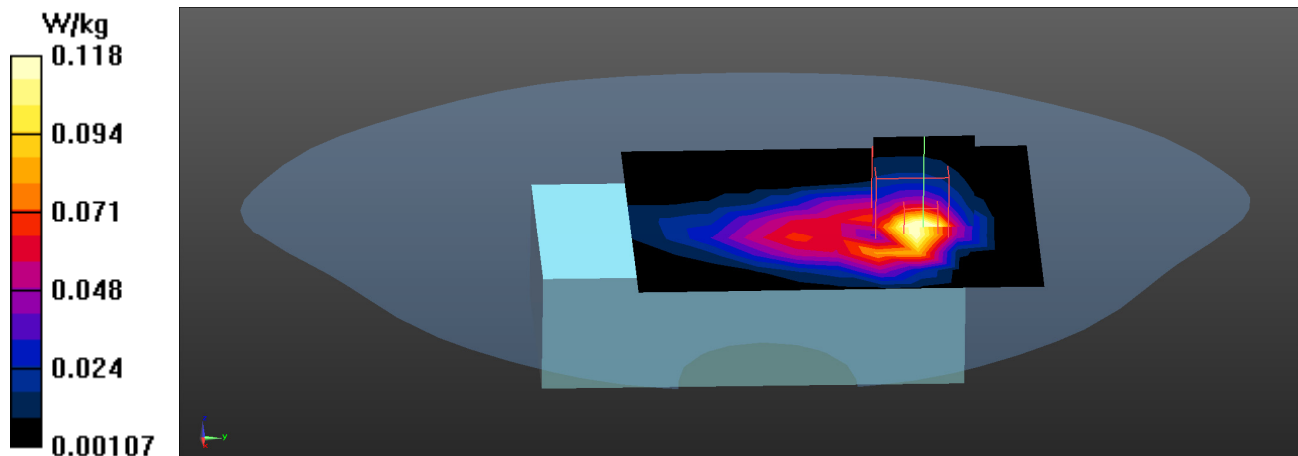

Test Laboratory: DEKRA

Date: 2026/04/10

9_Bluetooth_BLE-1M_CH0_Back_0mm_ANT Main**DUT: Mouse; Type: P725**

Communication System: UID 0, BT 1M&3M&BLE; Frequency: 2402 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 2402$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r = 39.37$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3698; ConvF(6.64, 6.51, 6.41) @ 2402 MHz; Calibrated: 2025/11/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2025/11/13
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/Flat/Area Scan (9x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.100 W/kg

Configuration/Flat/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.110 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.158 W/kg

SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.043 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 55.1%

Maximum value of SAR (measured) = 0.131 W/kg

