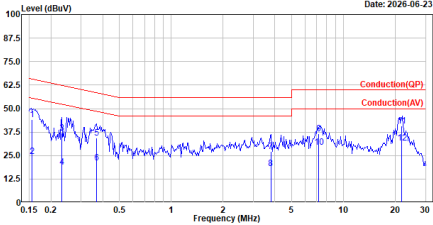
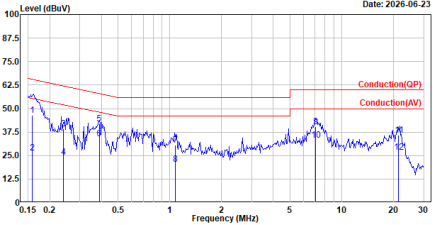



Appendix A. Test Result of AC Power Line Conducted Emission

TX_BLE2M_2440MHz_Line								TX_BLE2M_2440MHz_Neutral							
Site :HY-SR01 Condition :Line Mode :TX_BLE2M_2440MHz test by :Kevin  Date: 2026-06-23								Site :HY-SR01 Condition :Neutral Mode :TX_BLE2M_2440MHz test by :Kevin  Date: 2026-06-23							
No.	Frequency	Level	Limit	Over	Read	Factor	Remark	No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB			MHz	dBuV	dBuV	dB	dBuV	dB	
1	0.156	44.20	65.70	-21.50	34.57	9.63	QP	1	0.159	46.56	65.54	-18.98	36.92	9.64	QP
2	0.156	24.61	55.70	-31.09	14.98	9.63	Average	2	0.159	26.59	55.54	-28.95	16.95	9.64	Average
3	0.233	37.09	62.36	-25.27	27.45	9.64	QP	3	0.240	39.31	62.09	-22.78	29.65	9.66	QP
4	0.233	18.95	52.36	-33.41	9.31	9.64	Average	4	0.240	24.17	52.09	-27.92	14.51	9.66	Average
5	0.368	34.19	58.54	-24.35	24.53	9.66	QP	5	0.388	42.02	58.10	-16.08	32.37	9.65	QP
6	0.368	20.98	48.54	-27.56	11.32	9.66	Average	6	0.388	33.82	48.10	-14.28	24.17	9.65	Average
7	3.783	27.14	56.00	-28.86	17.16	9.98	QP	7	1.076	30.48	56.00	-25.52	20.80	9.68	QP
8	3.783	18.21	46.00	-27.79	8.23	9.98	Average	8	1.076	20.51	46.00	-25.49	10.83	9.68	Average
9	7.165	36.59	60.00	-23.41	26.45	10.14	QP	9	7.069	40.49	60.00	-19.51	30.35	10.14	QP
10	7.165	29.34	50.00	-20.66	19.20	10.14	Average	10	7.069	33.17	50.00	-16.83	23.03	10.14	Average
11	21.757	40.91	60.00	-19.09	30.99	9.92	QP	11	21.458	36.03	60.00	-23.97	26.11	9.92	QP
12	21.757	31.81	50.00	-18.19	21.89	9.92	Average	12	21.458	26.61	50.00	-23.39	16.69	9.92	Average
Note: 1. Level = Read Level + Factor 2. Factor = LISN insertion loss + Cable loss 3. Over Limit = Level - Limit Line								Note: 1. Level = Read Level + Factor 2. Factor = LISN insertion loss + Cable loss 3. Over Limit = Level - Limit Line							


Appendix B. Test Result of Occupied Bandwidth & DTS Bandwidth

Modulation	Frequency (MHz)	99% Occupied Bandwidth (MHz)	DTS Bandwidth (MHz)	Limit (MHz)	
				99% Occupied Bandwidth	DTS Bandwidth
GFSK (1Mbps)	2402	1.09	0.72	-	≥ 0.5
	2440	1.10	0.72	-	≥ 0.5
	2480	1.09	0.71	-	≥ 0.5
GFSK (2Mbps)	2404	2.10	1.36	-	≥ 0.5
	2440	2.09	1.31	-	≥ 0.5
	2478	2.09	1.31	-	≥ 0.5

For 99% Occupied Bandwidth:

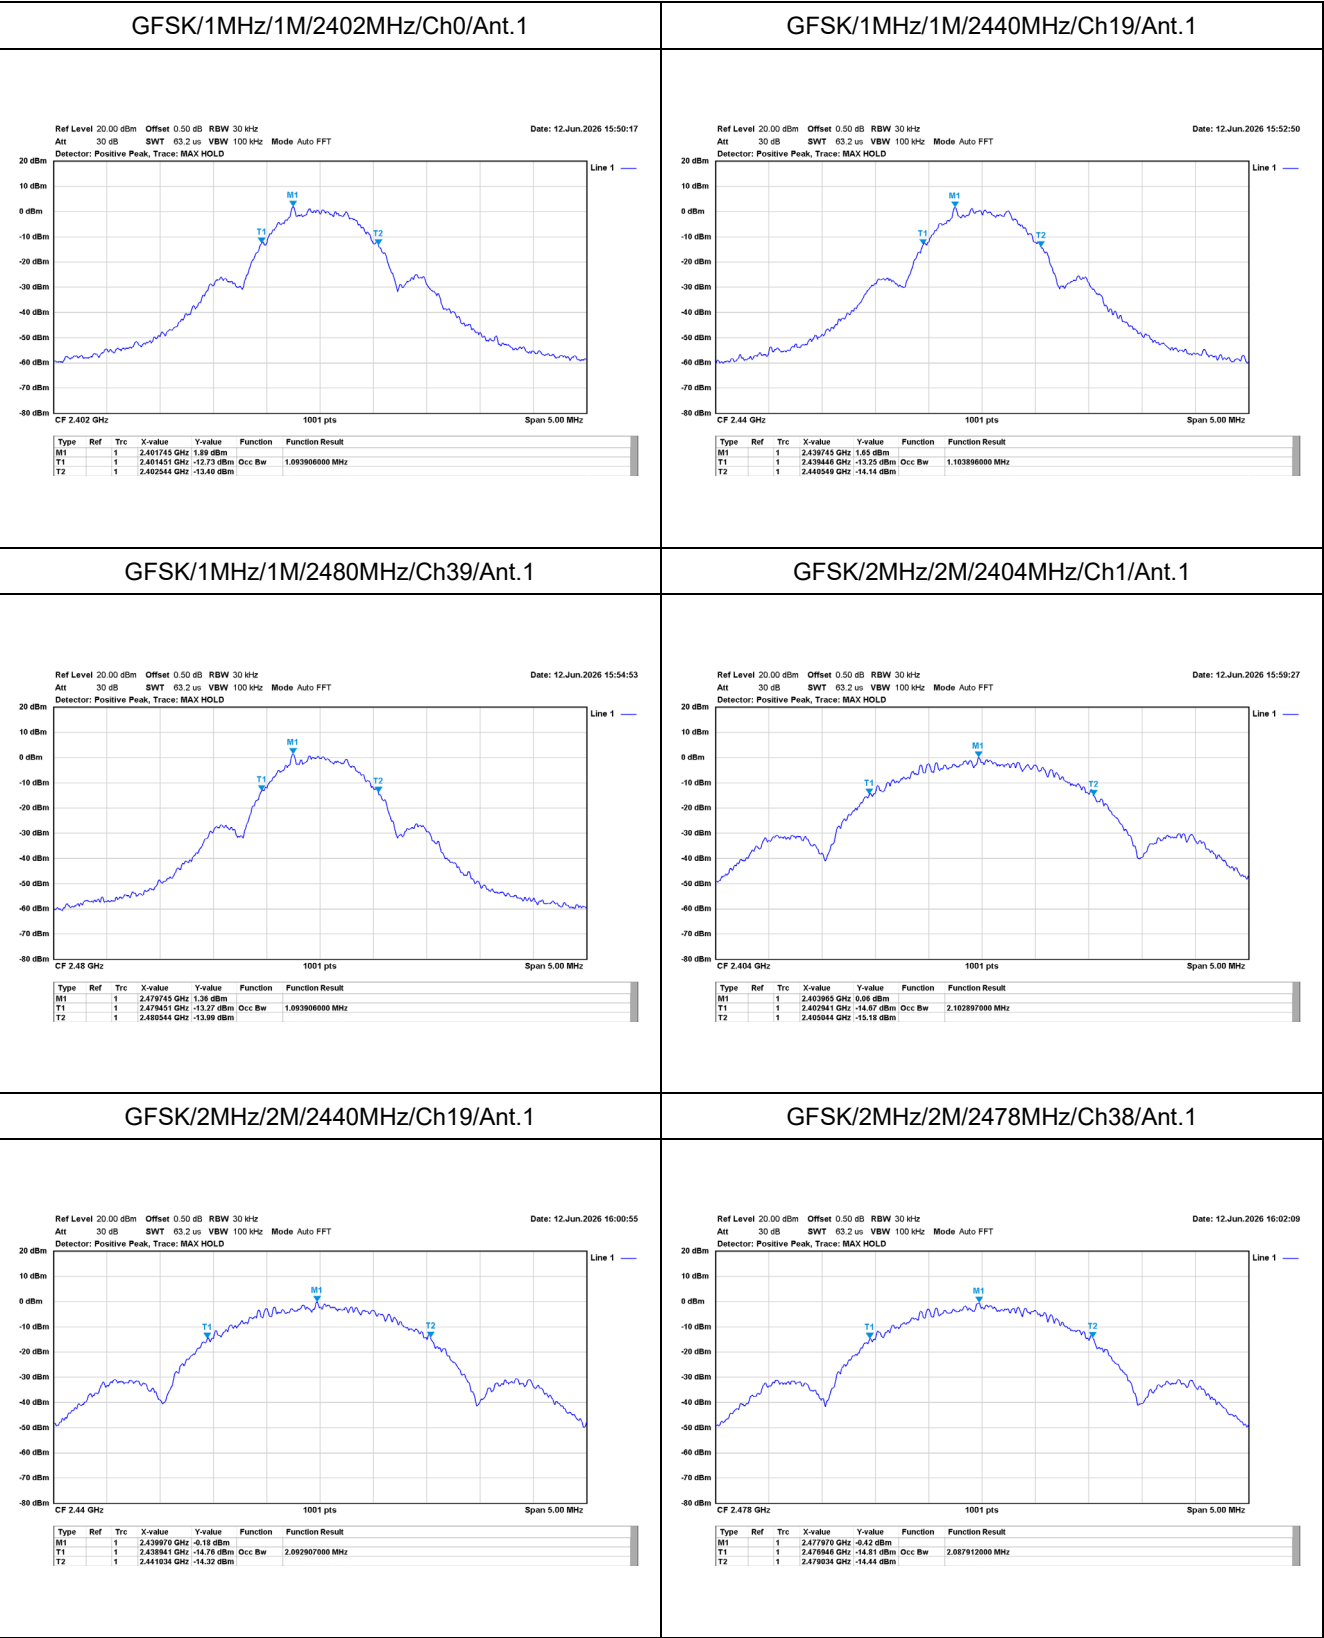

For DTS Bandwidth:

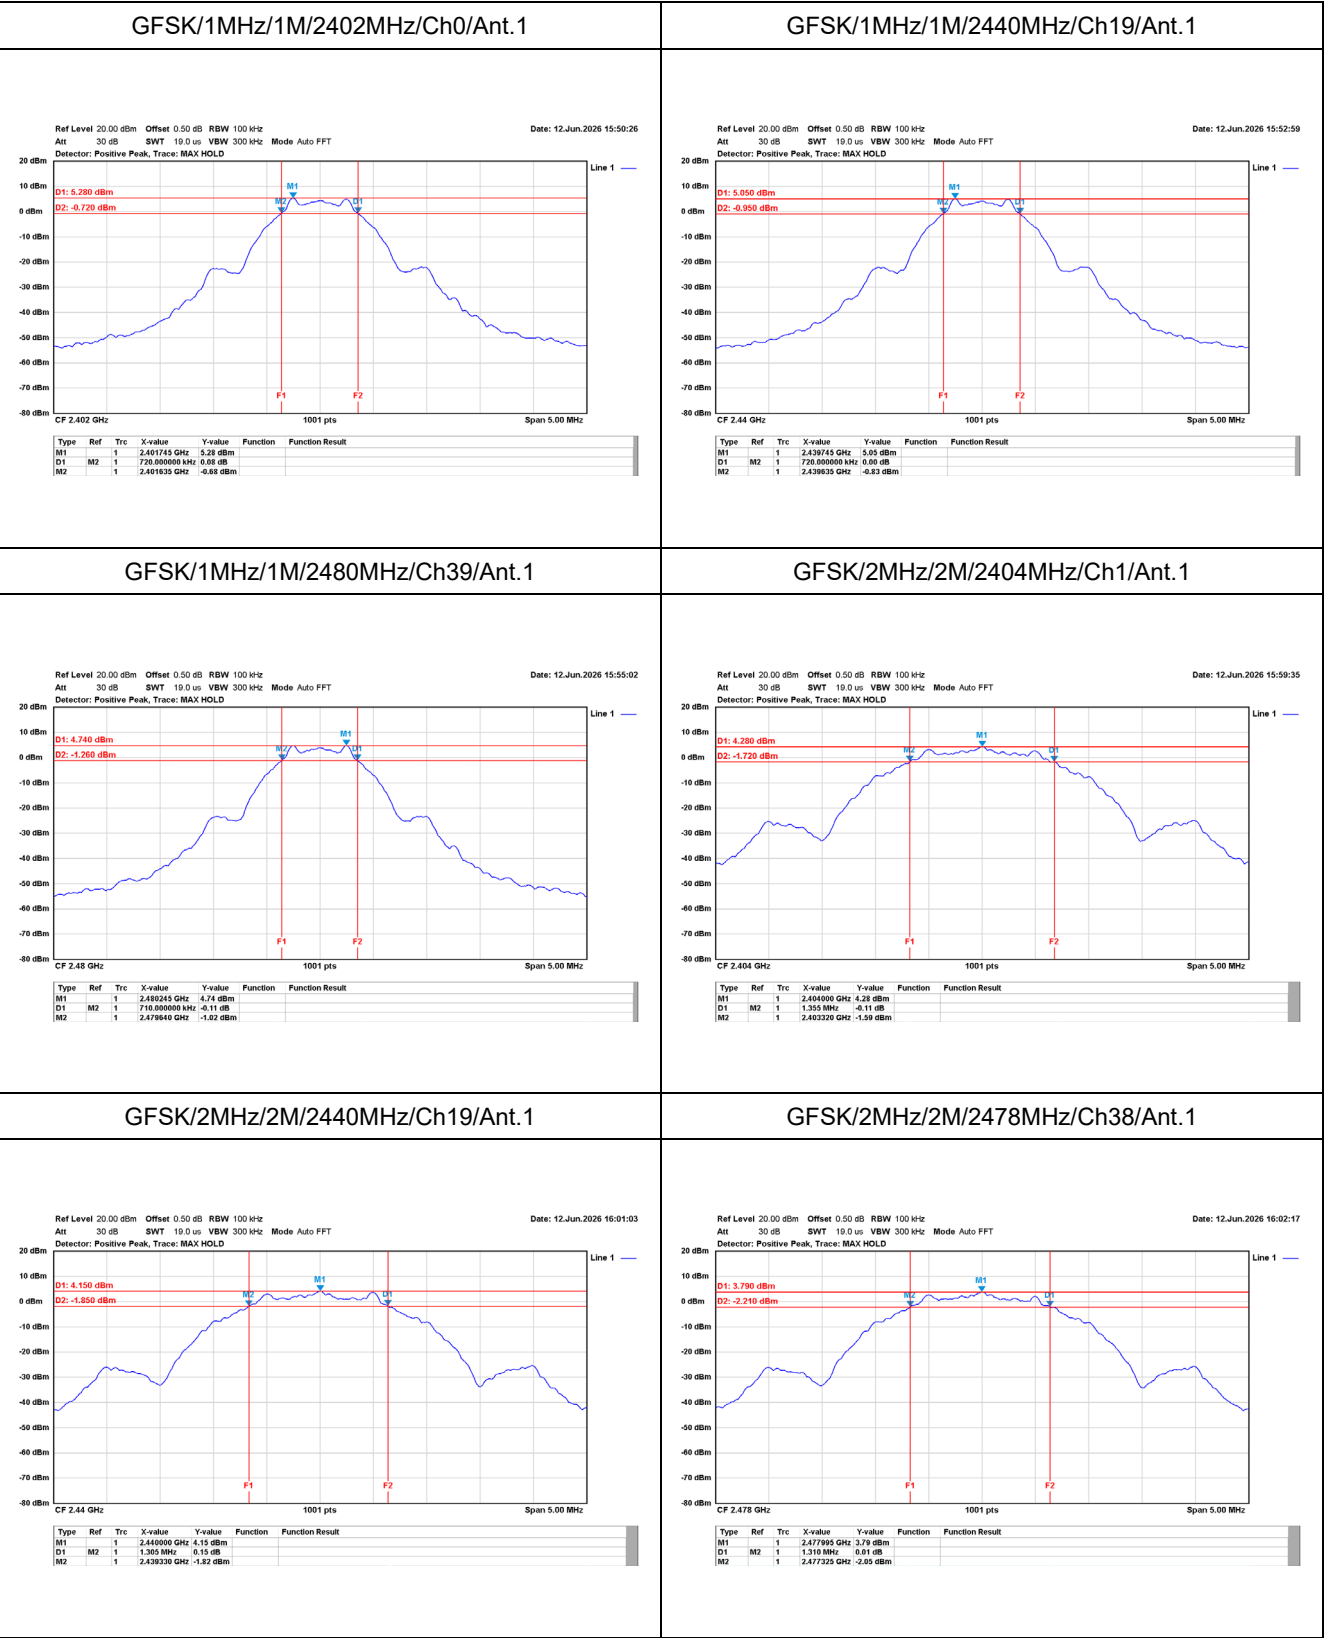


Appendix C. Test Result of Maximum Peak Conducted Output Power


Modulation	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)	Limit (dBm)	Result
GFSK (1Mbps)	2402	6.61	30.00	Pass
	2440	6.46	30.00	Pass
	2480	6.61	30.00	Pass
GFSK (2Mbps)	2404	6.60	30.00	Pass
	2440	6.44	30.00	Pass
	2478	6.61	30.00	Pass


Appendix D. Test Result of Maximum Power Spectral Density

Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
GFSK (1Mbps)	2402	-8.05	8.00	Pass
	2440	-8.42	8.00	Pass
	2480	-8.73	8.00	Pass
GFSK (2Mbps)	2404	-11.21	8.00	Pass
	2440	-11.04	8.00	Pass
	2478	-11.33	8.00	Pass

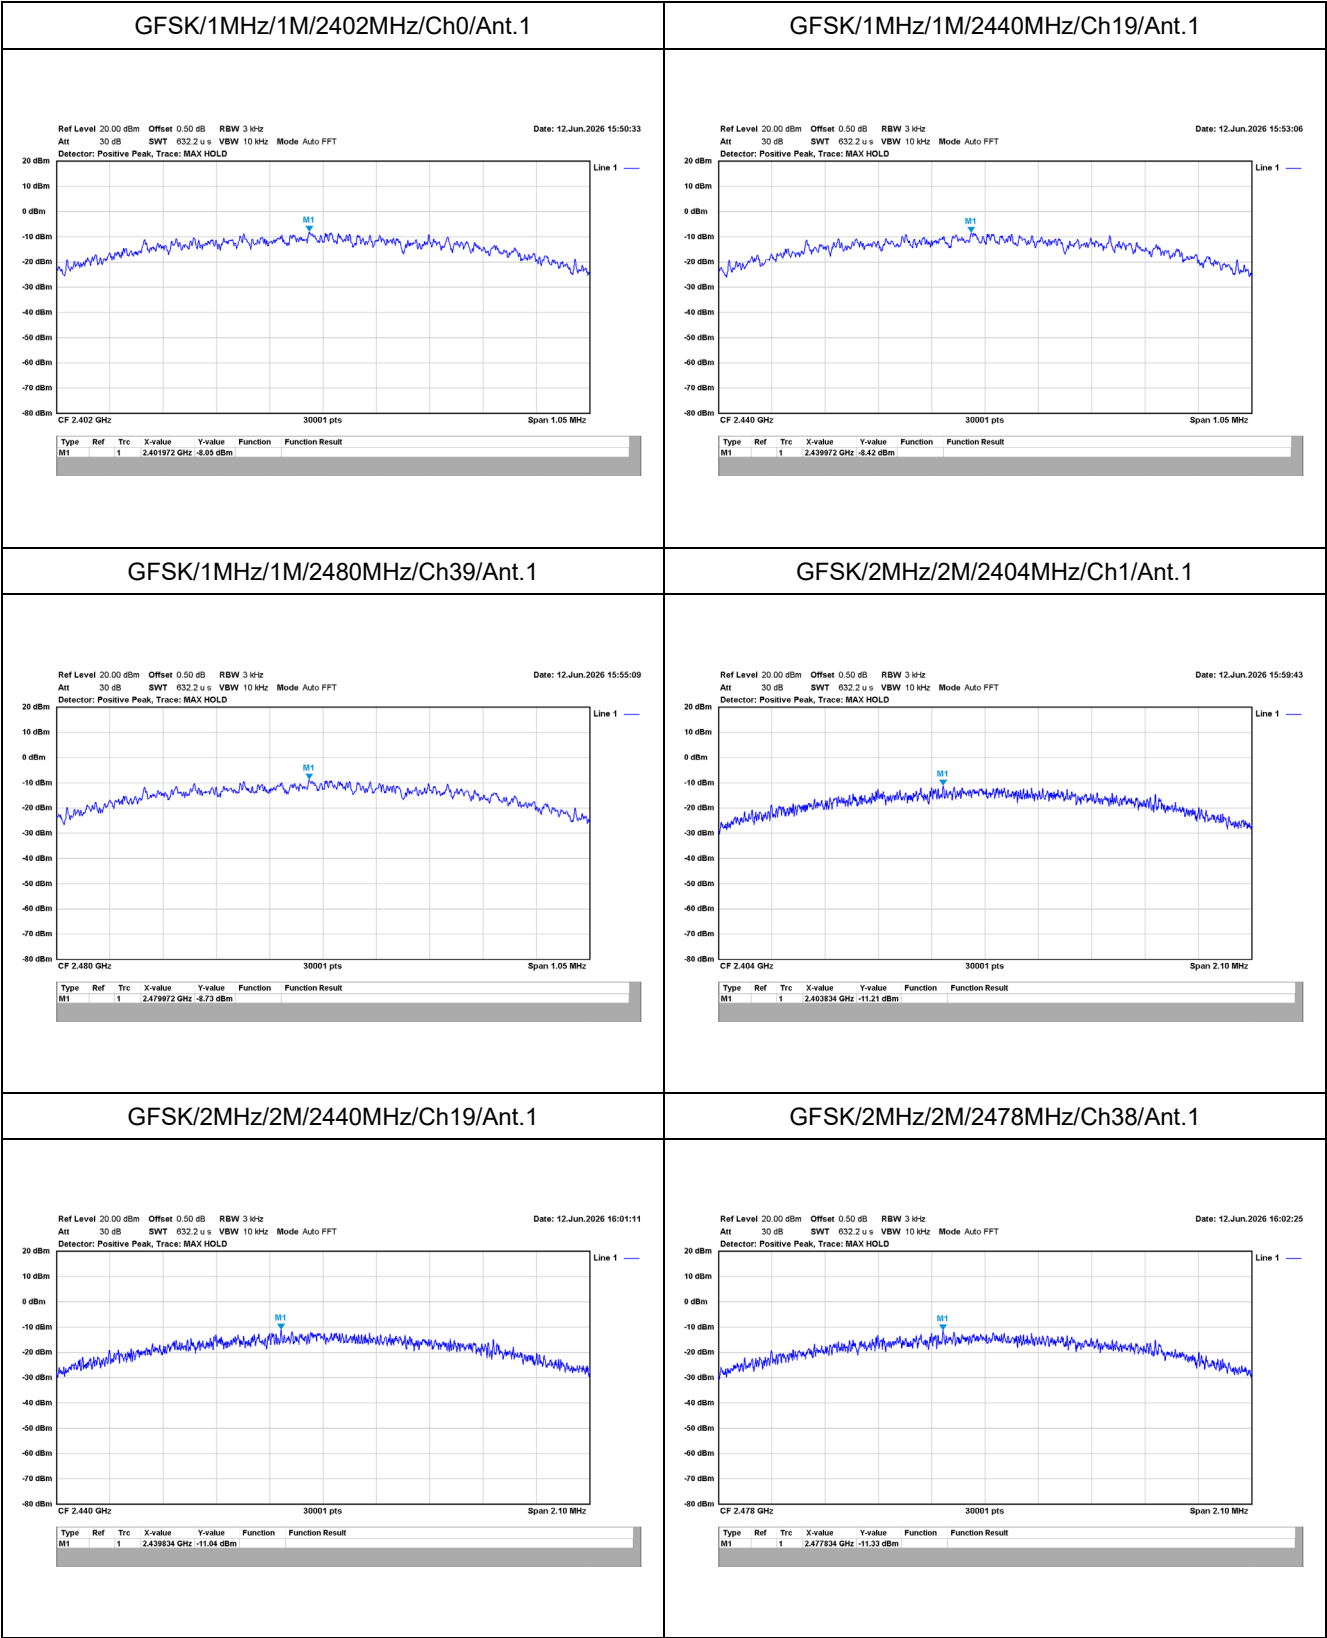


Appendix E. Test Result of Antenna Port Conducted Emission

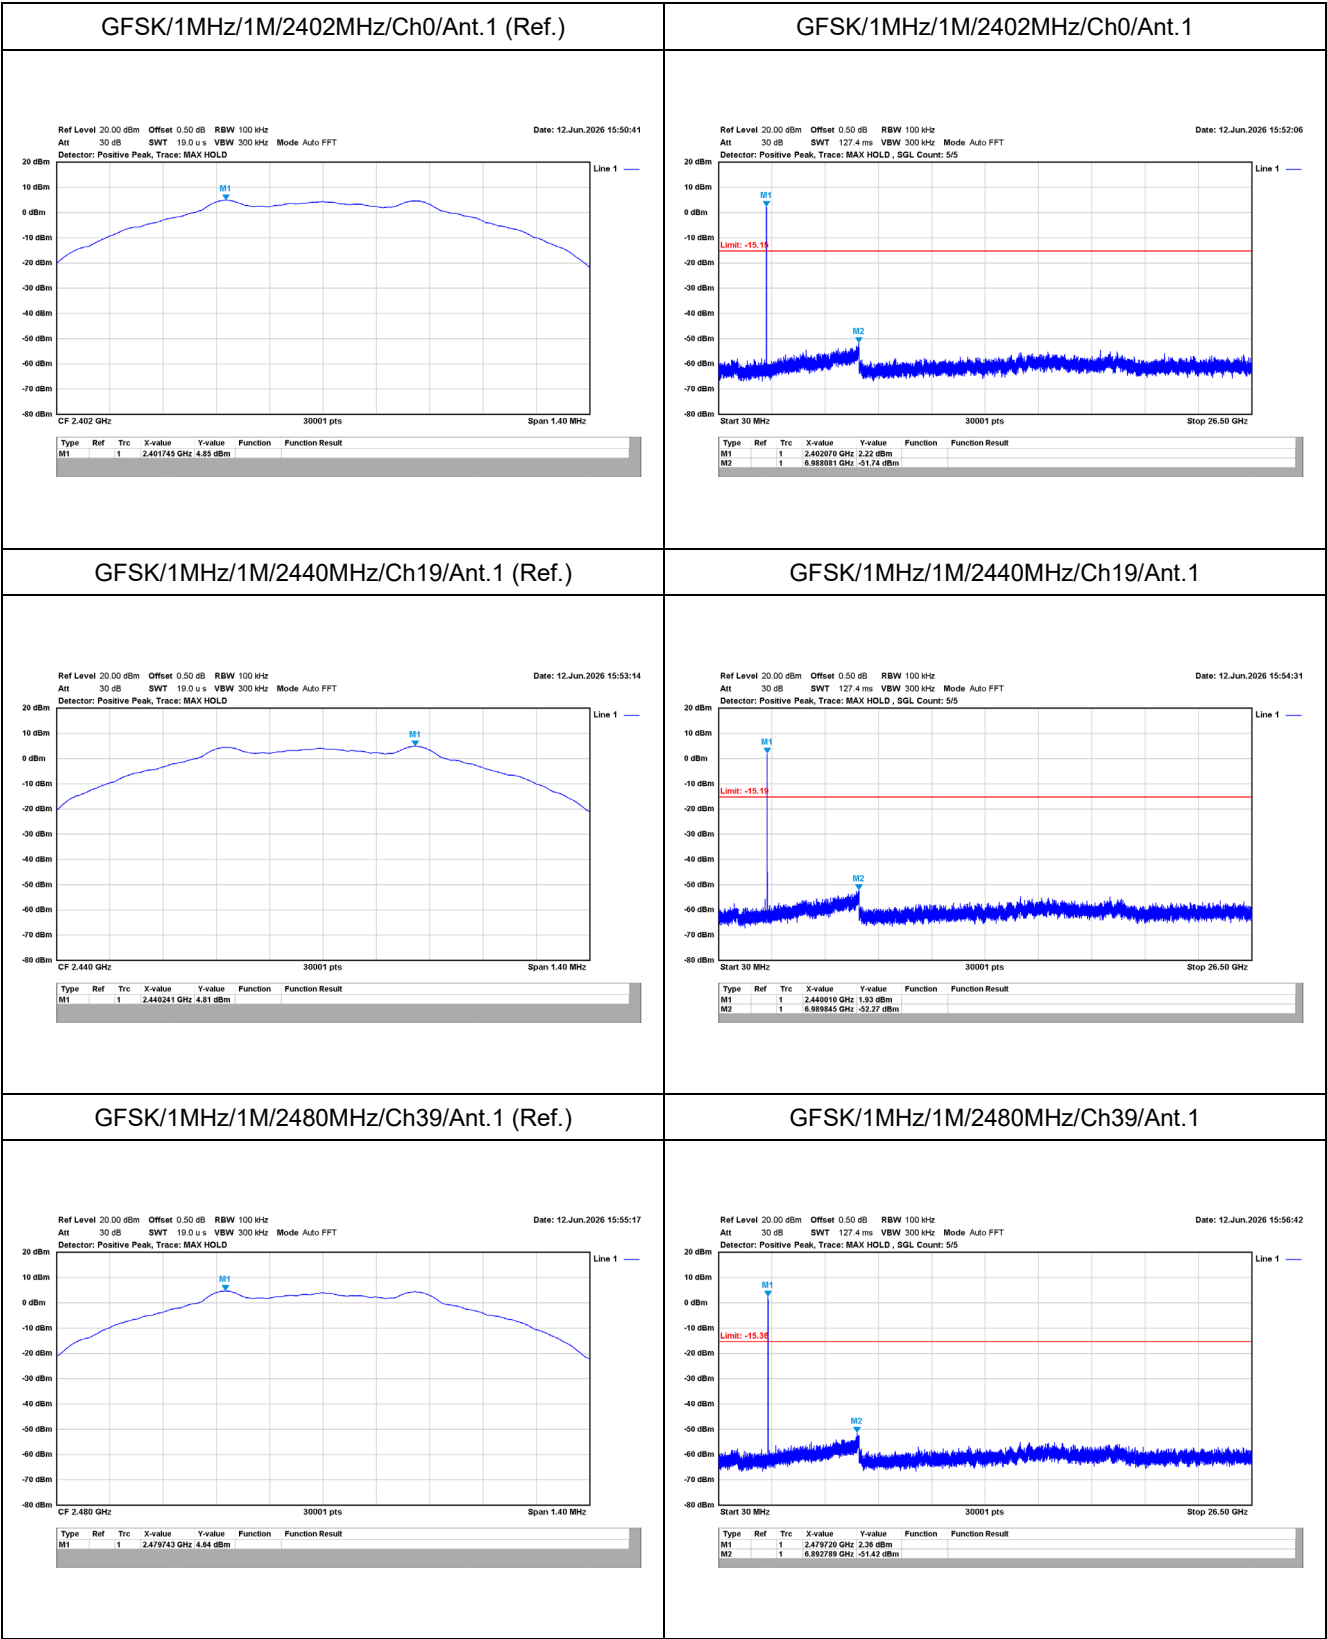


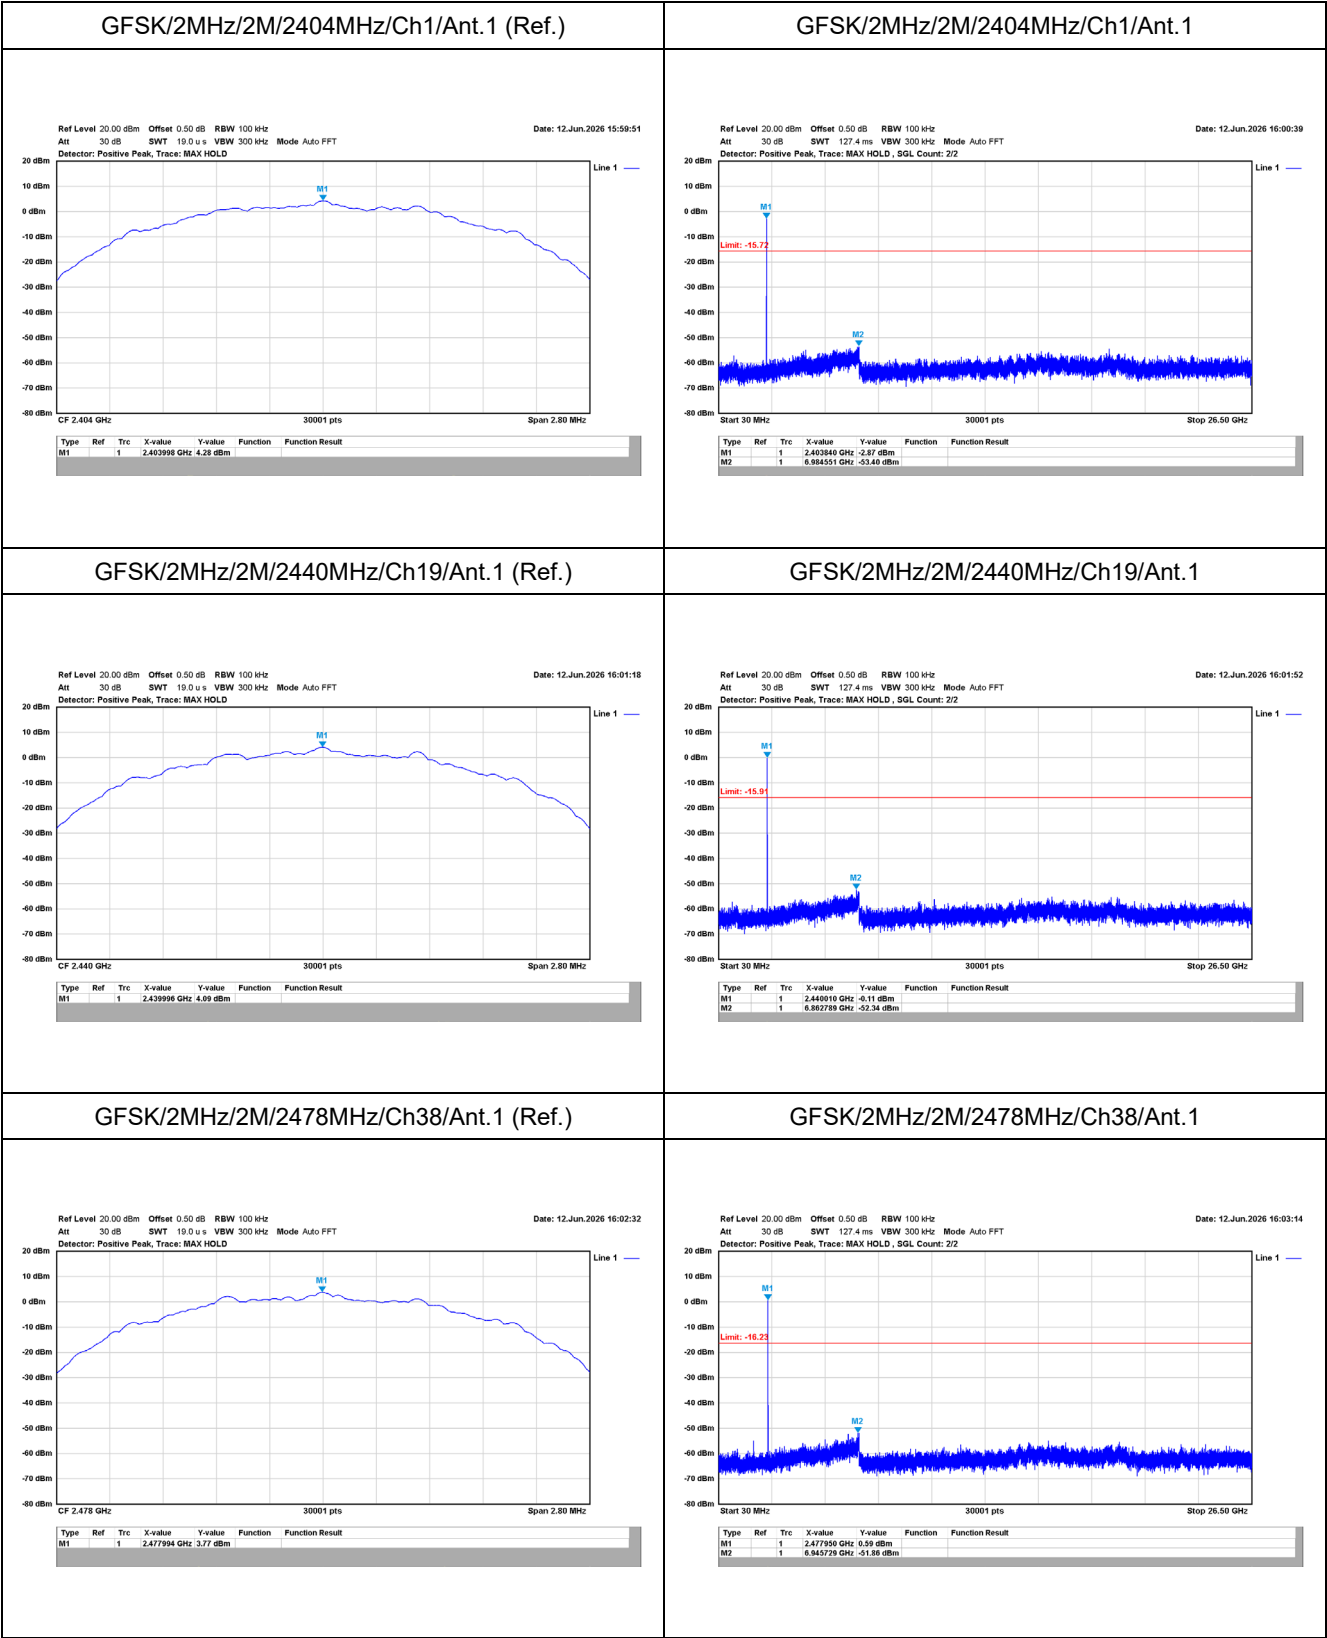


GFSK/1MHz/1M/2402MHz/Ch0/Ant.1(Band Edge)

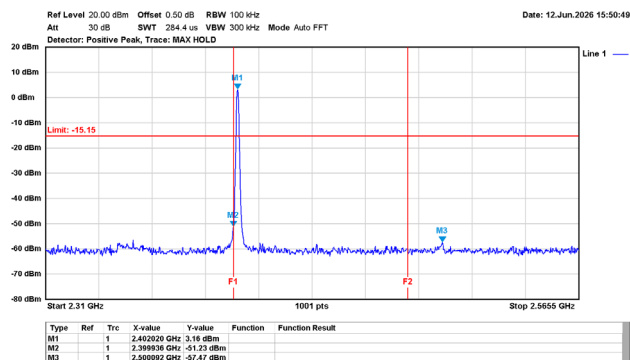


GFSK/1MHz/1M/2480MHz/Ch39/Ant.1(Band Edge)

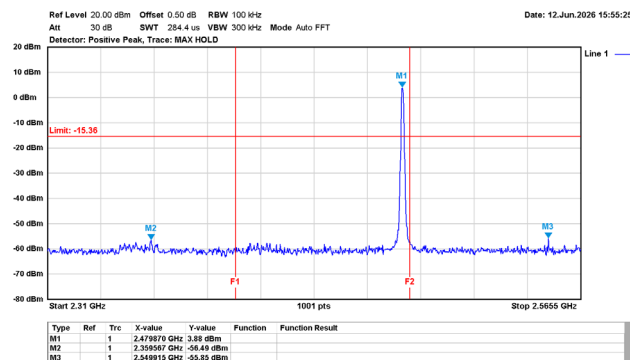

GFSK/2MHz/2M/2404MHz/Ch1/Ant.1(Band Edge)

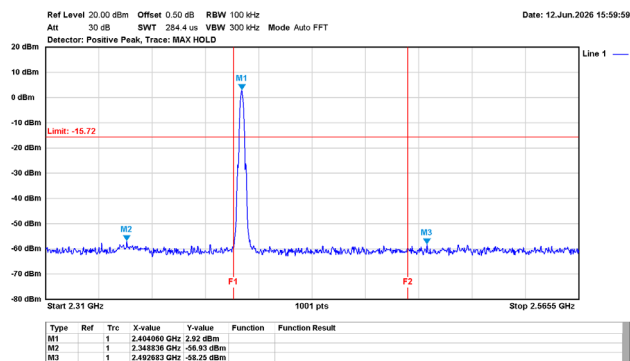


GFSK/2MHz/2M/2478MHz/Ch38/Ant.1(Band Edge)

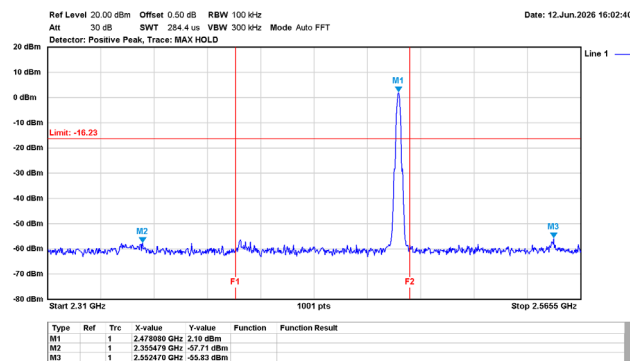

Appendix F. Test Result of Radiated Emission

TX_BLE1M_2402MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2402MHz
Test BY :Rock

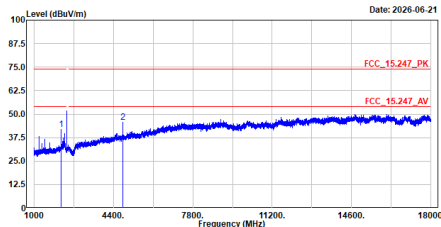


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2159.400	41.77	74.00	-32.23	65.54	-23.77	Peak
2	4804.000	45.69	74.00	-28.31	60.42	-14.73	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2402MHz
Test BY :Rock

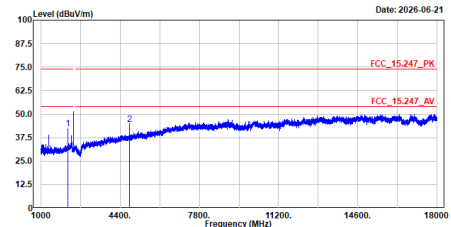


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2159.400	42.41	74.00	-31.59	66.18	-23.77	Peak
2	4804.000	44.68	74.00	-29.32	59.41	-14.73	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2440MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2440MHz
Test BY :Rock

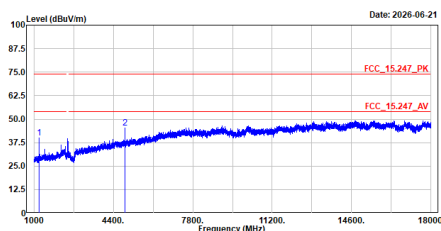


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1199.750	40.04	74.00	-33.96	65.89	-25.85	Peak
2	4880.000	45.15	74.00	-28.85	59.61	-14.46	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2440MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2440MHz
Test BY :Rock

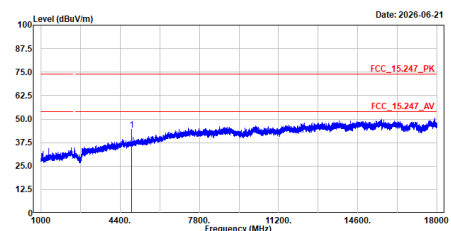


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4880.000	44.15	74.00	-29.85	58.61	-14.46	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2480MHz
Test BY :Rock

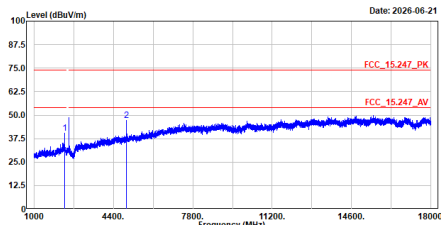


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2294.550	48.40	74.00	-33.60	63.73	-23.33	Peak
2	4960.000	47.15	74.00	-26.85	61.37	-14.22	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2480MHz
Test BY :Rock

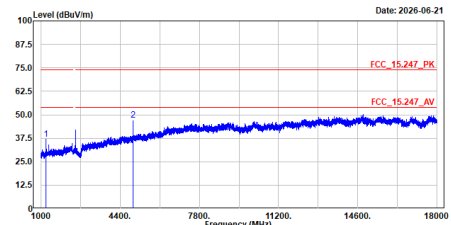


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1199.750	36.86	74.00	-37.14	62.71	-25.85	Peak
2	4960.000	47.31	74.00	-26.69	61.53	-14.22	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2404MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2404MHz
Test BY :Rock

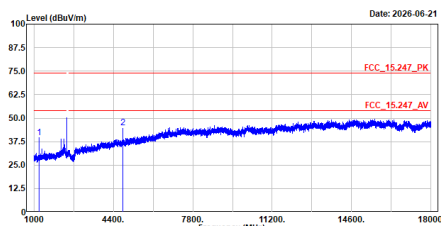


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1199.750	39.62	74.00	-34.38	65.47	-25.85	Peak
2	4808.000	45.07	74.00	-28.93	59.79	-14.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2404MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2404MHz
Test BY :Rock

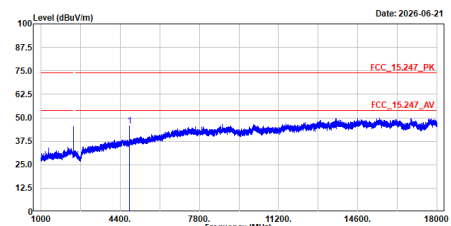


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4808.000	45.72	74.00	-28.28	60.44	-14.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2440MHz
Test BY :Rock

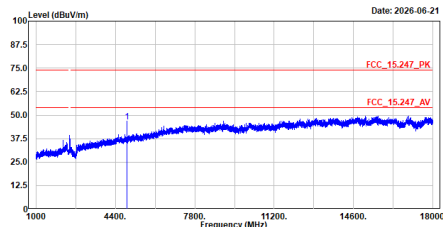


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4888.000	46.49	74.00	-27.51	60.95	-14.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2440MHz
Test BY :Rock

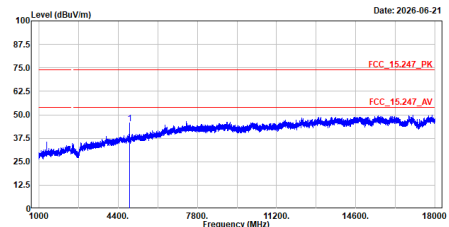


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4888.000	45.21	74.00	-28.79	59.67	-14.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2478MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2478MHz
Test BY :Rock

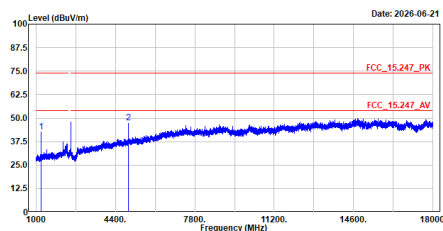


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	1199.750	42.73	74.00	-31.27	68.58	-25.85	Peak
2	4956.000	47.51	74.00	-26.49	61.75	-14.24	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2478MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2478MHz
Test BY :Rock

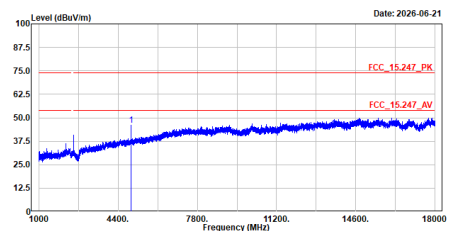


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4956.000	46.12	74.00	-27.88	60.36	-14.24	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2440MHz
Test BY :Rock

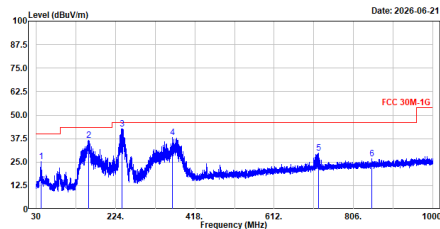


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	42.319	25.22	40.00	-14.78	48.96	-23.74	QP
2	157.046	36.61	43.50	-6.89	60.46	-23.85	QP
3	239.423	42.74	46.00	-3.26	67.86	-25.12	QP
4	363.195	37.97	46.00	-8.03	59.62	-21.65	QP
5	721.222	29.84	46.00	-16.16	43.54	-13.70	QP
6	850.232	26.78	46.00	-19.22	38.83	-12.05	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_BLE2M_2440MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2440MHz
Test BY :Rock

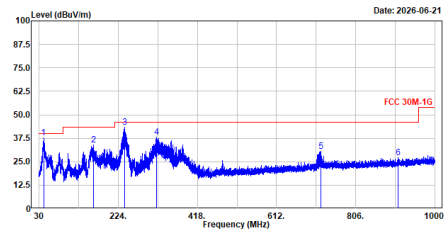


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	41.058	37.62	40.00	-2.38	61.72	-24.10	QP
2	163.472	34.07	43.50	-9.43	58.07	-24.00	QP
3	239.617	43.29	46.00	-2.71	68.40	-25.11	QP
4	318.381	37.93	46.00	-8.07	60.46	-22.53	QP
5	721.222	30.63	46.00	-15.37	44.33	-13.70	QP
6	909.887	27.01	46.00	-18.99	38.49	-11.48	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_BLE1M_2402MHz_H Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2402MHz
Test BY :Rock

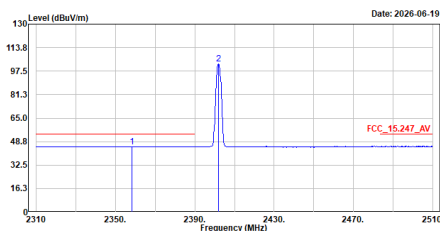


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2358.400	45.32	54.00	-8.68	14.84	30.48	Average
2	2402.000	102.49	-----	-----	72.12	30.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_H Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2402MHz
Test BY :Rock

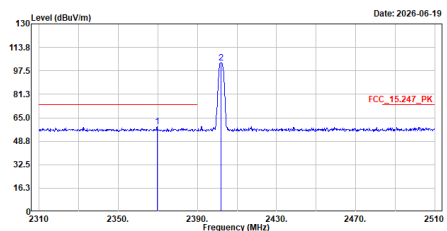


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2369.600	58.63	74.00	-15.37	28.15	30.48	Peak
2	2401.800	103.13	-----	-----	72.76	30.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2402MHz
Test BY :Rock

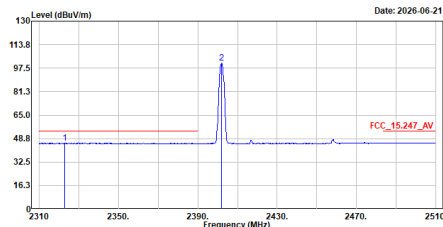


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2322.800	45.59	54.00	-8.41	15.02	30.57	Average
2	2402.000	100.85	-----	-----	70.48	30.37	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2402MHz
Test BY :Rock

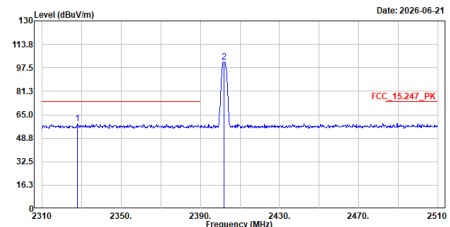


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2322.800	58.64	74.00	-15.36	28.87	30.57	Peak
2	2402.000	101.46	-----	-----	71.09	30.37	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2480MHz
Test BY :Rock

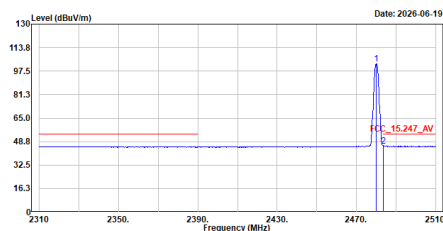


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.000	102.50	-----	-----	72.07	30.43	Average
2	2483.600	45.69	54.00	-8.31	15.26	30.43	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2480MHz
Test BY :Rock

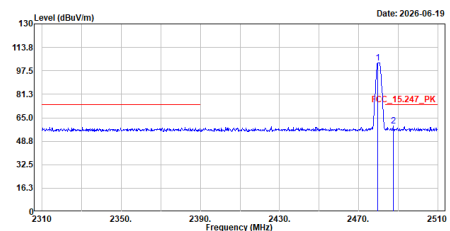


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2479.800	103.17	-----	-----	72.74	30.43	Peak
2	2487.400	59.39	74.00	-14.61	28.96	30.43	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2480MHz
Test BY :Rock

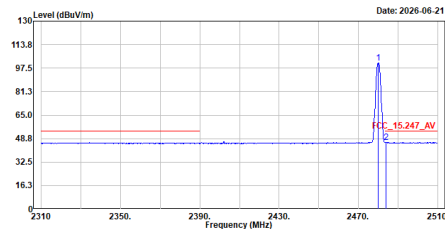


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2480.000	101.07	-----	-----	70.64	30.43	Average
2	2483.000	46.20	54.00	-7.80	15.77	30.43	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2480MHz
Test BY :Rock

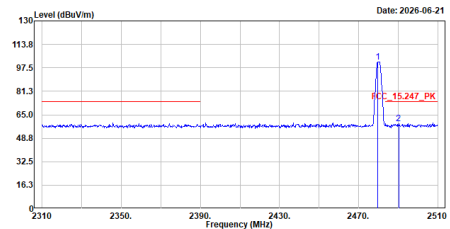


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2479.800	101.62	-----	-----	71.19	30.43	Peak
2	2490.200	58.93	74.00	-15.07	28.49	30.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2404MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2404MHz
Test BY :Rock

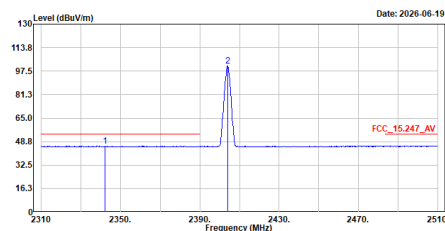


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2342.200	45.64	54.00	-8.36	15.09	30.55	Average
2	2404.000	101.11	-----	-----	70.76	30.35	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2404MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2404MHz
Test BY :Rock

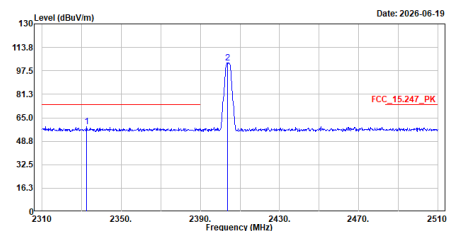


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2332.600	58.89	74.00	-15.11	28.32	30.57	Peak
2	2403.600	102.93	-----	-----	72.58	30.35	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2404MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2404MHz
Test BY :Rock

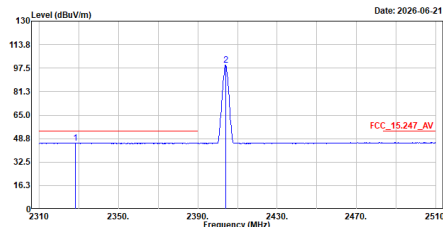


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2328.200	45.86	54.00	-8.14	15.29	30.57	Average
2	2404.000	99.58	-----	-----	69.23	30.35	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2404MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2404MHz
Test BY :Rock

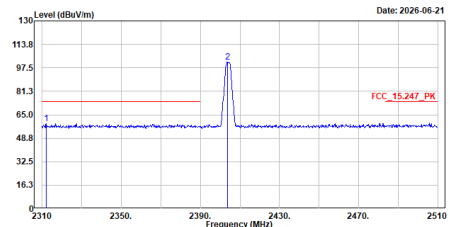


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2312.000	58.99	74.00	-15.01	28.43	30.56	Peak
2	2403.600	101.32	-----	-----	70.97	30.35	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2478MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2478MHz
Test BY :Rock

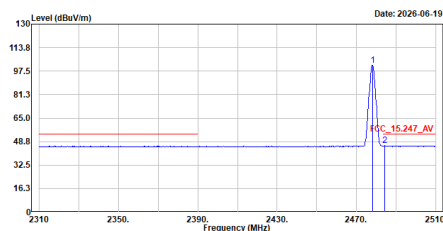


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2478.200	101.66	-----	-----	71.23	30.43	Average
2	2484.200	45.92	54.00	-8.08	15.49	30.43	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2478MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2478MHz
Test BY :Rock

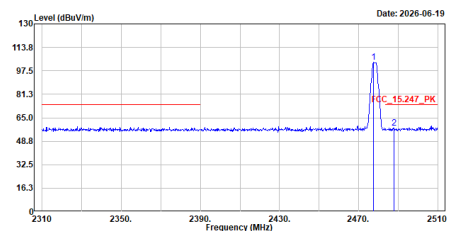


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2477.600	103.29	-----	-----	72.86	30.43	Peak
2	2487.800	57.91	74.00	-16.09	27.47	30.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2478MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2478MHz
Test BY :Rock

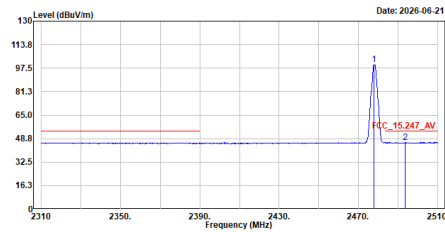


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2478.000	100.00	-----		69.57	30.43	Average
2	2493.600	46.18	54.00	-7.82	15.74	30.44	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2478MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2478MHz
Test BY :Rock

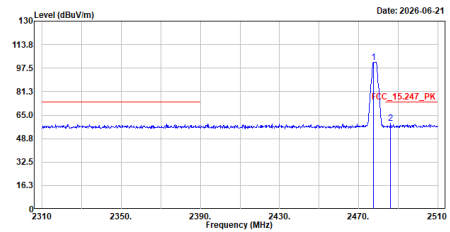

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2477.600	101.76	-----		71.33	30.43	Peak
2	2486.200	59.16	74.00	-14.84	28.73	30.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Worst-Case Emissions Above 18 GHz

