



REV	DESCRIPTION	APP'D BY
1	DRN670 10/29/90	
2	EDN 3477 6/26/95	
3	EDN 3564 3/10/98	

FUNCTION

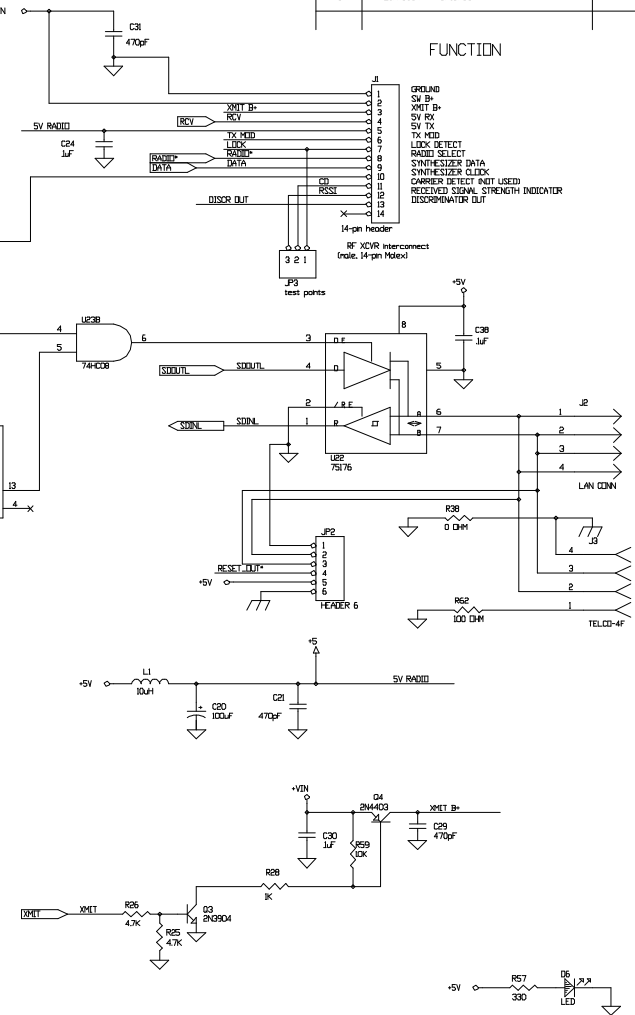

- NOTES:
1. Locate R11 near U14, and not beneath radio subassembly (must be adjustable when assembled).
 2. Adjust R11 for 100mVpp at test points TPI1 with 1 kHz RF modulation (3 Hz deviation).
 3. Install JUMP2 only if the DC level of U14 pin 5 needs to be made closer to the value of U14 pin 6.

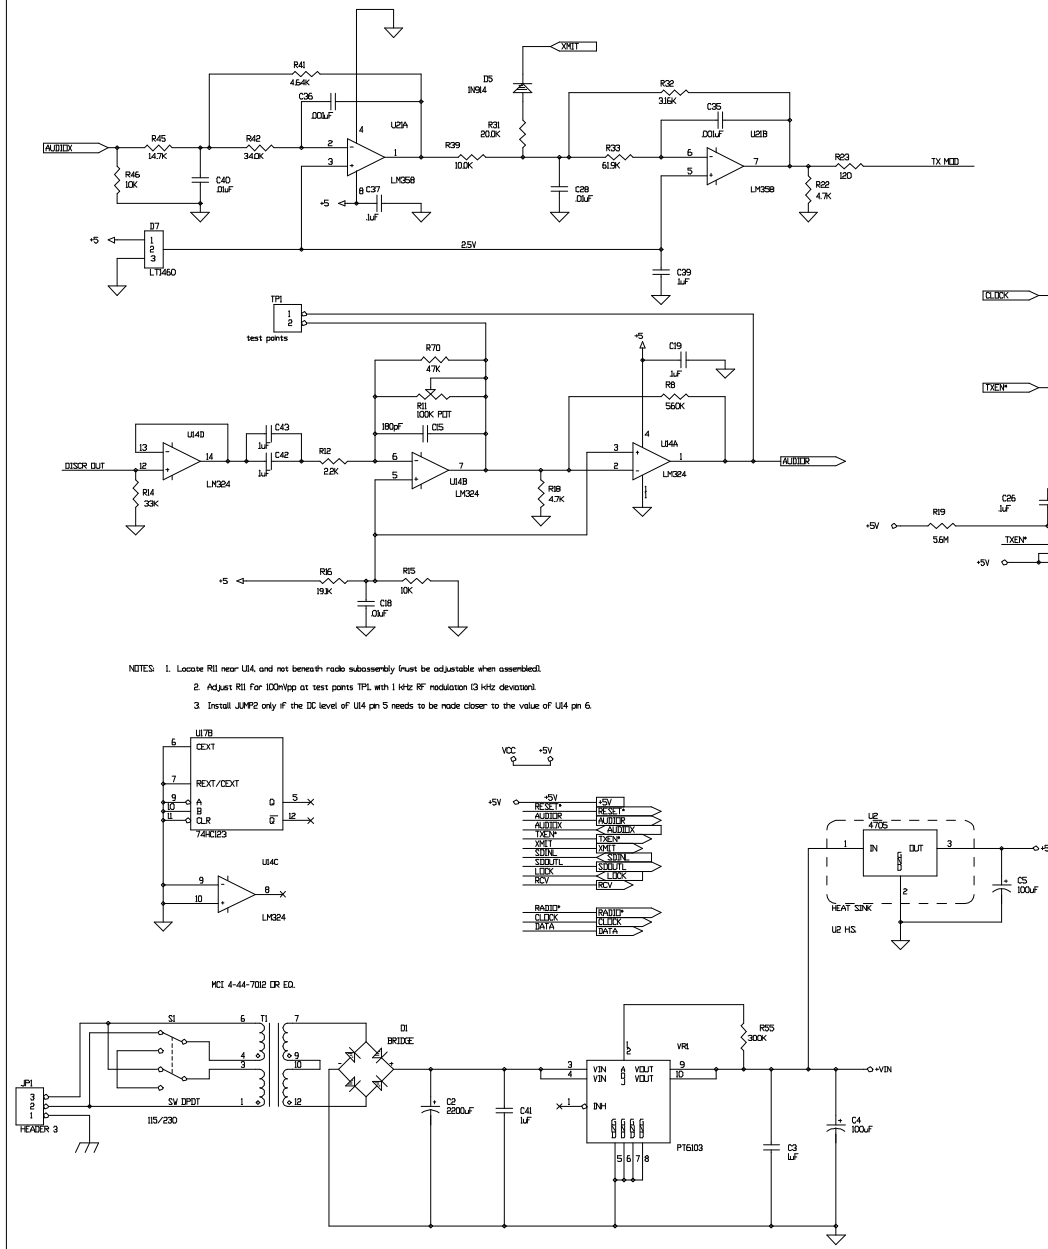

THIS DOCUMENT MAY NOT BE REPRODUCED BY ANY MEANS WITHOUT THE EXPRESSED PERMISSION OF GEAC COMPUTERS, RESTAURANT SYSTEMS DIVISION.

GEAC COMPUTERS, INC.
RESTAURANT SYSTEMS DIVISION
175 LEDGE STREET, NASHUA, NH

Title	NEV RBS Digital board
Size	Document Number
C	9000050000
Date	May 18, 1999
Sheet	3 of 3