




TYPE T6φ2 MODEL 2φ2S 400V/100V 3φ3W
SERIAL N. 692429
MANUF. DATE 2004
TYPE E18U10 MODEL DT01A
Technical Data
Rated Power: 400VA
Rated Voltage: 400V/100V
Rated Current: 1.0A/4.0A
Rated Frequency: 50/60Hz
Rated Power Factor: 1.0
Rated Efficiency: 98.5%
Rated Temperature Rise: 100K
Rated Ambient Temperature: 40°C
Rated Humidity: 95%
Rated Altitude: 2000m
Rated Pollution Degree: 3
Rated Seismicity: 0.1g
Rated Vibration: 0.1mm/s
Rated Noise: 55dB(A)
Rated Protection: IP20
Rated Ingress Protection: IP20
Rated Enclosure: IP20
Rated Mounting: IP20
Rated Installation: IP20
Rated Maintenance: IP20
Rated Disposal: IP20
Rated Recycling: IP20
Rated Reuse: IP20
Rated Repair: IP20
Rated Upgrade: IP20
Rated Replacement: IP20
Rated Decommissioning: IP20
Rated Dismantling: IP20
Rated Transport: IP20
Rated Storage: IP20
Rated Handling: IP20
Rated Use: IP20
Rated Abuse: IP20
Rated Misuse: IP20
Rated Neglect: IP20
Rated Damage: IP20
Rated Failure: IP20
Rated End of Life: IP20
Rated Disposal: IP20
Rated Recycling: IP20
Rated Reuse: IP20
Rated Repair: IP20
Rated Upgrade: IP20
Rated Replacement: IP20
Rated Decommissioning: IP20
Rated Dismantling: IP20
Rated Transport: IP20
Rated Storage: IP20
Rated Handling: IP20
Rated Use: IP20
Rated Abuse: IP20
Rated Misuse: IP20
Rated Neglect: IP20
Rated Damage: IP20
Rated Failure: IP20
Rated End of Life: IP20

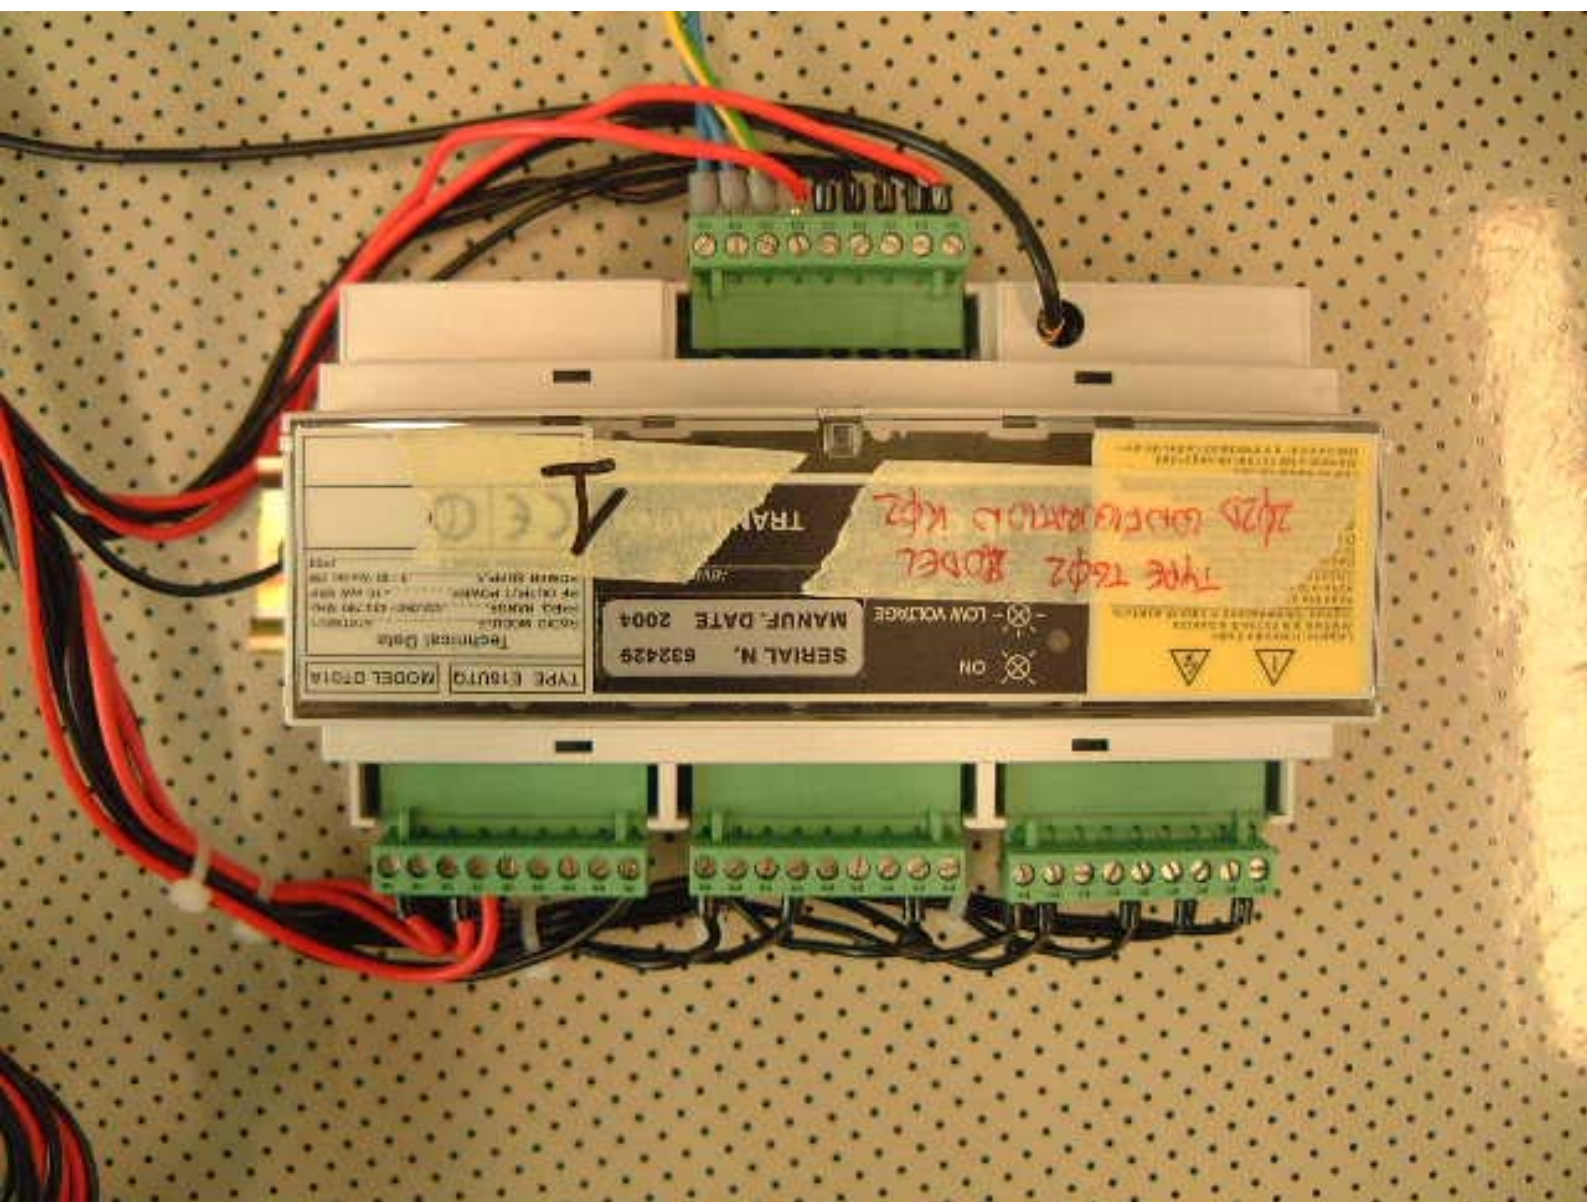