



Test Mode: 06; Polarity: Horizontal; Modulation:GFSK; ; Channel:middle

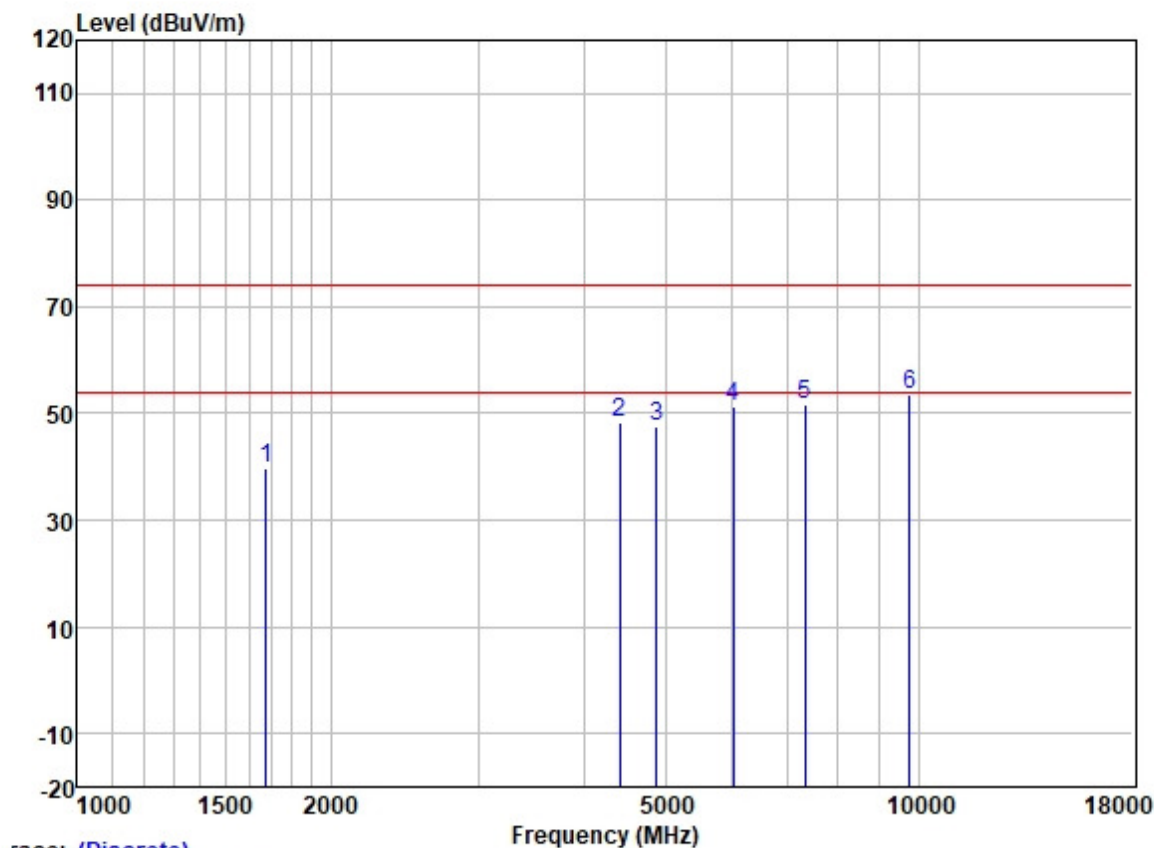

		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1677.621	49.26	25.68	2.80	37.91	39.83	74.00	-34.17	HORIZONTAL	Peak
2	4417.841	49.60	30.70	4.74	36.81	48.23	74.00	-25.77	HORIZONTAL	Peak
3	4880.000	47.45	31.54	5.50	36.84	47.65	74.00	-26.35	HORIZONTAL	Peak
4	6018.999	49.55	32.44	6.19	36.90	51.28	74.00	-22.72	HORIZONTAL	Peak
5	7320.000	46.92	36.00	6.13	37.43	51.62	74.00	-22.38	HORIZONTAL	Peak
6	9760.000	45.36	38.50	7.02	37.41	53.47	74.00	-20.53	HORIZONTAL	Peak


Test Mode: 06; Polarity: Vertical; Modulation:GFSK; ; Channel:middle

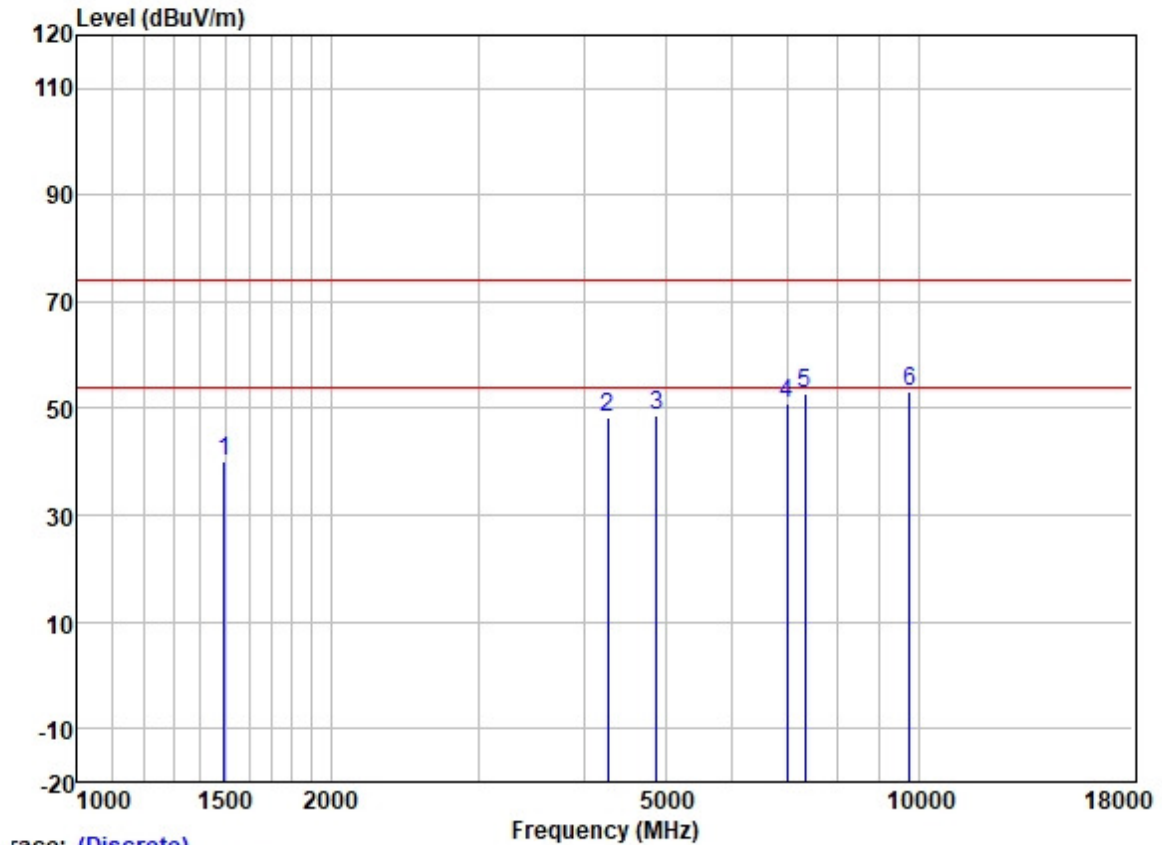

race: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1494.455	50.06	25.50	2.79	38.10	40.25	74.00	-33.75	VERTICAL	Peak
2	4267.237	50.01	30.38	4.63	36.81	48.21	74.00	-25.79	VERTICAL	Peak
3	4880.000	48.39	31.54	5.50	36.84	48.59	74.00	-25.41	VERTICAL	Peak
4	6974.982	47.41	34.97	5.81	37.23	50.96	74.00	-23.04	VERTICAL	Peak
5	7320.000	47.95	36.00	6.13	37.43	52.65	74.00	-21.35	VERTICAL	Peak
6	9760.000	45.23	38.50	7.02	37.41	53.34	74.00	-20.66	VERTICAL	Peak

Test Mode: 06; Polarity: Horizontal; Modulation:GFSK; ; Channel:High

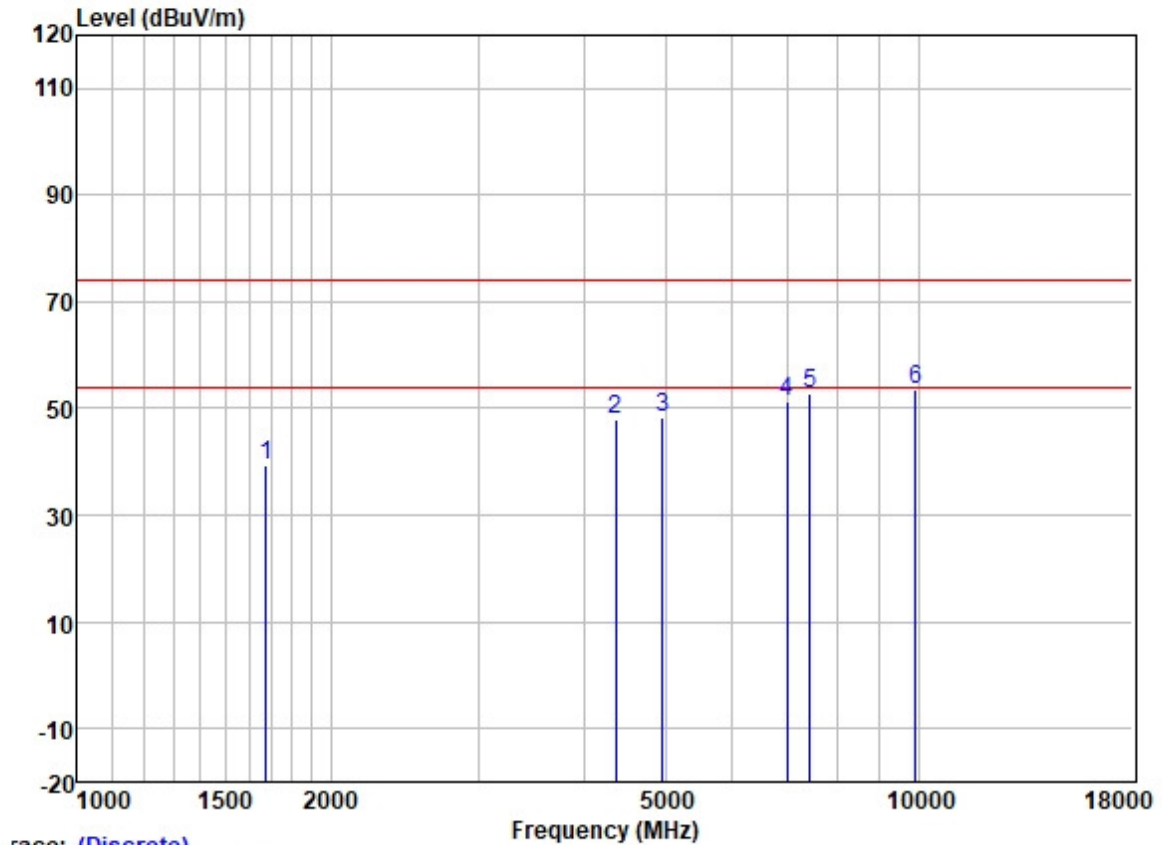

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1677.621	48.74	25.68	2.80	37.91	39.31	74.00	-34.69	HORIZONTAL	Peak
2	4367.058	49.56	30.62	4.68	36.81	48.05	74.00	-25.95	HORIZONTAL	Peak
3	4960.000	47.83	31.65	5.65	36.84	48.29	74.00	-25.71	HORIZONTAL	Peak
4	6974.982	47.80	34.97	5.81	37.23	51.35	74.00	-22.65	HORIZONTAL	Peak
5	7440.000	47.90	36.27	6.22	37.47	52.92	74.00	-21.08	HORIZONTAL	Peak
6	9920.000	45.19	38.65	6.96	37.40	53.40	74.00	-20.60	HORIZONTAL	Peak


Test Mode: 06; Polarity: Vertical; Modulation:GFSK; ; Channel:High

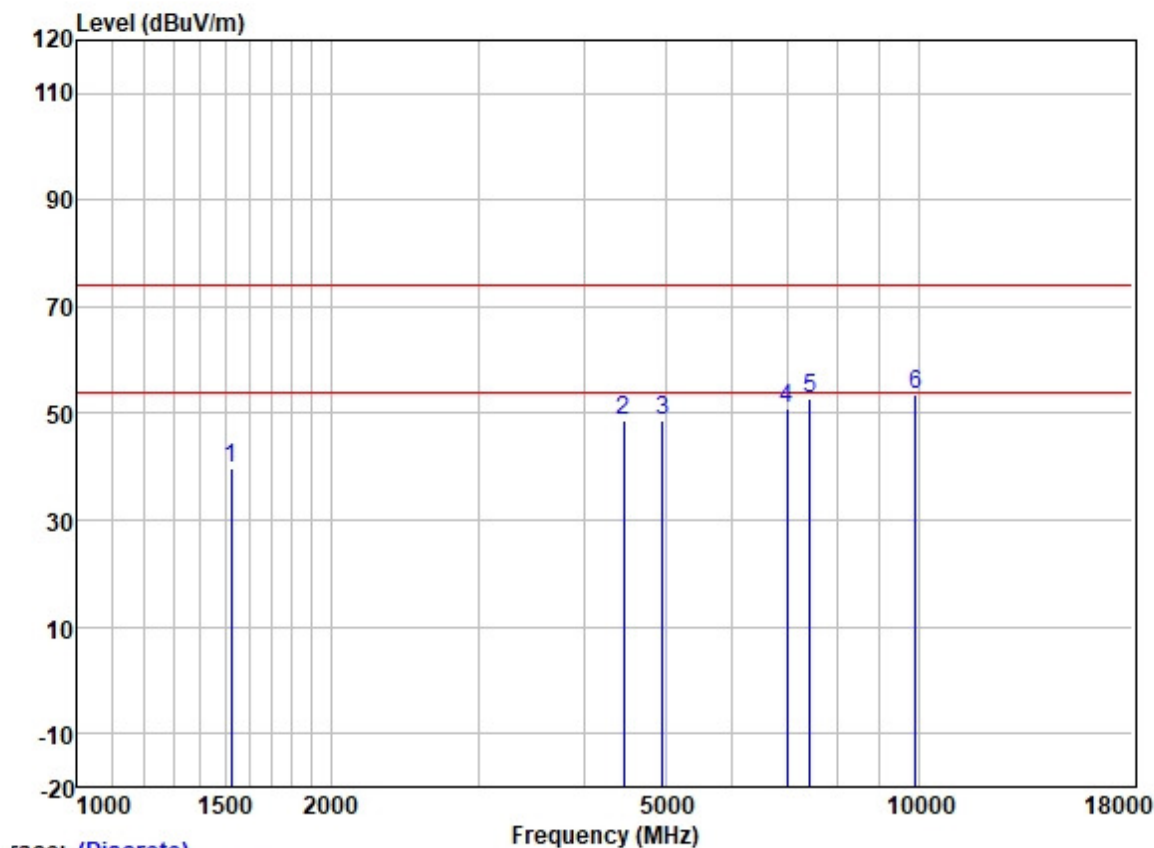

race: (Discrete)


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1525.000	49.44	25.52	2.80	38.07	39.69	74.00	-34.31	VERTICAL	Peak
2	4456.315	49.83	30.75	4.88	36.81	48.65	74.00	-25.35	VERTICAL	Peak
3	4960.000	48.13	31.65	5.65	36.84	48.59	74.00	-25.41	VERTICAL	Peak
4	6974.982	47.43	34.97	5.81	37.23	50.98	74.00	-23.02	VERTICAL	Peak
5	7440.000	47.77	36.27	6.22	37.47	52.79	74.00	-21.21	VERTICAL	Peak
6	9920.000	45.44	38.65	6.96	37.40	53.65	74.00	-20.35	VERTICAL	Peak

Test Mode: 07; Polarity: Horizontal; Modulation:GFSK; ; Channel:Low

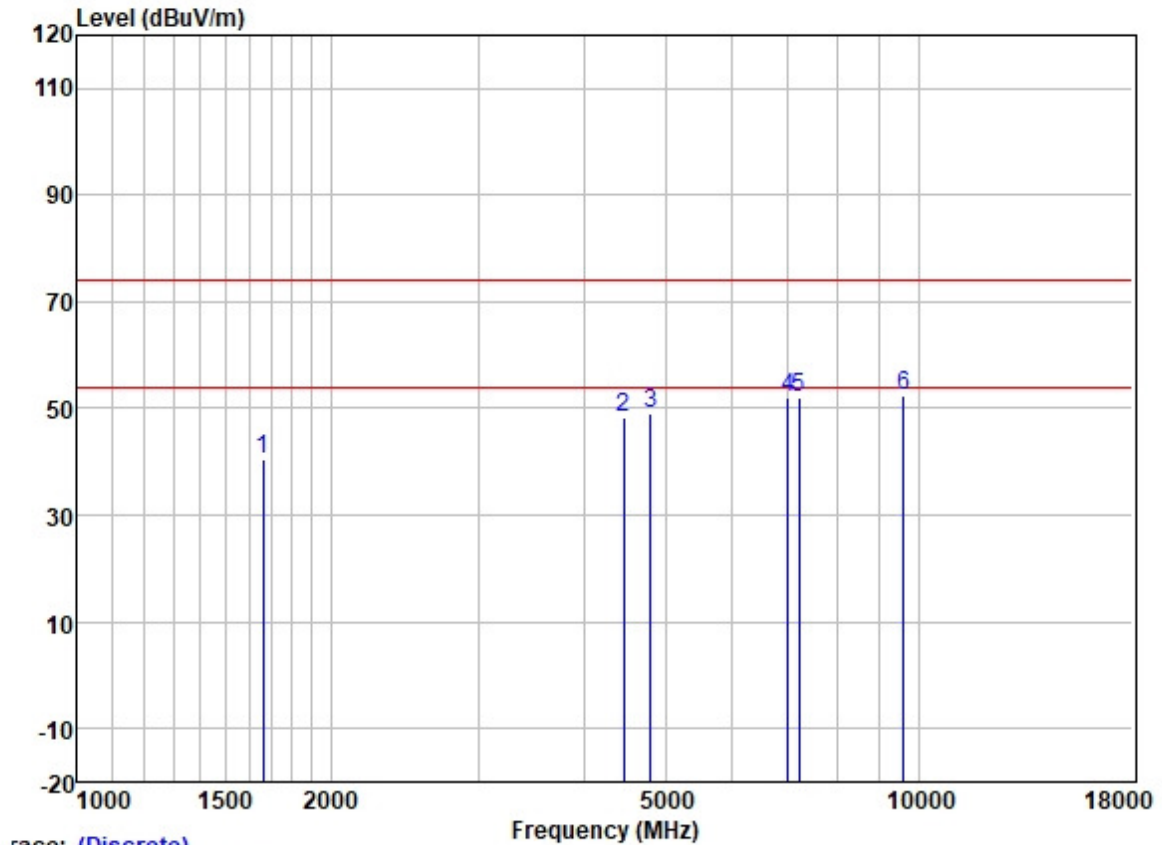


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1663.137	49.76	25.65	2.80	37.91	40.30	74.00	-33.70	HORIZONTAL	Peak
2	4456.315	49.43	30.75	4.88	36.81	48.25	74.00	-25.75	HORIZONTAL	Peak
3	4804.000	49.00	31.42	5.40	36.83	48.99	74.00	-25.01	HORIZONTAL	Peak
4	6995.172	48.42	35.00	5.81	37.25	51.98	74.00	-22.02	HORIZONTAL	Peak
5	7206.000	47.83	35.54	5.98	37.38	51.97	74.00	-22.03	HORIZONTAL	Peak
6	9608.000	44.58	38.37	7.07	37.42	52.60	74.00	-21.40	HORIZONTAL	Peak

Test Mode: 07; Polarity: Vertical; Modulation:GFSK; ; Channel:Low

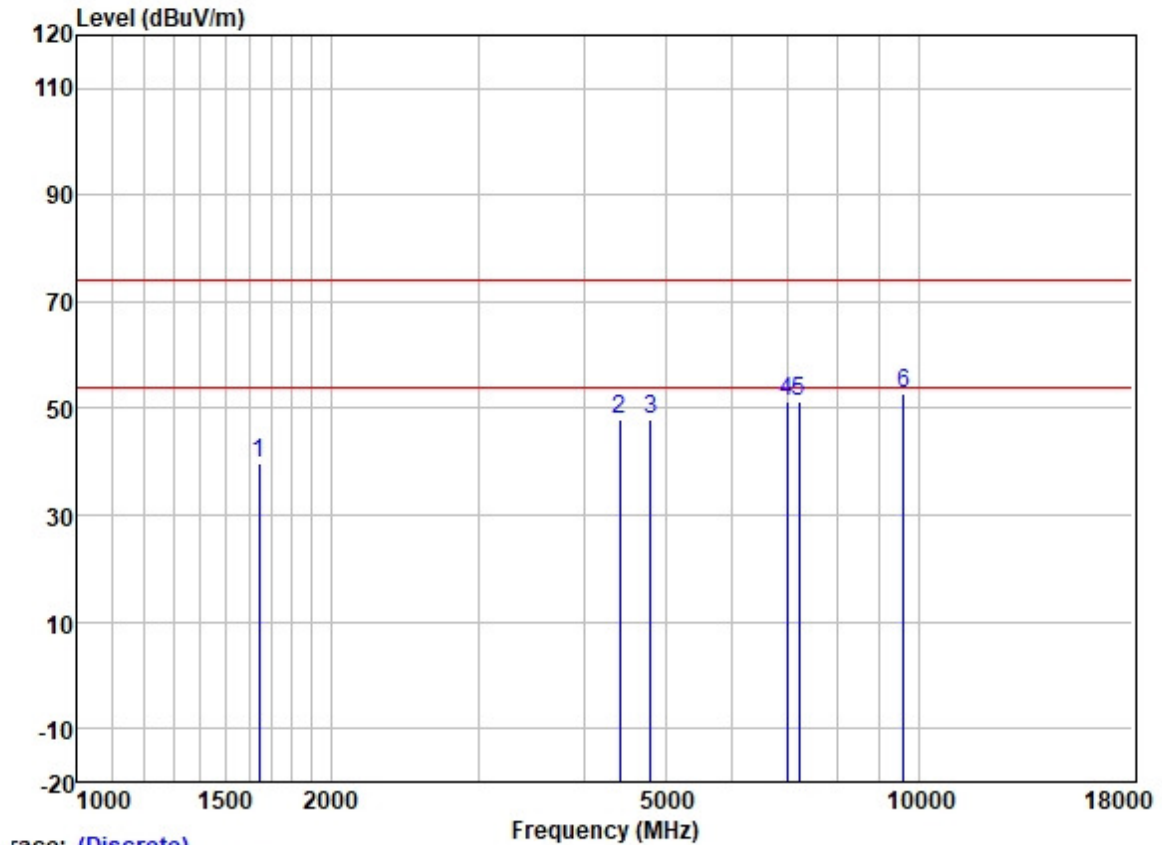


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1644.019	49.16	25.63	2.80	37.93	39.66	74.00	-34.34	VERTICAL	Peak
2	4417.841	49.16	30.70	4.74	36.81	47.79	74.00	-26.21	VERTICAL	Peak
3	4804.000	48.01	31.42	5.40	36.83	48.00	74.00	-26.00	VERTICAL	Peak
4	6974.982	47.85	34.97	5.81	37.23	51.40	74.00	-22.60	VERTICAL	Peak
5	7206.000	47.22	35.54	5.98	37.38	51.36	74.00	-22.64	VERTICAL	Peak
6	9608.000	44.77	38.37	7.07	37.42	52.79	74.00	-21.21	VERTICAL	Peak

Test Mode: 07; Polarity: Horizontal; Modulation:GFSK; ; Channel:middle

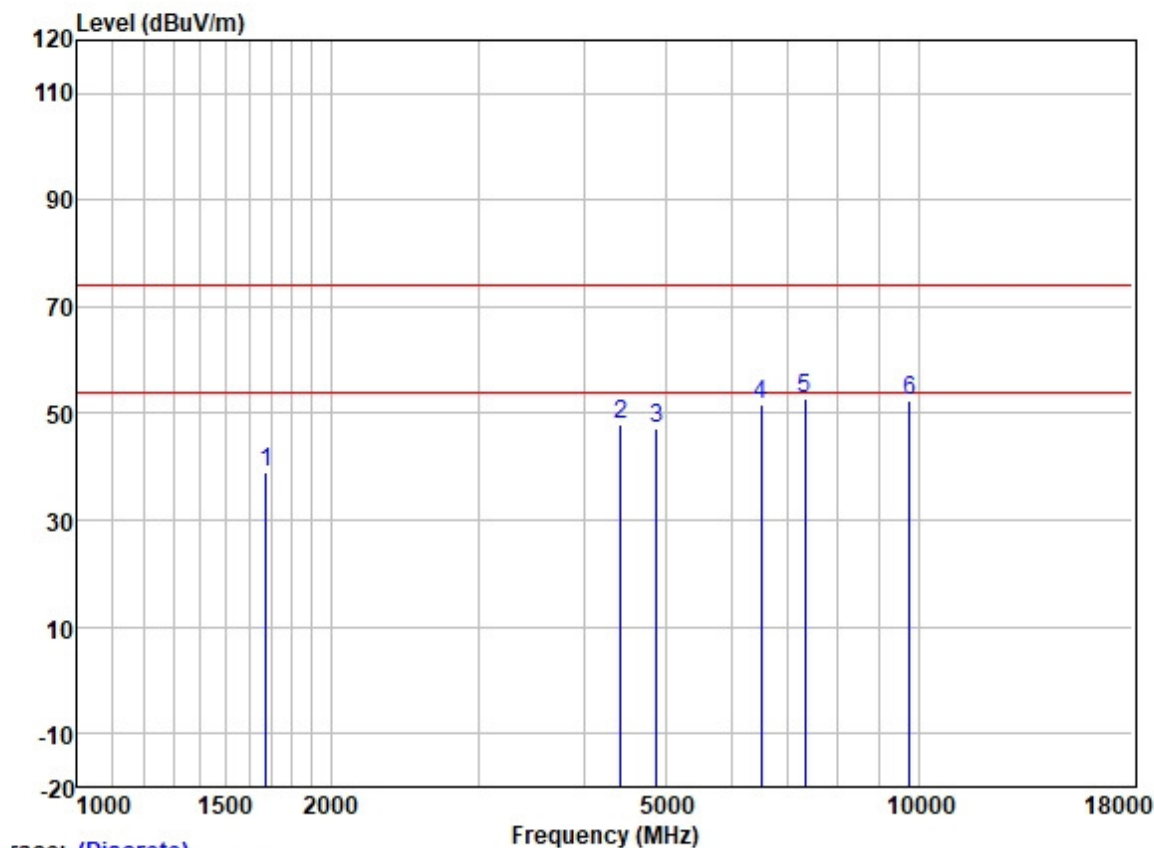


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1677.621	48.54	25.68	2.80	37.91	39.11	74.00	-34.89	HORIZONTAL	Peak
2	4430.628	49.22	30.72	4.78	36.81	47.91	74.00	-26.09	HORIZONTAL	Peak
3	4880.000	46.91	31.54	5.50	36.84	47.11	74.00	-26.89	HORIZONTAL	Peak
4	6507.536	48.77	34.00	5.84	37.01	51.60	74.00	-22.40	HORIZONTAL	Peak
5	7320.000	48.03	36.00	6.13	37.43	52.73	74.00	-21.27	HORIZONTAL	Peak
6	9760.000	44.15	38.50	7.02	37.41	52.26	74.00	-21.74	HORIZONTAL	Peak

Test Mode: 07; Polarity: Vertical; Modulation:GFSK; ; Channel:middle

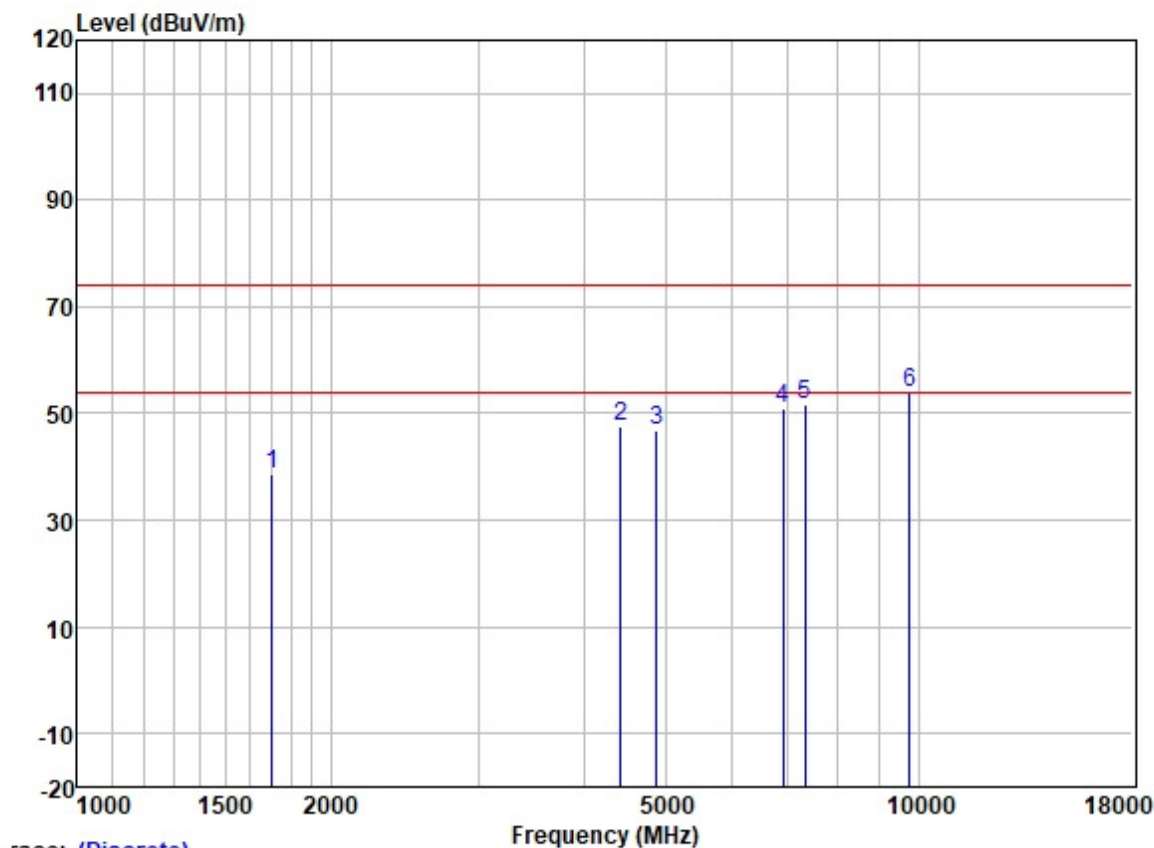


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1702.042	48.04	25.72	2.80	37.89	38.67	74.00	-35.33	VERTICAL	Peak
2	4430.628	48.98	30.72	4.78	36.81	47.67	74.00	-26.33	VERTICAL	Peak
3	4880.000	46.64	31.54	5.50	36.84	46.84	74.00	-27.16	VERTICAL	Peak
4	6894.806	47.47	34.85	5.81	37.18	50.95	74.00	-23.05	VERTICAL	Peak
5	7320.000	46.88	36.00	6.13	37.43	51.58	74.00	-22.42	VERTICAL	Peak
6	9760.000	45.77	38.50	7.02	37.41	53.88	74.00	-20.12	VERTICAL	Peak

Test Mode: 07; Polarity: Horizontal; Modulation:GFSK; ; Channel:High

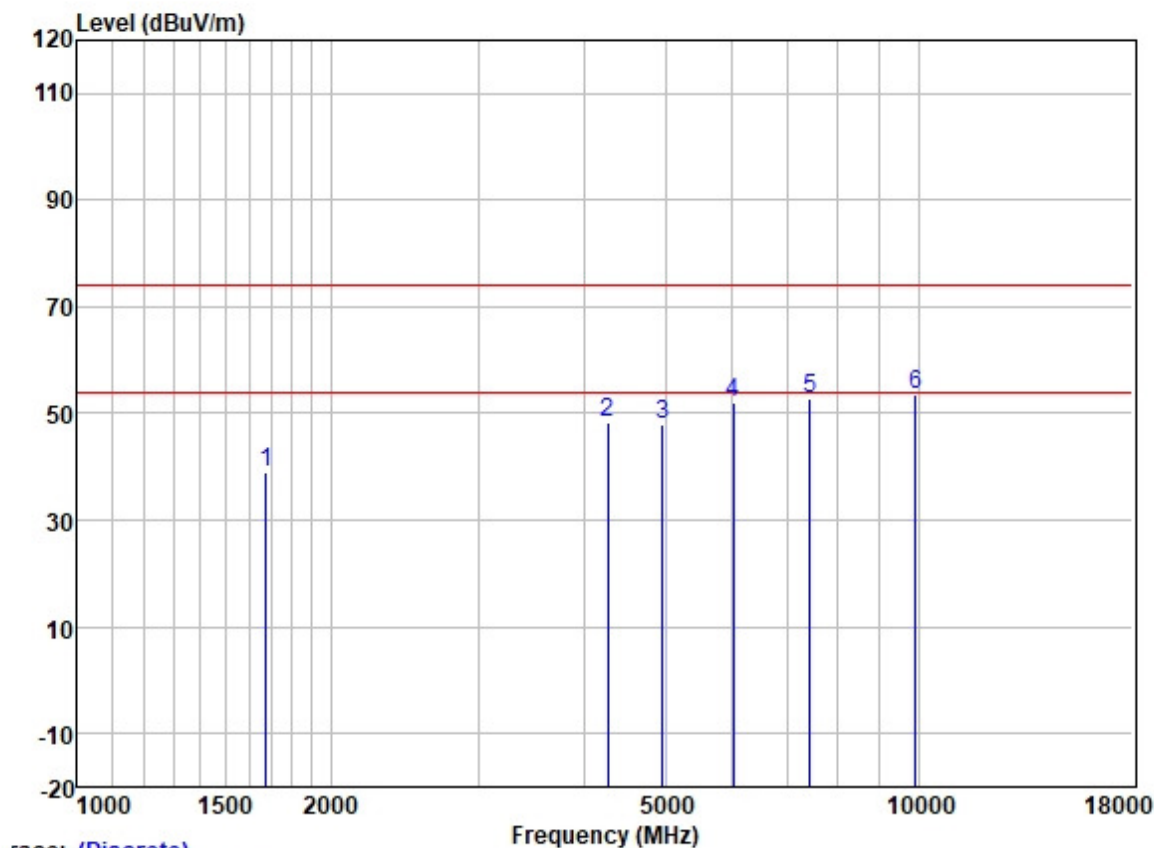

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Remark
1	1677.621	48.26	25.68	2.80	37.91	38.83	74.00	-35.17	HORIZONTAL Peak
2	4267.237	50.18	30.38	4.63	36.81	48.38	74.00	-25.62	HORIZONTAL Peak
3	4960.000	47.51	31.65	5.65	36.84	47.97	74.00	-26.03	HORIZONTAL Peak
4	6018.999	50.32	32.44	6.19	36.90	52.05	74.00	-21.95	HORIZONTAL Peak
5	7440.000	47.67	36.27	6.22	37.47	52.69	74.00	-21.31	HORIZONTAL Peak
6	9920.000	45.19	38.65	6.96	37.40	53.40	74.00	-20.60	HORIZONTAL Peak

Test Mode: 07; Polarity: Vertical; Modulation:GFSK; ; Channel:High

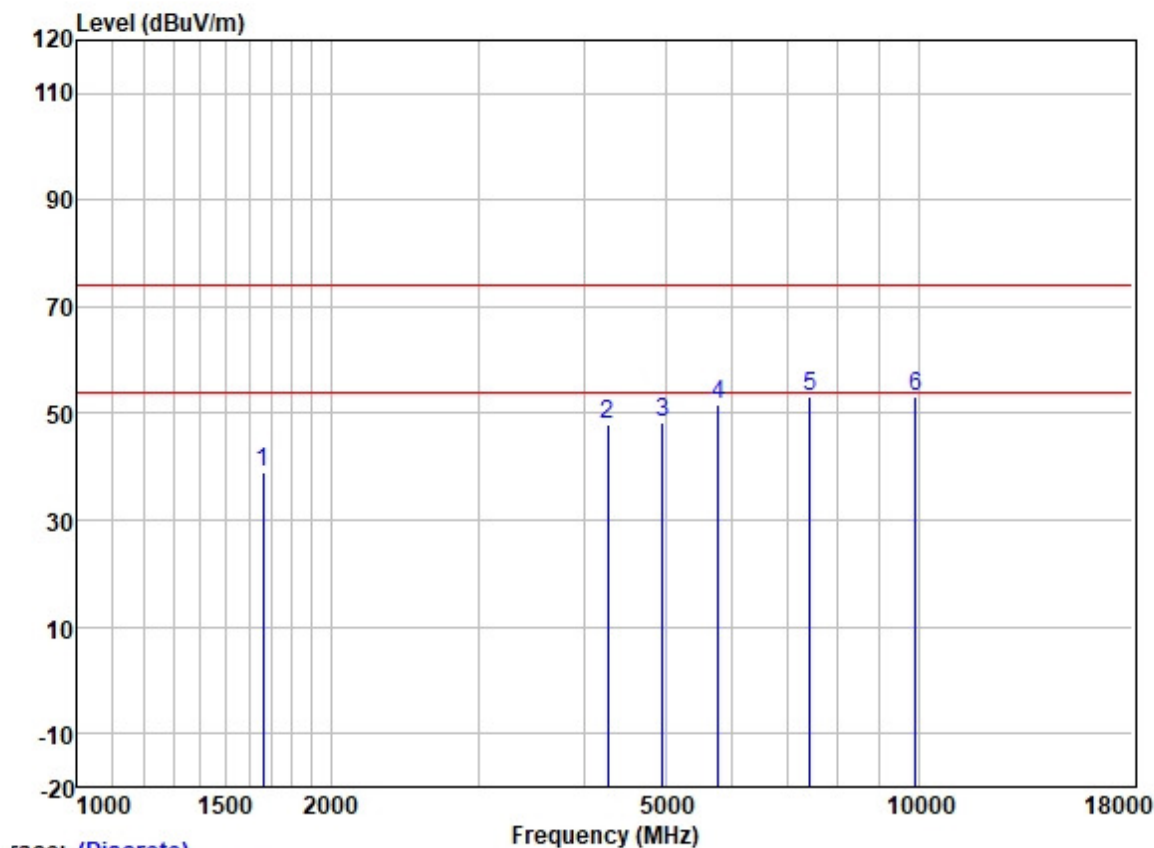

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1663.137	48.46	25.65	2.80	37.91	39.00	74.00	-35.00	VERTICAL	Peak
2	4267.237	49.56	30.38	4.63	36.81	47.76	74.00	-26.24	VERTICAL	Peak
3	4960.000	47.91	31.65	5.65	36.84	48.37	74.00	-25.63	VERTICAL	Peak
4	5780.300	50.35	32.16	6.10	36.89	51.72	74.00	-22.28	VERTICAL	Peak
5	7440.000	48.02	36.27	6.22	37.47	53.04	74.00	-20.96	VERTICAL	Peak
6	9920.000	45.02	38.65	6.96	37.40	53.23	74.00	-20.77	VERTICAL	Peak

8 Test Setup Photo

Radiated Emissions which fall in the restricted bands

For left earbud




For right earbud




Radiated Spurious Emissions (Below 1GHz)

For left earbud

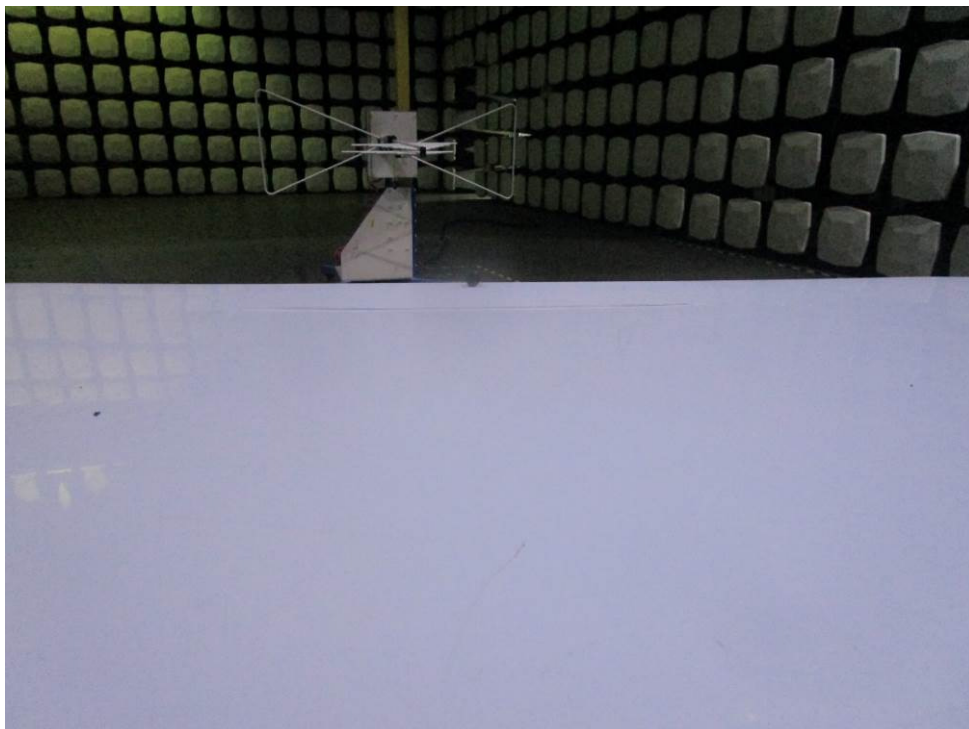

For right earbud

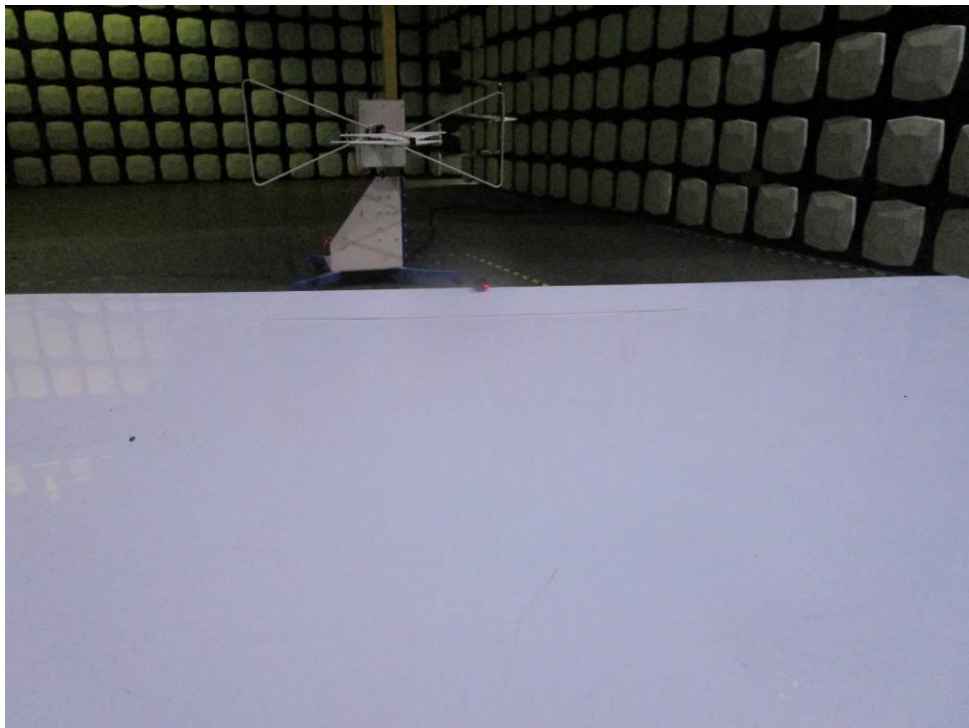

Radiated Spurious Emissions (Above 1GHz)

For left earbud



For right earbud



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch EMC Laboratory

No. 198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

9 EUT Constructional Details (EUT Photos)

Refer to Appendix - Photographs of EUT Constructional Details for GZCR2109021175AT



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

10 Appendix

For right earbud:


1. Duty Cycle

1.1 Ant1


1.1.1 Test Result

Ant1							
Mode	Tx Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	0.391	0.625	62.56	2.04	0.00
		2440	0.391	0.625	62.56	2.04	0.00
		2480	0.391	0.625	62.56	2.04	0.00
2M	SISO	2402	0.207	0.625	33.12	4.80	0.00
		2440	0.207	0.625	33.12	4.80	0.03
		2480	0.207	0.625	33.12	4.80	0.00


1.1.2 Test Graph

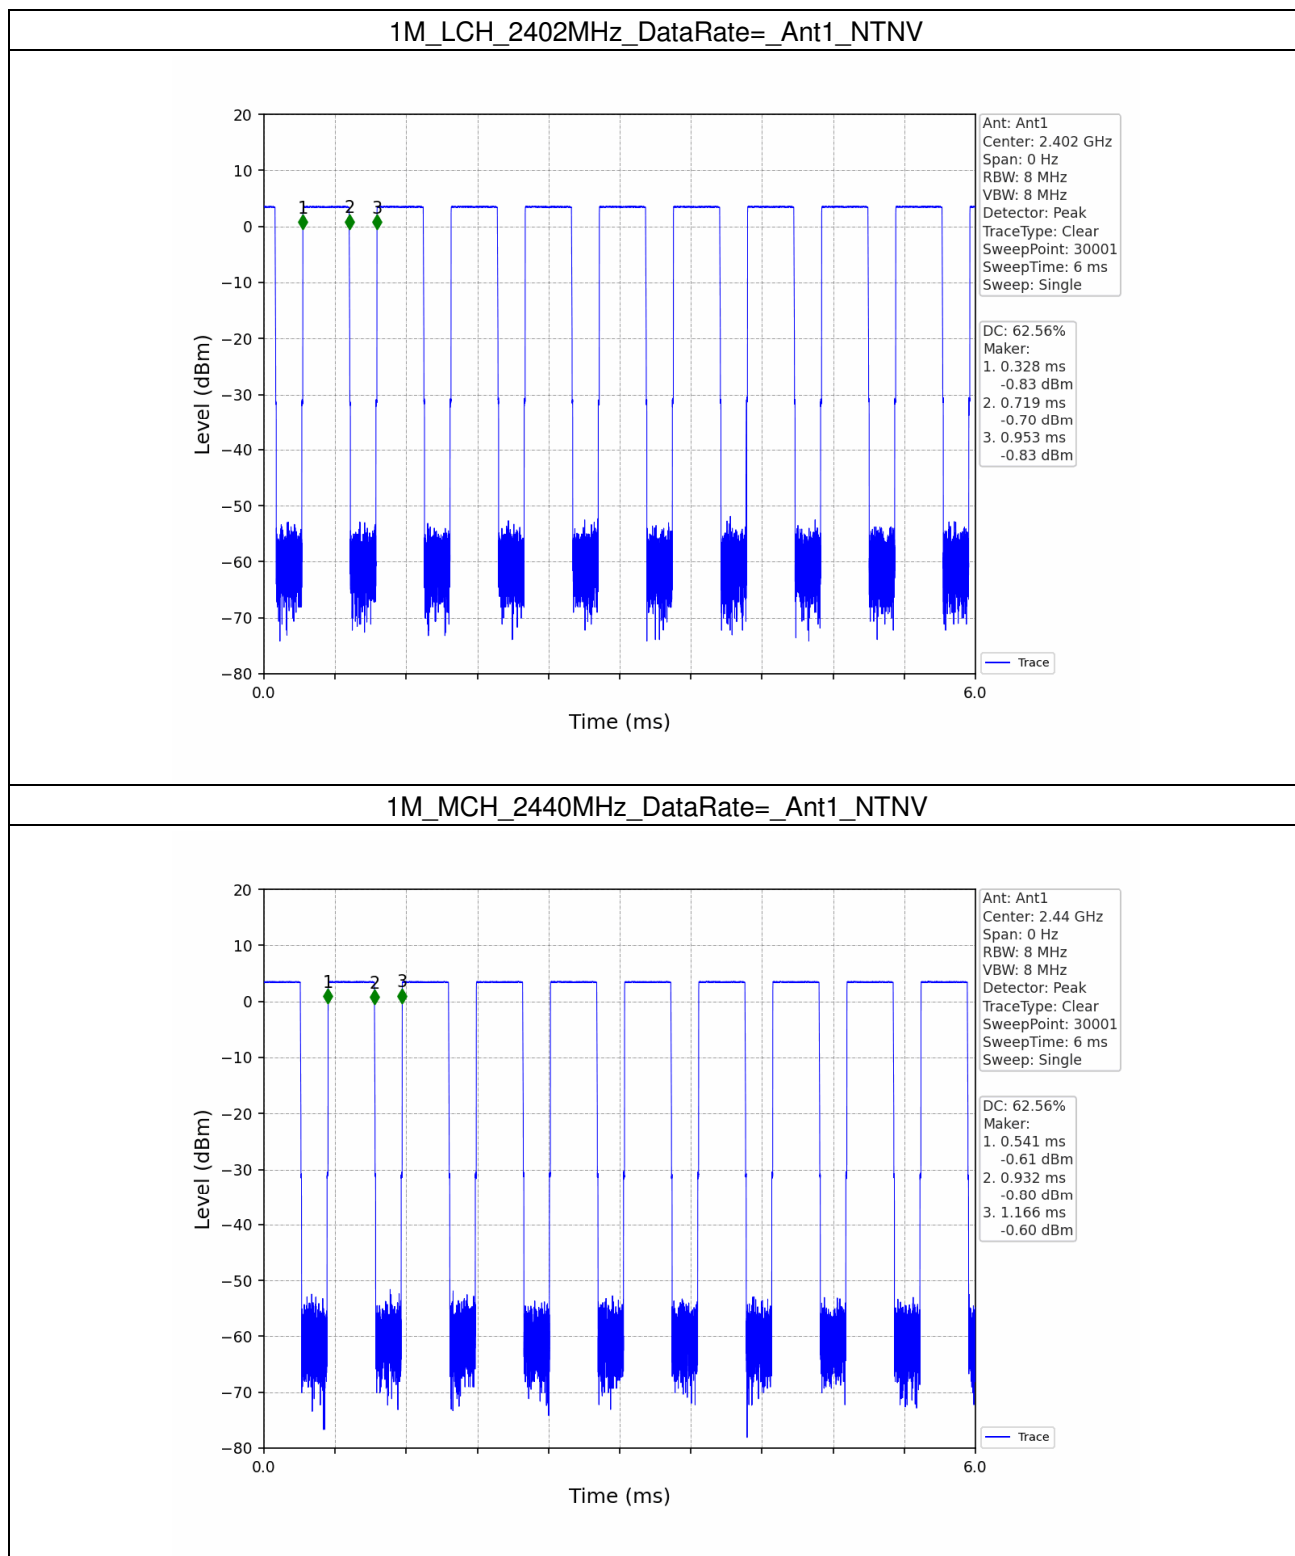

1M_HCH_2480MHz_DataRate=_Ant1_NTNV

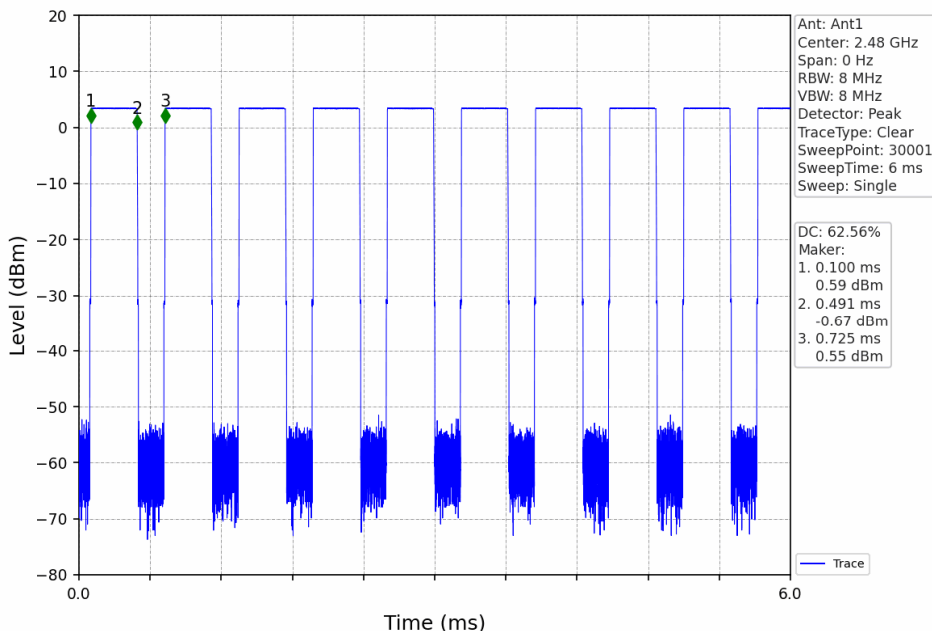


2M_LCH_2402MHz_DataRate=_Ant1_NTNV

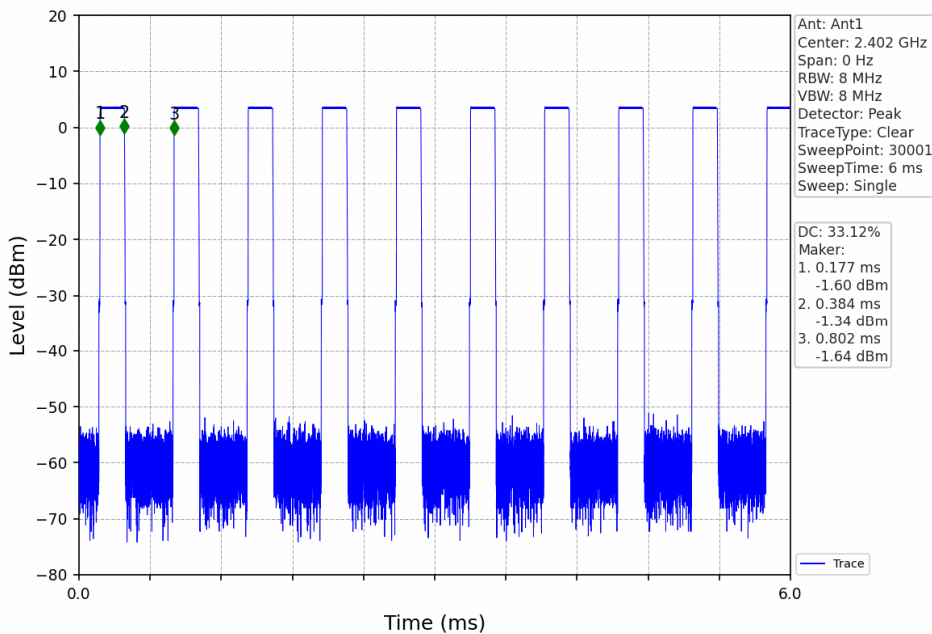


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

2M_MCH_2440MHz_DataRate=_Ant1_NTNV

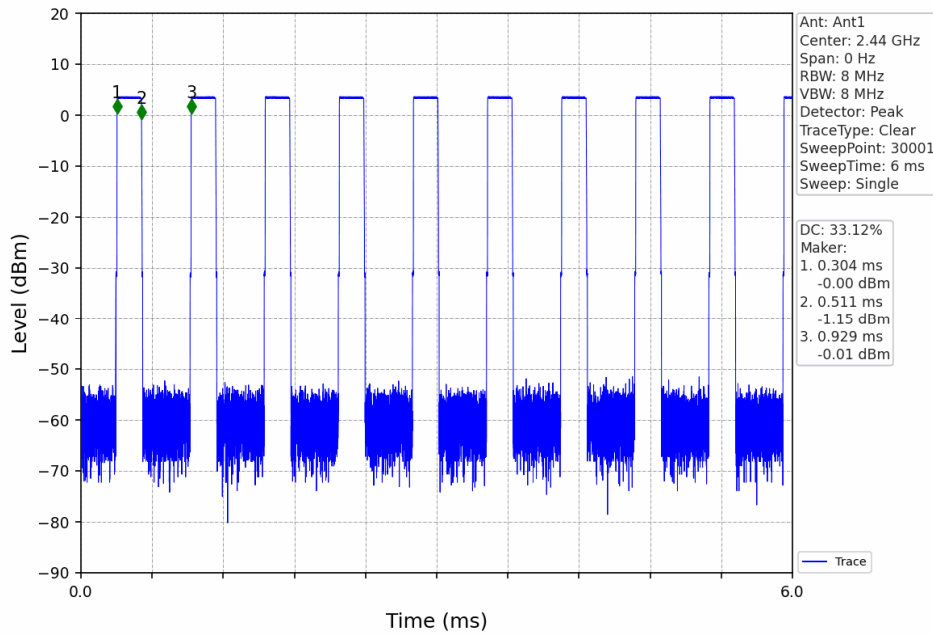

2M_HCH_2480MHz_DataRate=_Ant1_NTNV

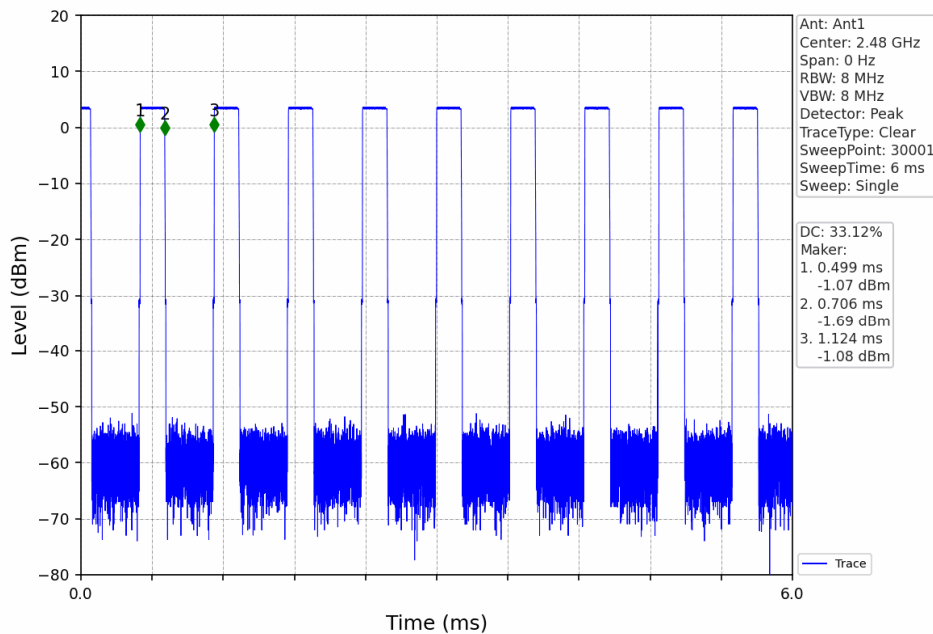


2. Bandwidth

2.1 OBW


2.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Ant	99% Occupied Bandwidth (MHz)	Verdict
				Result	
1M	SISO	2402	1	1.046	Pass
		2440	1	1.046	Pass
		2480	1	1.044	Pass
2M	SISO	2402	1	2.072	Pass
		2440	1	2.070	Pass
		2480	1	2.068	Pass


2.1.2 Test Graph

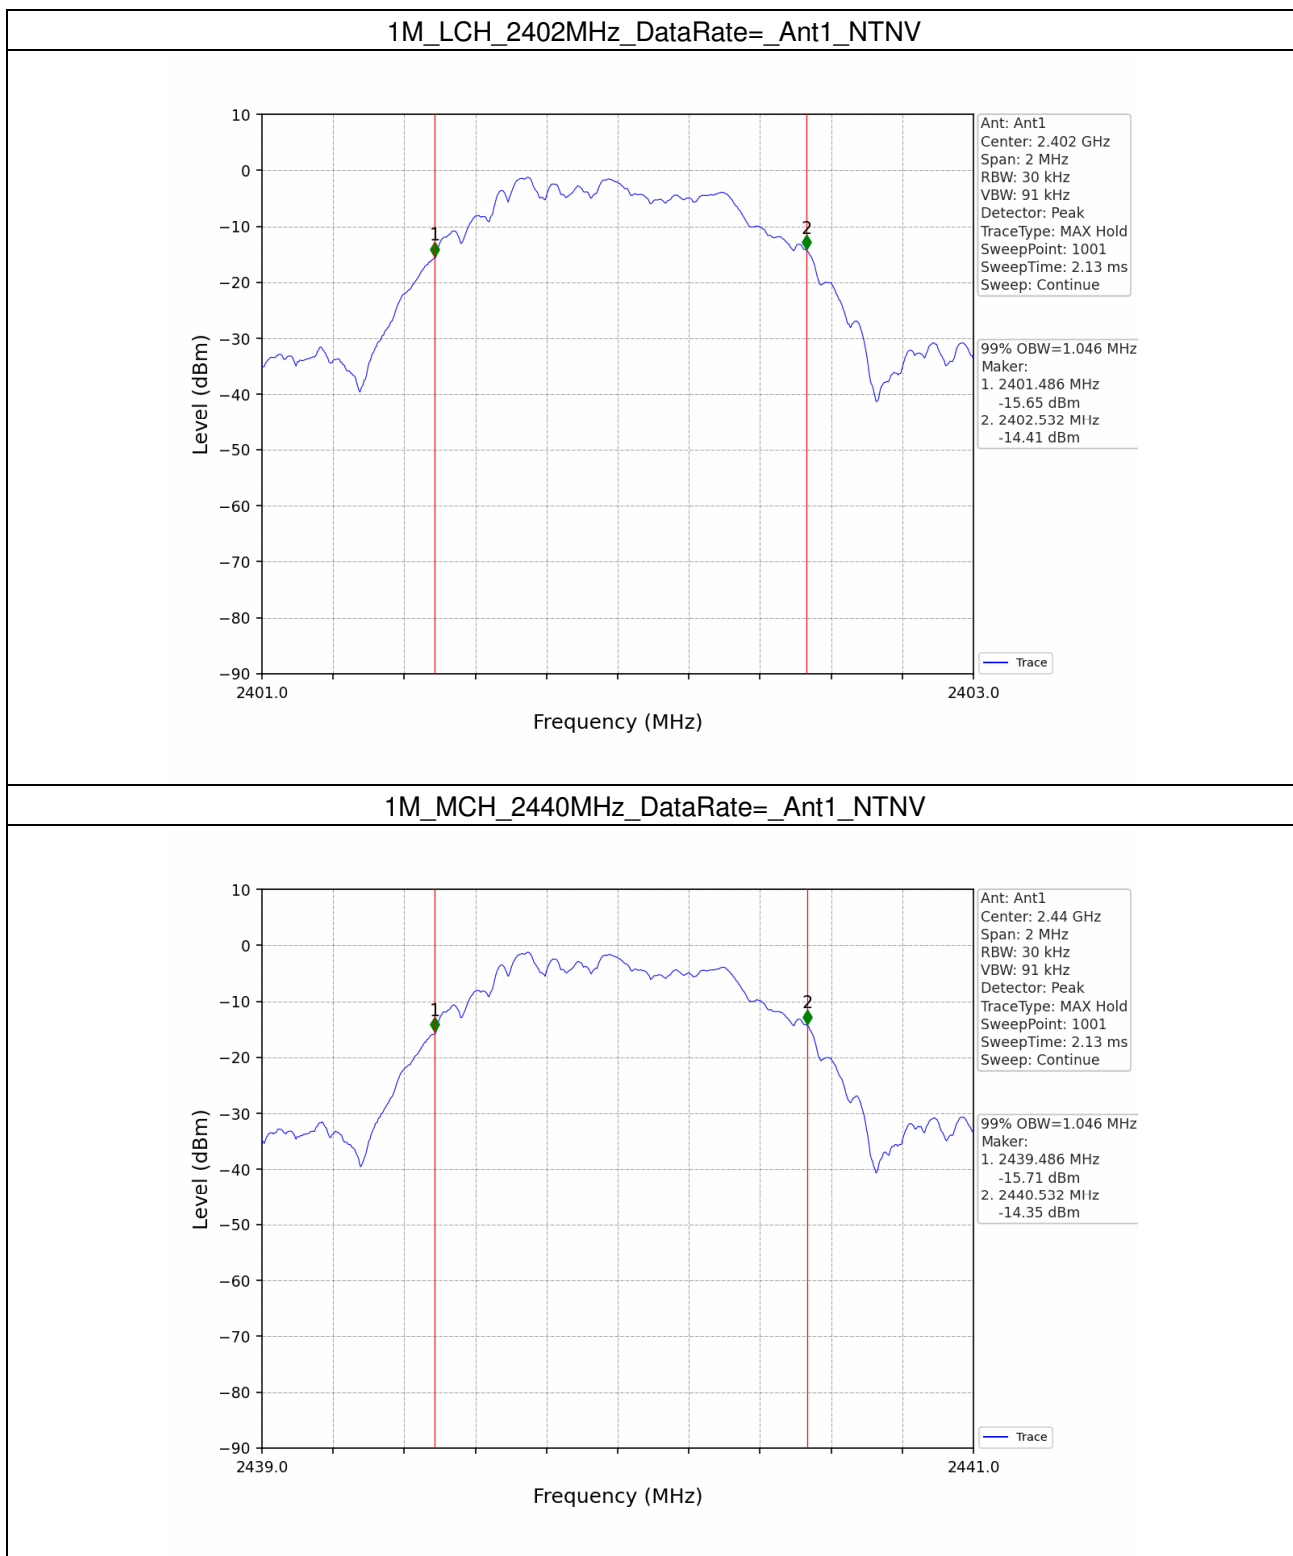

1M_HCH_2480MHz_DataRate=_Ant1_NTNV

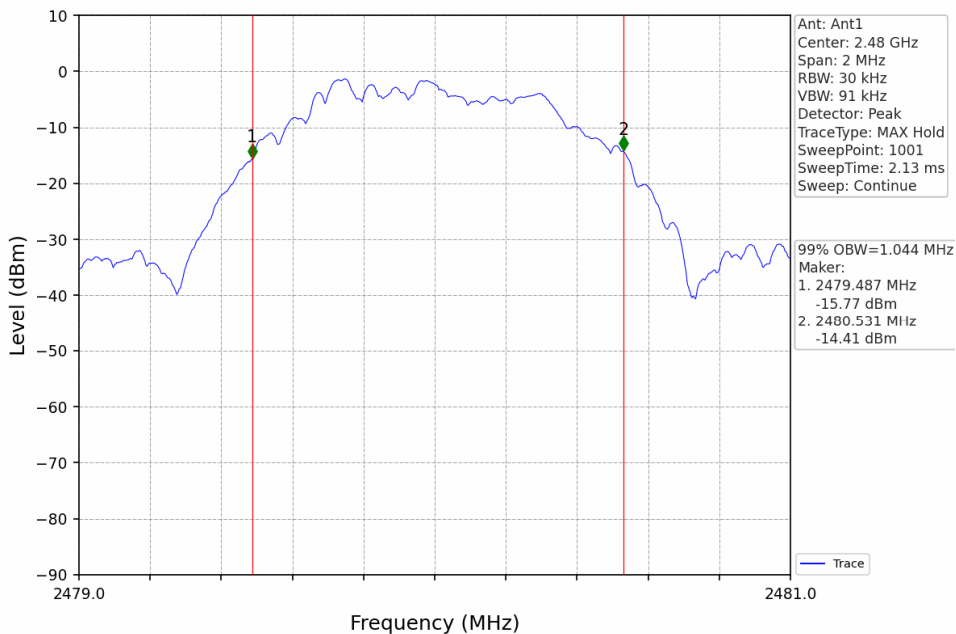


2M_LCH_2402MHz_DataRate=_Ant1_NTNV

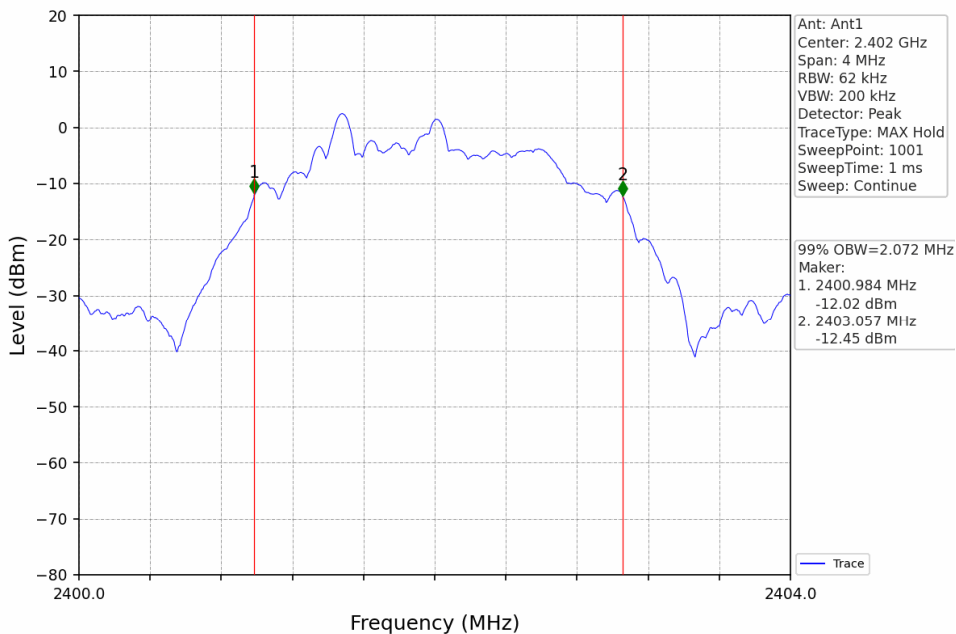


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

2M_MCH_2440MHz_DataRate=_Ant1_NTNV

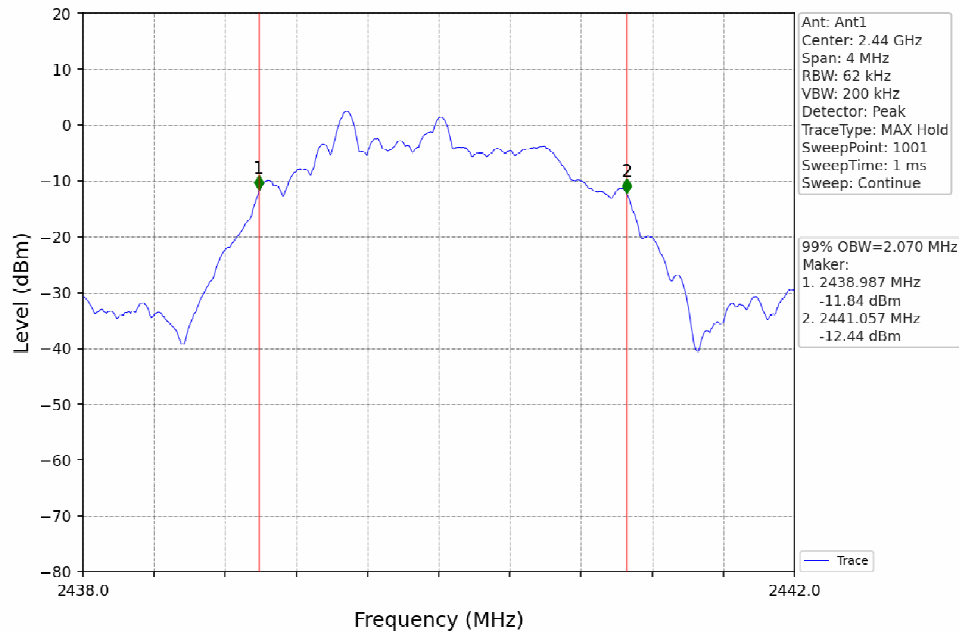

2M_HCH_2480MHz_DataRate=_Ant1_NTNV

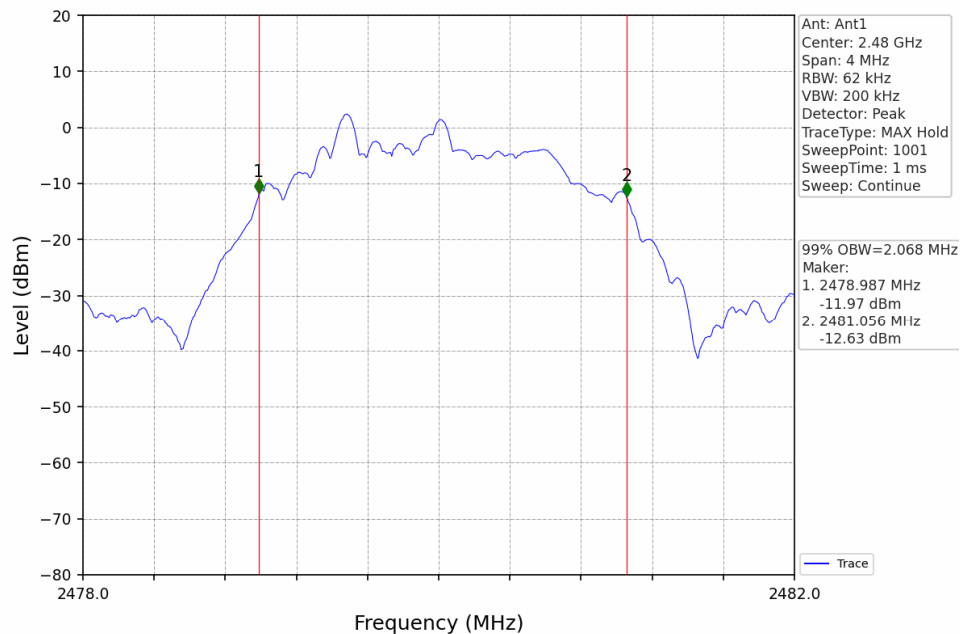

2.2 6dB BW

2.2.1 Test Result


Mode	TX Type	Frequency (MHz)	Ant	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.713	≥ 0.5	Pass
		2440	1	0.715	≥ 0.5	Pass
		2480	1	0.710	≥ 0.5	Pass
2M	SISO	2402	1	1.212	≥ 0.5	Pass
		2440	1	1.270	≥ 0.5	Pass
		2480	1	1.252	≥ 0.5	Pass




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


2.2.2 Test Graph

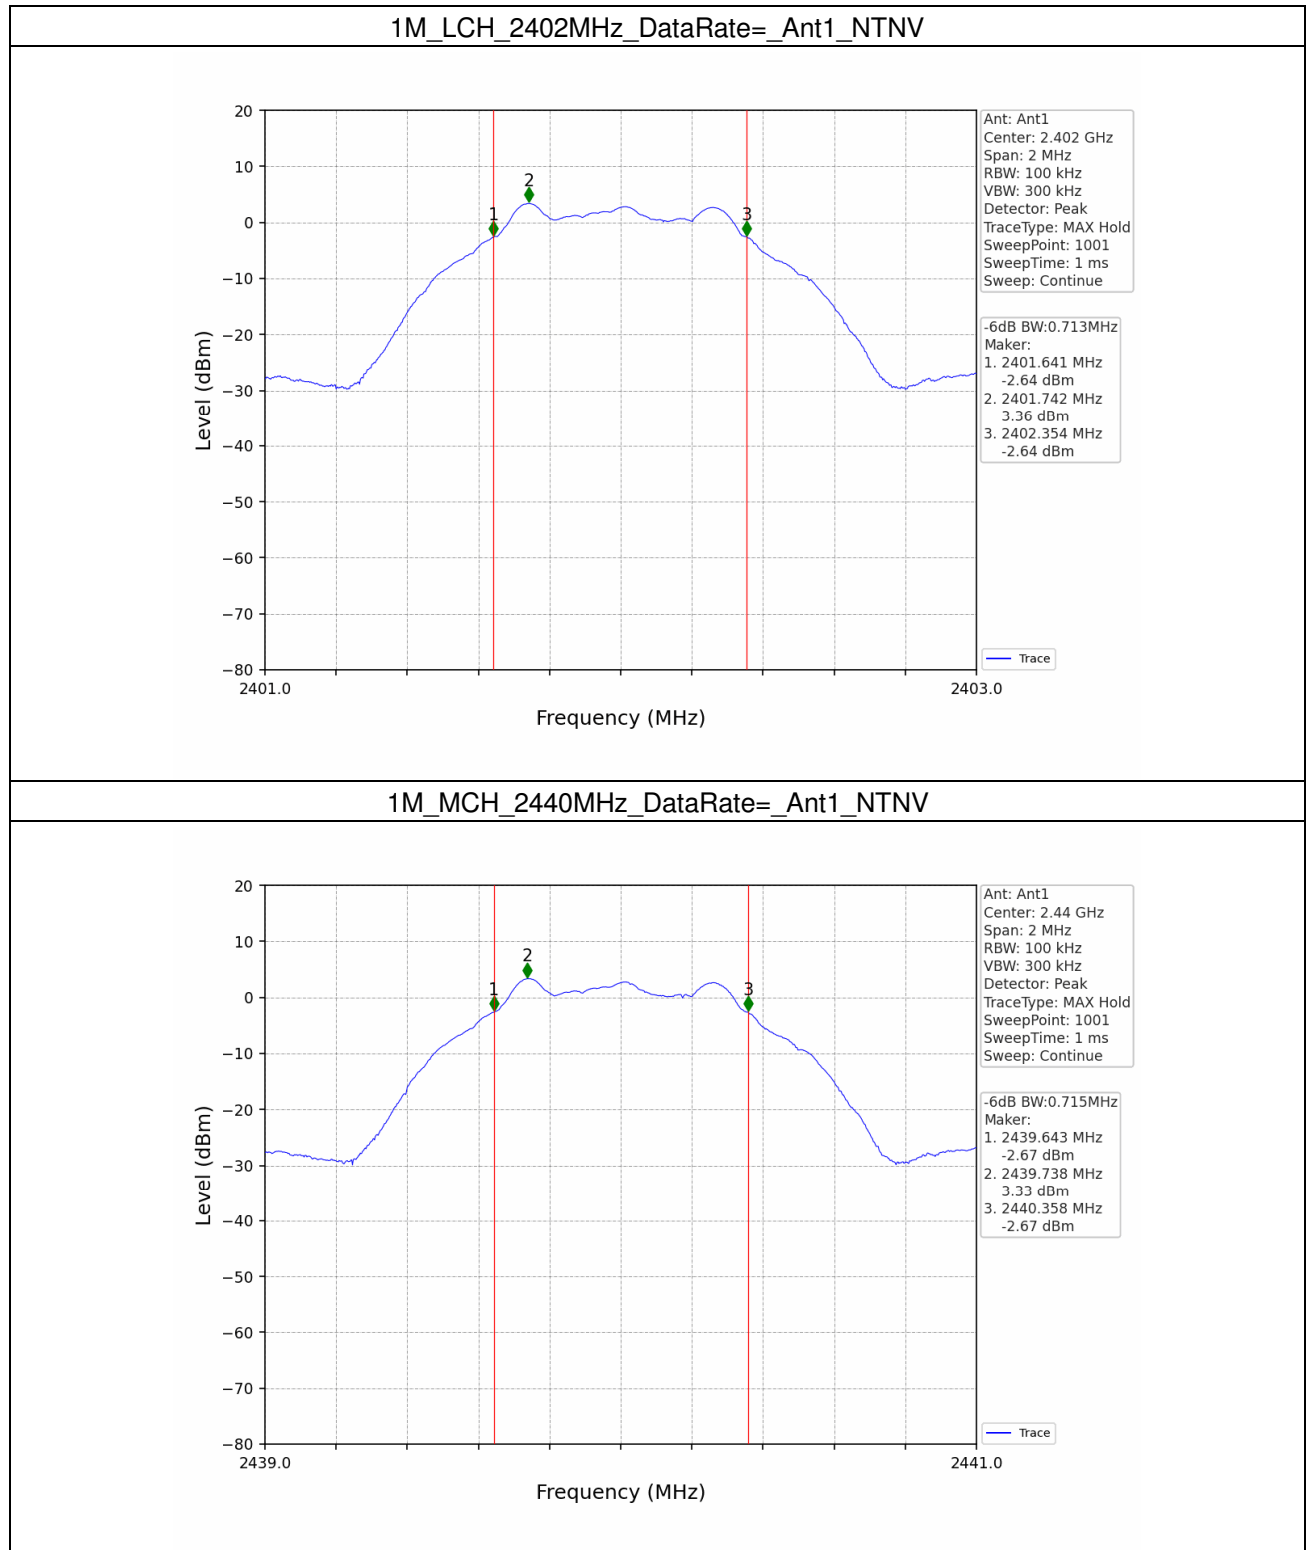


1M_HCH_2480MHz_DataRate=_Ant1_NTNV

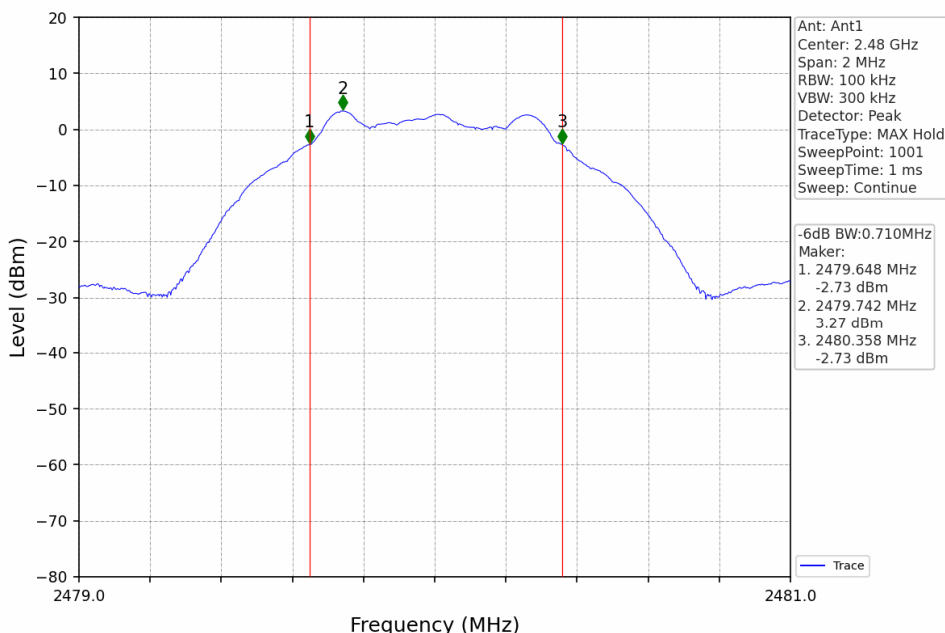


2M_LCH_2402MHz_DataRate=_Ant1_NTNV

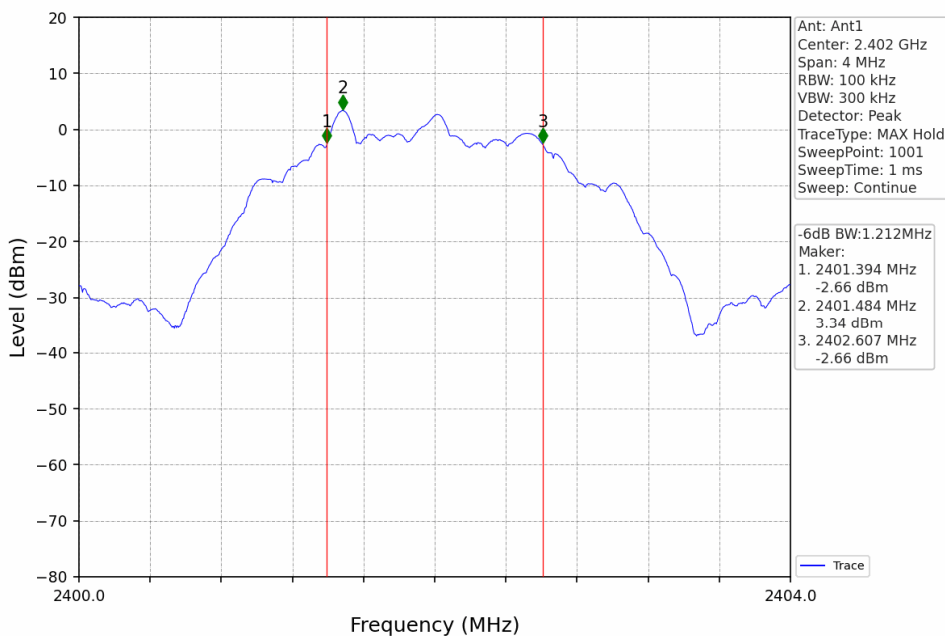

2M_MCH_2440MHz_DataRate=_Ant1_NTNV

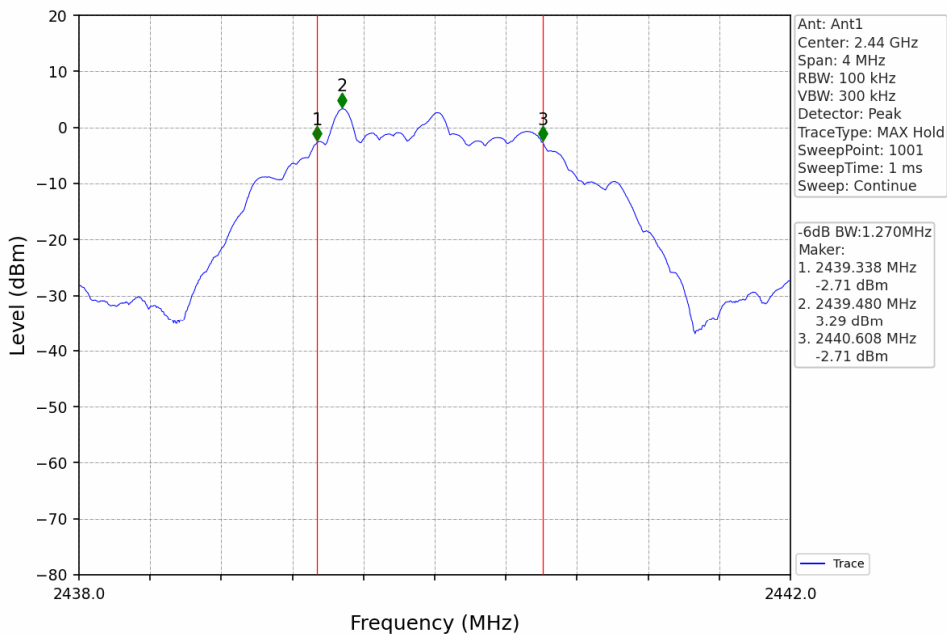

2M_HCH_2480MHz_DataRate=_Ant1_NTNV

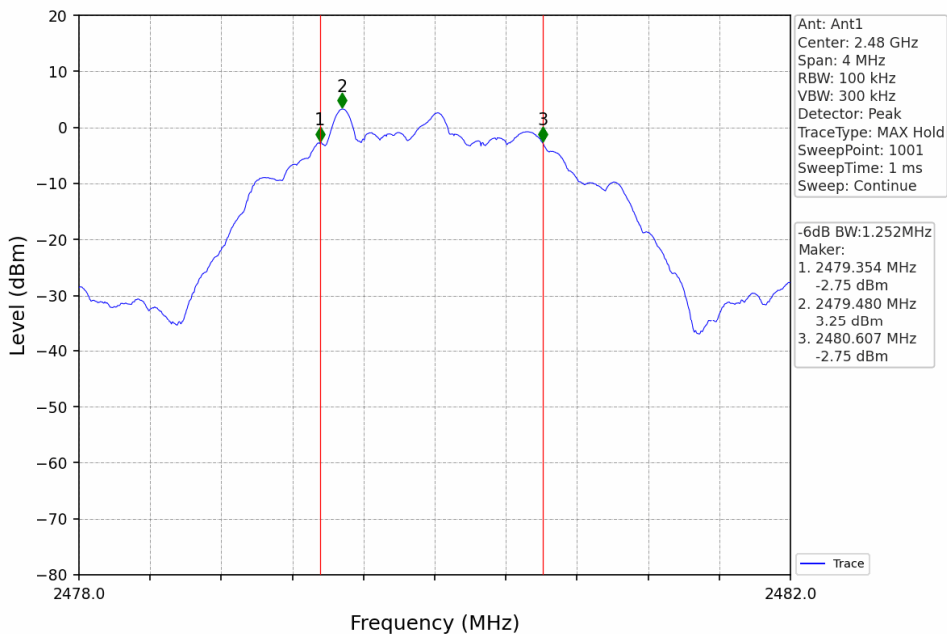

3. Maximum Conducted Output Power

3.1 Power

3.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			Ant1	Limit	
1M	SISO	2402	3.51	<=30	Pass
		2440	3.47	<=30	Pass
		2480	3.42	<=30	Pass
2M	SISO	2402	3.54	<=30	Pass
		2440	3.50	<=30	Pass
		2480	3.47	<=30	Pass

Note1: Antenna Gain: Ant1: -2.50dBi;

4. Maximum Power Spectral Density


4.1 PSD

4.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			Ant1	Limit	
1M	SISO	2402	-12.04	<=8	Pass
		2440	-12.07	<=8	Pass
		2480	-12.11	<=8	Pass
2M	SISO	2402	-15.53	<=8	Pass
		2440	-15.47	<=8	Pass
		2480	-15.57	<=8	Pass

Note1: Antenna Gain: Ant1: -2.50dBi;


4.1.2 Test Graph

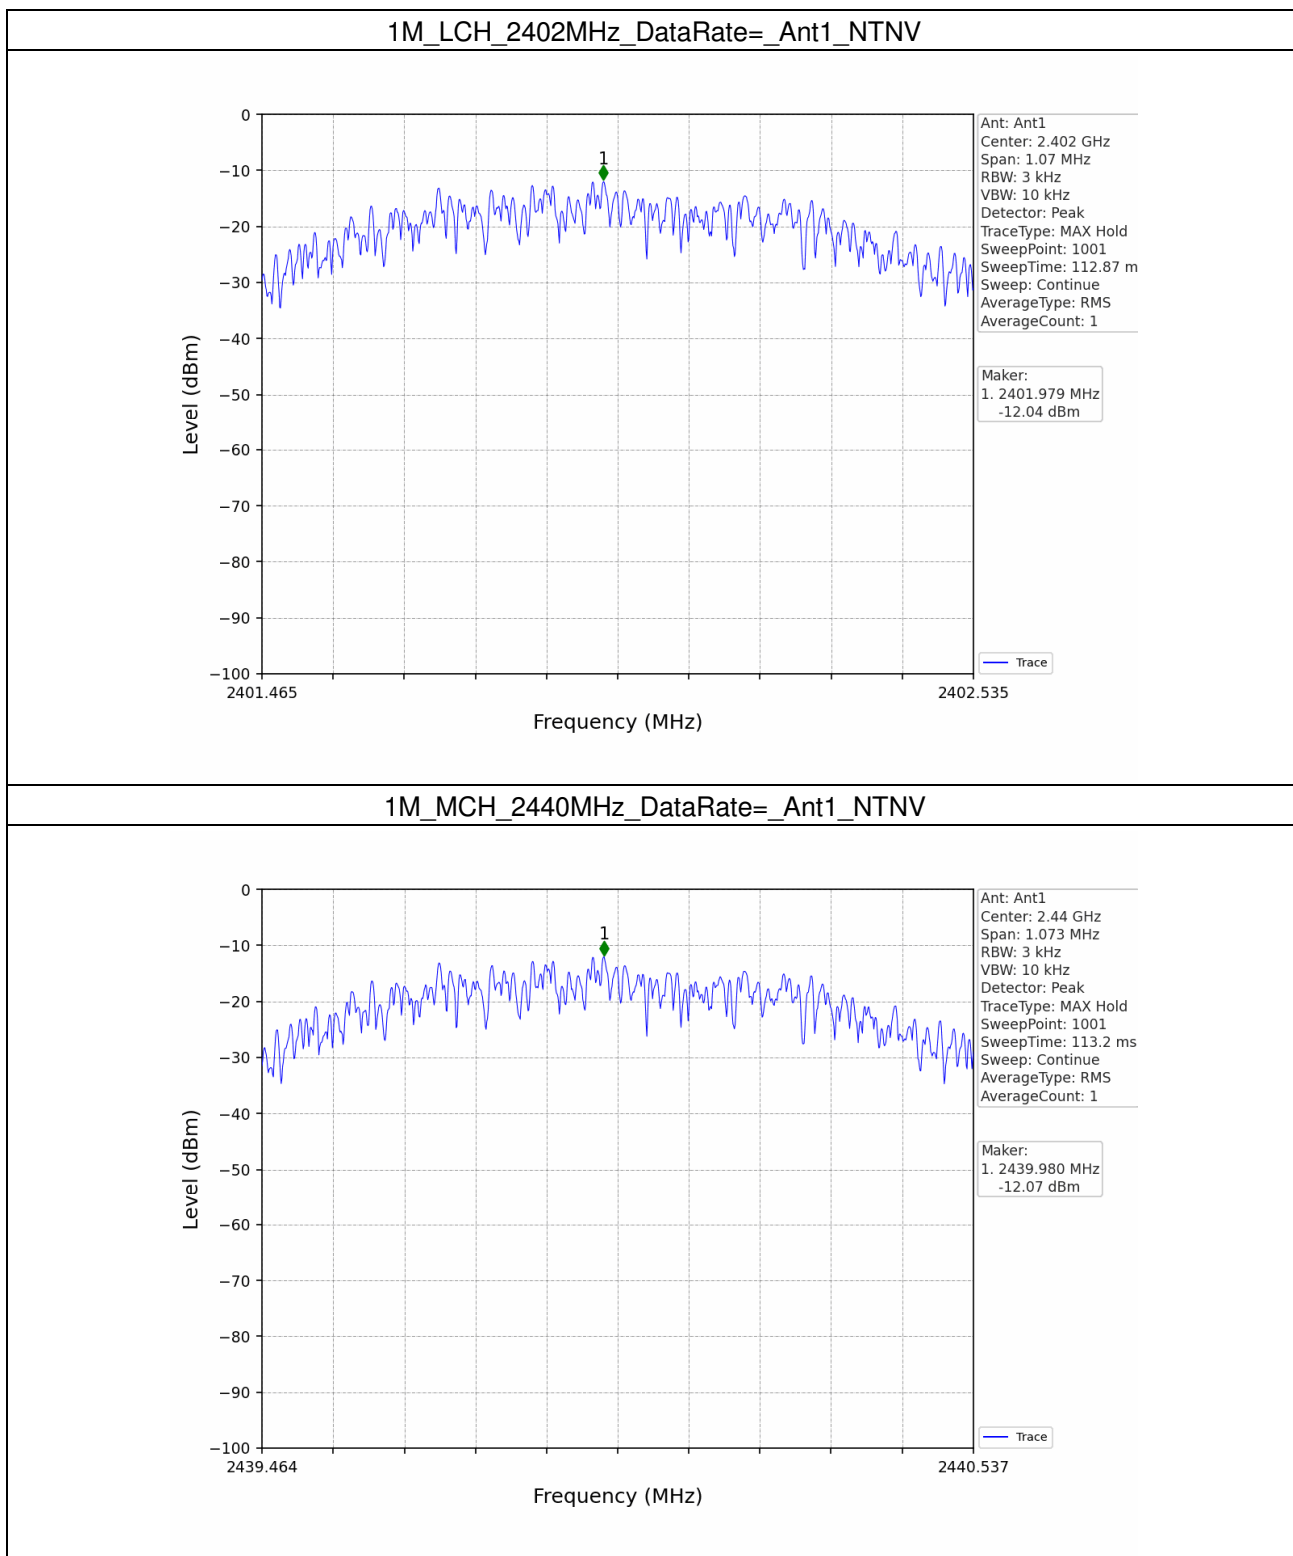


1M_HCH_2480MHz_DataRate=_Ant1_NTNV

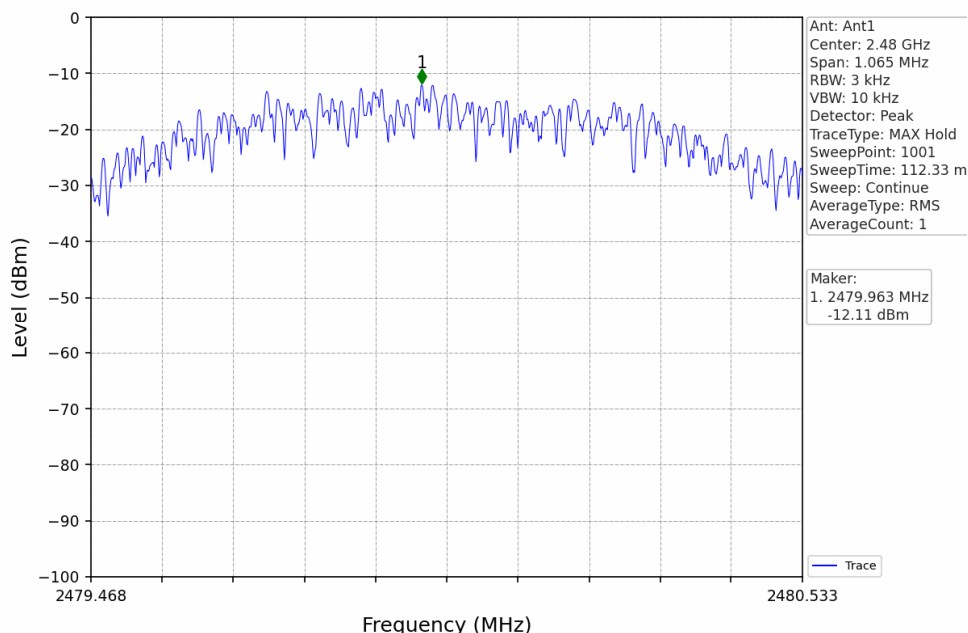


2M_LCH_2402MHz_DataRate=_Ant1_NTNV

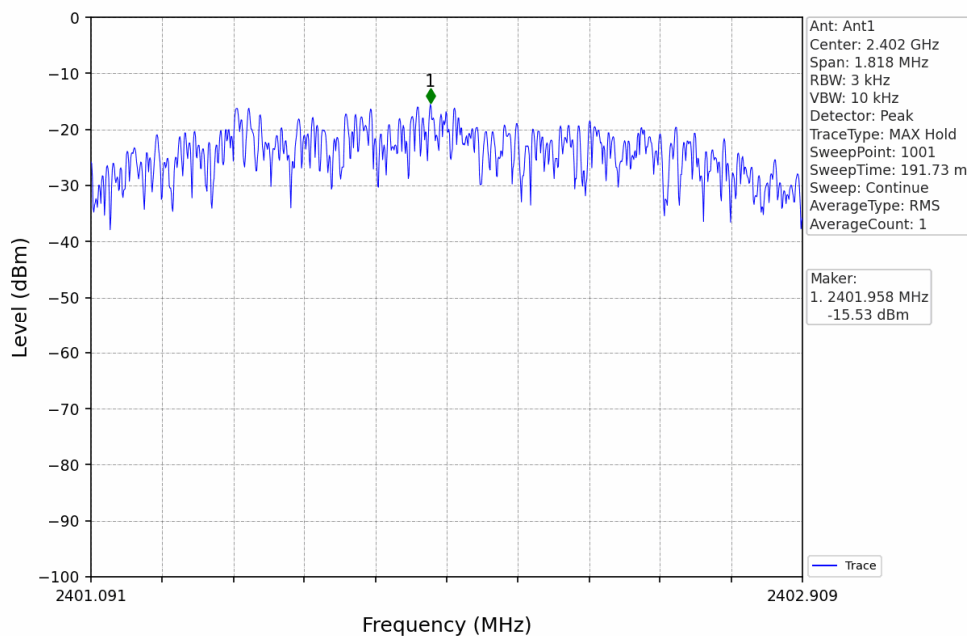

2M_MCH_2440MHz_DataRate=_Ant1_NTNV

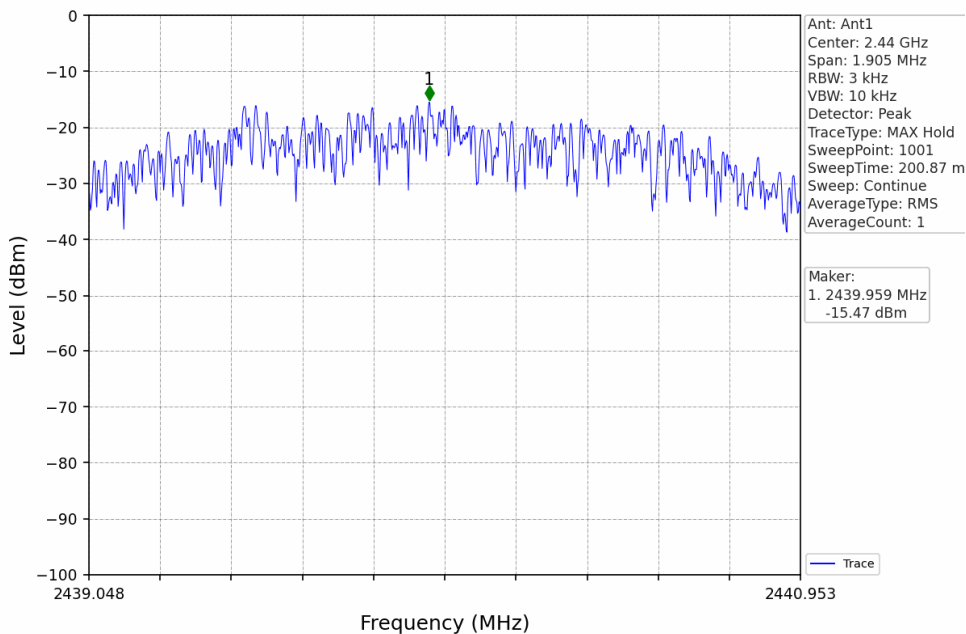

2M_HCH_2480MHz_DataRate=_Ant1_NTNV

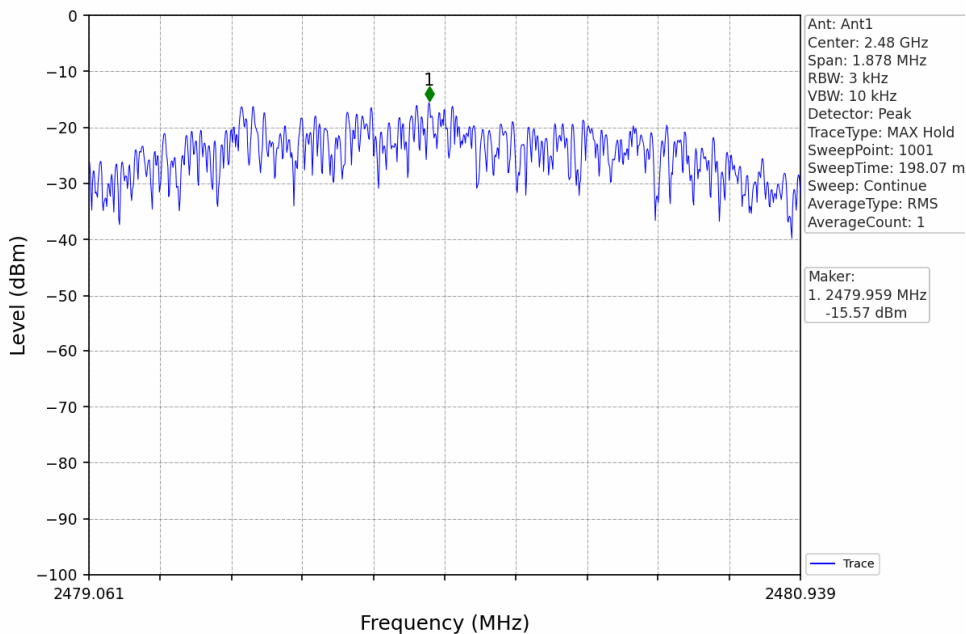

5. Unwanted Emissions In Non-restricted Frequency Bands


5.1 Ref

5.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Ant	Level of Reference (dBm)
1M	SISO	2402	1	3.36
		2440	1	3.33
		2480	1	3.28
2M	SISO	2402	1	3.31
		2440	1	3.28
		2480	1	3.24

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


5.1.2 Test Graph

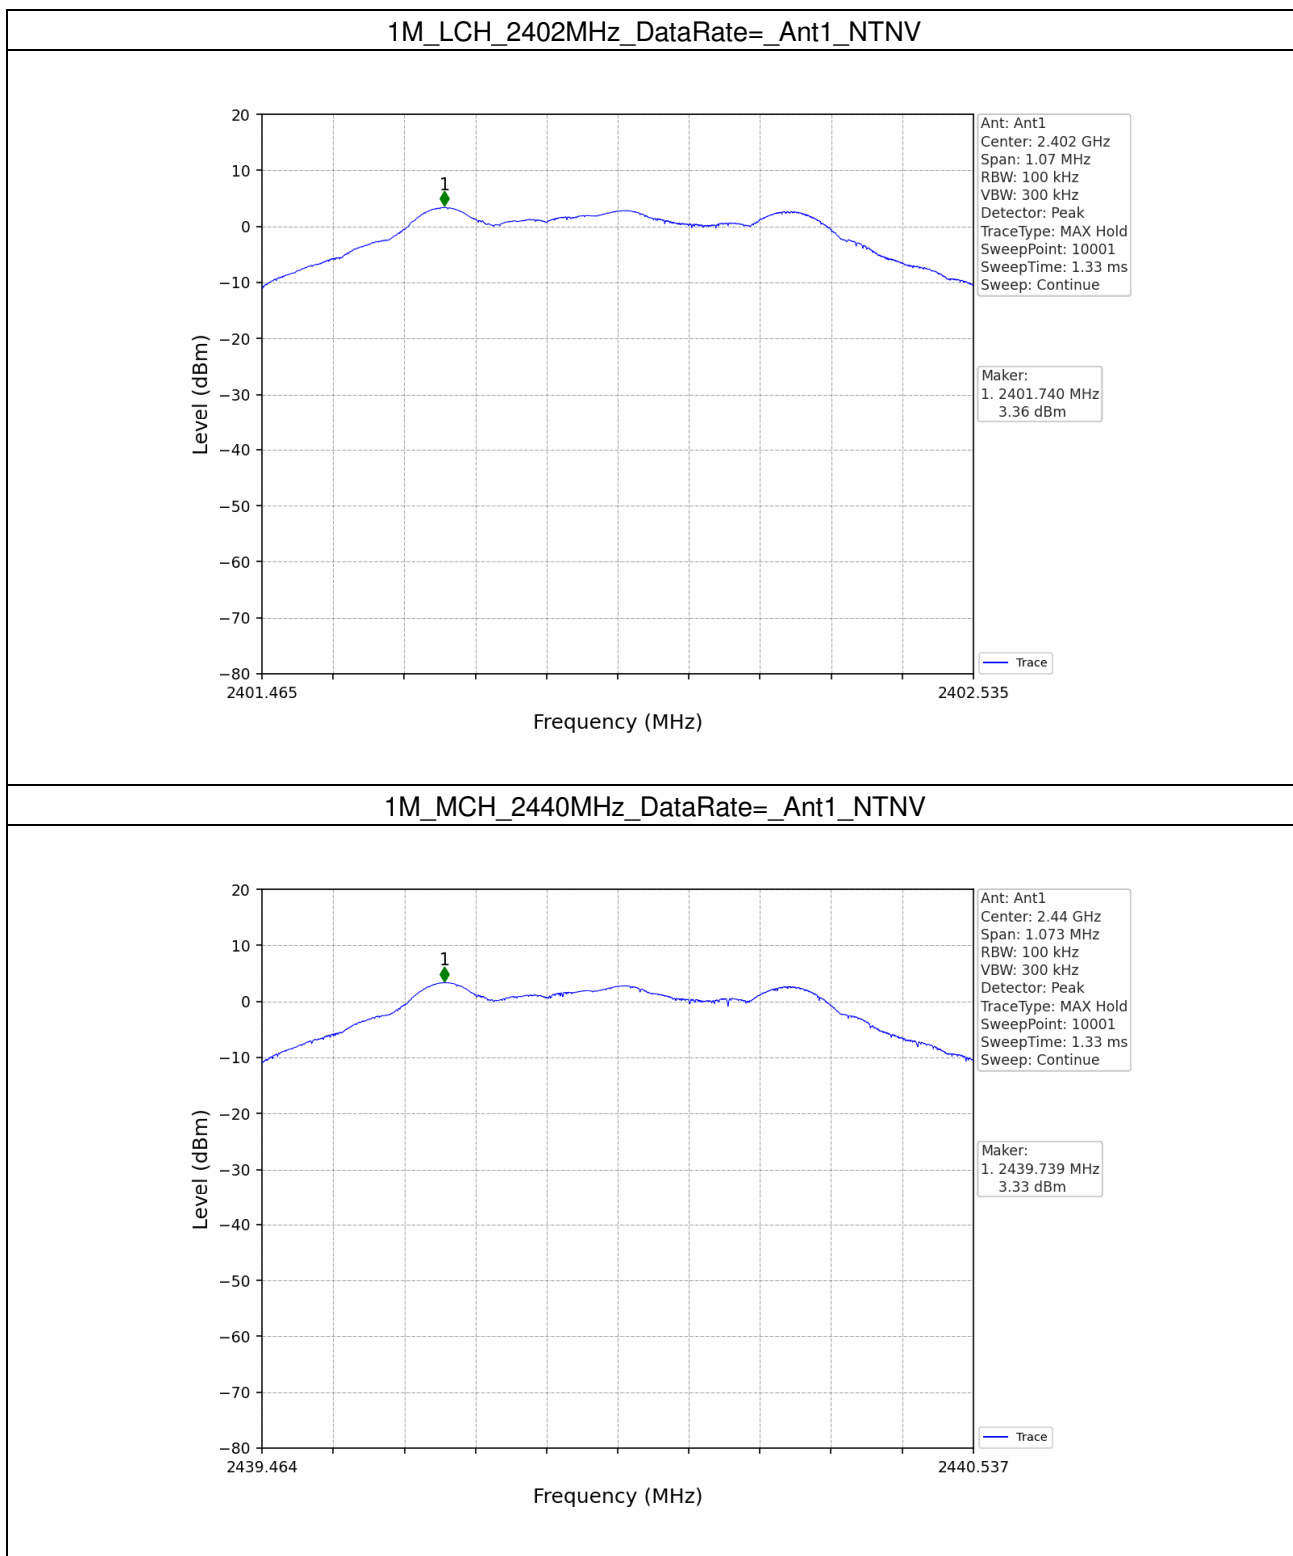

1M_HCH_2480MHz_DataRate=_Ant1_NTNV

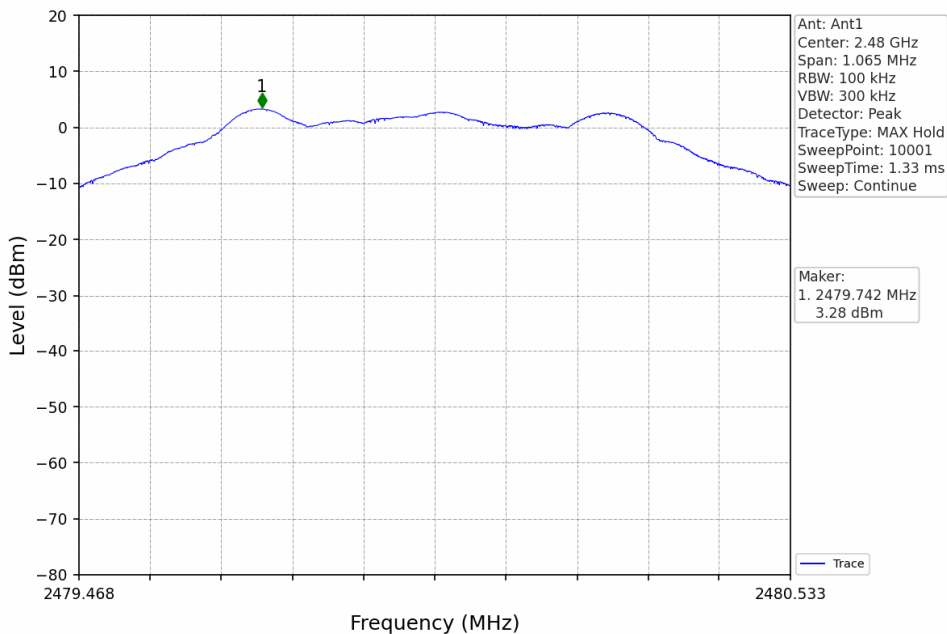


2M_LCH_2402MHz_DataRate=_Ant1_NTNV

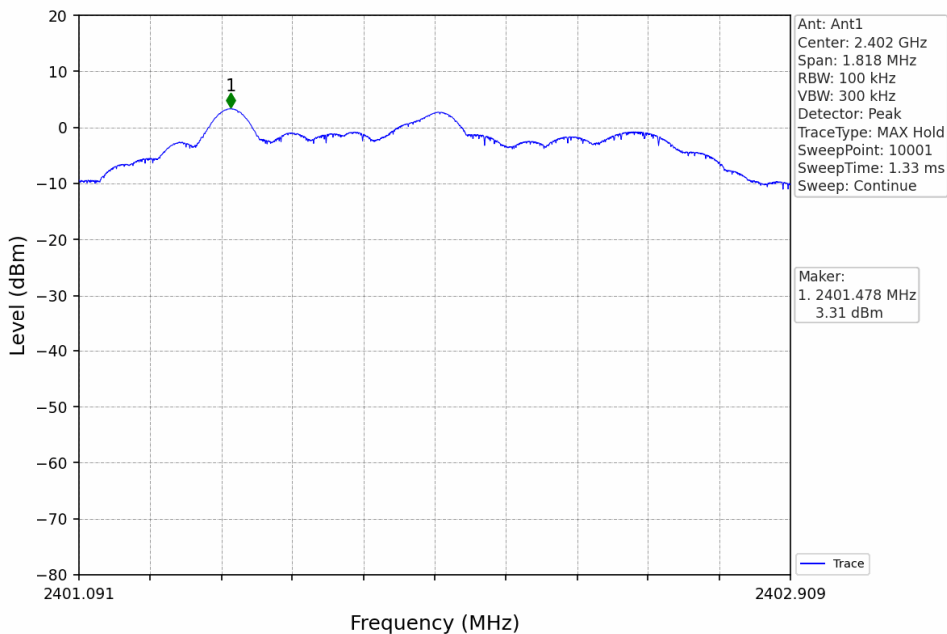


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

2M_MCH_2440MHz_DataRate=_Ant1_NTNV

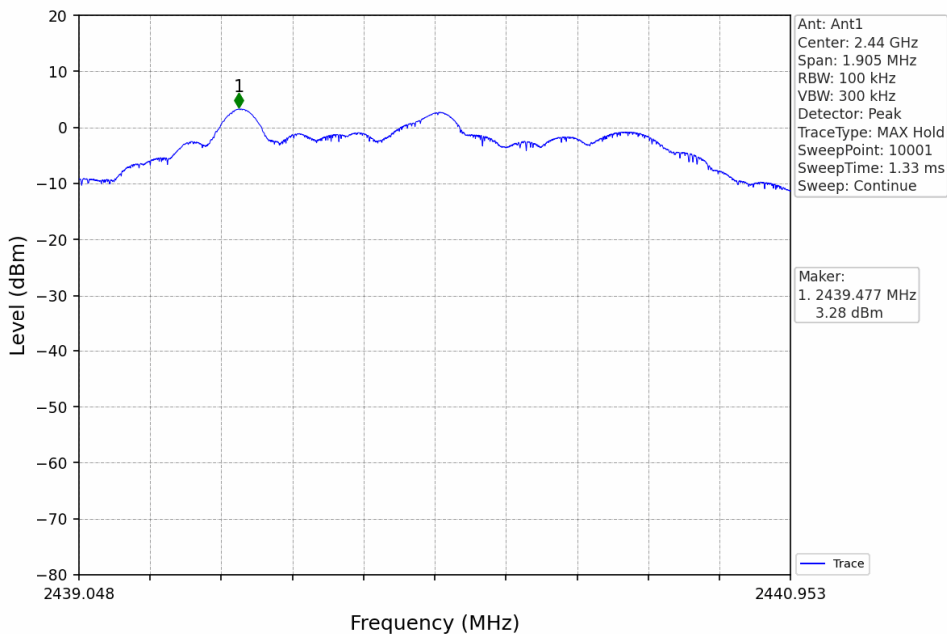

2M_HCH_2480MHz_DataRate=_Ant1_NTNV

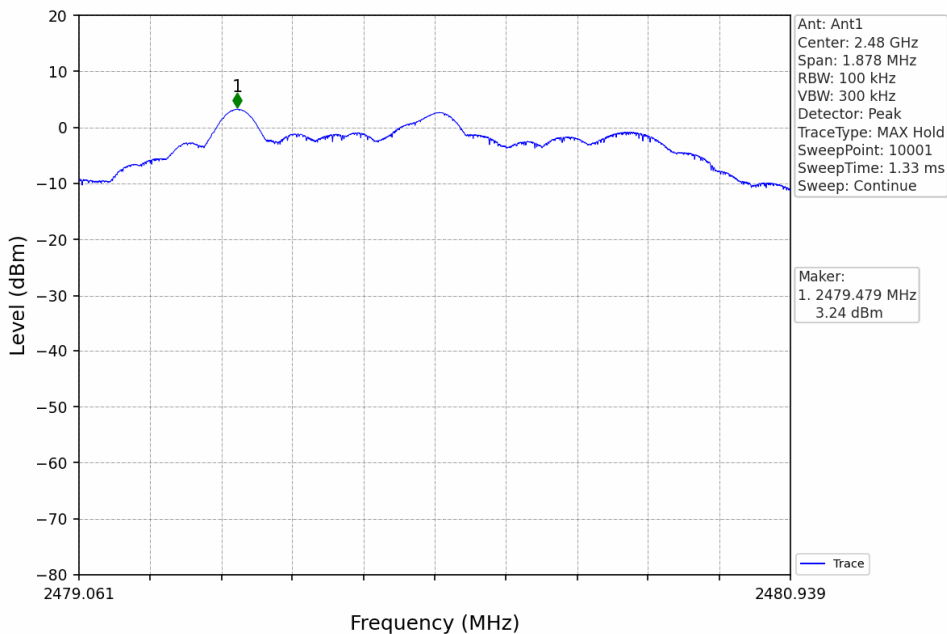

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


5.2 CSE

5.2.1 Test Result


Mode	TX Type	Frequency (MHz)	Ant	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	3.36	-16.64	Pass
		2440	1	3.36	-16.64	Pass
		2480	1	3.36	-16.64	Pass
2M	SISO	2402	1	3.31	-16.69	Pass
		2440	1	3.31	-16.69	Pass
		2480	1	3.31	-16.69	Pass

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


5.2.2 Test Graph

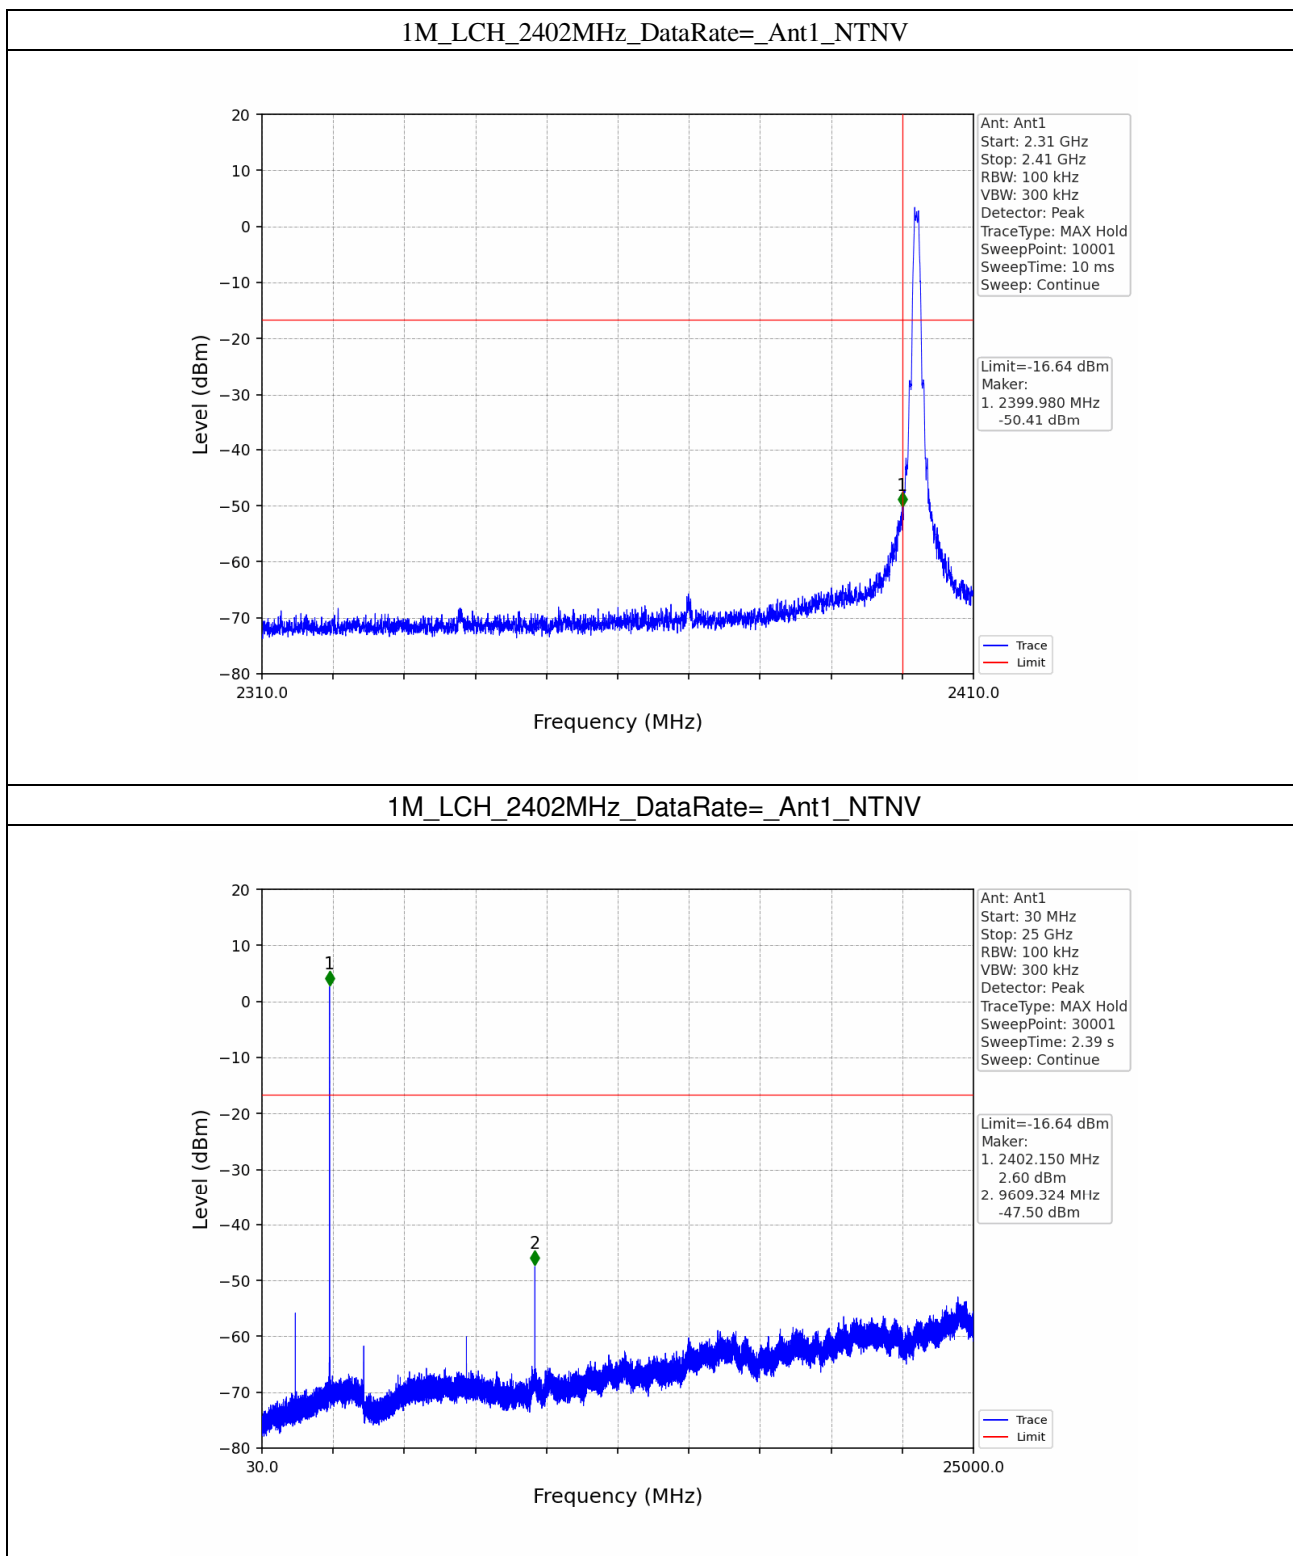


1M_MCH_2440MHz_DataRate=_Ant1_NTNV

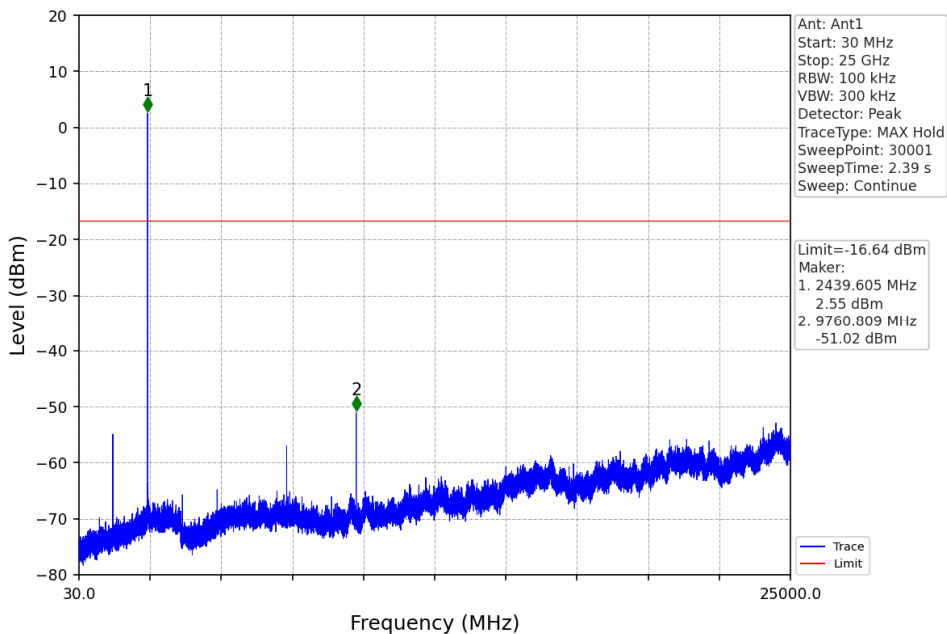


1M_HCH_2480MHz_DataRate=_Ant1_NTNV

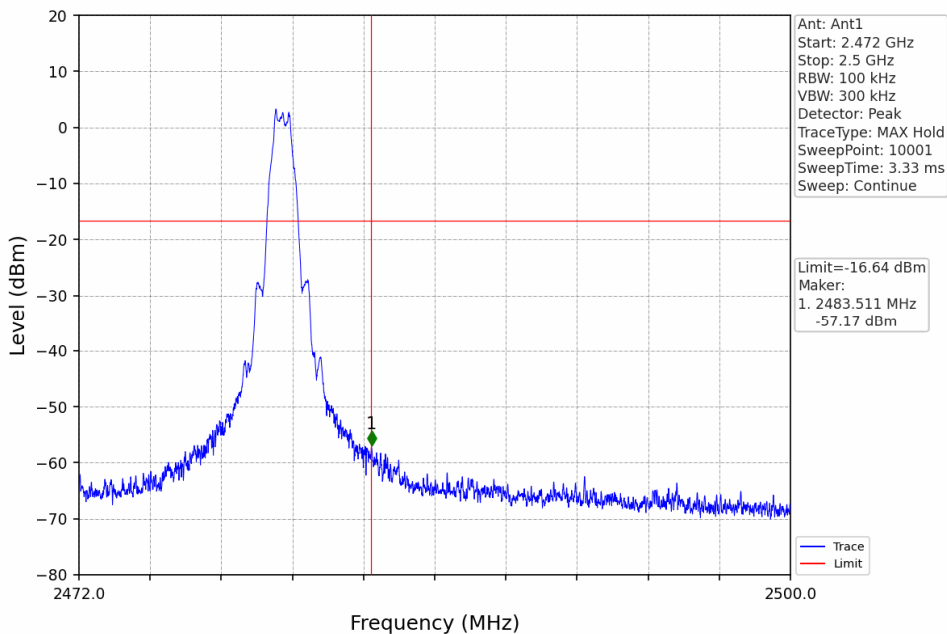


1M_HCH_2480MHz_DataRate=_Ant1_NTNV

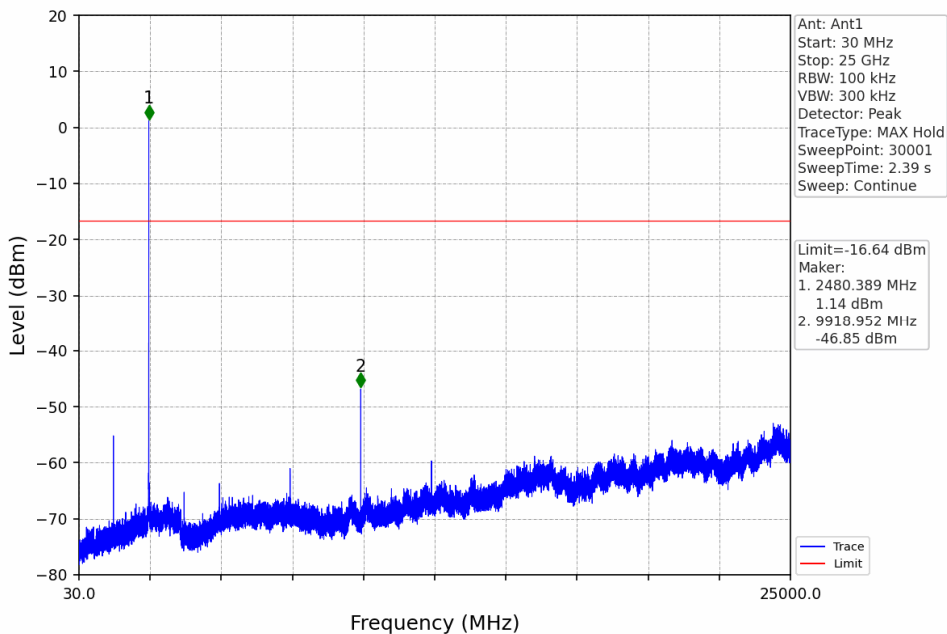


2M_LCH_2402MHz_DataRate=_Ant1_NTNV

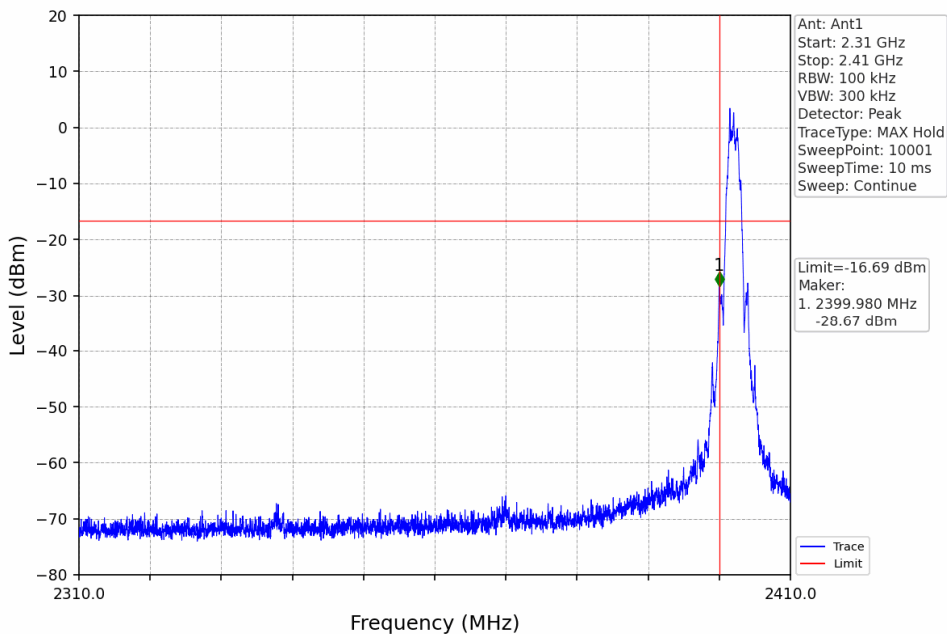


2M_LCH_2402MHz_DataRate=_Ant1_NTNV

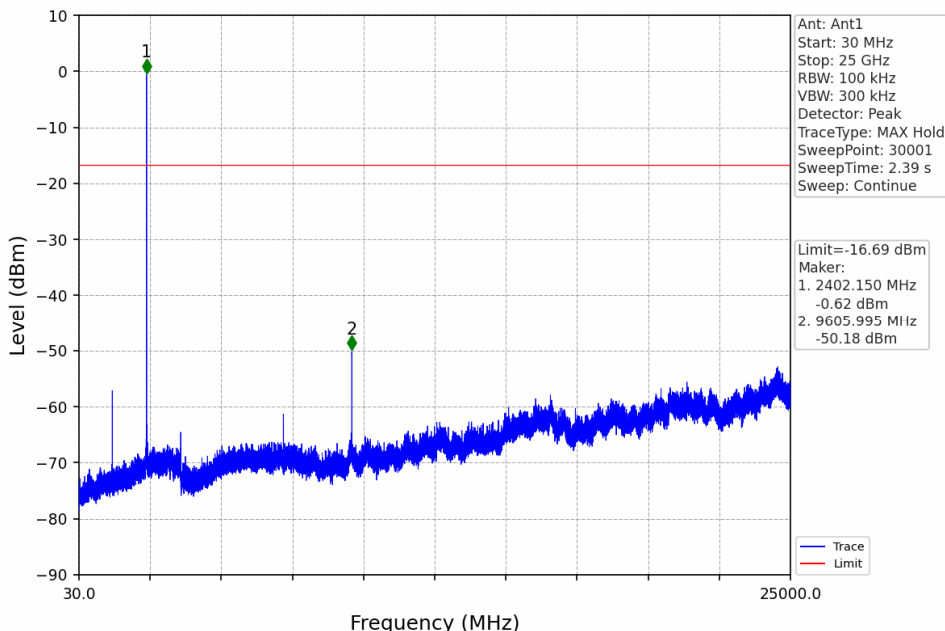


2M_MCH_2440MHz_DataRate=_Ant1_NTNV

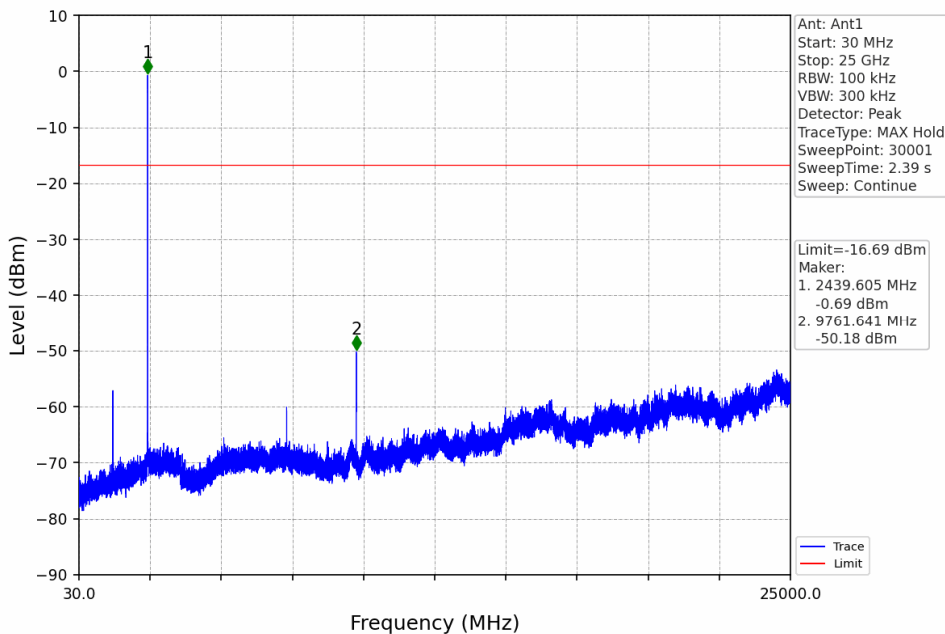

2M_HCH_2480MHz_DataRate=_Ant1_NTNV

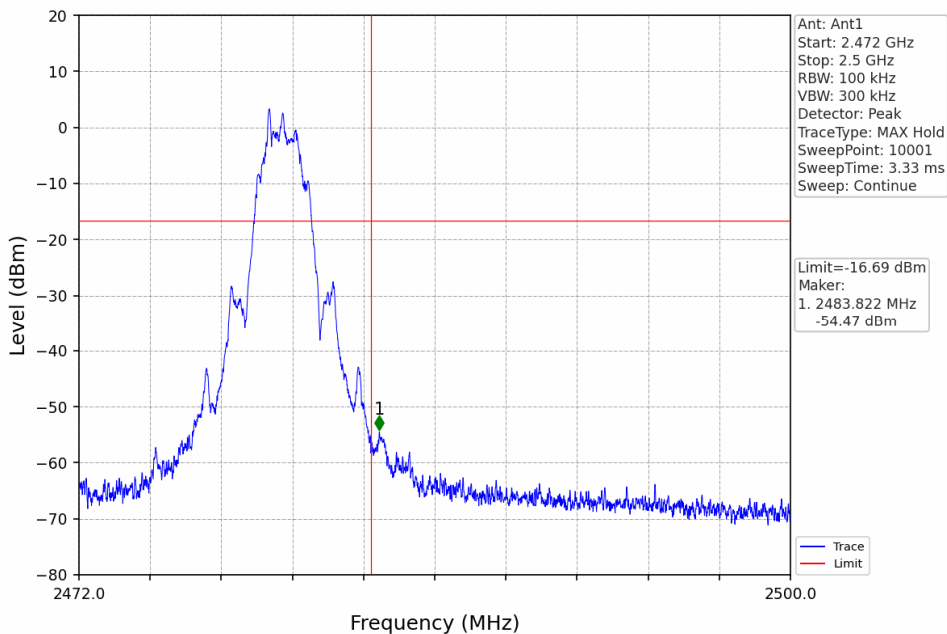


2M_HCH_2480MHz_DataRate=_Ant1_NTNV

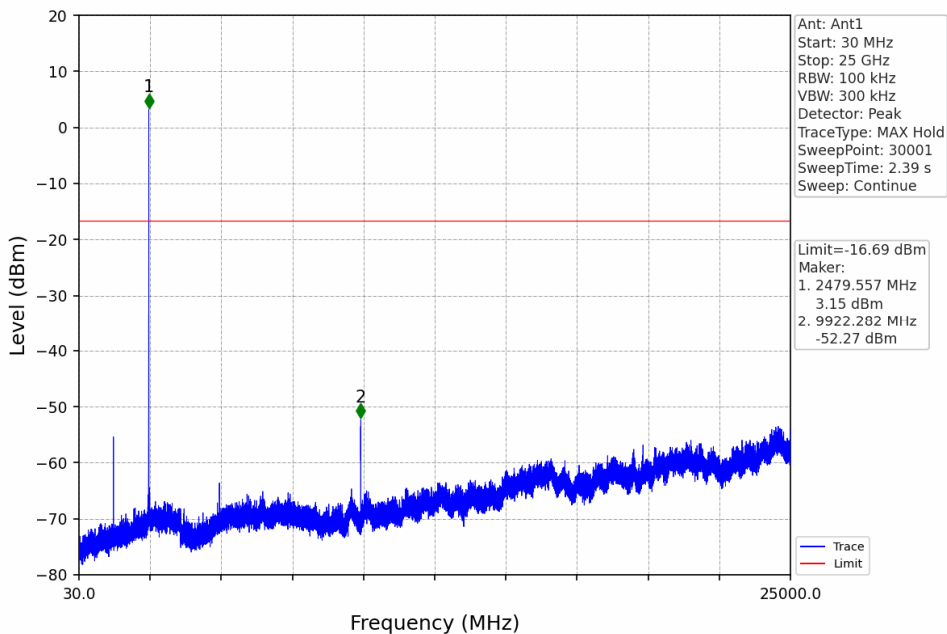


For left earbud:**1. Duty Cycle****1.1 Ant1****1.1.1 Test Result**

Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	0.391	0.625	62.56	2.04	0.00
		2440	0.391	0.625	62.56	2.04	0.00
		2480	0.391	0.625	62.56	2.04	0.00
2M	SISO	2402	0.208	0.625	33.28	4.78	0.00
		2440	0.208	0.625	33.28	4.78	0.00
		2480	0.208	0.625	33.28	4.78	0.00


1.1.2 Test Graph

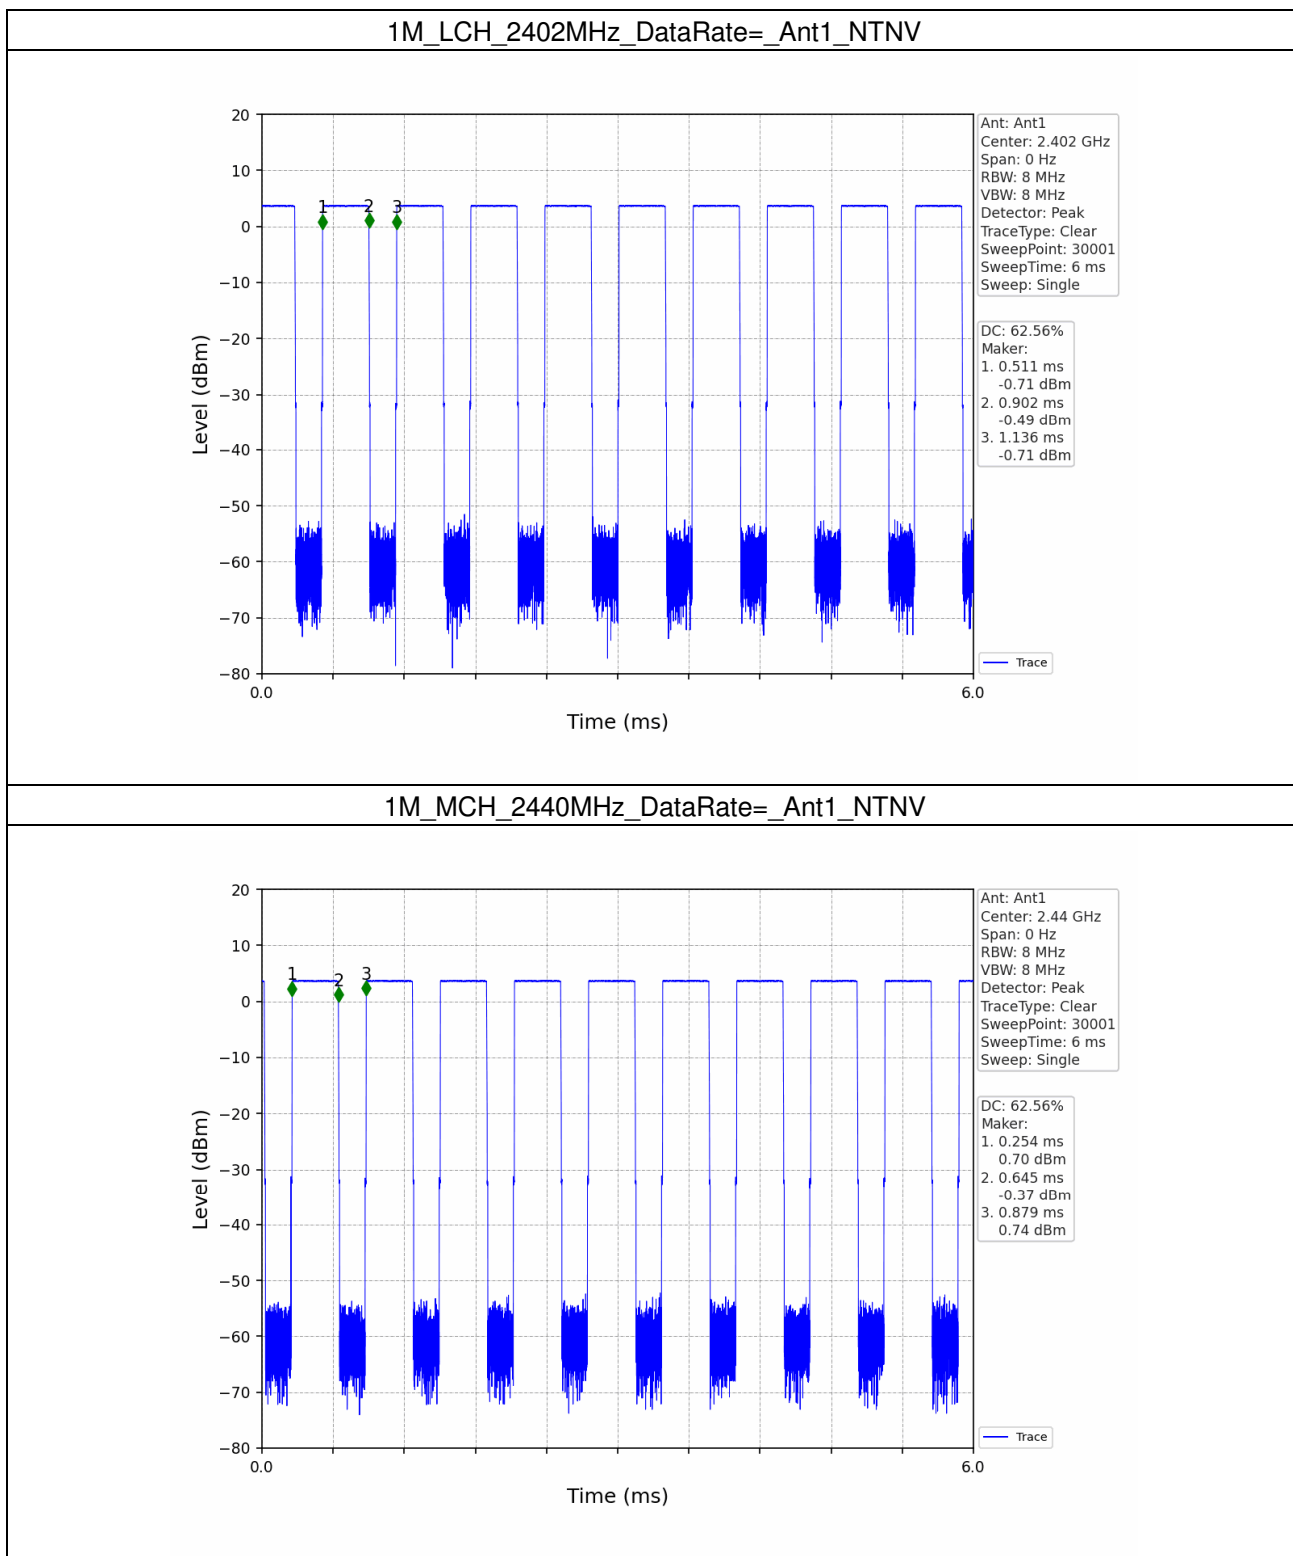


1M_HCH_2480MHz_DataRate=_Ant1_NTNV

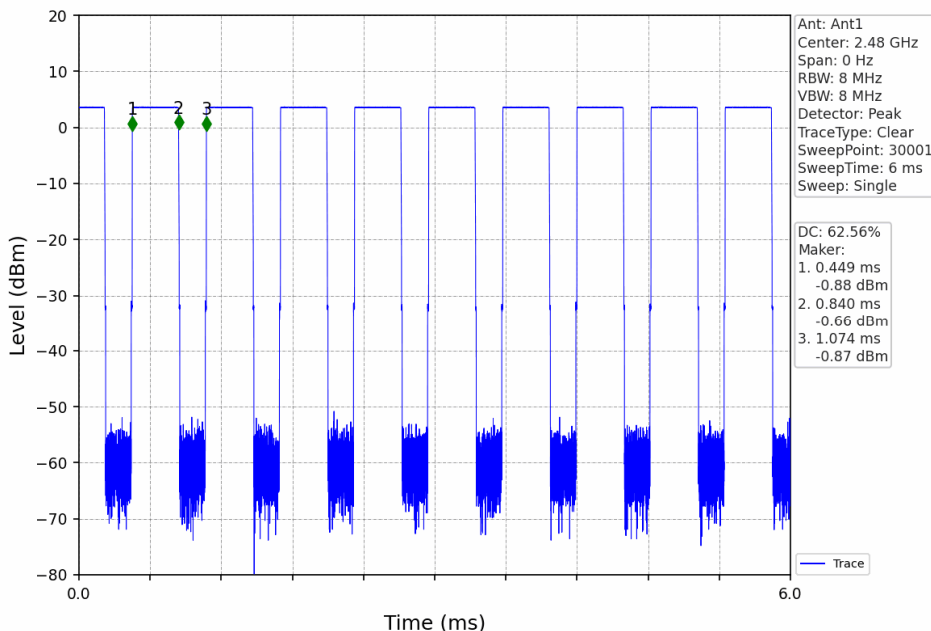


2M_LCH_2402MHz_DataRate=_Ant1_NTNV

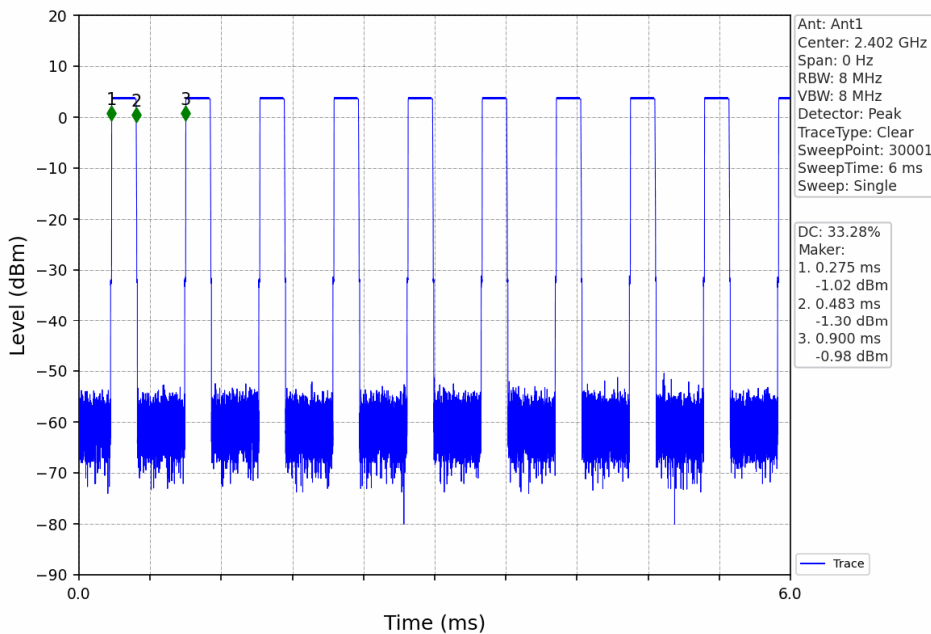

2M_MCH_2440MHz_DataRate=_Ant1_NTNV

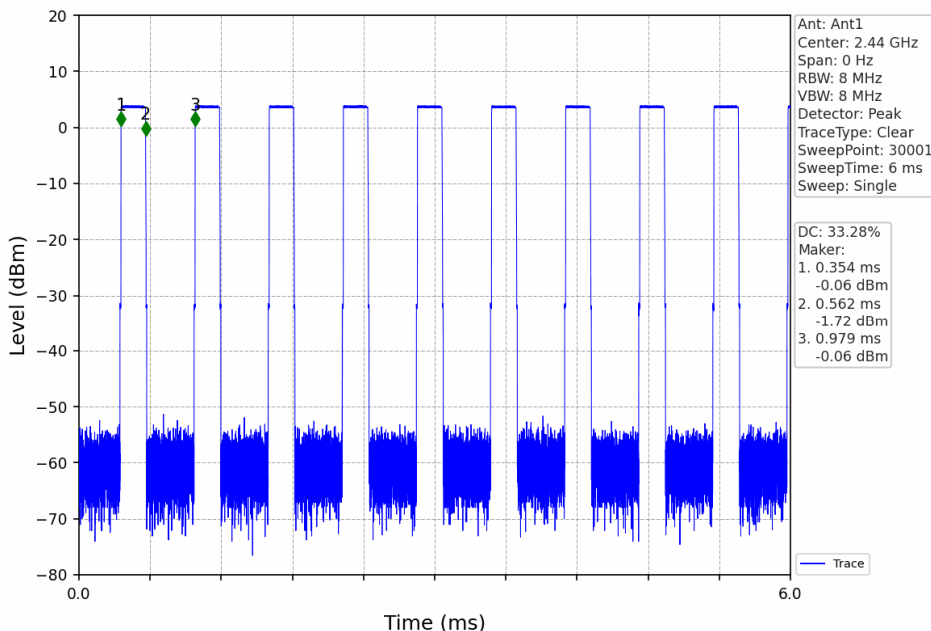

2M_HCH_2480MHz_DataRate=_Ant1_NTNV

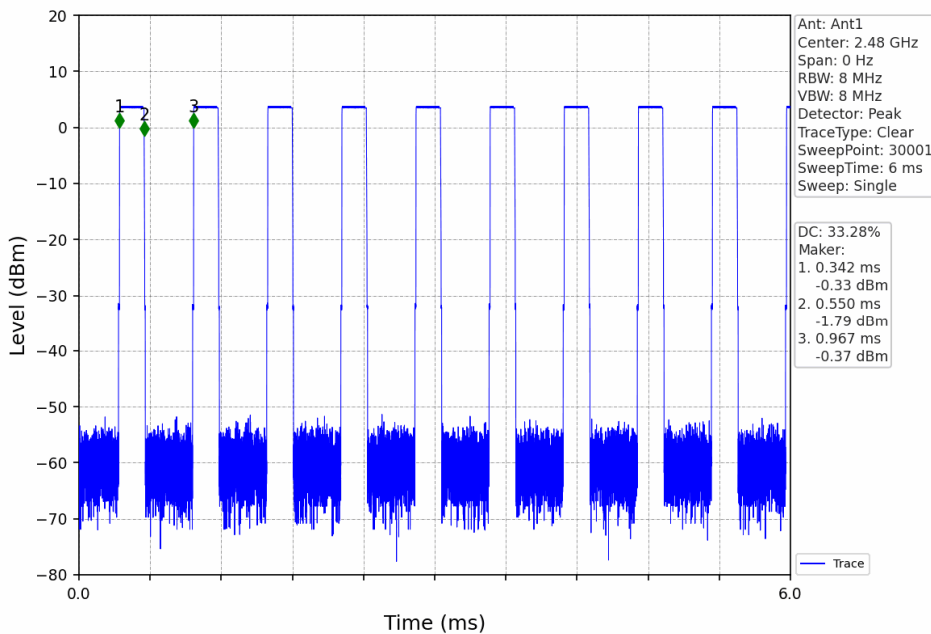


2. Bandwidth

2.1 OBW


2.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Ant	99% Occupied Bandwidth (MHz)	Verdict
				Result	
1M	SISO	2402	1	1.045	Pass
		2440	1	1.045	Pass
		2480	1	1.043	Pass
2M	SISO	2402	1	2.070	Pass
		2440	1	2.067	Pass
		2480	1	2.067	Pass


2.1.2 Test Graph

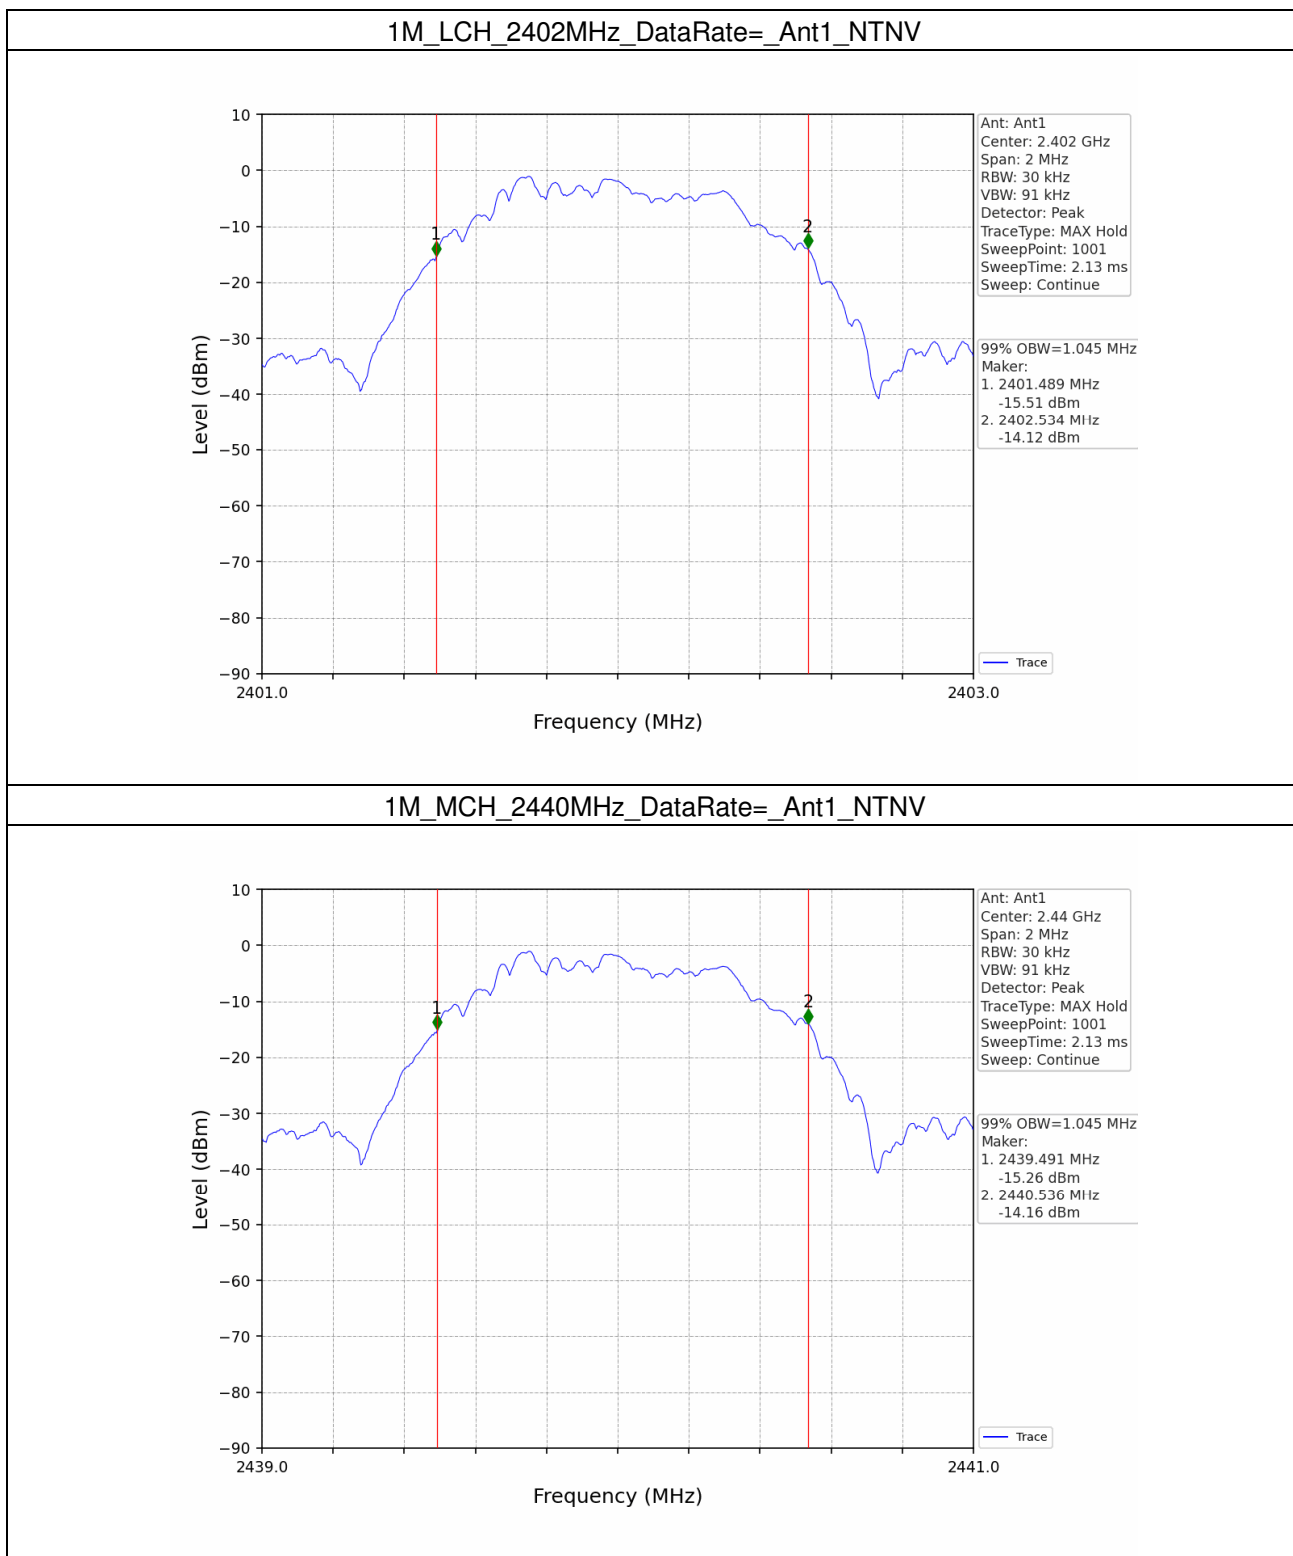


1M_HCH_2480MHz_DataRate=_Ant1_NTNV

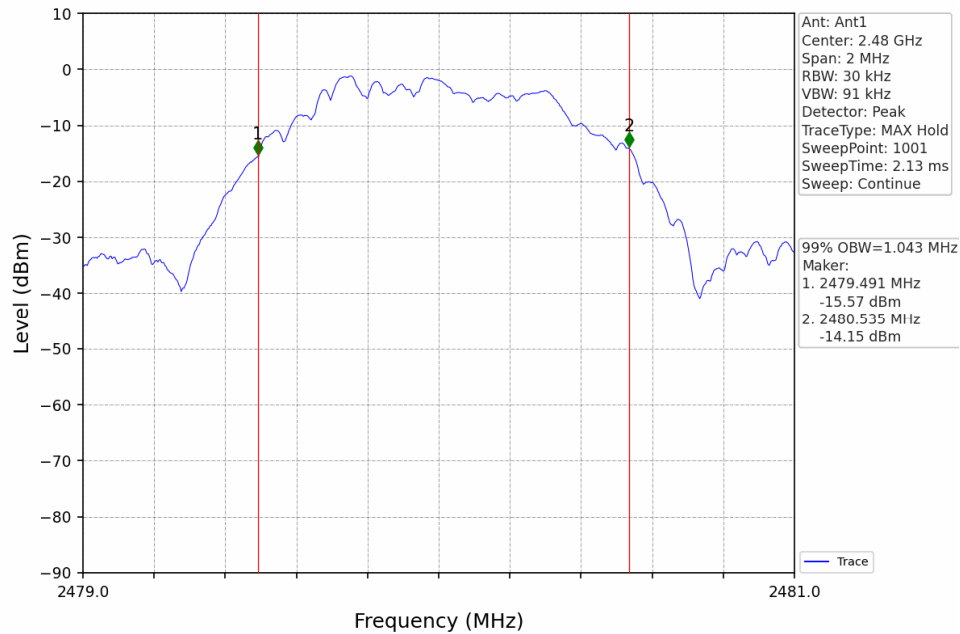


2M_LCH_2402MHz_DataRate=_Ant1_NTNV

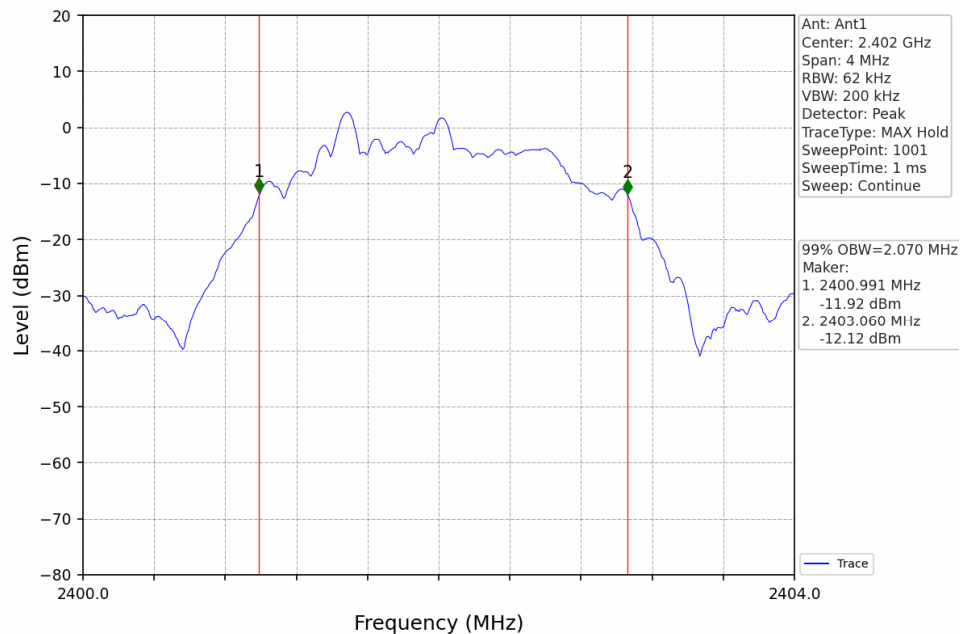

2M_MCH_2440MHz_DataRate=_Ant1_NTNV

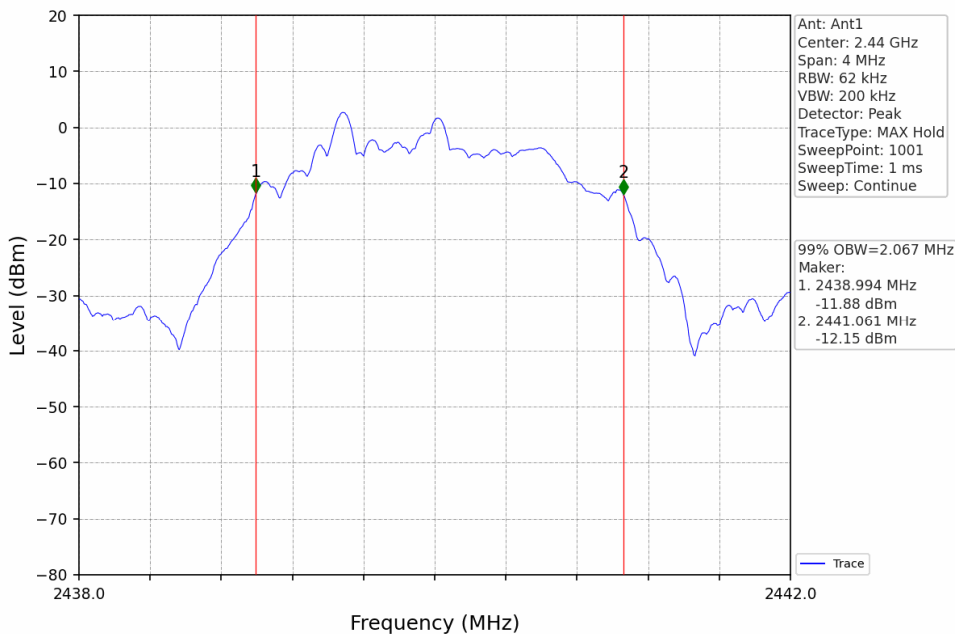

2M_HCH_2480MHz_DataRate=_Ant1_NTNV

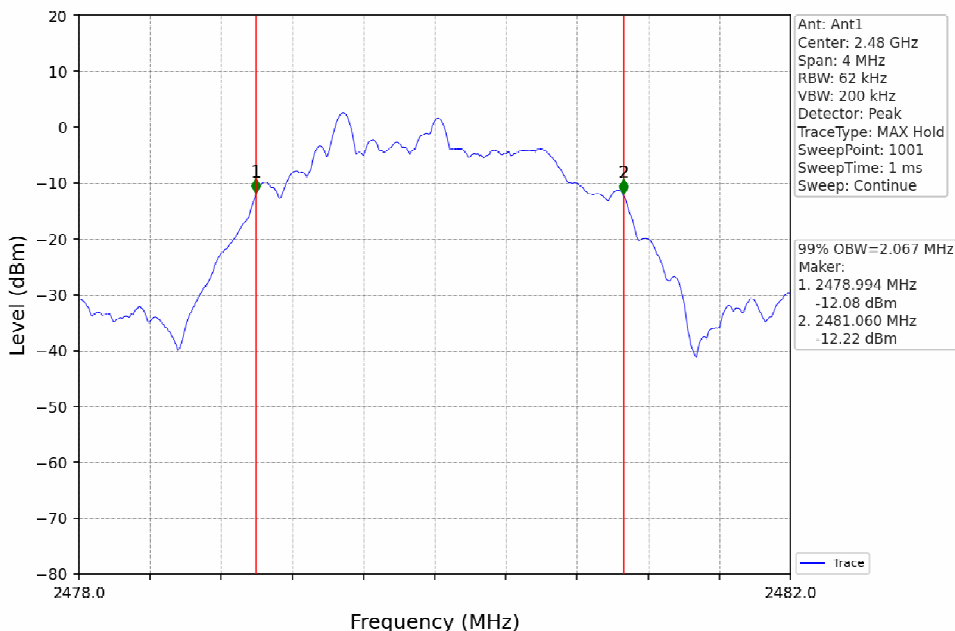

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

2.2 6dB BW

2.2.1 Test Result


Mode	TX Type	Frequency (MHz)	Ant	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.709	≥ 0.5	Pass
		2440	1	0.717	≥ 0.5	Pass
		2480	1	0.706	≥ 0.5	Pass
2M	SISO	2402	1	1.256	≥ 0.5	Pass
		2440	1	1.258	≥ 0.5	Pass
		2480	1	1.248	≥ 0.5	Pass




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


2.2.2 Test Graph

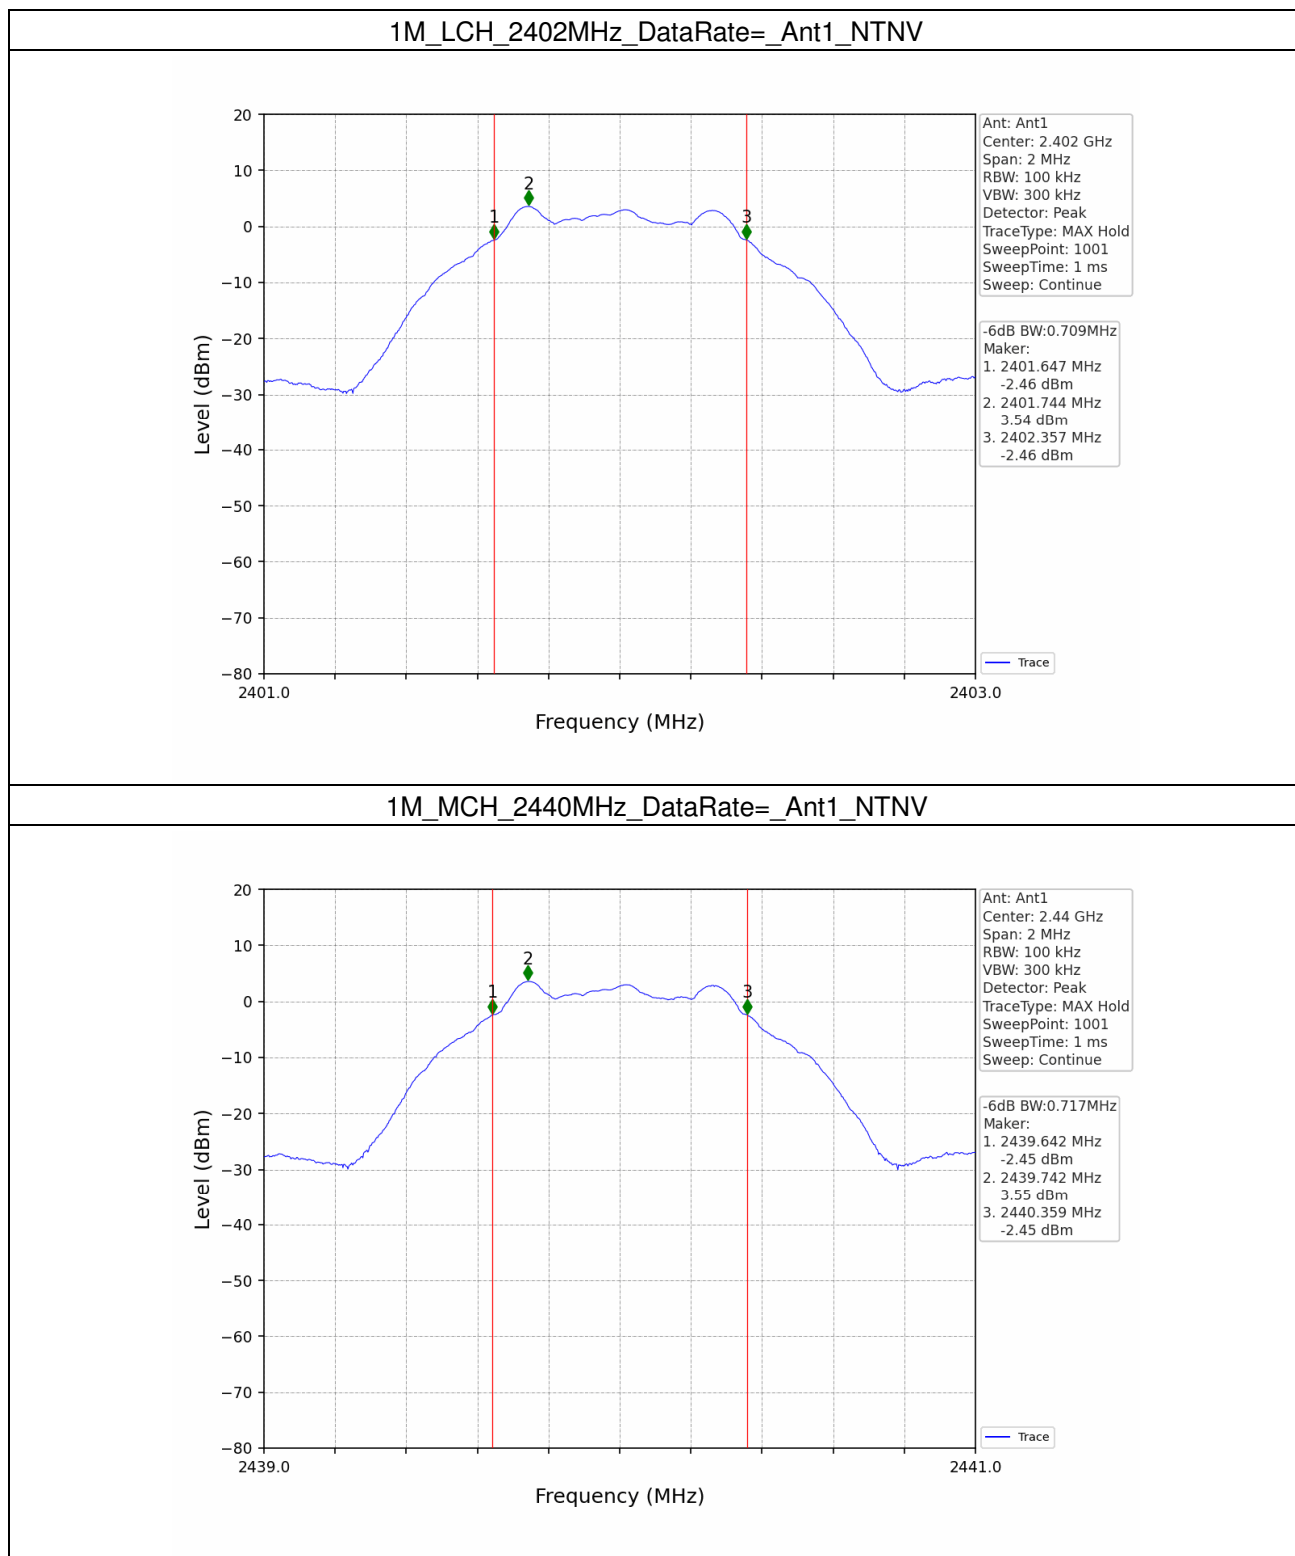


1M_HCH_2480MHz_DataRate=_Ant1_NTNV

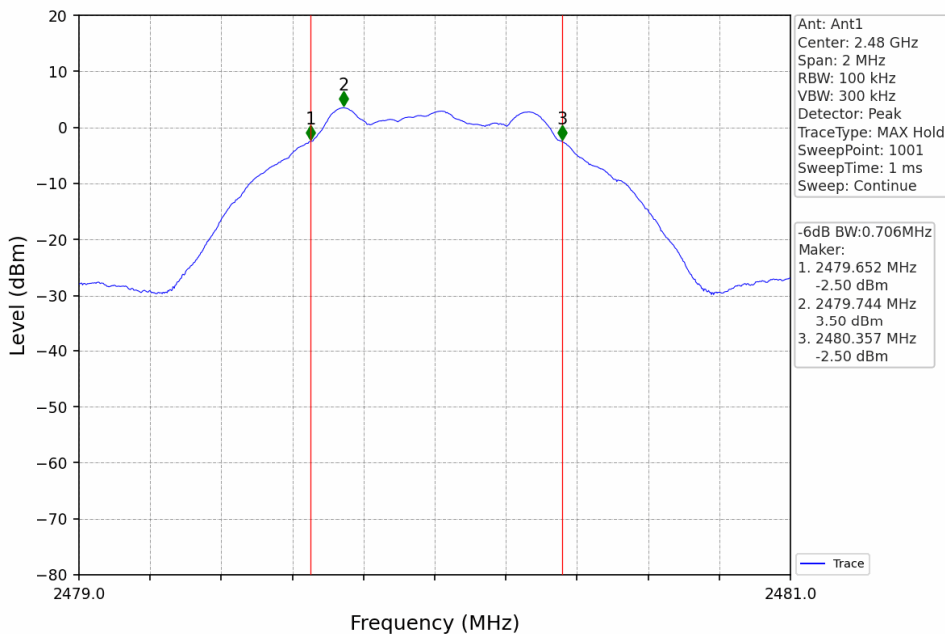


2M_LCH_2402MHz_DataRate=_Ant1_NTNV

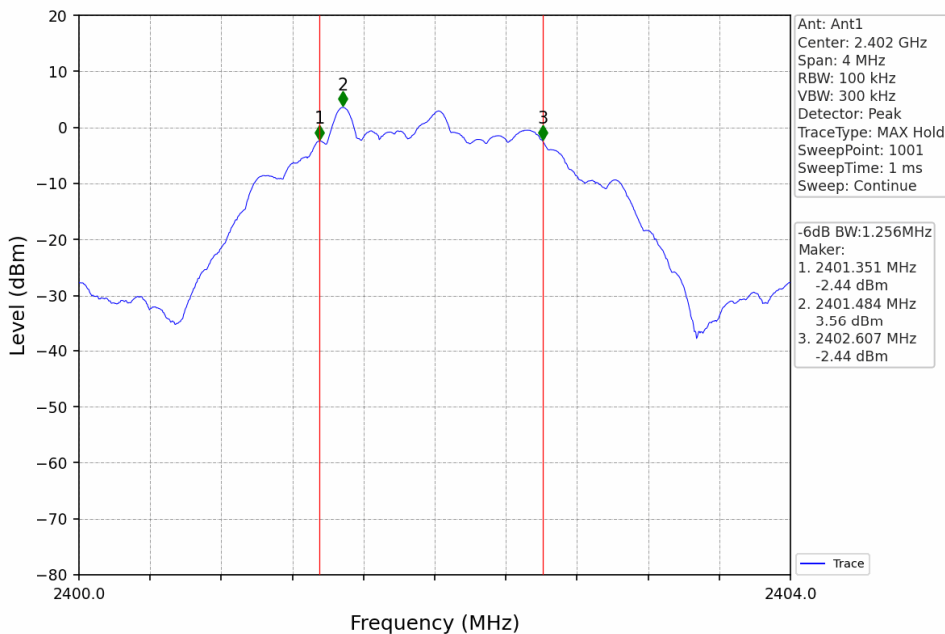

2M_MCH_2440MHz_DataRate=_Ant1_NTNV

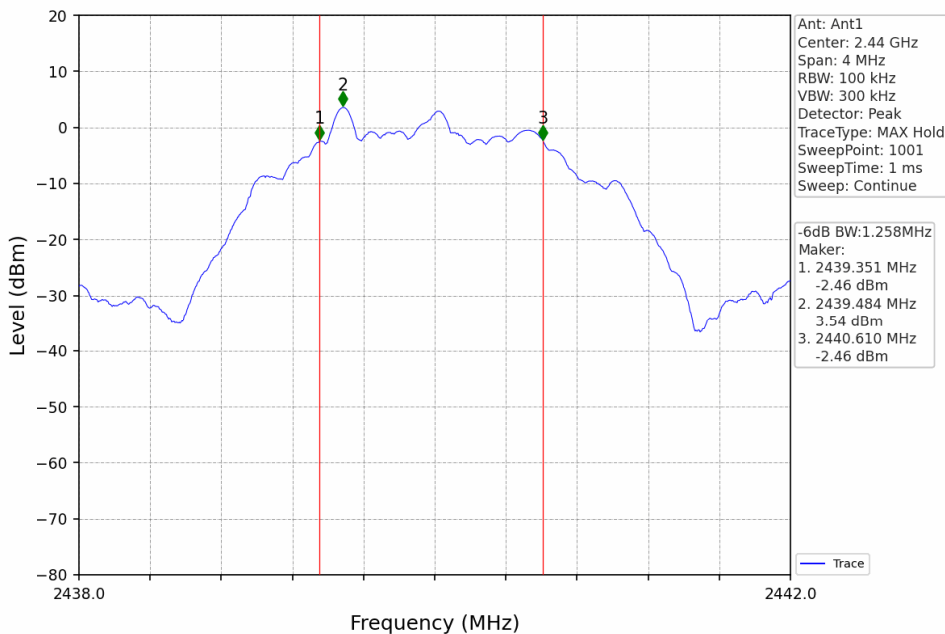

2M_HCH_2480MHz_DataRate=_Ant1_NTNV

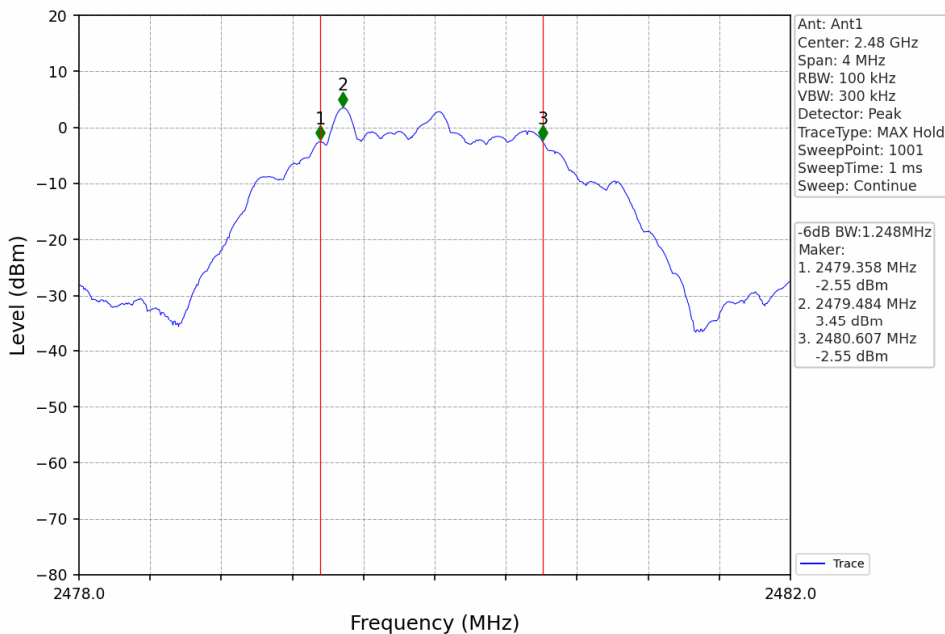

3. Maximum Conducted Output Power

3.1 Power

3.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			Ant1	Limit	
1M	SISO	2402	3.67	<=30	Pass
		2440	3.66	<=30	Pass
		2480	3.59	<=30	Pass
2M	SISO	2402	3.74	<=30	Pass
		2440	3.71	<=30	Pass
		2480	3.64	<=30	Pass

Note1: Antenna Gain: Ant1: -2.60dBi;

4. Maximum Power Spectral Density


4.1 PSD

4.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			Ant1	Limit	
1M	SISO	2402	-11.82	<=8	Pass
		2440	-11.92	<=8	Pass
		2480	-11.84	<=8	Pass
2M	SISO	2402	-15.53	<=8	Pass
		2440	-15.45	<=8	Pass
		2480	-15.65	<=8	Pass

Note1: Antenna Gain: Ant1: -2.60dBi;


4.1.2 Test Graph

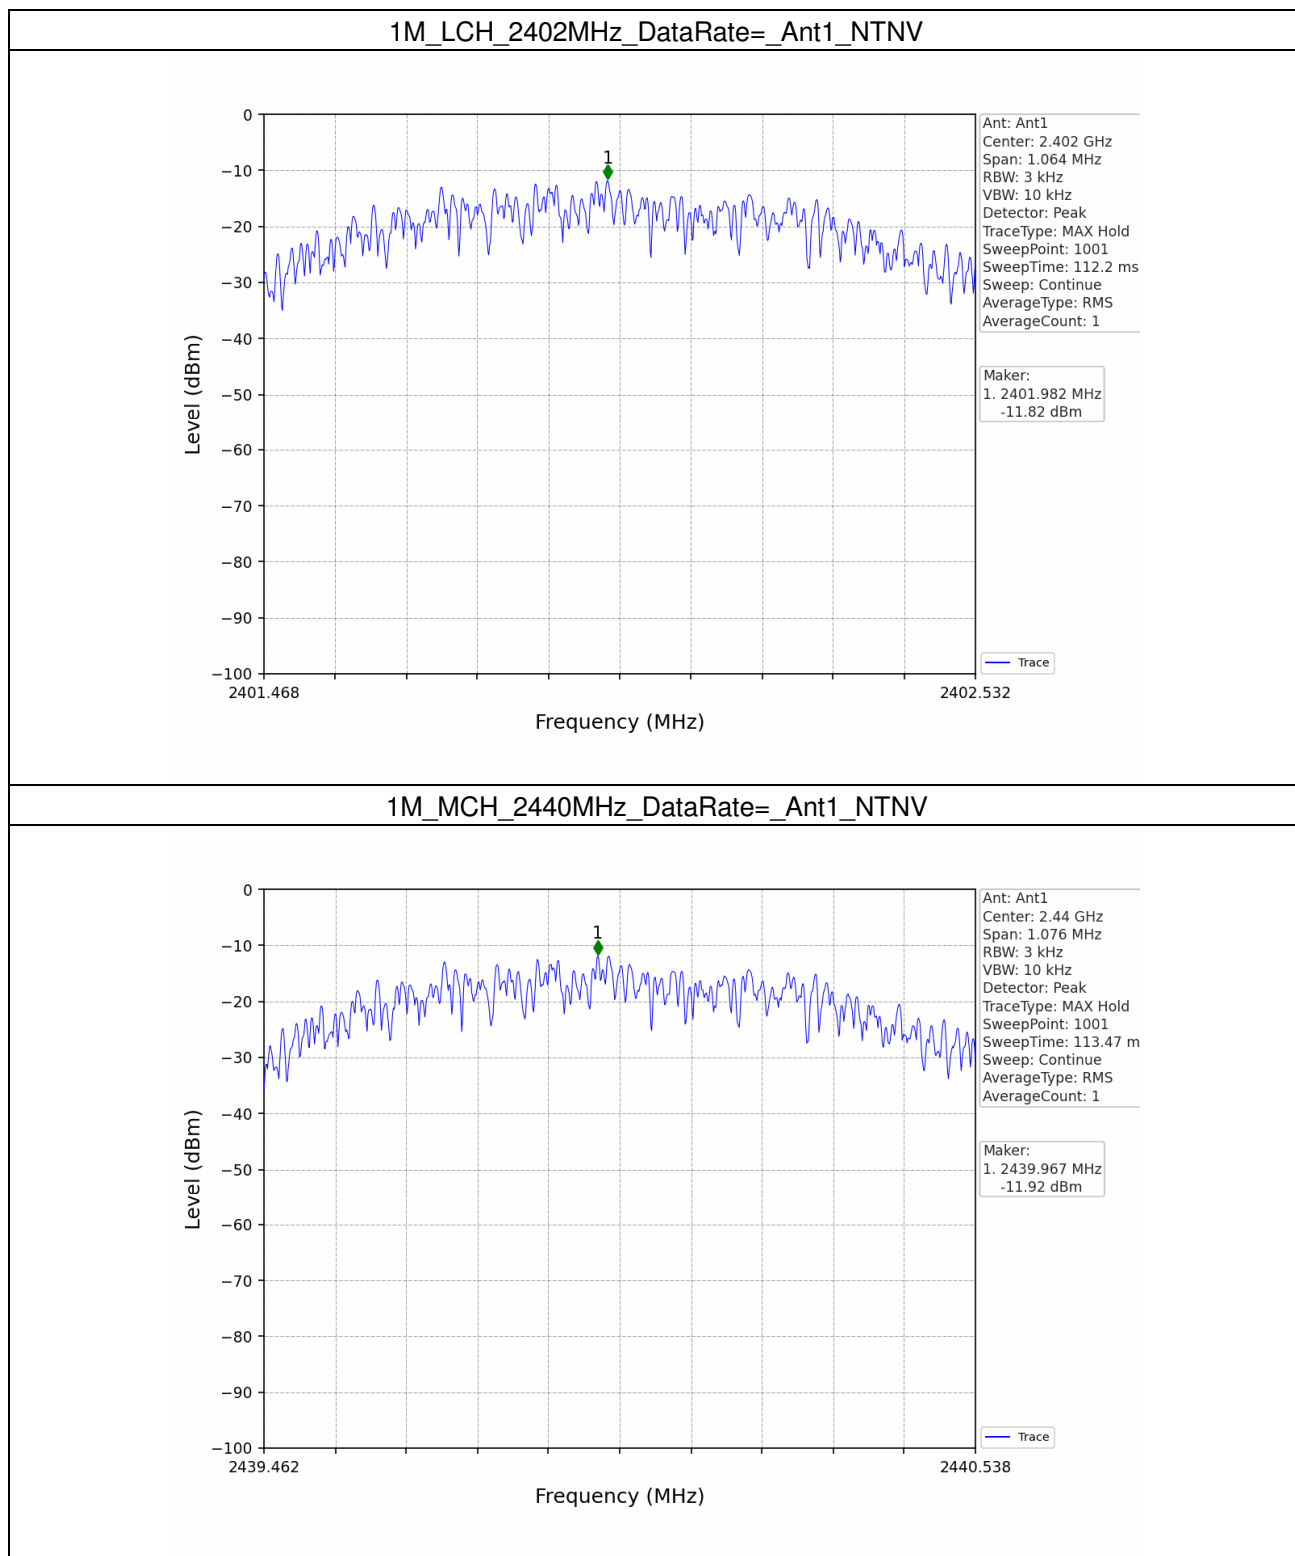

1M_HCH_2480MHz_DataRate=_Ant1_NTNV

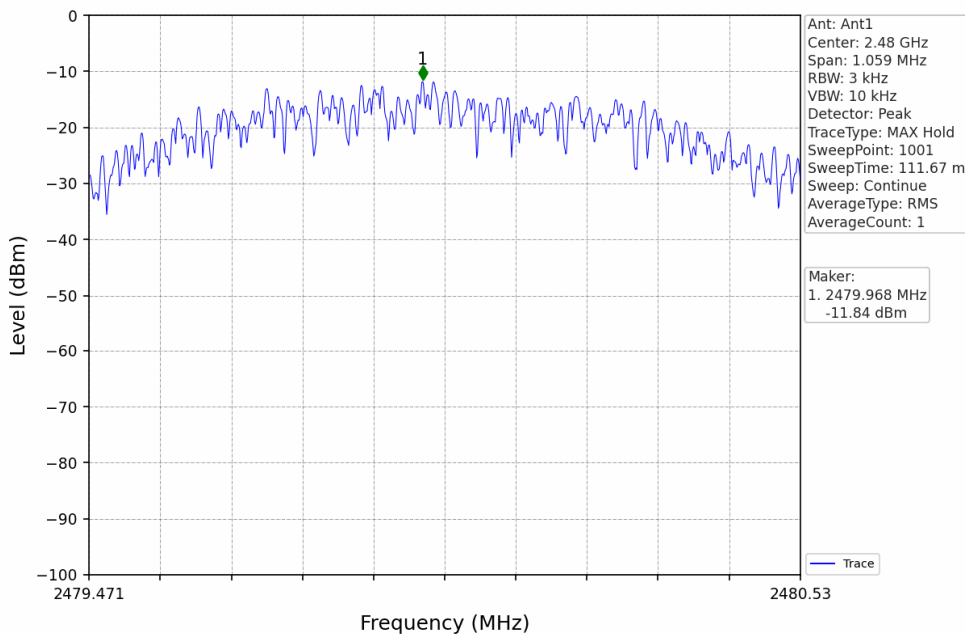


2M_LCH_2402MHz_DataRate=_Ant1_NTNV

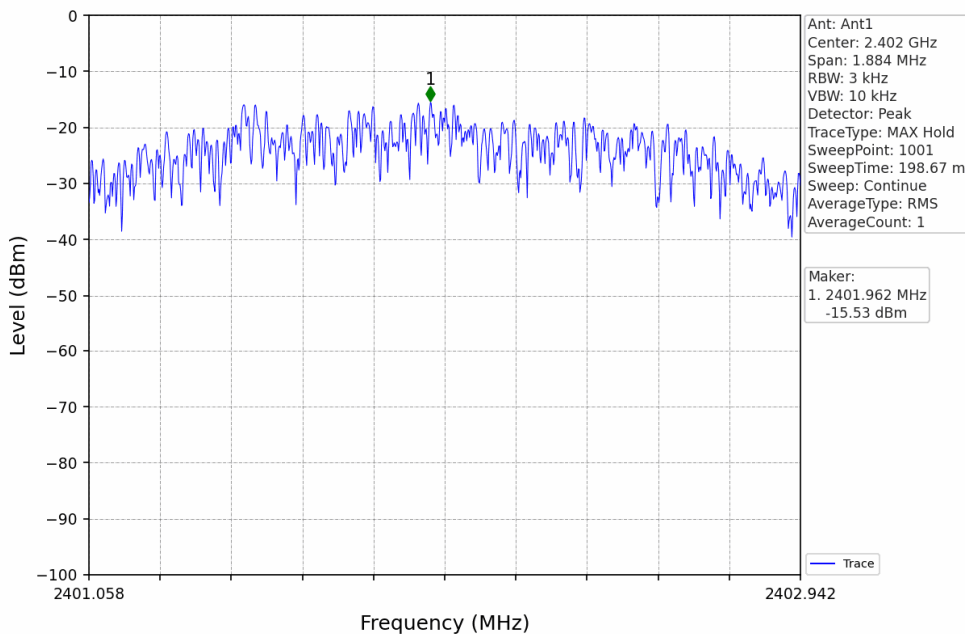


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

2M_MCH_2440MHz_DataRate=_Ant1_NTNV

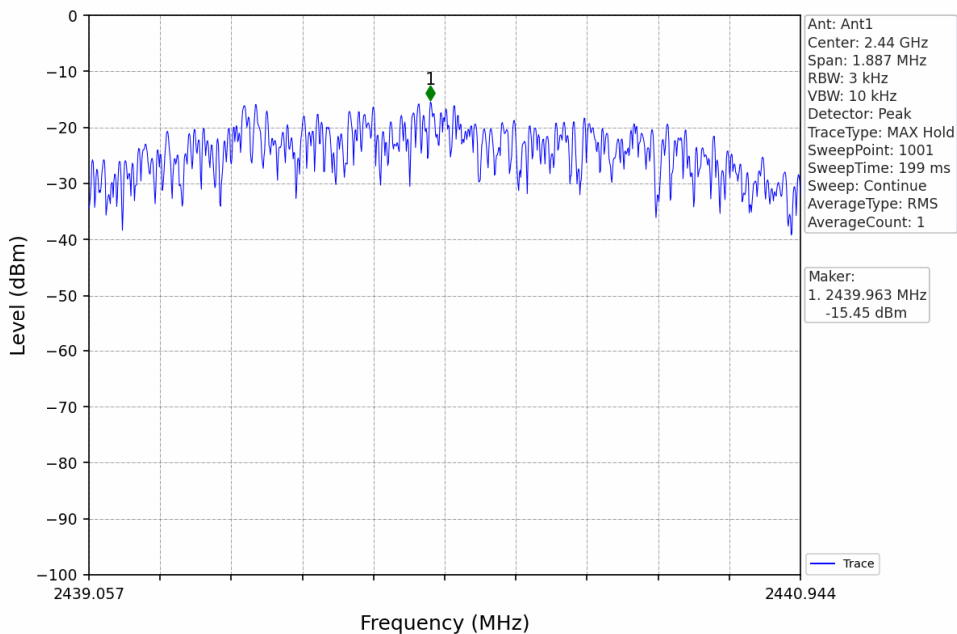

2M_HCH_2480MHz_DataRate=_Ant1_NTNV

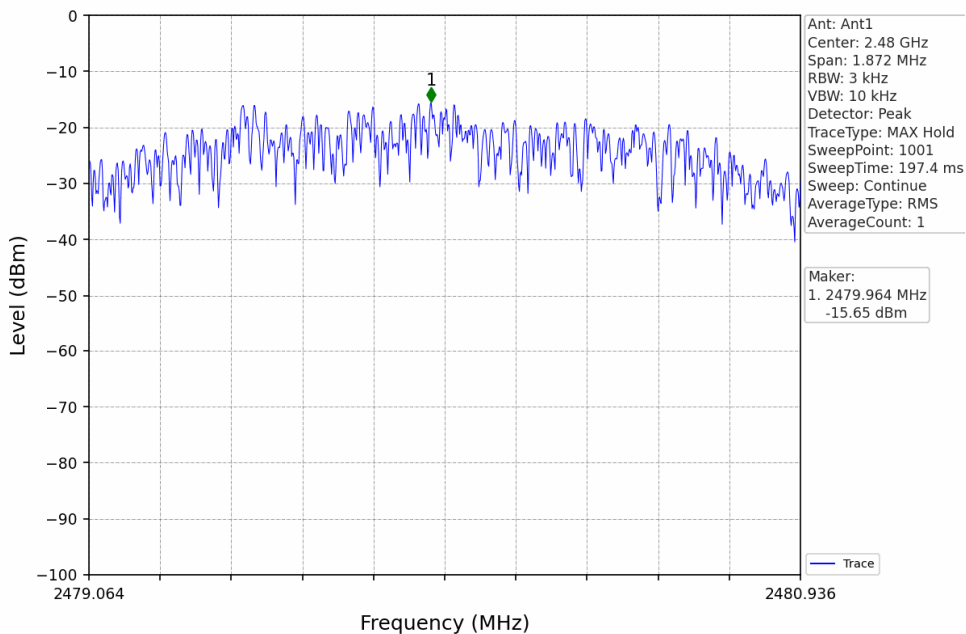

5. Unwanted Emissions In Non-restricted Frequency Bands


5.1 Ref

5.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Ant	Level of Reference (dBm)
1M	SISO	2402	1	3.55
		2440	1	3.54
		2480	1	3.47
2M	SISO	2402	1	3.54
		2440	1	3.52
		2480	1	3.42

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


5.1.2 Test Graph

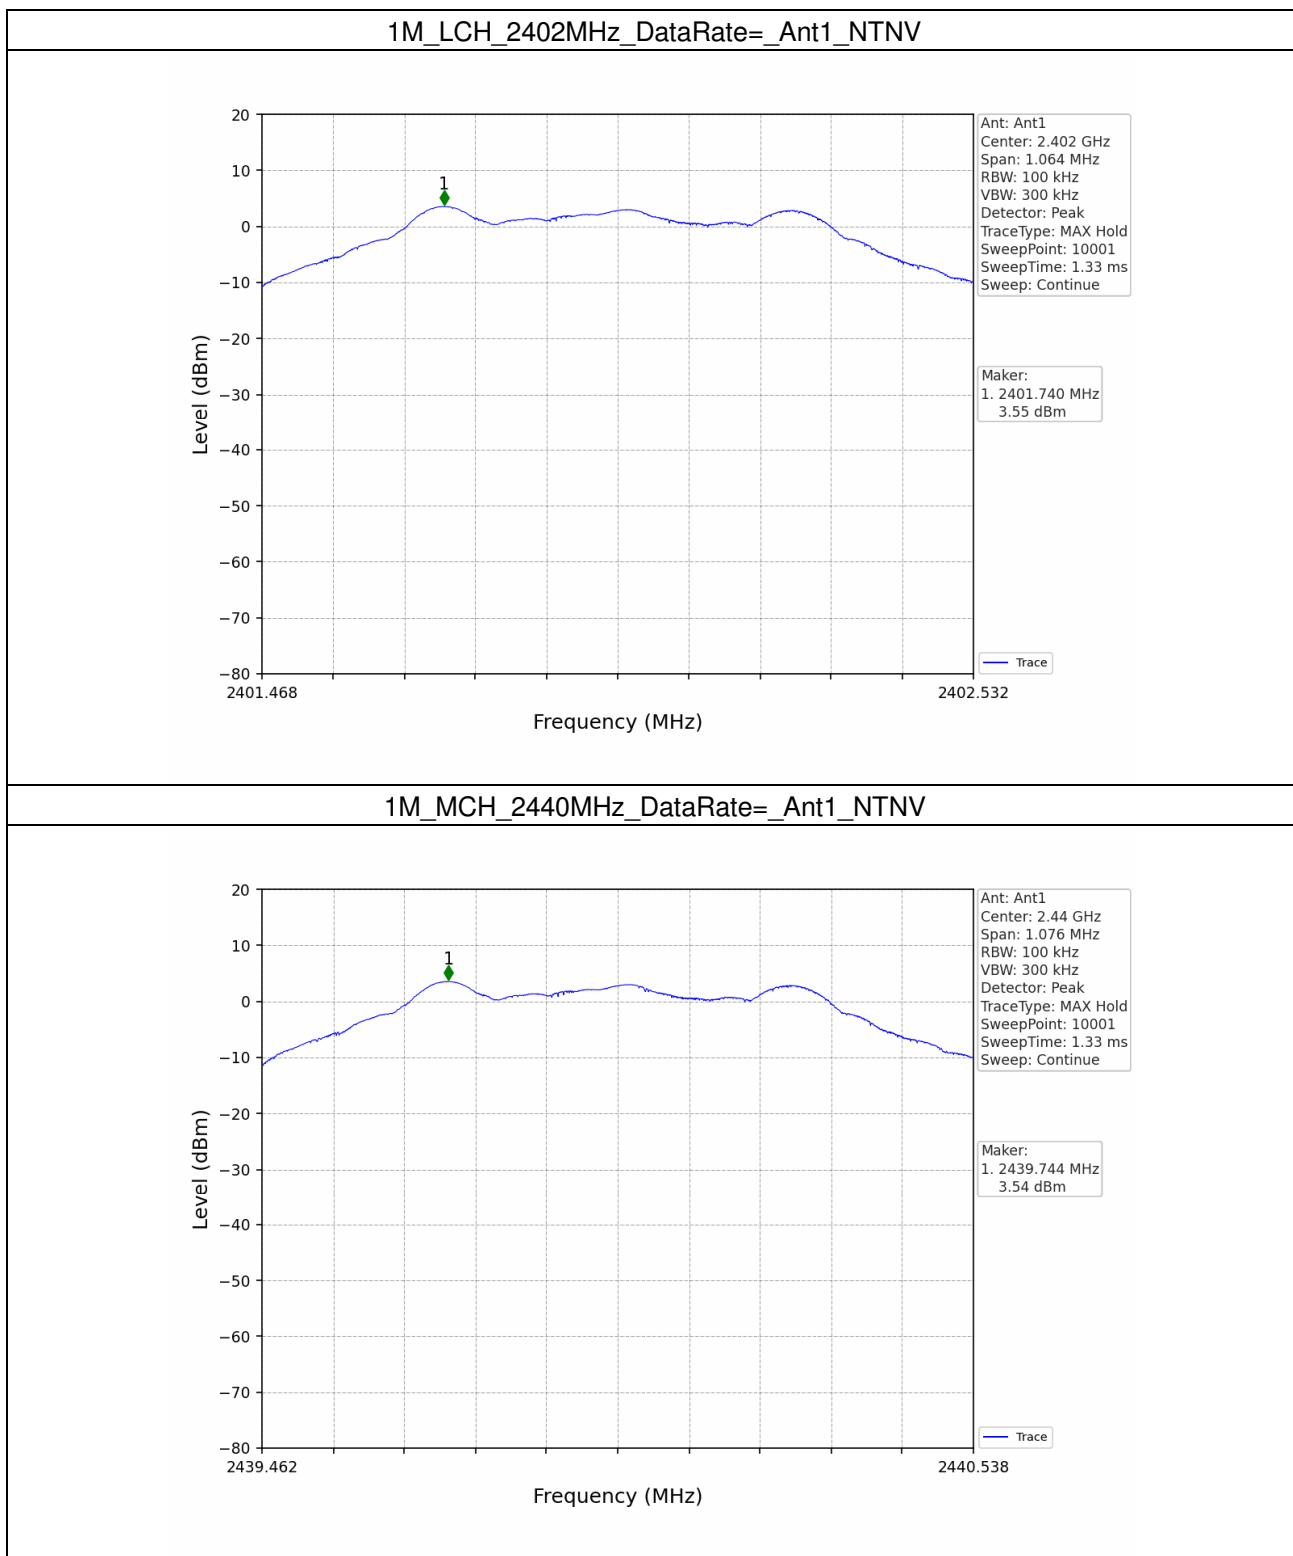

1M_HCH_2480MHz_DataRate=_Ant1_NTNV

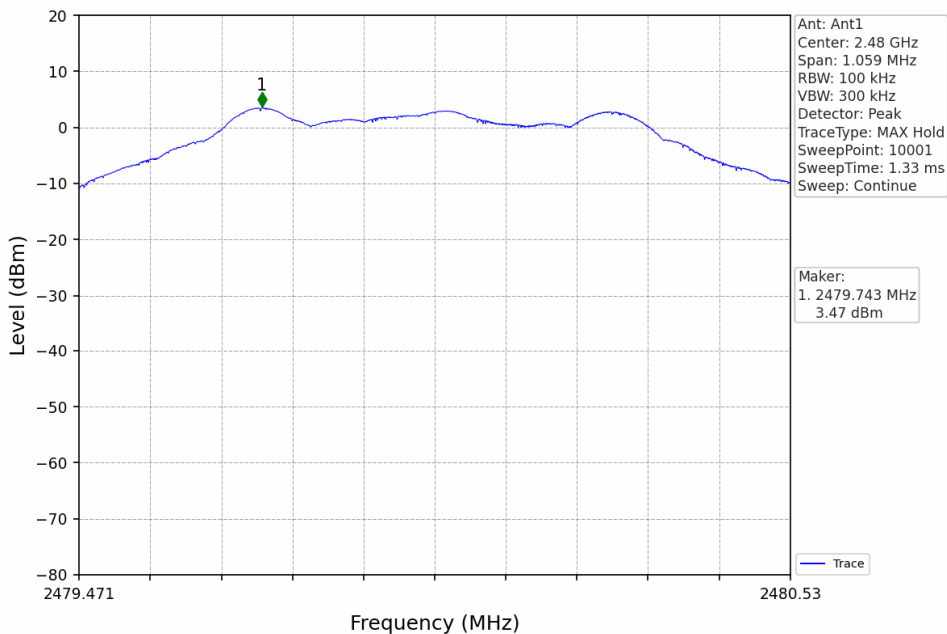


2M_LCH_2402MHz_DataRate=_Ant1_NTNV

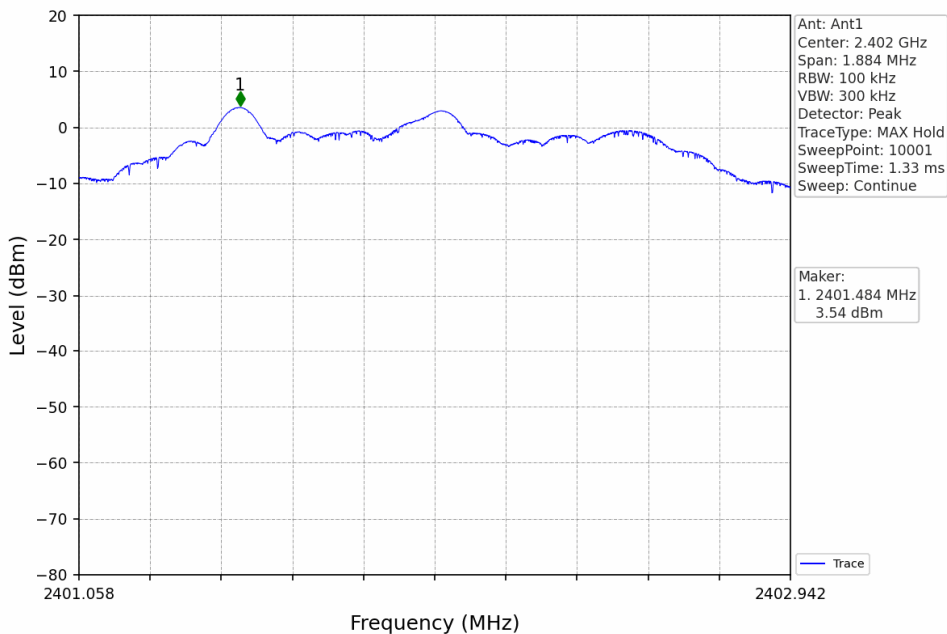


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

2M_MCH_2440MHz_DataRate=_Ant1_NTNV

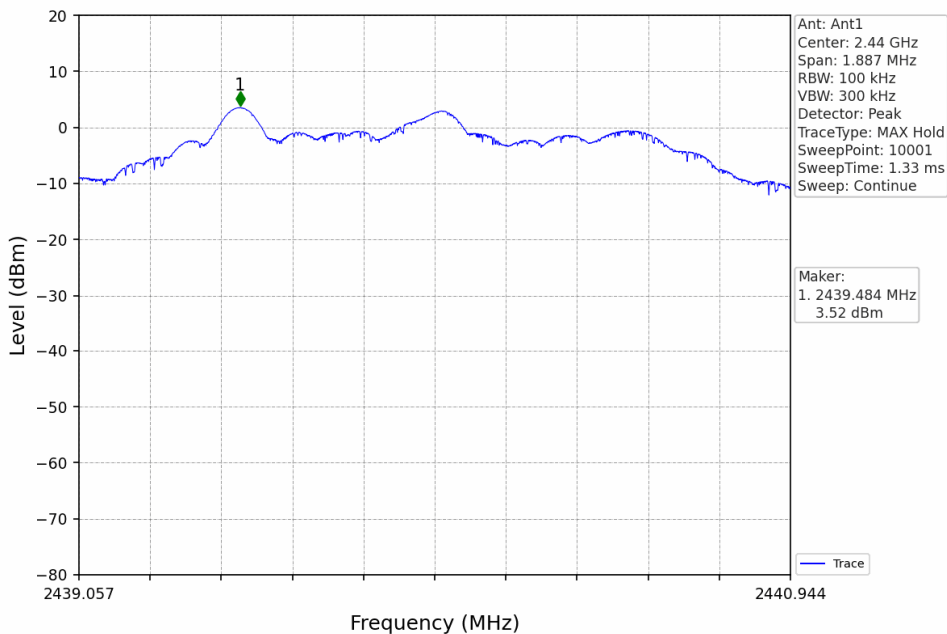

2M_HCH_2480MHz_DataRate=_Ant1_NTNV

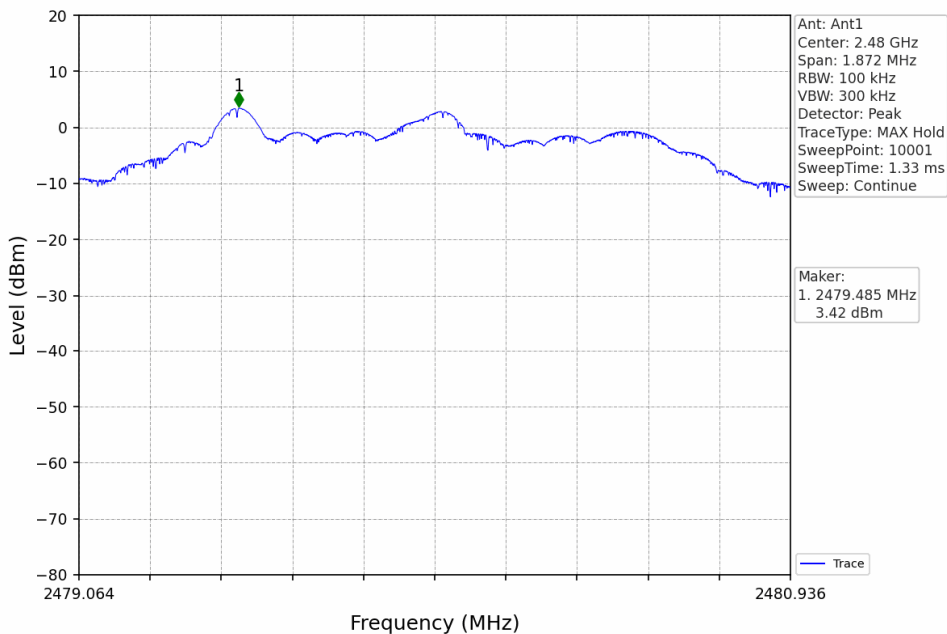

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


5.2 CSE

5.2.1 Test Result


Mode	TX Type	Frequency (MHz)	Ant	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	3.55	-16.45	Pass
		2440	1	3.55	-16.45	Pass
		2480	1	3.55	-16.45	Pass
2M	SISO	2402	1	3.54	-16.46	Pass
		2440	1	3.54	-16.46	Pass
		2480	1	3.54	-16.46	Pass

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


5.2.2 Test Graph

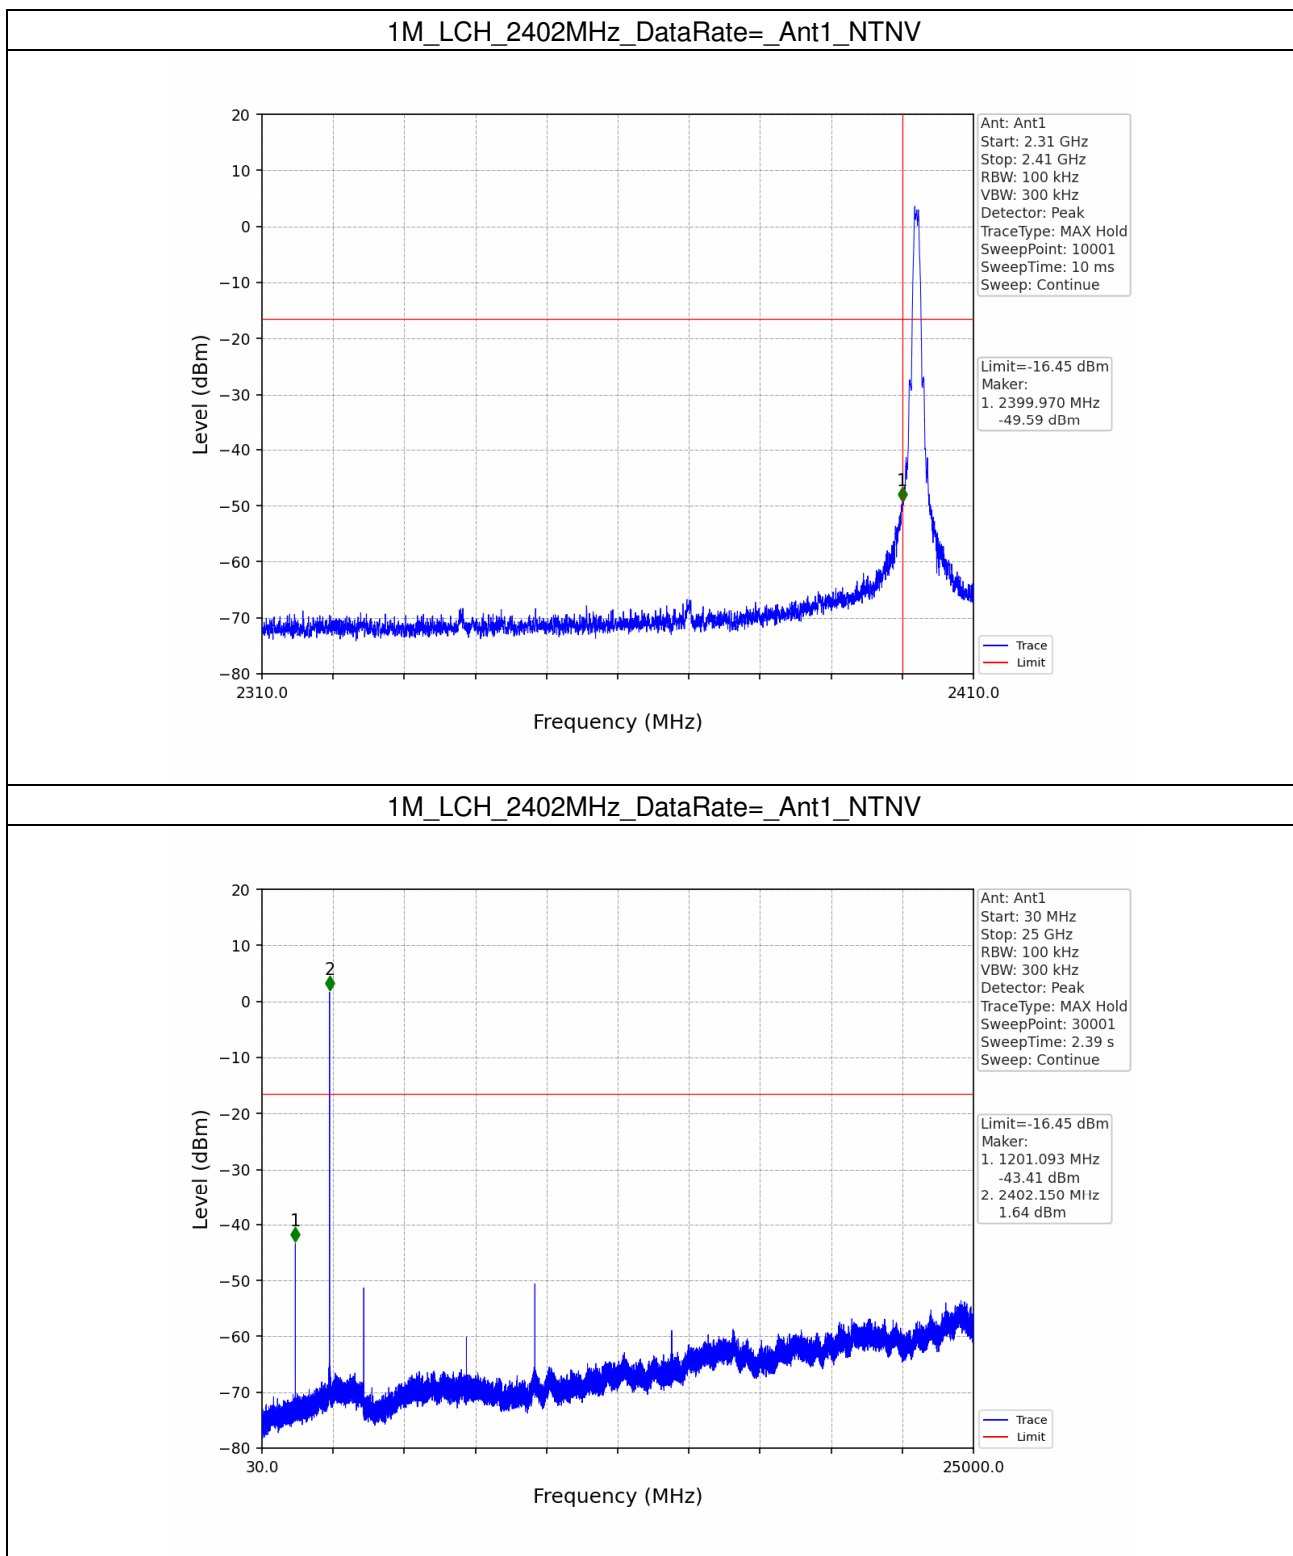


1M_MCH_2440MHz_DataRate=_Ant1_NTNV

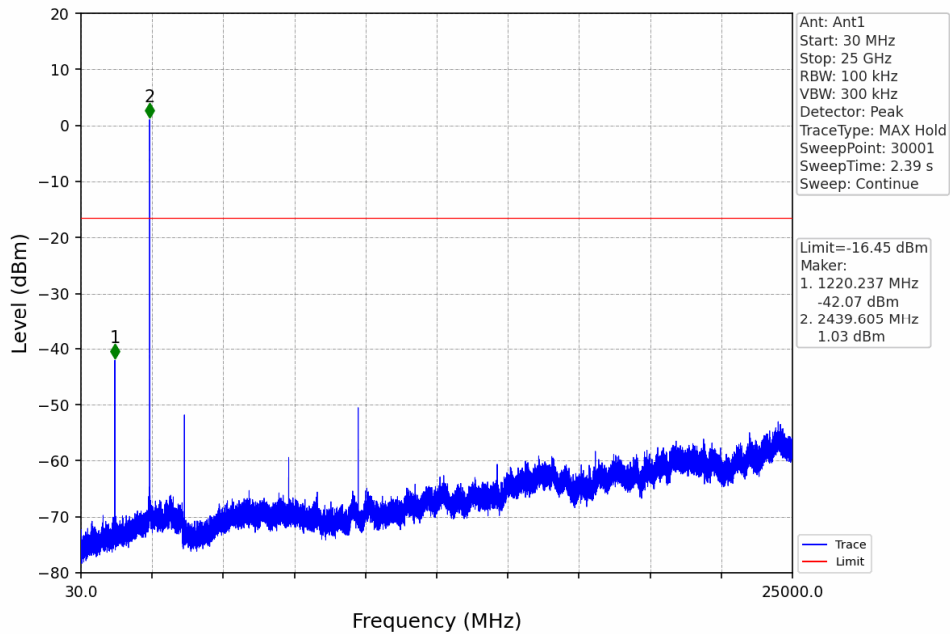


1M_HCH_2480MHz_DataRate=_Ant1_NTNV

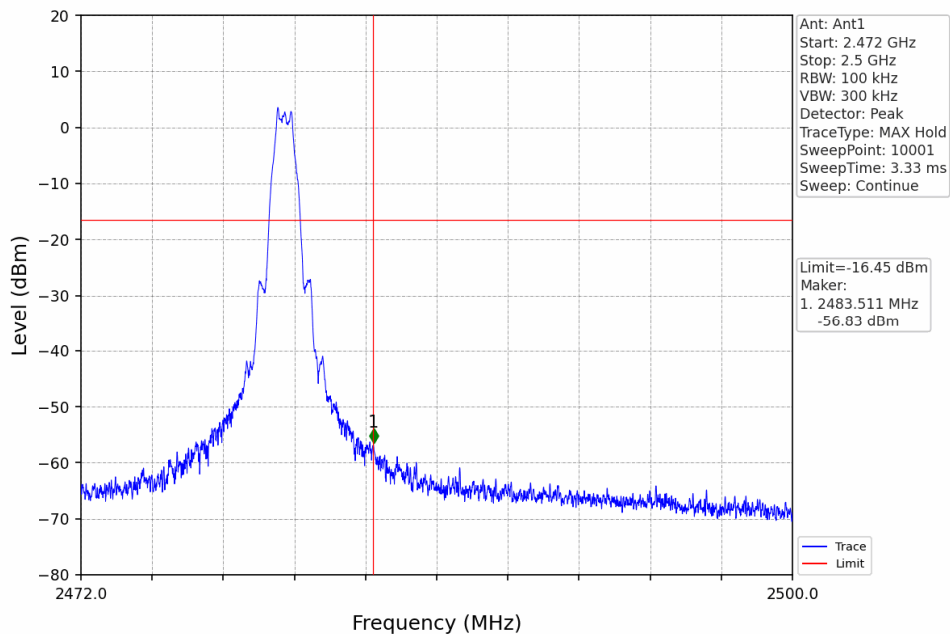


1M_HCH_2480MHz_DataRate=_Ant1_NTNV

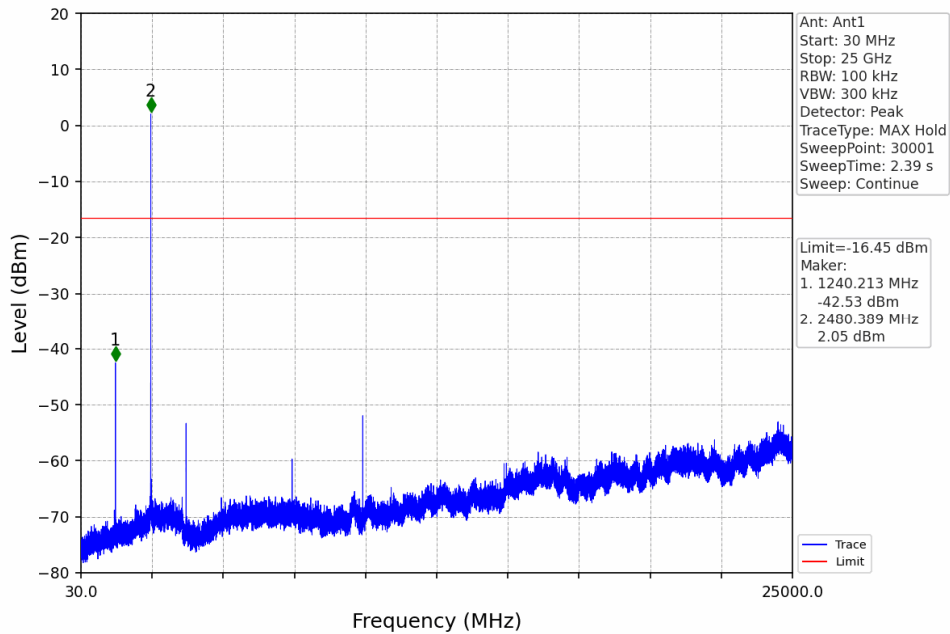


2M_LCH_2402MHz_DataRate=_Ant1_NTNV

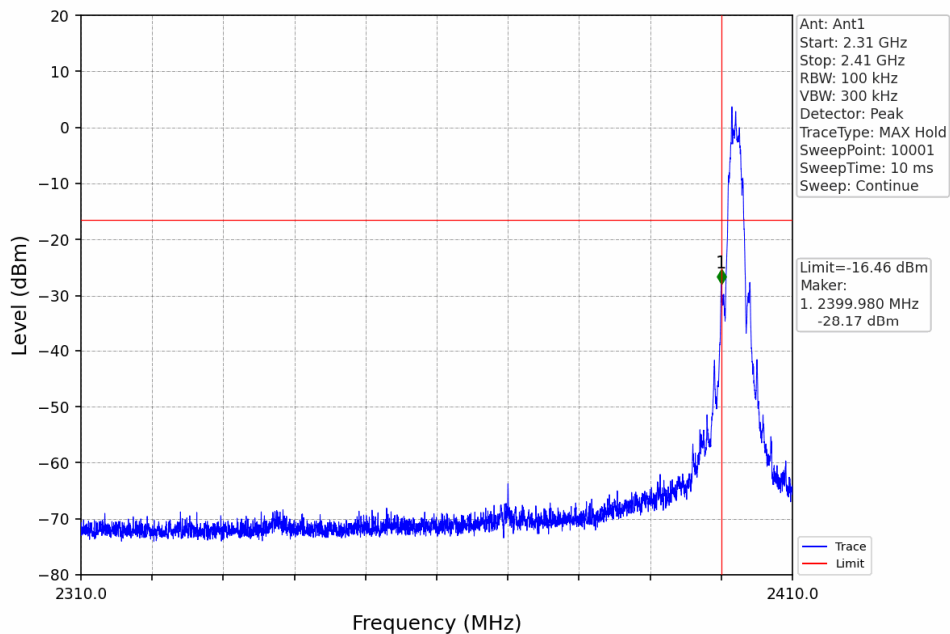


2M_LCH_2402MHz_DataRate=_Ant1_NTNV

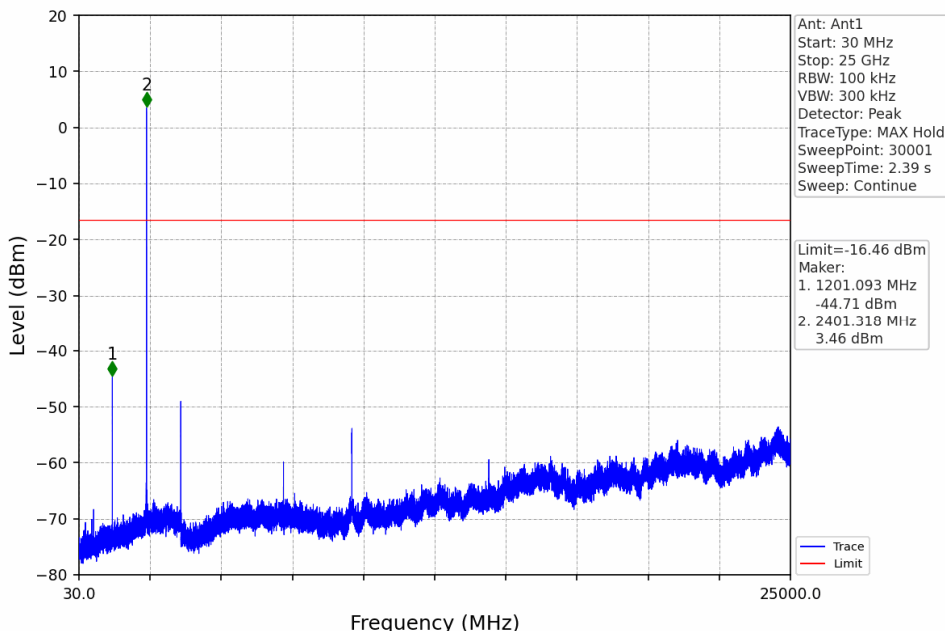


2M_MCH_2440MHz_DataRate=_Ant1_NTNV

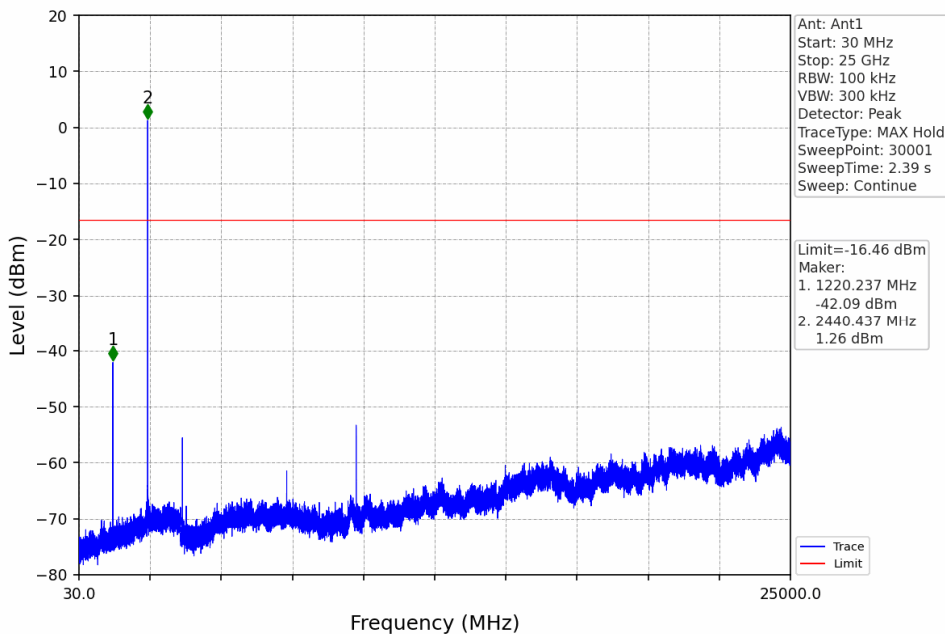

2M_HCH_2480MHz_DataRate=_Ant1_NTNV

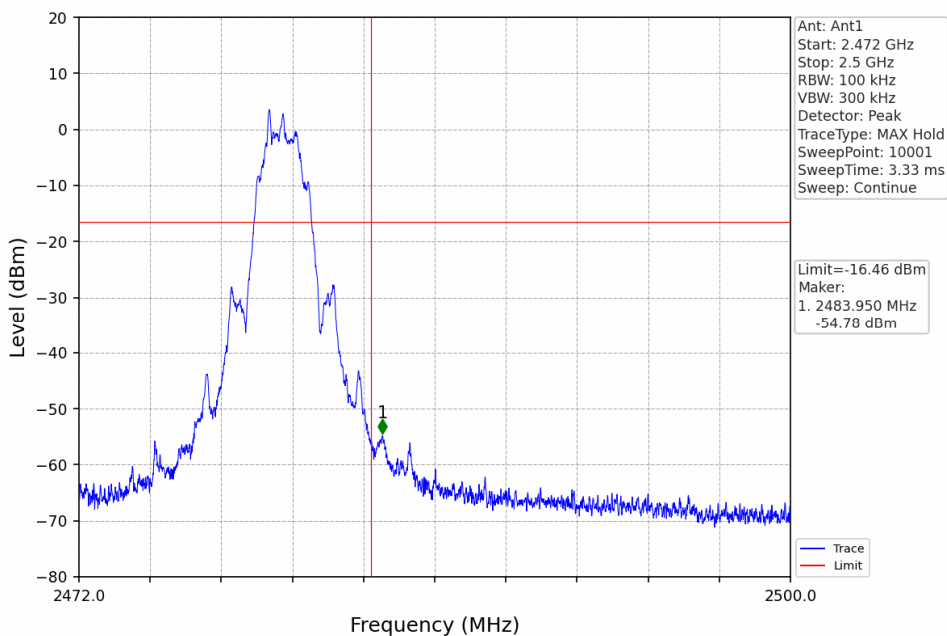

2M_HCH_2480MHz_DataRate=_Ant1_NTNV

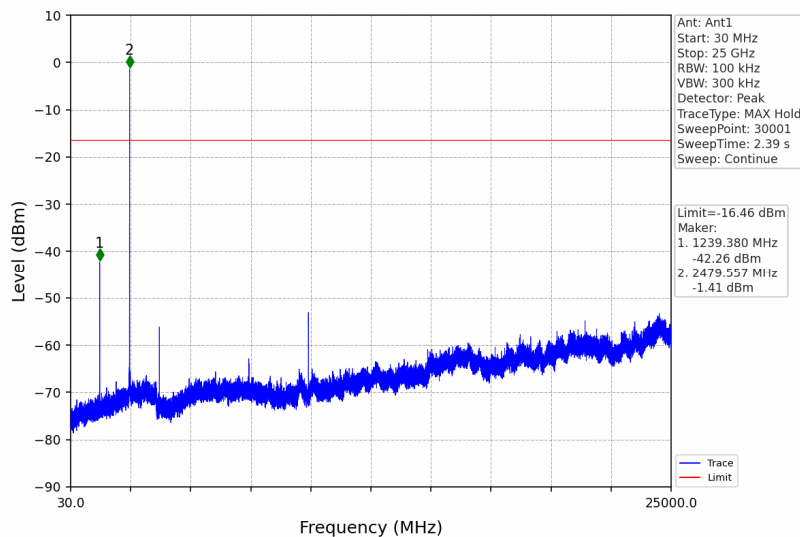

- End of the Report -