



TEST REPORT NUMBER: (8522)005-0207

TEST REPORT

Applicant:	Jakks Pacific (HK) Ltd.	Fax:	---
		E-mail:	---
Address :	12/F., Wharf T&T Centre, 7 Canton Road. Tsim Sha Tsui Hongkong		
Test Date :	2022-01-07 to 2022-01-21		

Manufacturer or Supplier :	Jakks Pacific, Inc.
Address :	22619 PCH Malibu CA 90265 United States Of America (Excluding The States Of Alaska)
Sample Description:	AirTitans Jurassic World Massive Attack T-Rex R/C
Model number:	15423TX
Additional Model :	N/A
Rated Voltage:	DC4.5V (AAA*3)
FCC ID :	OTA15423TX
IC :	7783A-15423TX

The submitted sample of the above equipment has been tested according to following standard(s)

47 CFR Part 15, Subpart C 249

RSS-210 Issue 10 December 2019

RSS-Gen Issue 5 March 2019

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Assistant Manager

Name: Nick Lung

Date: FEB 23,2022



TEST REPORT NUMBER: (8522)005-0207

1 Test Summary

Test Item	IC Test Requirement	Test method	Result
Antenna Requirement	RSS-Gen Section 6.8 47 CFR Part 15, Subpart C Section 15.203	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	RSS-Gen Section 8.8 47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10-2013	N/A
Field Strength of the Fundamental Signal	RSS 210 B 10(a) 47 CFR Part 15, Subpart C Section 15.249 (a)	RSS-Gen section 6.12 & ANSI C63.10-2013	PASS
Spurious Emissions	RSS 210 B 10 (b) 47 CFR Part 15, Subpart C Section 15.249 (a)/15.209	RSS-Gen section 6.13 & ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency	RSS 210 B 10 (b) 47 CFR Part 15, Subpart C Section 15.249(a)/15.205	RSS-Gen section 6.13 & ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	RSS-Gen section 6.7 47 CFR Part 15, Subpart C Section 15.215 (c)	RSS-Gen section 6.7 & ANSI C63.10-2013	PASS
99% Occupied Bandwidth	RSS-Gen section 6.7	RSS-Gen section 6.7	PASS



TEST REPORT NUMBER: (8522)005-0207

2 Contents

	Page
TEST REPORT.....	1
1 TEST SUMMARY.....	2
2 CONTENTS.....	3
3 GENERAL INFORMATION.....	4
3.1 CLIENT INFORMATION.....	4
3.2 GENERAL DESCRIPTION OF EUT.....	4
3.3 TEST ENVIRONMENT AND MODE.....	6
3.4 DESCRIPTION OF SUPPORT UNITS.....	6
3.5 STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	7
3.6 TEST LOCATION.....	8
3.7 TEST FACILITY.....	8
3.8 DEVIATION FROM STANDARDS.....	8
3.9 ABNORMALITIES FROM STANDARD CONDITIONS.....	8
3.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	8
3.11 EQUIPMENT LIST.....	9
4 TEST RESULTS AND MEASUREMENT DATA.....	10
4.1 ANTENNA REQUIREMENT.....	10
4.2 RADIATED EMISSION.....	11
4.3 20dB BANDWIDTH.....	19
4.4 99% OCCUPY BANDWIDTH.....	22
5 PHOTOGRAPHS.....	26
5.1 RADIATED EMISSION TEST SETUP.....	26
5.2 EUT CONSTRUCTIONAL DETAILS.....	28



TEST REPORT NUMBER: (8522)005-0207

3 General Information

3.1 Client Information

Applicant:	Jakks Pacific (HK) Ltd.
Address of Applicant:	12/F., Wharf T&T Centre, 7 Canton Road. Tsim Sha Tsui Hongkong
Manufacturer:	Jakks Pacific, Inc.
Address of Manufacturer:	22619 PCH Malibu CA 90265 United States Of America (Excluding The States Of Alaska)

3.2 General Description of EUT

Name:	AirTitans Jurassic World Massive Attack T-Rex R/C
Tset Model No.:	15423TX
Model No.:	15423TX
Trade Mark :	N/A
Serial No.:	---
Software Version:	MFU260-008TX
Hardware Version:	DL1012-TX1
Frequency Range:	2407-2475MHz
Modulation Type:	OFDM
Number of Channels:	33
Sample Type:	Portable product
Antenna Type:	Internal antenna
Antenna Gain:	-0.58dBi
Power Supply:	DC4.5V (AAA*3)

TEST REPORT NUMBER: (8522)005-0207

Operation Frequency each of channel					
Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2407MHz	12	2429MHz	23	2455MHz
2	2409MHz	13	2431MHz	24	2457MHz
3	2411MHz	14	2433MHz	25	2459MHz
4	2413MHz	15	2435MHz	26	2461MHz
5	2415MHz	16	2437MHz	27	2463MHz
6	2417MHz	17	2439MHz	28	2465MHz
7	2419MHz	18	2445MHz	29	2467MHz
8	2421MHz	19	2447MHz	30	2469MHz
9	2423MHz	20	2449MHz	31	2471MHz
10	2425MHz	21	2451MHz	32	2473MHz
11	2427MHz	22	2453MHz	33	2475MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2407MHz
The Middle channel	2445MHz
The Highest channel	2475MHz



TEST REPORT NUMBER: (8522)005-0207

3.3 Test Environment and Mode

Operating Environment:	
Temperature:	29 °C
Humidity:	59 % RH
Atmospheric Pressure:	1001mbar
Test mode:	
Test Mode:	Use test software (RF test) to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.

3.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Remark	FCC certification
Adapter	HUAWEI	HW-0502000C01	/	CQA



TEST REPORT NUMBER: (8522)005-0207

3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for **CQA** laboratory is reported:

No.	Item	Uncertainty
1	Radiated Emission (Below 1GHz)	5.12dB
2	Radiated Emission (Above 1GHz)	4.60dB
3	Conducted Disturbance (0.15~30MHz)	3.34dB
4	Radio Frequency	3×10^{-8}
5	Duty cycle	0.6 %
6	Occupied Bandwidth	1.1%
7	RF conducted power	0.86dB
8	RF power density	0.74
9	Conducted Spurious emissions	0.86dB
10	Temperature test	0.8℃
11	Humidity test	2.0%
12	Supply voltages	0.5 %
13	time	0.6 %.
14	Frequency Error	5.5 Hz



TEST REPORT NUMBER: (8522)005-0207

3.6 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

3.7 Test Facility

• **ISED No.: 22984**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements

• **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

3.8 Deviation from Standards

None.

3.9 Abnormalities from Standard Conditions

None.

3.10 Other Information Requested by the Customer

None.



TEST REPORT NUMBER: (8522)005-0207

3.11 Equipment List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2021/9/10	2022/9/9
Spectrum analyzer	R&S	FSU26	CQA-038	2021/9/10	2022/9/9
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2021/9/10	2022/9/9
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2021/9/10	2022/9/9
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2021/9/16	2024/9/15
Bilog Antenna	R&S	HL562	CQA-011	2021/9/16	2024/9/15
Horn Antenna	R&S	HF906	CQA-012	2021/9/16	2024/9/15
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2021/9/16	2024/9/15
Coaxial Cable (Above 1GHz)	CQA	N/A	C019	2021/9/10	2022/9/9
Coaxial Cable (Below 1GHz)	CQA	N/A	C020	2021/9/10	2022/9/9
Antenna Connector	CQA	RFC-01	CQA-080	2021/9/10	2022/9/9
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2021/9/10	2022/9/9
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2021/9/10	2022/9/9


Note:

The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

TEST REPORT NUMBER: (8522)005-0207

4 Test results and Measurement Data

4.1 Antenna Requirement

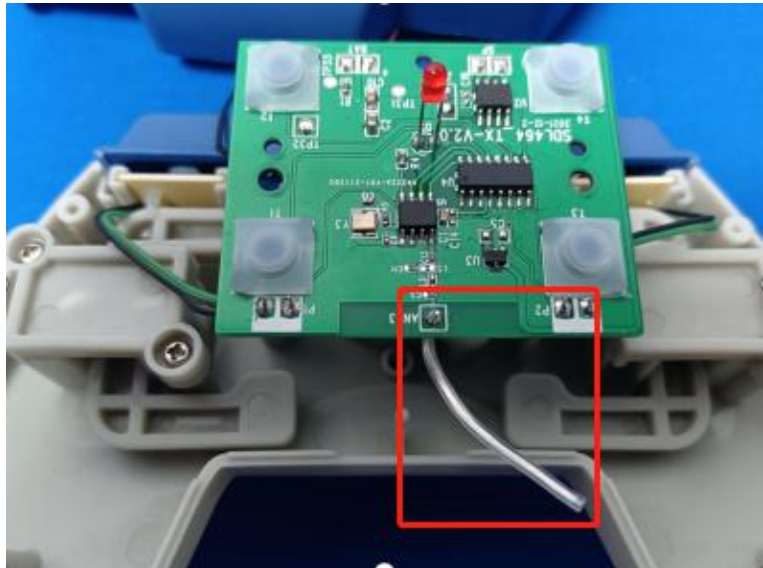Standard requirement:	RSS-Gen Section 6.8 47 CFR Part 15C Section 15.203
EUT Antenna:	
The antenna is soldered on the PCB, no need to consider replacement. best case gain Antenna is -0.58dBi.	



TEST REPORT NUMBER: (8522)005-0207

4.2 Radiated Emission

Test Requirement:	RSS 210 B 10 (a) 47 CFR Part 15, Subpart C Section 15.205/15.209				
Test Method:	ANSI C63.10 & RSS-Gen section 6.12/6.13				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Note: For fundamental frequency, RBW=5MHz, VBW=5MHz, Peak detector is for PK value, RMS detector is for Average value.					
Limit: (Spurious Emissions and band edge)	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 1) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device. 2) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				
Limit:	Frequency	Limit (dBuV/m @3m)	Remark		



BUREAU
VERITAS

TEST REPORT NUMBER: (8522)005-0207

(Field strength of the fundamental signal)	2400MHz-2483.5MHz	94.0	Average Value
		114.0	Peak Value

Test Setup:

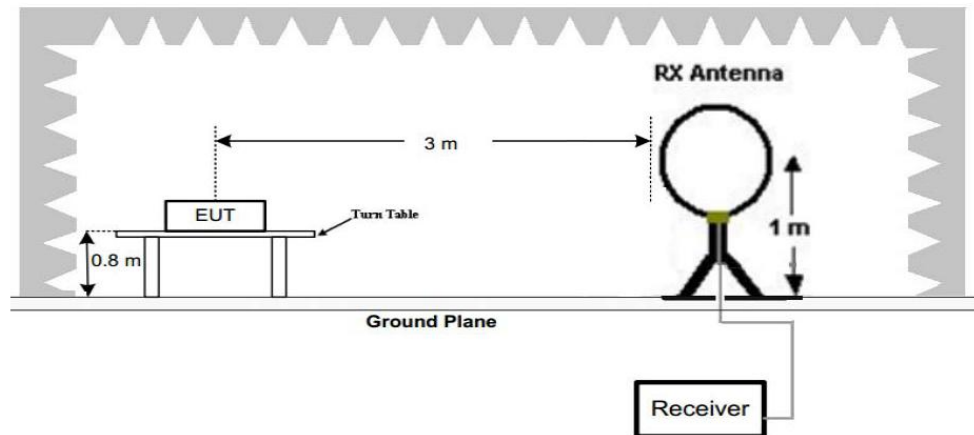


Figure 1. Below 30MHz

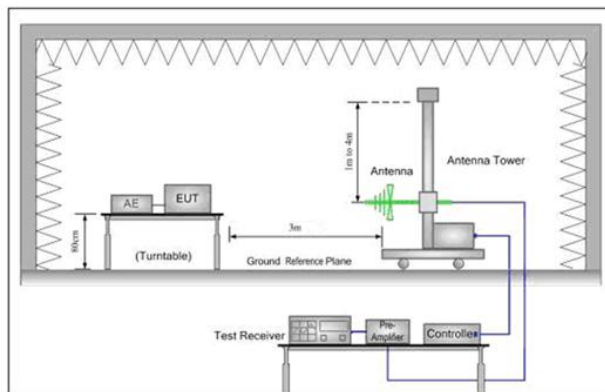


Figure 2. 30MHz to 1GHz

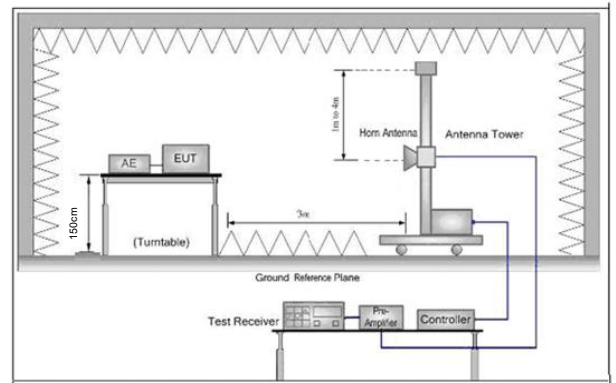


Figure 3. Above 1 GHz

Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- Note: For the radiated emission test above 1GHz:
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.



TEST REPORT NUMBER: (8522)005-0207

	b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel,the middle channel,the Highest channel h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the X axis positioning which it is worse case. i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with GFSK at lowest, middle and highest channel.
Final Test Mode:	Pretest the EUT at Transmitting mode, For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report.
Test Voltage:	DC4.5V (AAA*3)
Test Results:	Pass




BUREAU
VERITAS

TEST REPORT NUMBER: (8522)005-0207

Measurement Data

30MHz~1GHz (the worst case)

Test mode: Transmitting (Lowest channel) Vertical

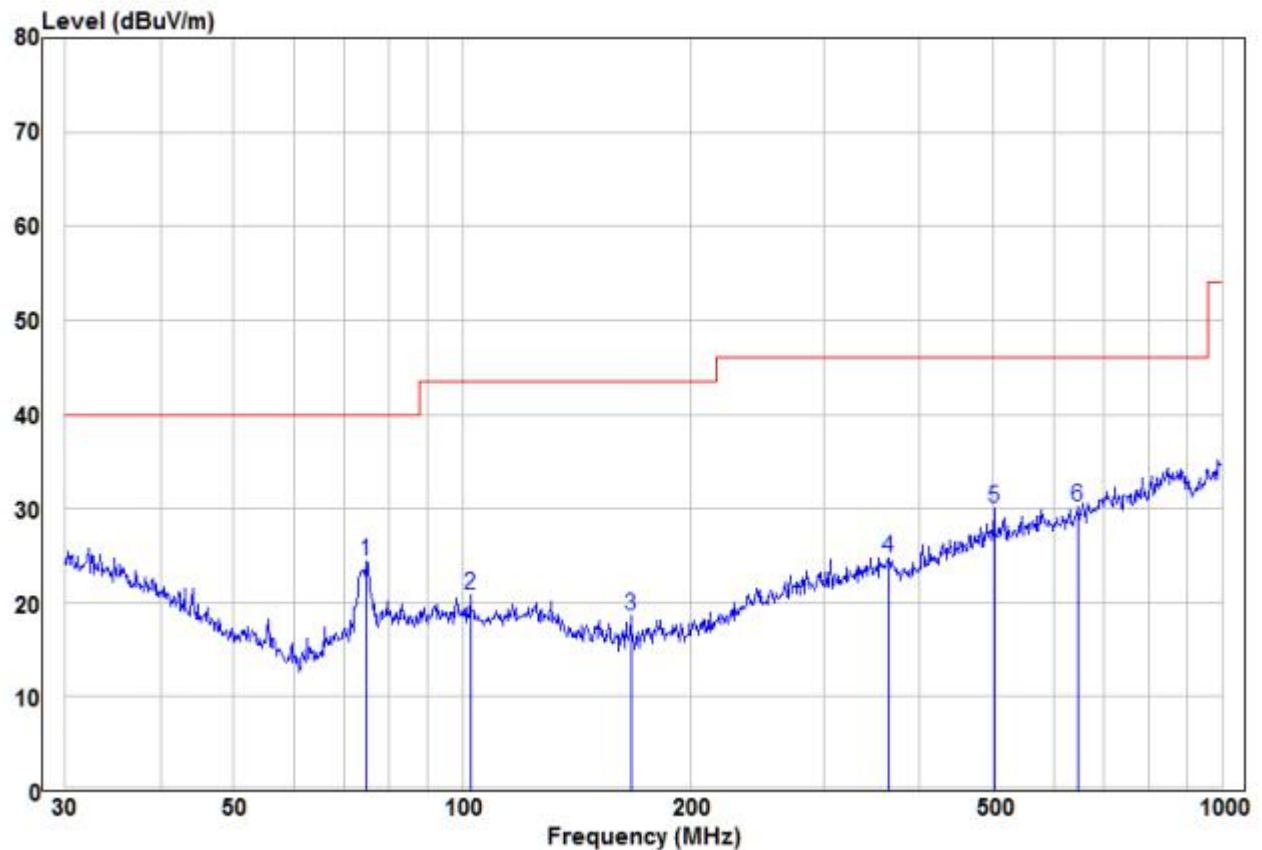

	Read		Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Pol/Phase
1 pp	74.66	15.42	8.92	24.34	40.00	-15.66 Peak
2	102.36	10.29	10.54	20.83	43.50	-22.67 Peak
3	166.65	10.92	7.68	18.60	43.50	-24.90 Peak
4	362.98	9.45	15.26	24.71	46.00	-21.29 Peak
5	501.18	11.66	18.29	29.95	46.00	-16.05 Peak
6	645.12	10.66	19.60	30.26	46.00	-15.74 Peak

Bureau Veritas Shenzhen Co., Ltd

1st Floor, Block A, Minlida Industrial Building, 4th
Zone of Honghualing Industrial Park, Shenzhen,
Guangdong Province, China

Tel: +86 755 8600 0151
Email: <http://www.bureauveritas.com>




BUREAU
VERITAS

TEST REPORT NUMBER: (8522)005-0207

30MHz~1GHz (the worst case)

Test mode: Transmitting (Lowest channel) Horizontal

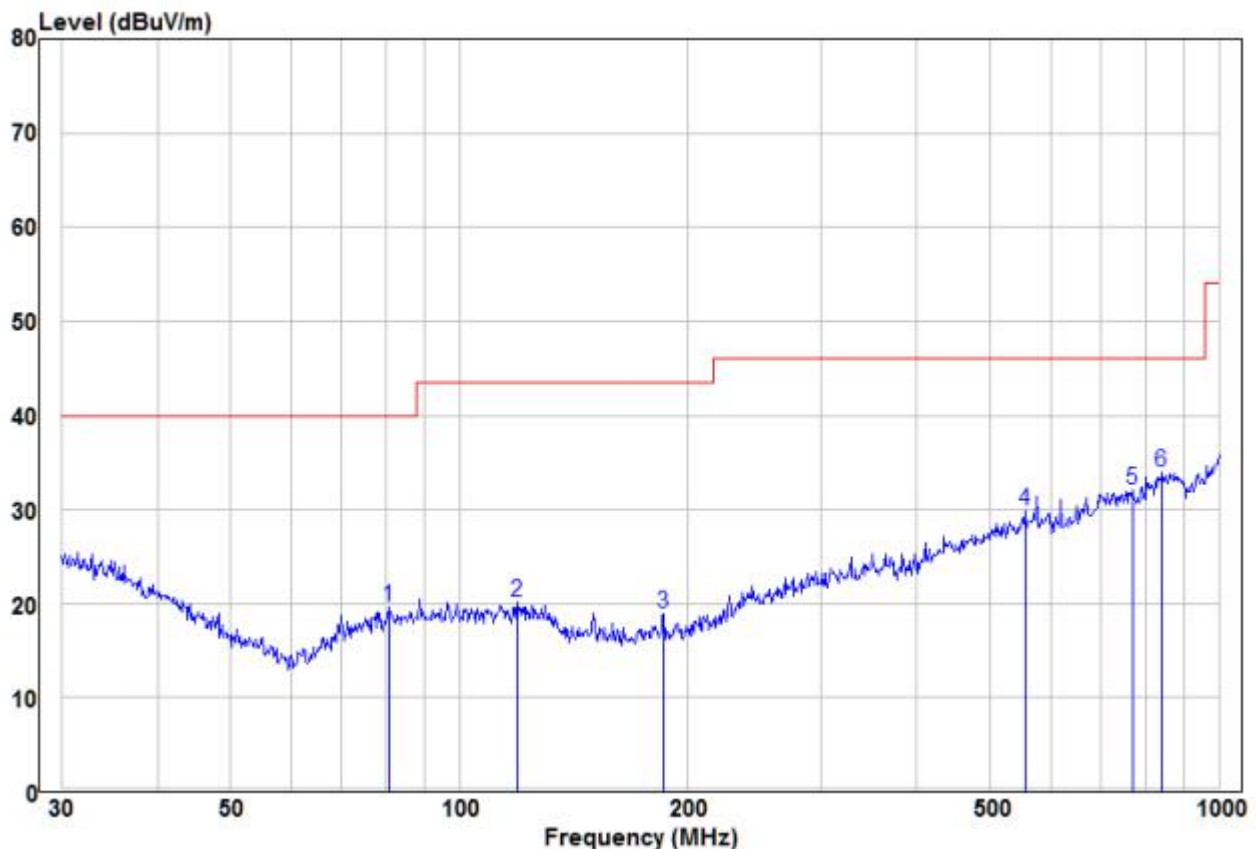

	Read Freq	Level	Factor	Limit Level	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	80.64	9.80	9.80	19.60	40.00	-20.40	Peak
2	119.44	9.43	10.67	20.10	43.50	-23.40	Peak
3	185.79	10.87	8.13	19.00	43.50	-24.50	Peak
4	554.83	11.10	18.84	29.94	46.00	-16.06	Peak
5	768.75	10.00	22.07	32.07	46.00	-13.93	Peak
6 pp	842.13	9.85	24.10	33.95	46.00	-12.05	Peak



**BUREAU
VERITAS**

TEST REPORT NUMBER: (8522)005-0207

Above 1GHz							
Test mode:		Transmitting		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390	58.33	-9.2	49.13	74	-24.87	Peak	H
2390	44.38	-9.2	35.18	54	-18.82	AVG	H
2400	60.15	-9.39	50.76	74	-23.24	Peak	H
2400	46.01	-9.39	36.62	54	-17.38	AVG	H
2407	94.80	-9.33	85.47	114	-28.53	peak	H
2407	85.68	-9.33	76.35	94	-17.65	AVG	H
4814	54.80	-4.28	50.52	74	-23.48	peak	H
4814	41.61	-4.28	37.33	54	-16.67	AVG	H
7221	53.19	1.13	54.32	74	-19.68	peak	H
7221	36.42	1.13	37.55	54	-16.45	AVG	H
2390	58.28	-9.2	49.08	74	-24.92	peak	V
2390	44.90	-9.2	35.70	54	-18.30	AVG	V
2400	59.86	-9.39	50.47	74	-23.53	peak	V
2400	46.79	-9.39	37.40	54	-16.60	AVG	V
2407	92.93	-9.33	83.60	114	-30.40	peak	V
2407	82.63	-9.34	73.29	94	-20.71	AVG	V
4814	55.12	-4.28	50.84	74	-23.16	peak	V
4814	40.70	-4.28	36.42	54	-17.58	AVG	V
7221	53.09	1.13	54.22	74	-19.78	peak	V
7221	36.57	1.13	37.70	54	-16.30	AVG	V

Bureau Veritas Shenzhen Co., Ltd

1st Floor, Block A, Minlida Industrial Building, 4th
Zone of Honghualing Industrial Park, Shenzhen,
Guangdong Province, China

Tel: +86 755 8600 0151
Email: <http://www.bureauveritas.com>



TEST REPORT NUMBER: (8522)005-0207

Test mode:		Transmitting		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2445	97.65	-9.37	88.28	114	-25.72	peak	H
2445	86.46	-9.37	77.09	94	-16.91	AVG	H
4890	55.71	-4.14	51.57	74	-22.43	peak	H
4890	41.70	-4.14	37.56	54	-16.44	AVG	H
7335	52.63	0.56	53.19	74	-20.81	peak	H
7335	38.40	0.56	38.96	54	-15.04	AVG	H
2445	96.63	-9.36	87.27	114	-26.73	peak	V
2445	83.30	-9.36	73.94	94	-20.06	AVG	V
4890	56.93	-4.14	52.79	74	-21.21	peak	V
4890	42.42	-4.14	38.28	54	-15.72	AVG	V
7335	51.54	0.56	52.10	74	-21.90	peak	V
7335	37.07	0.56	37.63	54	-16.37	AVG	V



TEST REPORT NUMBER: (8522)005-0207


Test mode:		Transmitting		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2475	92.93	-9.23	83.70	114	-30.30	peak	H
2475	82.38	-9.23	73.15	94	-20.85	AVG	H
2483.5	59.90	-9.29	50.61	74	-23.39	Peak	H
2483.5	42.84	-9.29	33.55	54	-20.45	AVG	H
4950	55.97	-4.03	51.94	74	-22.06	peak	H
4950	41.52	-4.03	37.49	54	-16.51	AVG	H
7425	52.52	1.68	54.20	74	-19.80	peak	H
7425	36.88	1.68	38.56	54	-15.44	AVG	H
2475	94.19	-9.23	84.96	114	-29.04	peak	V
2475	81.03	-9.23	71.80	94	-22.20	AVG	V
2483.5	61.27	-9.29	51.98	74	-22.02	peak	V
2483.5	45.20	-9.29	35.91	54	-18.09	AVG	V
4950	57.10	-4.03	53.07	74	-20.93	peak	V
4950	43.51	-4.03	39.48	54	-14.52	AVG	V
7425	52.42	1.68	54.10	74	-19.90	peak	V
7425	37.87	1.68	39.55	54	-14.45	AVG	V

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz,The disturbance above 8GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported .

TEST REPORT NUMBER: (8522)005-0207

4.3 20dB Bandwidth

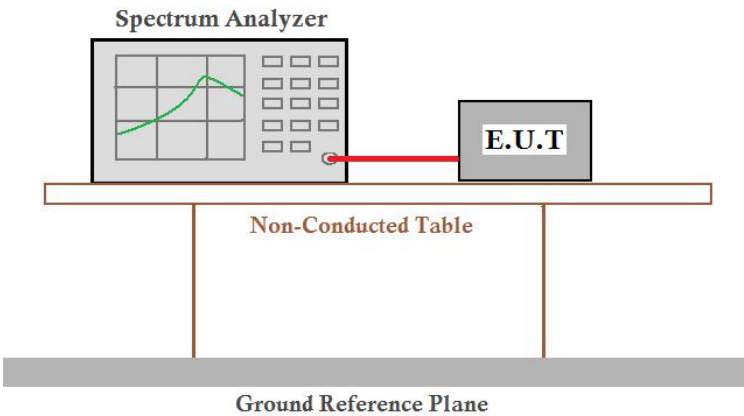Test Requirement:	RSS-Gen Section 6.7 47 CFR Part 15C Section 15.215
Test Method:	ANSI C63.10:2013 & RSS-Gen Section 6.7
Test Setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.
Test Mode:	Transmitting with GFSK at lowest, middle and highest channel.
Limit:	N/A
Test Results:	Pass

Measurement Data

Test channel	20dB bandwidth (MHz)	Results
Lowest	1.187	Pass
Middle	1.274	Pass
Highest	1.447	Pass




BUREAU
VERITAS

TEST REPORT NUMBER: (8522)005-0207

Test plot as follows:

Test channel: Lowest

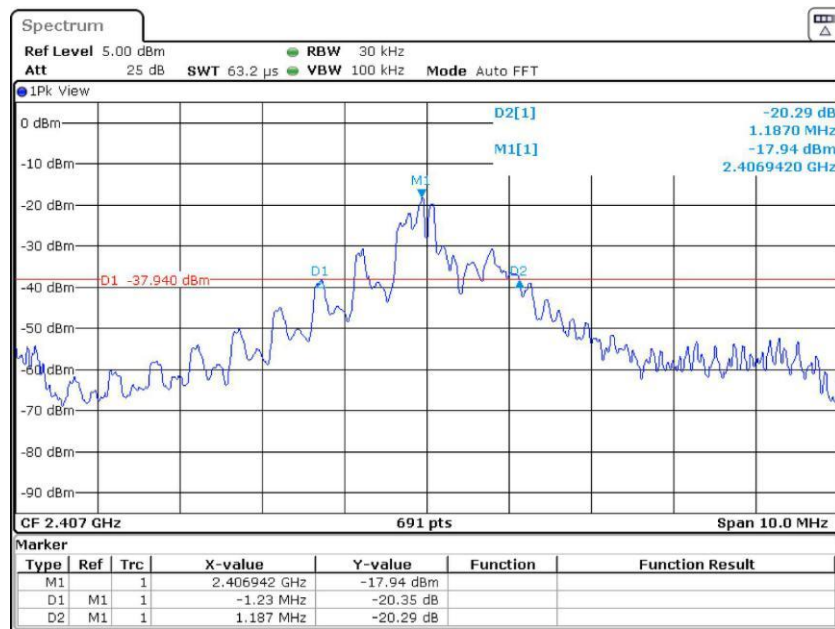

Date: 12.JAN 2022 06:54:47

Bureau Veritas Shenzhen Co., Ltd

1st Floor, Block A, Minlida Industrial Building, 4th
Zone of Honghualing Industrial Park, Shenzhen,
Guangdong Province, China


Tel: +86 755 8600 0151
Email: <http://www.bureauveritas.com>



BUREAU
VERITAS


TEST REPORT NUMBER: (8522)005-0207

Test channel: Middle

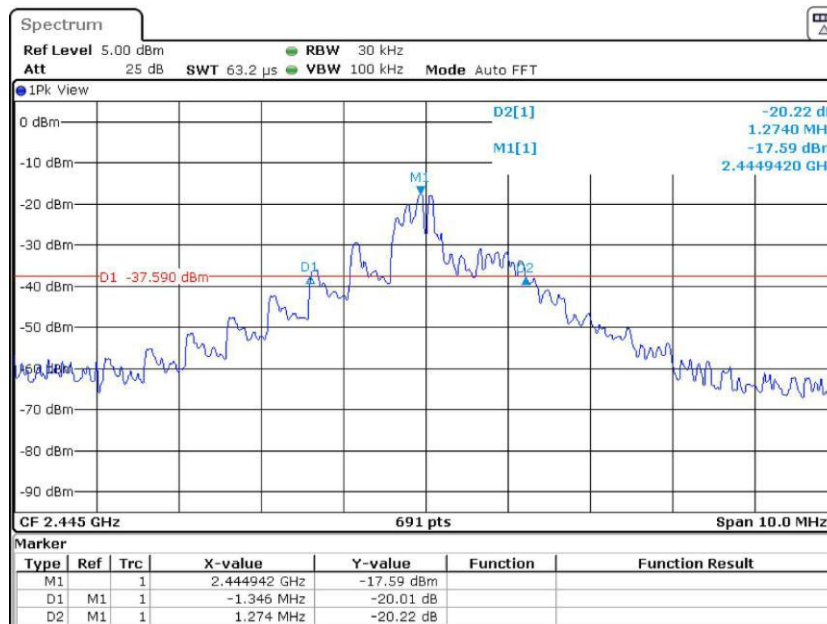

Date: 12.JAN.2022 07:00:27

Test channel: Highest

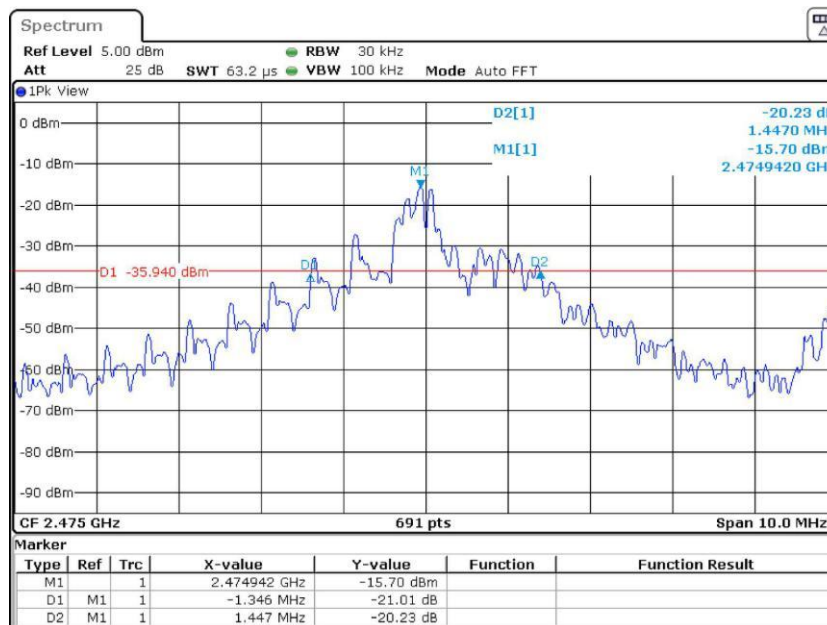

Date: 12.JAN.2022 06:59:30


Bureau Veritas Shenzhen Co., Ltd

1st Floor, Block A, Minlida Industrial Building, 4th
Zone of Honghualing Industrial Park, Shenzhen,
Guangdong Province, China

Tel: +86 755 8600 0151
Email: <http://www.bureauveritas.com>

TEST REPORT NUMBER: (8522)005-0207

4.4 99% Occupy Bandwidth

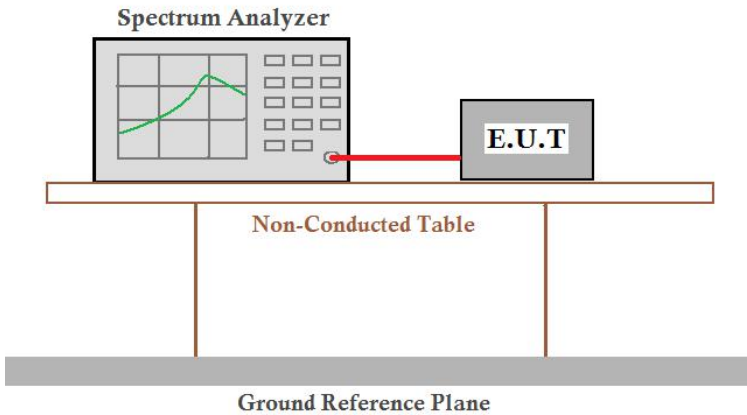Test Requirement:	RSS-Gen Section 6.7
Test Method:	RSS-Gen Section 6.7
Test Setup:	
Test Mode:	Transmitting with GFSK at lowest, middle and highest channel.
Limit:	N/A
Test Results:	Pass

Measurement Data

Test channel	99% Occupy Bandwidth (MHz)	Results
Lowest	2.489	Pass
Middle	2.822	Pass
Highest	2.981	Pass




BUREAU
VERITAS

TEST REPORT NUMBER: (8522)005-0207

Test plot as follows:

Test channel:	Lowest
---------------	--------

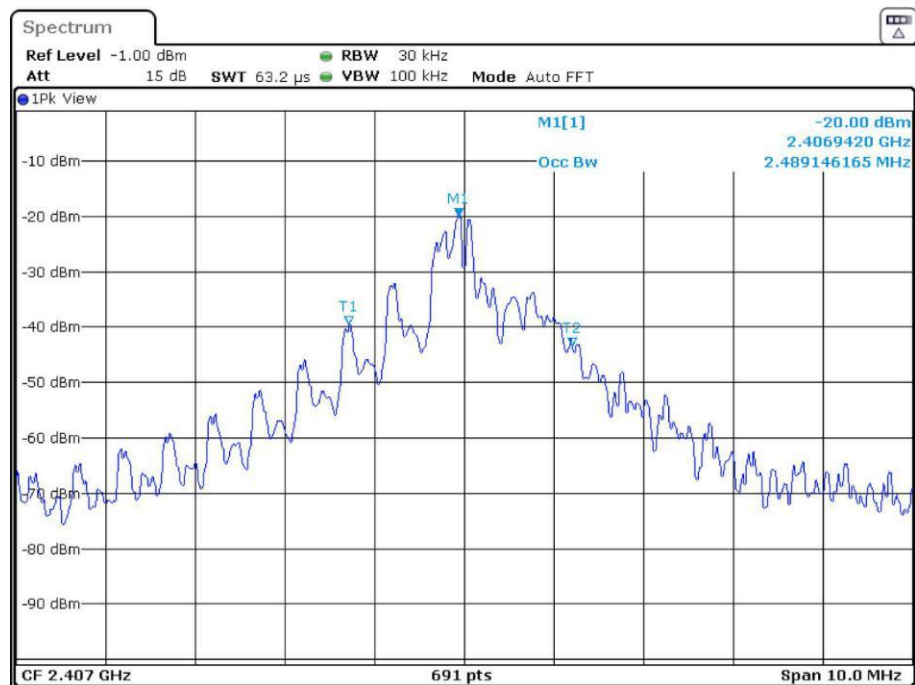

Date: 20. JAN 2022 12:53:08



Test channel:	Middle
---------------	--------




Test channel:	Highest
---------------	---------



BUREAU
VERITAS

TEST REPORT NUMBER: (8522)005-0207

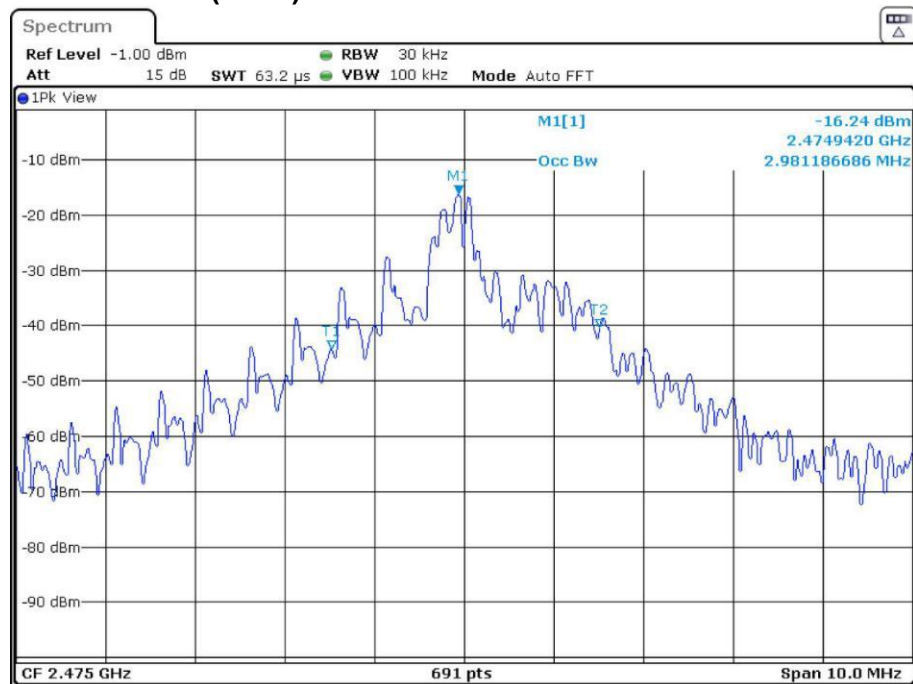

Date: 20.JAN.2022 12:54:09

Bureau Veritas Shenzhen Co., Ltd

1st Floor, Block A, Minlida Industrial Building, 4th
Zone of Honghualing Industrial Park, Shenzhen,
Guangdong Province, China

Tel: +86 755 8600 0151
Email: <http://www.bureauveritas.com>

TEST REPORT NUMBER: (8522)005-0207

5 Photographs

5.1 Radiated Emission Test Setup

9KHz~30MHz:



30MHz~1GHz:




**BUREAU
VERITAS**

TEST REPORT NUMBER: (8522)005-0207




Above 1GHz:

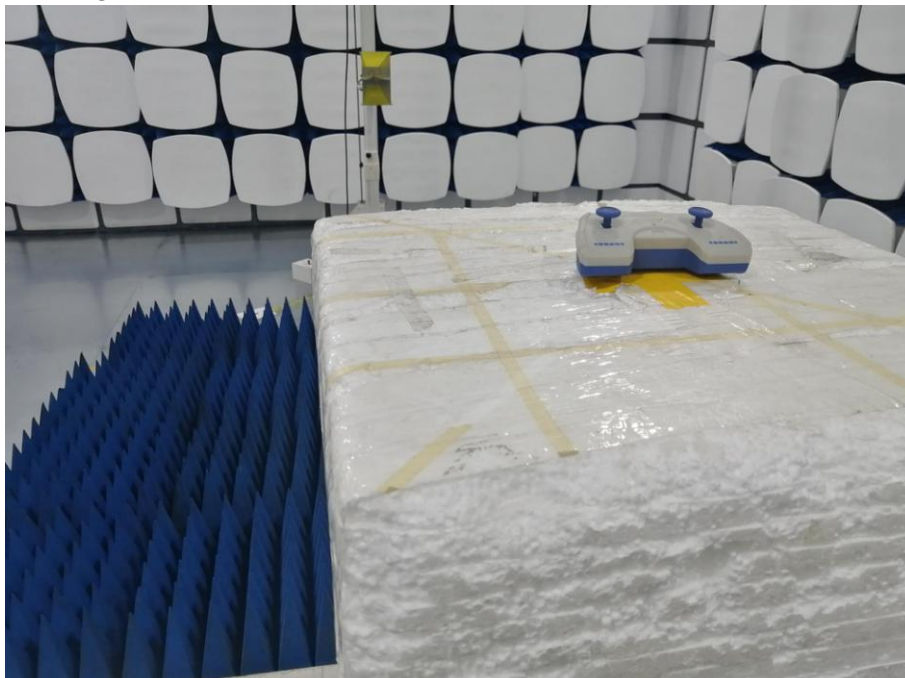

TEST REPORT NUMBER: (8522)005-0207

5.2 EUT Constructional Details

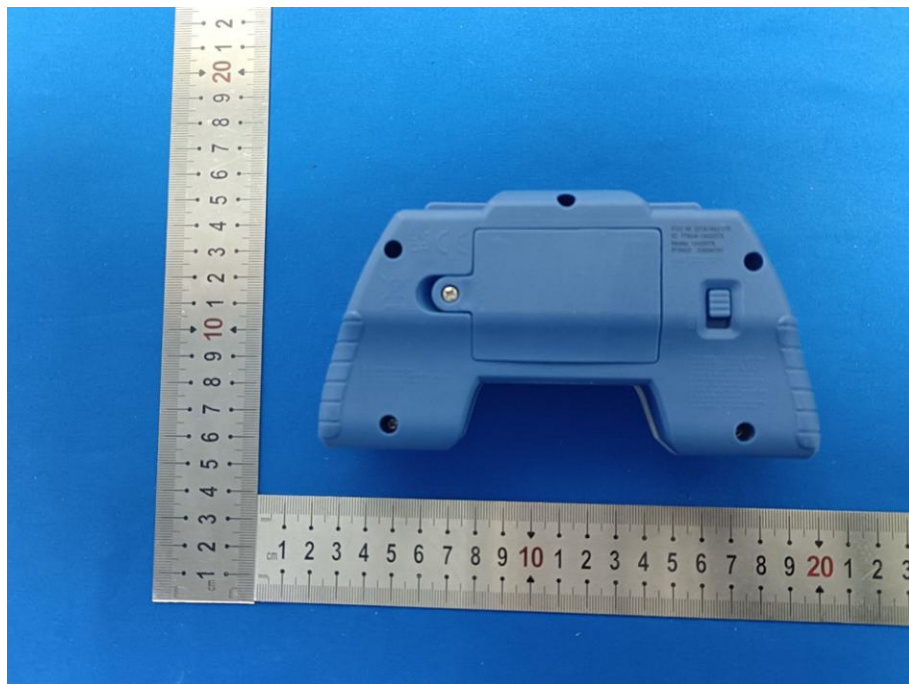



**BUREAU
VERITAS**



TEST REPORT NUMBER: (8522)005-0207





**BUREAU
VERITAS**

TEST REPORT NUMBER: (8522)005-0207

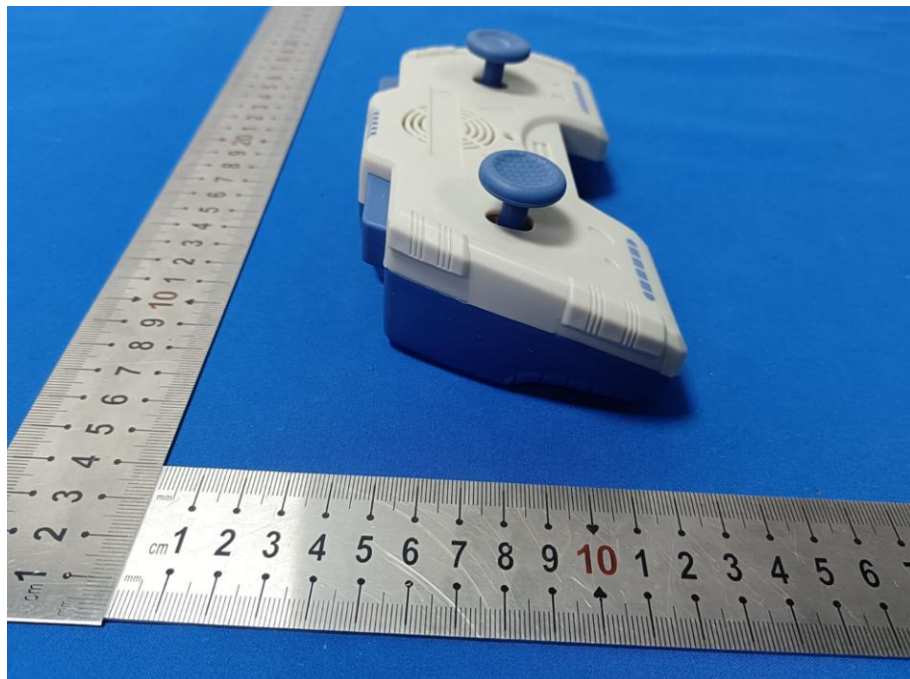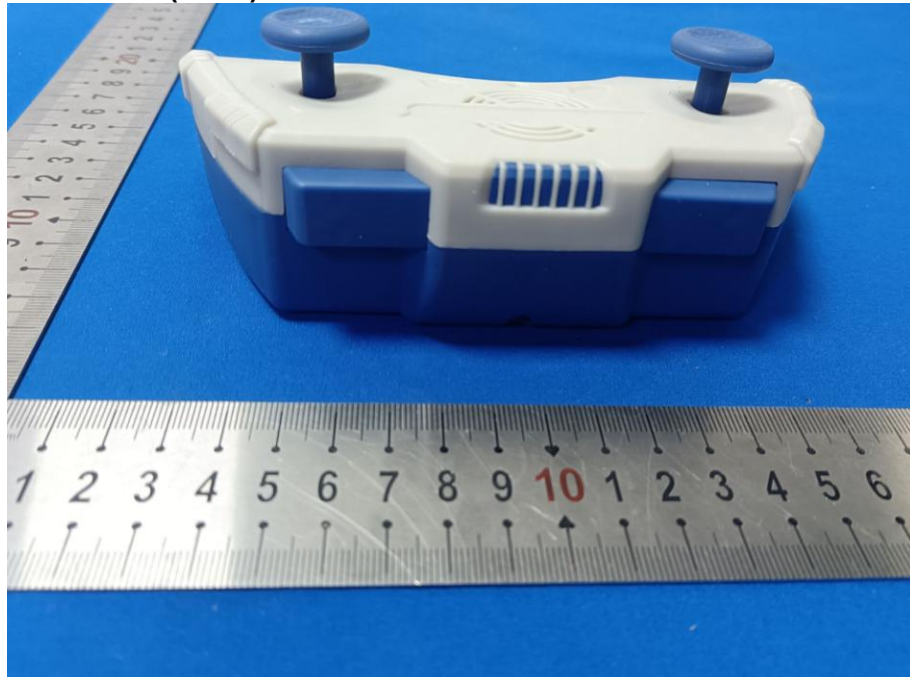

Bureau Veritas Shenzhen Co., Ltd



1st Floor, Block A, Minlida Industrial Building, 4th
Zone of Honghualing Industrial Park, Shenzhen,
Guangdong Province, China

Tel: +86 755 8600 0151
Email: <http://www.bureauveritas.com>



**BUREAU
VERITAS**



TEST REPORT NUMBER: (8522)005-0207

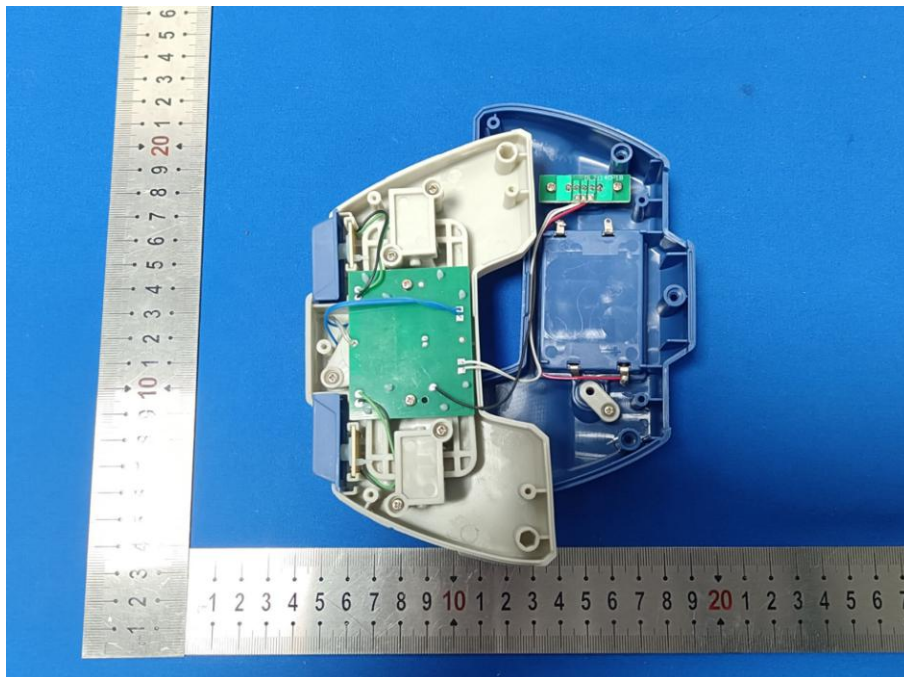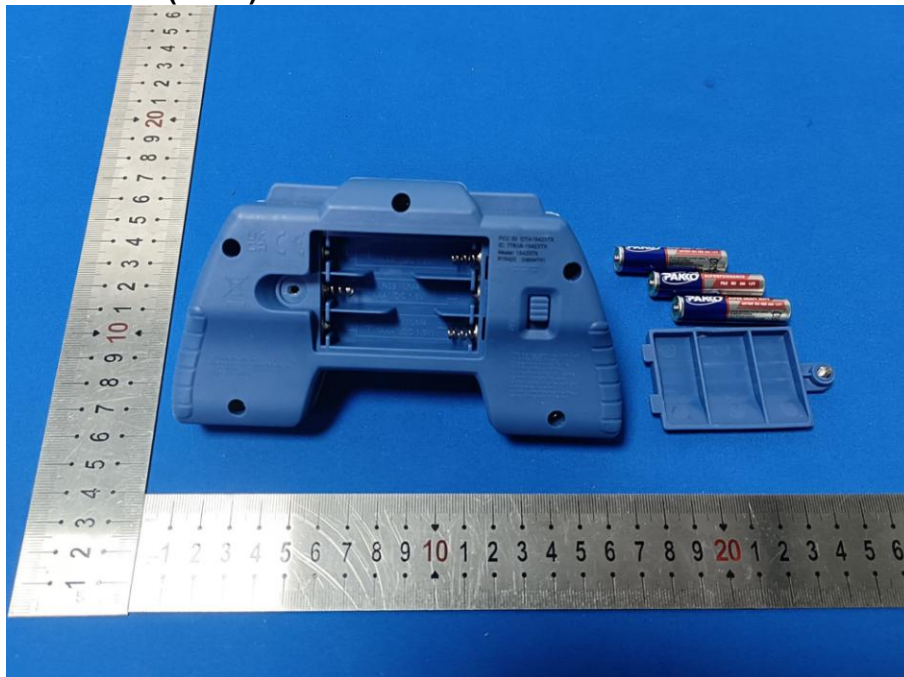




**BUREAU
VERITAS**

TEST REPORT NUMBER: (8522)005-0207

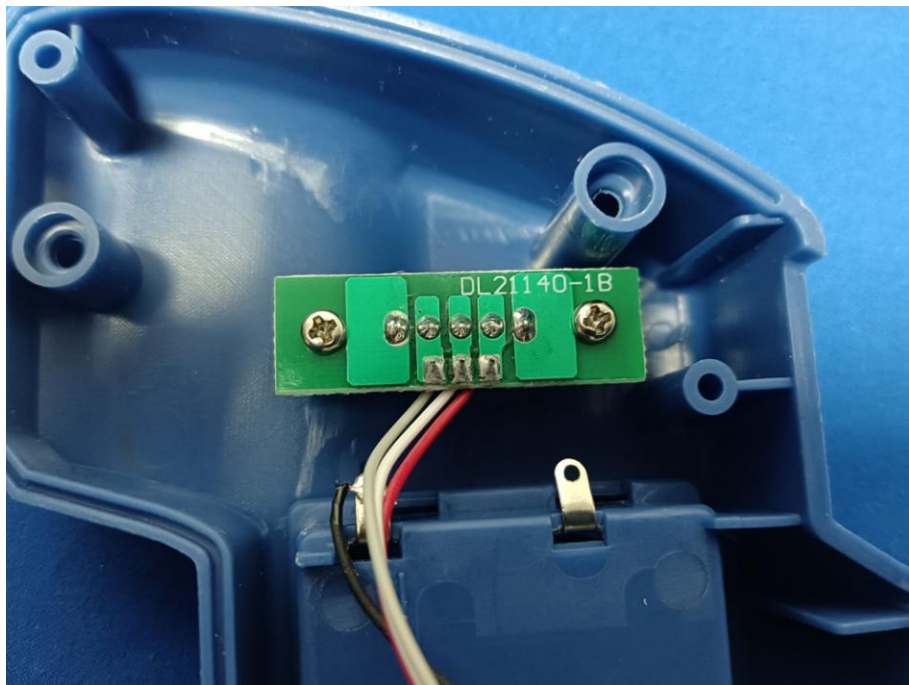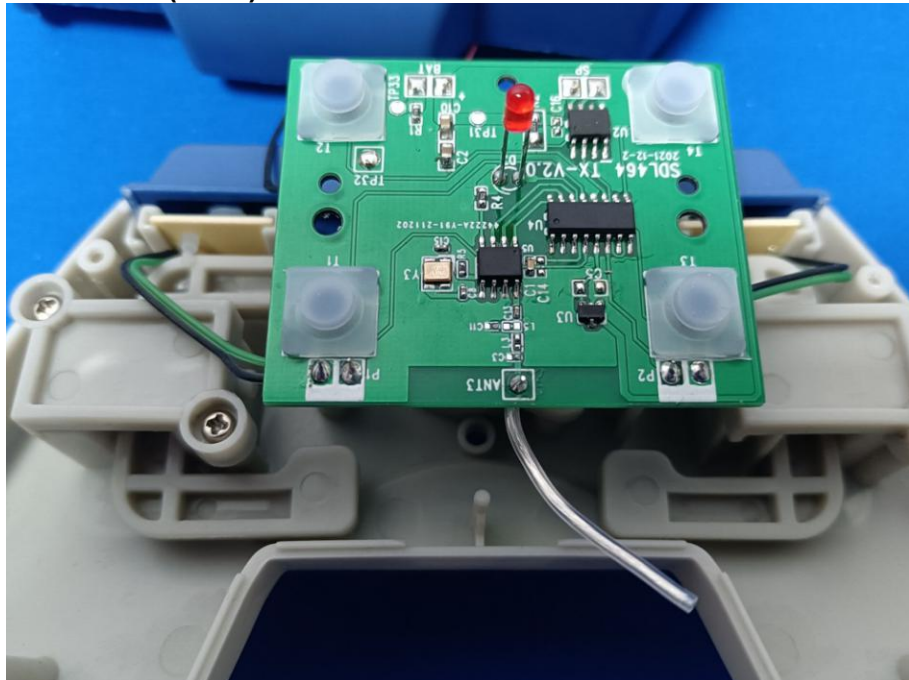

TEST REPORT NUMBER: (8522)005-0207

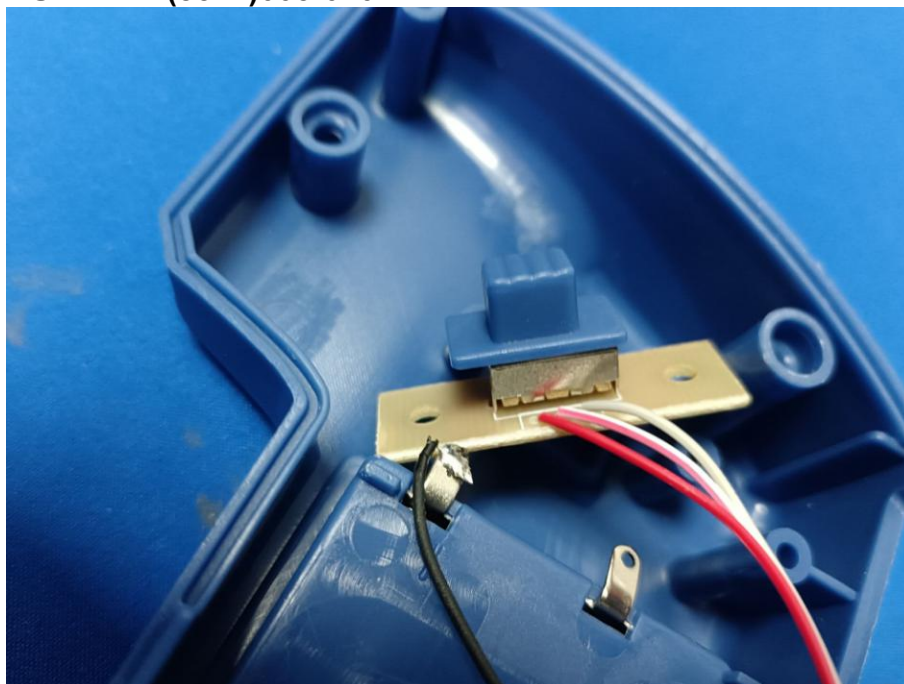

*** END OF REPORT ***