



Valued Quality. Delivered.

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



TEST REPORT

Report No.: 14041841HKG-001

JAKKS Pacific (HK) Limited

Application
For
Certification
(Original Grant)
(FCC ID: OTA78425)
(IC: 7783A-78425)

Transmitter

Prepared and Checked by:



Wong Kwok Yeung, Kenneth
Lead Engineer

Approved by:



Chan Chi Hung, Terry
Supervisor
Date: June 26, 2014

- The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Services Hong Kong Ltd.

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.

Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: www.hk.intertek-etlsemko.com



Valued Quality. Delivered.

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



GENERAL INFORMATION

Grantee:	JAKKS Pacific (HK) Limited
Grantee Address:	12/F., Wharf T&T Centre, 7 Canton Road, Tsim Sha Tsui, Kowloon, Hong Kong.
Contact Person:	Dick Au
Tel:	2269 7631
Fax:	2366 8247
e-mail:	dicka@jakks.com.hk
Manufacturer:	Root Land Plastic Factory
Manufacturer Address:	Bai Yun Keng Industrial, Danshui Town, Huiyang Zone, Huizhou City, Guangdong, Province China.
Vendor:	Rootland Plastic Factory
Brand Name:	N/A
FCC & IC Model:	Refer to report P.ii
Additional Model No.:	Refer to report P.ii
Asst. No.:	Refer to report P.ii
GL Class No.:	3500.8020.105
Type of EUT:	Transceiver
Description of EUT:	Refer to report P.ii
Serial Number:	N/A
FCC ID / IC:	OTA78425 / 7783A-78425
Date of Sample Submitted:	April 30, 2014
Date of Test:	April 30, 2014 to May 19, 2014
Report No.:	14041841HKG-001
Report Date:	June 26, 2014
Environmental Conditions:	Temperature: +10 to 40°C Humidity: 10 to 90%

Report No.: 14041841HKG-001

FCC ID: OTA78425

IC: 7783A-78425

i

Intertek Testing Services Hong Kong Ltd.

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.
Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: www.hk.intertek-etlsemko.com



Valued Quality. Delivered.

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



GENERAL INFORMATION

(Cont'd)

FCC Model:	78425
FCC Additional Model No.:	78425, 78426, 80947, 82307, 82639, 78426, 80947, 84899, 78426, 80947
IC Model:	78425
Asst. No.:	78425-QVC, 78425-UK, 80948, 80948-CAN, 80948-EU, 82307, 82307-CAN, 82307-EU, 82639, 82639-CAN, 82639-EU, 84899, 84899-CAN, 84899-EU, 80947, 80947-CAN, 80947-EU, 84907, 84907-CAN, 84907-EU, 82712, 82712-CAN, 82712-EU
Description of EUT:	HERO PORTAL ASST., HERO PORTAL ASST. - 4 characters: HERO GATEWAY – DC (78425) HERO GATEWAY WITH BONUS FIGURE – DC: HERO GATEWAY WITH BONUS FIGURE – DC (78425) HERO GATEWAY - DC Booster Pack Assortment: HERO GATEWAY - DC Booster Pack (Green Lantern & Cyborg) (78426) HERO GATEWAY - DC Booster Pack (Wonder Woman & Flash) (80947) HERO GATEWAY – Kmart DC GATEWAY + 4 Figures: HERO GATEWAY – Kmart DC GATEWAY + 4 Figures (82307) HERO GATEWAY WITH TWO FIGURES – DC: HERO GATEWAY WITH TWO FIGURES – DC (82639) DC HERO GATEWAY BOOSTER PACK ASST.: HERO GATEWAY - DC Booster Pack (Green Lantern & Cyborg) (78426) HERO GATEWAY - DC Booster Pack (Wonder Woman & Flash): HERO GATEWAY - DC Booster Pack (Wonder Woman & Flash) (80947) HERO PORTAL BOOSTER PACK ASST.: DC HERO GATEWAY PDQ (84899) HERO GATEWAY - DC Booster Pack (Green Lantern & Cyborg) (78426) HERO GATEWAY - DC Booster Pack (Wonder Woman & Flash) (80947)

Report No.: 14041841HKG-001

FCC ID: OTA78425

IC: 7783A-78425

ii

Intertek Testing Services Hong Kong Ltd.

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.
Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: www.hk.intertek-etlsemko.com



Valued Quality. Delivered.

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



SUMMARY OF TEST RESULT

TEST SPECIFICATION	REFERENCE	RESULTS
Transmitter Field Strength Frequency Stability	15.225 / RSS-210 A2.6	Pass
Radiated Emission in Restricted bands	15.205/ RSS-210 2.2	Pass

The equipment under test is found to be complying with the following standards:
FCC Part 15, October 1, 2012 Edition
RSS-210 Issue 8, December 2010

- Note: 1. The EUT uses a permanently attached antenna which, in accordance to section 15.203, is considered sufficient to comply with the provisions of this section.
2. Pursuant to FCC part 15 Section 15.215(c), the 20 dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered.

Report No.: 14041841HKG-001

FCC ID: OTA78425

IC: 7783A-78425

iii

Intertek Testing Services Hong Kong Ltd.

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.
Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: www.hk.intertek-etlsemko.com

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



Table of Contents

1.0	<u>General Description</u>	1
1.1	Product Description	1
1.2	Related Submittal(s) Grants	1
1.3	Test Methodology	1
1.4	Test Facility	1
2.0	<u>System Test Configuration</u>	2
2.1	Justification	2
2.2	EUT Exercising Software	2
2.3	Special Accessories	2
2.4	Measurement Uncertainty	3
2.5	Support Equipment List and Description	3
3.0	<u>Emission Results</u>	4
3.1	Field Strength Calculation	4
3.2	Radiated Emission Configuration Photograph	5
3.3	Radiated Emission Data	5
3.4	Frequency Stability	8
3.5	Supplementary Data for IC RSS-210 Section A2.6	9
4.0	<u>Equipment Photographs</u>	10
5.0	<u>Product Labelling</u>	10
6.0	<u>Technical Specifications</u>	10
7.0	<u>Instruction Manual</u>	10
8.0	<u>Miscellaneous Information</u>	11
8.1	Measured Bandwidth	11
8.2	Discussion of Pulse Desensitization	13
8.3	Calculation of Average Factor	13
8.4	Emissions Test Procedures	14
9.0	<u>Equipment List</u>	16

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



1.0 General Description

1.1 Product Description

The equipment under test (EUT) is a 13MHz RFID for control panel (RFID toy reader) operating at 13.560MHz which is controlled by a crystal. The EUT is powered by 4 x AA size batteries. This product consists of a control panel (RFID tag reader) and six Hero Figures (passive type powered tags). The EUT has an ON/OFF switch and a RFID tag sensor on the control panel. It can also connect to the TV monitor for game playing. After switched on the EUT, the monitor can show the game mode while the Hero Figure (passive tags) was placed on it.

The Model: 78425, 78426, 80947, 82307, 82639, 78426, 80947, 84899, 78426 and 80947 are the same as the Model: 78425 in hardware aspect. The difference in model number serves as marketing strategy. The models are different in packaging and figure combination only.

Antenna Type: Internal, Integral

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

1.2 Related Submittal(s) Grants

This is a single application for certification of a transmitter.

1.3 Test Methodology

Radiated emission measurements was performed according to the procedures in ANSI C63.4 (2009). All radiated measurements were performed in an Open Area Test Site. Preliminary scans were performed in the Open Area Test Site only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the **“Justification Section”** of this Application.

1.4 Test Facility

The open area test site used to collect the radiated data is located at Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong. This test facility and site measurement data have been placed on file with the FCC and IC.

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



2.0 System Test Configuration

2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.4 (2009).

The device was powered by new 4 x 1.5V AA Batteries.

For maximizing emissions below 30 MHz, the EUT was rotated through 360°, the centre of the loop antenna was placed 1 meter above the ground, and the antenna polarization was changed. For maximizing emissions at and above 30 MHz, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the wooden turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

All relevant operation modes have been tested, and the worst case data is included in this report.

2.2 EUT Exercising Software

There was no special software to exercise the device. Once the unit is powered up, it transmits the RF signal continuously.

2.3 Special Accessories

There are no special accessories necessary for compliance of this product.



Valued Quality. Delivered.

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



2.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

2.5 Support Equipment List and Description

LCD TV monitor. (Model: Samsung LS15E33C) EW-2122 (Provided By Intertek)

2 x Figures (Provided By Client)

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



3.0 Emission Results

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG - AV$$

where FS = Field Strength in $\text{dB}\mu\text{V/m}$
 RA = Receiver Amplitude (including preamplifier) in $\text{dB}\mu\text{V}$
 CF = Cable Attenuation Factor in dB
 AF = Antenna Factor in dB
 AG = Amplifier Gain in dB
 AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

where FS = Field Strength in $\text{dB}\mu\text{V/m}$
 $RR = RA - AG - AV$ in $\text{dB}\mu\text{V}$
 $LF = CF + AF$ in dB

Assume a receiver reading of $52.0 \text{ dB}\mu\text{V}$ is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and average factor of 5 dB are subtracted, giving a field strength of $27 \text{ dB}\mu\text{V/m}$. This value in $\text{dB}\mu\text{V/m}$ was converted to its corresponding level in $\mu\text{V/m}$.

$RA = 52.0 \text{ dB}\mu\text{V/m}$	
$AF = 7.4 \text{ dB}$	$RR = 18.0 \text{ dB}\mu\text{V}$
$CF = 1.6 \text{ dB}$	$LF = 9.0 \text{ dB}$
$AG = 29.0 \text{ dB}$	
$AV = 5.0 \text{ dB}$	
$FS = RR + LF$	
$FS = 18 + 9 = 27 \text{ dB}\mu\text{V/m}$	

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(27 \text{ dB}\mu\text{V/m})/20] = 22.4 \mu\text{V/m}$$



Valued Quality. Delivered.

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



3.2 Radiated Emission Configuration Photograph

The worst case in radiated emission was found at 191.465 MHz

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgment: Passed by 5.9 dB

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



Applicant: JAKKS Pacific (HK) Limited
Model: 78425
Worst-Case Operating Mode: Transmitting

Date of Test: May 19, 2014

Table 1
Radiated Emissions
Pursuant to FCC Part15.225/ RSS-210 Section A2.6 Requirement

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Distance Factor (-dB)	Calculated at 30m (dBμV/m)	Limit at 30m (dBμV/m)	Margin (dB)
V	13.560	56.5	0	10.8	67.3	40.0	27.3	84.0	-56.7
V	27.120	18.2	0	9.5	27.7	40.0	-12.3	29.5	-41.8

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
V	40.680	34.7	16	10.0	28.7	40.0	-11.3
V	54.240	32.7	16	11.0	27.7	40.0	-12.3
V	67.800	34.5	16	8.0	26.5	40.0	-13.5
V	81.360	34.9	16	7.0	25.9	40.0	-14.1
V	94.920	31.6	16	11.0	26.6	43.5	-16.9
V	108.480	28.9	16	14.0	26.9	43.5	-16.6
V	122.040	28.6	16	14.0	26.6	43.5	-16.9
V	135.600	27.8	16	14.0	25.8	43.5	-17.7

NOTES: 1. Peak Detector Data unless otherwise stated.

- All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
- Negative sign in the column shows value below limit.
- Loop antenna is used for the emissions below 30MHz.
- Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205/ RSS-210 Section 2.2.

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



Applicant: JAKKS Pacific (HK) Limited
Model: 78425
Worst-Case Operating Mode: TV Game Playing

Date of Test: May 19, 2014

Table 2
Radiated Emissions
Pursuant to FCC Part 15.209/ RSS-210 Section A2.6 Requirement

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
V	33.585	34.9	16	10.0	28.9	40.0	-11.1
V	85.385	38.6	16	8.0	30.6	40.0	-9.4
V	132.575	35.4	16	14.0	33.4	43.5	-10.1
V	191.465	37.6	16	16.0	37.6	43.5	-5.9
H	279.294	26.5	16	22.0	32.5	46.0	-13.5
H	338.586	22.7	16	24.0	30.7	46.0	-15.3

NOTES: 1. Quasi-Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.

3.4 Frequency Tolerance

Data Table
Frequency tolerance of Transmitter
(Temperature Variation: -20°C to +50°C)

Operating frequency		13.563725MHz		
Test Voltage (V)	Temperature (°C)	Measured frequency (MHz)	Frequency error (%)	Limit (%)
6.0	+ 50	13.563763	+0.00028	±0.01
	+ 40	13.563759	+0.00025	±0.01
	+ 30	13.563743	+0.00013	±0.01
	+ 20	13.563725	0	±0.01
	+ 10	13.563766	+0.00030	±0.01
	0	13.563748	+0.00017	±0.01
	- 10	13.563705	-0.00015	±0.01
	- 20	13.563677	-0.00035	±0.01

We found that the EUT met the requirement of FCC Part 15 Section 15.225(e).

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.

3.5 Supplementary Data for IC RSS-210 Section A2.6

RSS-210 Section A2.6

Data Table
Frequency Deviation with Voltage Variation

Operating frequency		13.563725MHz		
Test Voltage (V)	Temperature (°C)	Measured frequency (MHz)	Frequency error (%)	Limit (%)
6.0	+20	13.563725	0	±0.01
5.44	+20	13.563756	+0.00023	±0.01
4.87	+20	13.563792	+0.00049	±0.01
4.30	+20	13.563858	+0.00098	±0.01

Note:

The battery operating end point is 4.30V, which is declared by the manufacturer.



Valued Quality. Delivered.

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



4.0 Equipment Photographs

For electronic filing, the photographs are saved with filename: external photos.pdf and internal photos.pdf.

5.0 Product Labelling

For electronics filing, the FCC ID/IC ID label artwork and the label location are saved with filename: label.pdf.

6.0 Technical Specifications

For electronic filing, the block diagram and schematic of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

7.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States and Canada.

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited


Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.

8.0 Miscellaneous Information

The miscellaneous information includes details of the test procedure and measured bandwidth



8.1 Measured Emission of Bandedge

The below plot shows the fundamental emission is confined in the specified band. The emission of the fundamental is 27.3dB μ V/m and it is below the limit of 50.5 dB μ V/m in the range of (13.410-13.553MHz) and (13.567-13.710MHz) and the limit of 40.5 dB μ V/m in the frequency range of (13.110-14.410MHz) and (13.710-14.010MHz). In the frequency range from 13.110-14.010MHz, we can not find any emission higher than the fundamental emission. Therefore they meet the requirement of Section 15.225(a), (b), (c), & (d).

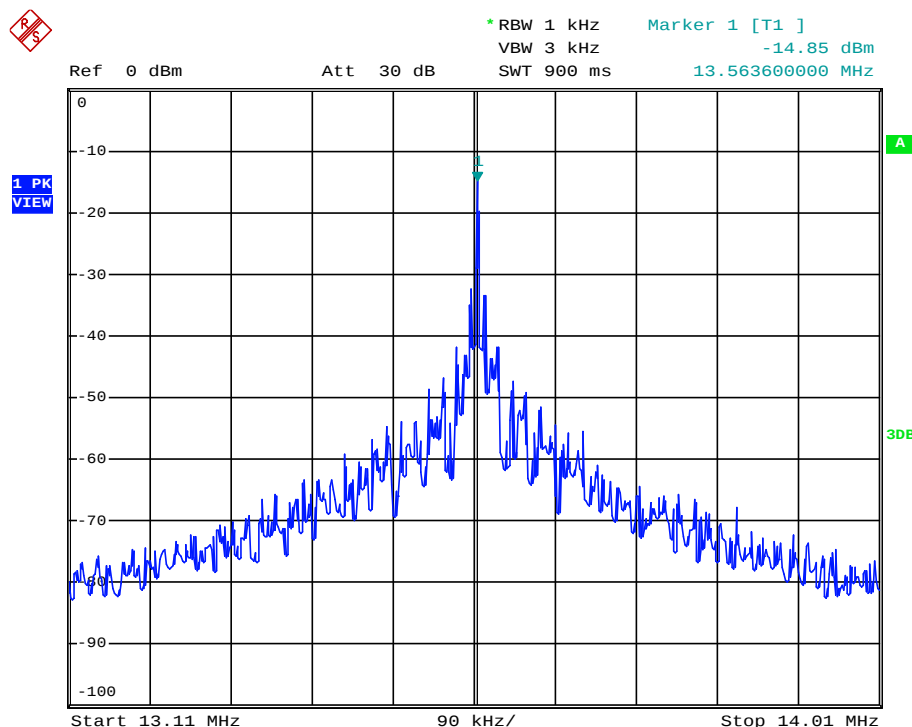

Issuing Laboratory: Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.

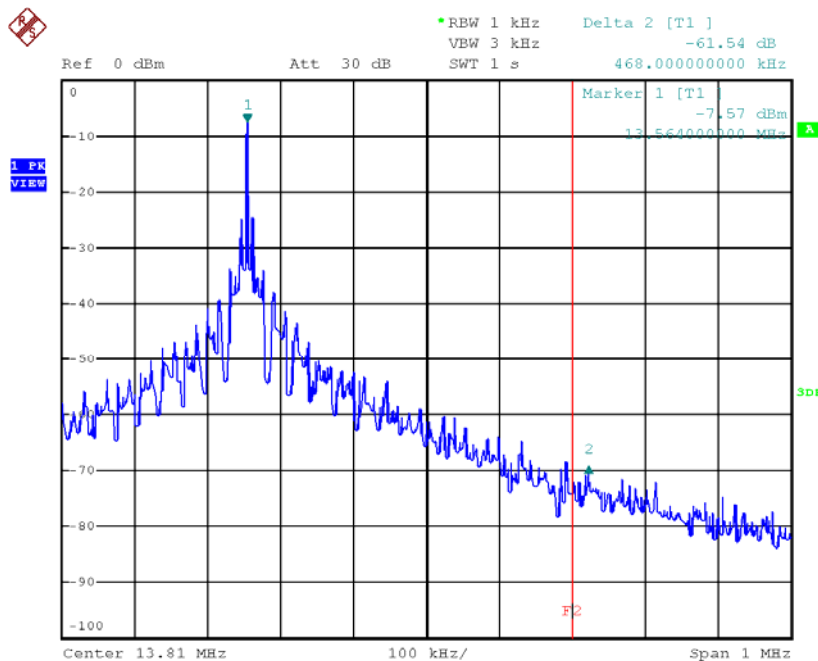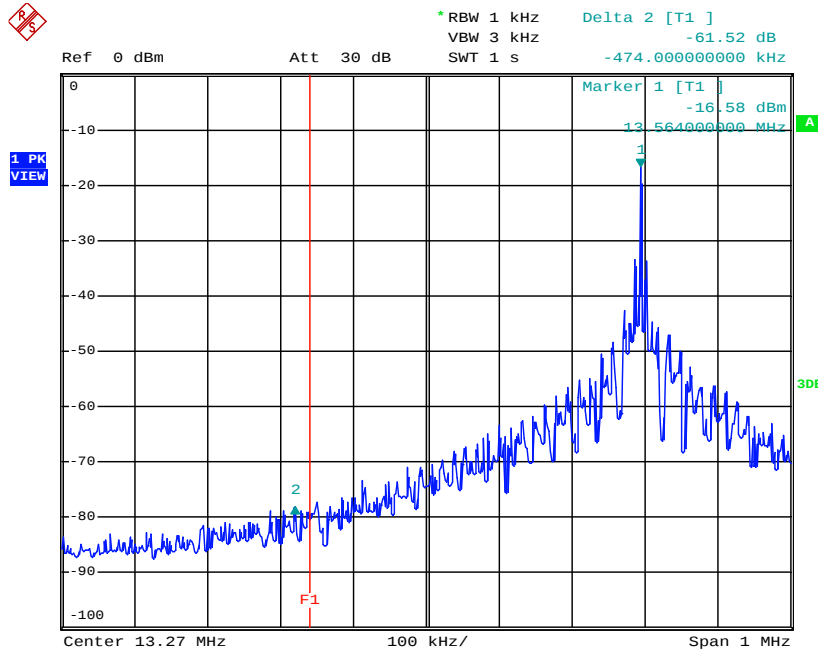



Valued Quality. Delivered.

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



8.2 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. Since the transmitter transmits the RF signal continuously.

8.3 Calculation of Average Factor

The average factor is not applicable for this device as the transmitted signal is a continuously signal.



Valued Quality. Delivered.

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



8.4 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services Hong Kong Ltd. in the measurements of transmitter operating under the Part 15, Subpart C rules.

The transmitting equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately one meter in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axis to obtain maximum emission levels. The antenna height and polarization are also varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Exhibit 8.3.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to 1GHz.



Valued Quality. Delivered.

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



8.4 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

The IF bandwidth used for measurement of radiated signal strength was 100 kHz or greater when frequency is below 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report (See Exhibit 8.1). Above 1000 MHz, a resolution bandwidth of 1 MHz is used.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the forbidden bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, unless otherwise reported. Measurements taken at a closer distance are so marked.

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.

9.0 Equipment List

1) Radiated Emissions Test

Equipment	EMI Test Receiver	Log Periodic Antenna
Registration No.	EW-2666	EW-0446
Manufacturer	R&S	EMCO
Model No.	ESCI7	3146
Calibration Date	Jun. 20, 2013	Apr. 30, 2013
Calibration Due Date	Jun. 20, 2014	Oct. 30, 2014

Equipment	Spectrum Analyzer	Active Loop H-field Antenna
Registration No.	EW-2188	EW-0191
Manufacturer	AGILENTTECH	EMCO
Model No.	E4407B	6502
Calibration Date	Apr. 16, 2014	Jan. 30, 2013
Calibration Due Date	Apr. 16, 2015	Jul. 30, 2014

2) Bandedge Measurement

Equipment	Spectrum Analyzer
Registration No.	EW-3016
Manufacturer	ROHDESCHWARZ
Model No.	FSV40
Calibration Date	Feb. 13, 2014
Calibration Due Date	Feb. 13, 2015

3) Frequency Tolerance

Equipment	Temperature & Humidity Chamber	Spectrum Analyzer
Registration No.	EW-2395	EW-2249
Manufacturer	GIANT FORCE	R&S
Model No.	GTH-210-40-SP-AR	FSP30
Calibration Date	Feb. 24, 2014	Oct. 28, 2013
Calibration Due Date	Feb. 28, 2015	Oct. 28, 2014

END OF TEST REPORT